

## PROCEDURE FOR HANDLING CHASSIS/DEALER CLAIMS

### **General**

All chassis tendered for delivery by the Transportation Company are to be accepted by the Body Company. If a chassis has been damaged or is short certain parts when received by the Body Company, they will repair or replace missing parts, if possible, with their own or other local facilities and promptly forward the claim to the dealer.

If the Body Company or other local facilities are not adequate for replacing missing or damaged parts, the Body Company will promptly notify the Dealer and hold damaged chassis awaiting his instructions. The Dealer must be notified promptly upon receipt of a chassis on which a claim is in order giving the "model", "engine number," and "serial number" and what the damage or shortage consisted of. This is important since Chevrolet/GMC Truck cannot accept claims from the Dealer unless filed within thirty days from date of delivery, or unless within the thirty-day period, the Dealer has advised Chevrolet/GMC Truck that a claim will be filed. Delivery to the Body Company constitutes delivery to the Dealer, since the Body Company is the Dealer's agent.

Completed vehicles that are to be driven to the Dealer or the Dealer's customer must first be serviced by the Body Company at the Body Company's location in accordance with Chevrolet/GMC Truck new vehicle conditioning procedures. Expenses incurred for this condition are the responsibility of the selling Dealer.

### **Shipments Received from Truckaway or Driveaway Company**

The Body Company will inspect condition of chassis and call driver's attention to damage or missing parts and make a detailed notation of both copies of Transportation Company's delivery receipt of the nature and extent of the existing damage and/or shortage and have driver sign such notation on the Dealer's copy. If chassis are received after business hours and cannot, therefore, be adequately inspected, the delivery receipt (both copies) is to carry notation "Received subject to inspection" and show the time and date. On such chassis, a detailed inspection must be made within 24 hours or on the first working day after receipt of chassis and immediately furnish to the Dealer. Any exceptions are to be noted on both copies of the delivery receipt by the Body Company.

### **If Received from Railroad**

Freight car should be opened and contents inspected in presence of railroad representative before starting to unload, and any existing damage or shortage recorded by the railroad representative on his standard inspection report. Body Company must secure from railroad agent, a copy of his inspection report detailing nature and extent of the damage and/or shortage.

If the railroad representative does not comply with consignee's request to make an inspection, then the Body Company will immediately confirm his request (in writing) to the railroad agent, outlining the nature and extent of damage and/or shortage disclosed by consignee's inspection, prior to starting any unloading operations, sending a copy of his letter to the Dealer.

### **Filing a Claim**

Upon completion of repairs or replacements of missing parts, the Body Company will promptly bill the Dealer for the cost involved, supporting such debit with a detailed statement showing how the amount is arrived at end either the original delivery receipt with notation if received from a truckaway company or the carrier's inspection report if received from a railroad.

### **Disposition of Damaged Parts**

Damaged parts removed from chassis by the Body Company must be held for disposition orders from the Dealer.

**Dealer claims will not be allowed unless above instructions are fully complied with.**

## GOVERNMENT REGULATIONS

### **Introduction**

The Federal Government has established Motor Vehicle Safety Standards for various categories of motor vehicles and motor vehicle equipment under the provisions of the National Traffic and Motor Vehicle Safety Act of 1966. The Act imposes important legal responsibilities on manufacturers, dealers, body builders and others engaged in the manufacturing and marketing of motor vehicles and motor vehicle equipment.

Questions dealing with the specific application of the Act or the standards to your business should be discussed with your legal counsel. This is particularly so because the standards and other requirements or interpretations are subject to change by the government agency in charge, the National Highway Traffic Safety Administration.

New standards and amendments issued by the National Highway Traffic Safety Administration will appear in the Federal Register from time to time. You may obtain the Federal Register, through the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402, or at <http://www.NHTSA.dot.gov/cars/ruels/>

**Responsibility for Complete Vehicle Performance**

General Motors performs extensive testing on all trucks described in this book. Major changes to a complete vehicle or the installation of a body on an incomplete truck chassis will, however, affect vehicle performance.

It is the responsibility of the body and equipment manufacturers to validate final completed vehicle performance. Total vehicle system performance tests may be required. The test schedule must reflect the type of vehicle system loading to which the completed vehicle will be subjected, and must also include consideration of all aspects of performance, e.g., durability, ride, handling, etc.

**Noise Emission Standards for Transportation Equipment—Medium and Heavy Trucks****40 CFR PART 205**

The U.S. Environmental Protection Agency (EPA) has established noise emission standards applicable to vehicles (in general vehicles in excess of 10,000 pounds GVWR capable of transportation of property on a street or highway) manufactured after January 1, 1978, under the provisions of the Noise Control Act of 1972. The standards provide that vehicles manufactured after January 1, 1978, when tested pursuant to EPA's prescribed test procedure, must conform to an 83 dBA level and vehicles manufactured after January 1, 1988 must conform to an 80 dBA level.

The Act and the standards impose legal obligations on vehicle manufacturers and subsequent manufacturers. Questions dealing with what is covered under the definition of a "vehicle" in the standards and the specific application of the Act or the standards to your business should be discussed with your legal counsel. This is particularly so in light of EPA's broad definition of a "vehicle."

The standards or interpretations of such standards are subject to change by EPA. New standards or amendments issued by the Environmental Protection Agency appear in the Federal Register from time to time. You may obtain the Federal Register through the Superintendent of Documents, U.S. Government Building Office, Washington, D.C. 20402.

**NOTE:** Model and option weight information is available in the GM Medium Duty Data Book. Contact your local GM dealer for assistance.


**TRUCK-CAMPER LOADING**

*(Truck-Camper loading information, see your dealer)*

**Recreational Vehicles** (campers) are also subject to the regulations. The addition of a chassis-mounted camper, You should check with your own legal council in making these vehicle classification determinations.

**Consumer Information Regulation 575.103-Truck Camper Loading**

All pickup trucks will have the required information on a label affixed to the inside surface of the glovebox.

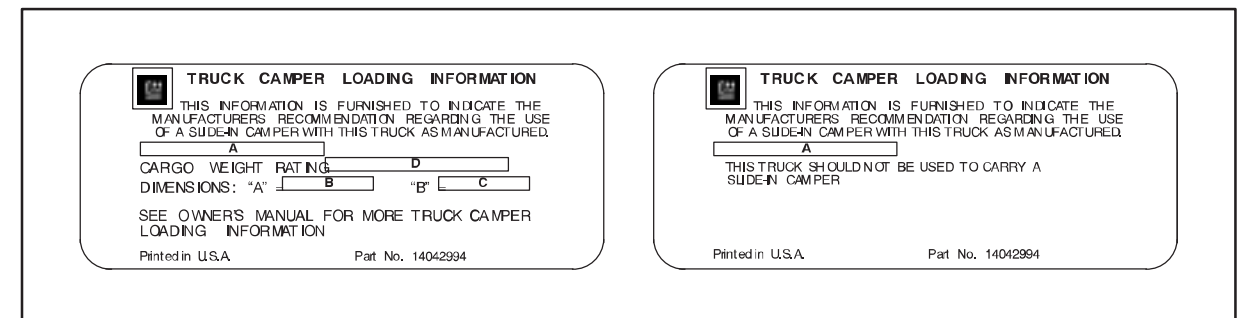

CONSUMER INFORMATION REGULATION 575.103 issued by the National Highway Traffic Safety Administration requires manufacturers of trucks capable of accommodating slide-in camper bodies to provide information concerning proper load and proper load distribution in truck-camper applications.

This Consumer Information booklet is designed to provide basic information relating to load capabilities of 2000 General Motors truck models which are adaptable to slide-in camper applications. Information contained herein is applicable to the truck buyer who already owns a 2000 General Motors truck or to a prospective truck purchaser.

The regulation also provides that proper truck-camper loading information is to be maintained in truck dealerships and be made available to all prospects on request. This booklet relates to the 2000 General Motors truck models recommended for slide-in camper applications and is to be used as a consumer information brochure.

Product specifications or data contained herein may change periodically. When a revision of this booklet is supplied to truck dealers, it is the dealers' responsibility to make the revised information available to the public.

Chevrolet's and GMC's 1500/2500 Series Full-Size Pickups feature new styling for 1999. There are many products offered by aftermarket manufacturers designed to fit on the new pickups, such as slide-in campers, camper shells, and bedliners. However, some products designed for use on the following C/K & Sierra Full-Size Pickups and S 10/Sonoma Pickups may not fit in the bed of your 2000 vehicle:


- C/K & Sierra Full-Size Pickups built prior to 1998 model year
- R/V Models built prior to 1992 model year
- S/T Series Pickups built prior to 1994 model year

Please check the compatibility of any aftermarket product you intend to install on your new 2000 vehicle with your aftermarket product manufacturer.

Consumer Information Regulation 575.103 requires manufacturers of trucks capable of accommodating slide-in campers to specify the vehicles' Cargo Weight Rating (CWR) and the longitudinal limits within which the center of gravity for the cargo weight rating should be located.

**Cargo Weight Rating (CWR)** – The cargo weight rating of a vehicle means the value specified by the vehicle manufacturer as the cargo-carrying capacity of a vehicle in kilograms (pounds), exclusive of (minus) the weight of occupants, computed as 68 kilograms (150 pounds) times the number of designated seat belt positions.

**Longitudinal Center of Gravity (CG) Zone for CWR** – The forward limit of the recommended CG Zone is determined by the application of dimension "A" measured in centimeters (inches) from the rear of the truck bed. The rearward limit of the recommended CG Zone is established by application of dimension "B", also measured in centimeters (inches) from the rear of the truck bed. The recommended CG Zone lies between these points.

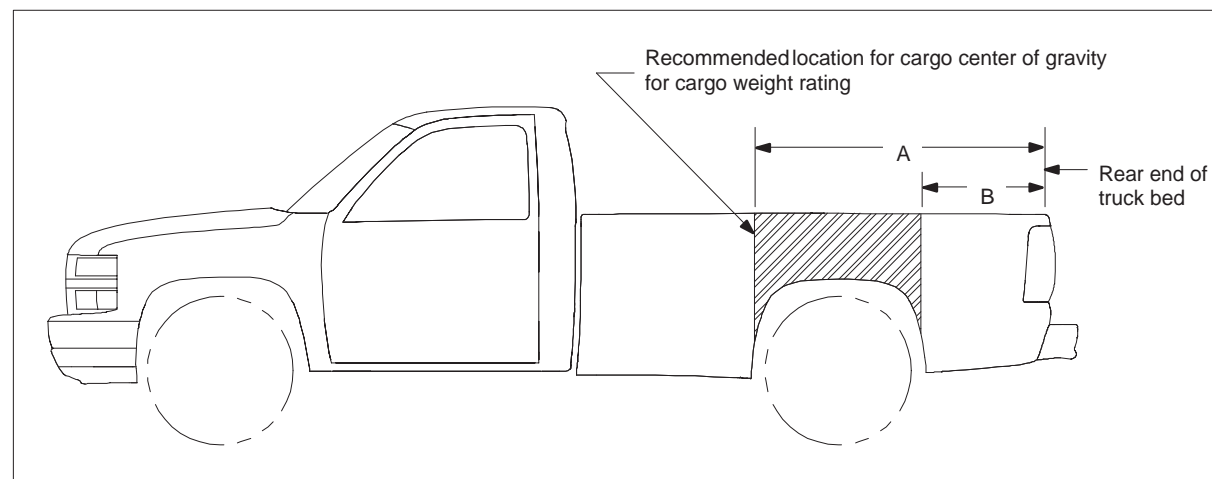

Model \_\_\_\_\_ Calculated Cargo Weight Rating \_\_\_\_\_  
 Dimension A \_\_\_\_\_ Dimension B \_\_\_\_\_

## Limitations on Recommended CG Zones

### Forward Limit

1. Must not extend beyond the inside surface of the pickup box.

2. Must not exceed the front gross axle rating (GAWR).

1. Must be no farther rearward than the inside surface of the pickup box.

2. Must not exceed the gross axle weight rating (GAWR) of the rear axle.

3. Must not exceed rear axle load limits below:


| Series                                      | Rear Axle Load Limits (% of GVWR) |
|---|-----------------------------------|
| S 10/Sonoma 2WD 2086.6 kg. (4600 lbs.) GVWR | 63%                               |
| 2WD 2222.6 kg. (4900 lbs.) GVWR             | 59%                               |
| Silverado/Sierra 1500                       | 60%                               |
| Silverado/Sierra 2500                       | 65%                               |
| Silverado/Sierra 2500/C6P, C/K/Sierra 3500  | 70%                               |

**Vehicle CG Identification** – All General Motors Corporation trucks that may be suitable for carrying a slide-in camper incorporate a Truck-Camper Loading information label located on the glove box floor for C/K/Silverado/Sierra models, and on the passenger door for S/T 10/Sonoma models. The vehicle identification number (VIN), the as-manufactured cargo weight rating (CWR) of that vehicle plus the CG limits of dimension "A" and "B" for that vehicle in centimeters (inches) are included.

Vehicle and Truck-Camper Loading are also discussed at length in the Vehicle Owner's Manual.

## Loading Instructions

**Loading Instructions** – When the truck is used to carry a slide-in camper, the total cargo load of the truck consists of the manufacturer's camper weight figure, the weight of installed additional camper equipment not included in the manufacturer's camper weight figure, the weight of camper cargo and the weight of passengers *in the camper*. The total cargo load should not exceed the truck's cargo weight rating (CWR) and the camper's center of gravity should fall within the truck's recommended center of gravity zone when installed.

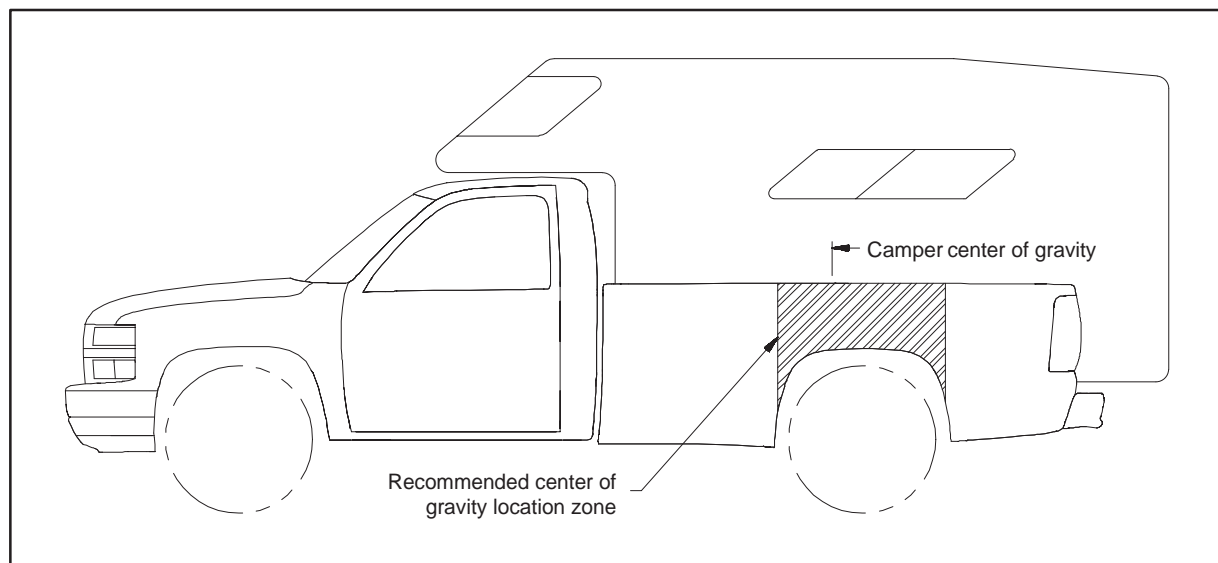

Any accessories or other equipment added to this vehicle, after final date of manufacture, must be weighed or have their weight determined, and the weight deducted from the prescribed cargo weight rating (CWR) of this vehicle. This may decrease the permissible longitudinal zone of the center of gravity for this vehicle.

The longitudinal center of gravity zone has been determined for the full cargo weight rating of this truck. If a slide-in camper has a total weight less than the cargo weight rating (CWR), the permissible longitudinal zone of the center of gravity may be larger. However, individual axle loads should not exceed either of the gross axle weight ratings (GAWR).

Secure loose items to prevent weight shifts that could affect the balance of your vehicle. When the truck camper is loaded, drive to a scale and weigh on the front and on the rear wheels separately to determine the axle loads. Individual axle loads should not exceed either of the gross axle weight ratings (GAWR). The total of the axle loads should not exceed the gross vehicle weight rating (GVWR). These ratings are given on the vehicle identification plate and on the vehicle certification label which are located on the left side of the vehicle, normally on the door latch post or door edge next to the driver. If weight ratings are exceeded, move or remove items to bring all weights below the ratings.

**CAUTION:** The longitudinal center of gravity is only one of the many factors which may affect the overall performance of a vehicle, including handling, steering and braking. The cargo load should be distributed on both sides of the centerline as equally as possible. The recommended longitudinal limits for the camper's center of gravity are based on the assumption that the vehicle will be operated with reasonable prudence in light of all of the existing conditions. Failure to do so could result in unsatisfactory vehicle performance and could make the vehicle unsafe to operate.

In this connection, refer to any recommendations by the slide-in camper manufacturer regarding installation and loading of the camper.

### *Definition of Terms*

For the purposes of calculating Truck-Camper Loading in this book, listed below are some common terms and abbreviations:

**Cargo Weight Rating (CWR)** – means the value specified by the vehicle manufacturer as the cargo-carrying capacity of a vehicle in kilograms (pounds), exclusive of (minus) the weight of occupants, computed as 68 kilograms (150 pounds) times the number of designated seating positions.

**Center of Gravity (CG)** – point where the mass of a body is concentrated and if suspended at that point would balance front and rear.

**Curb Weight** – weight of a vehicle without driver, passengers or cargo but including maximum capacity of fuel, oil, coolant and other items of standard equipment.

**Dimension A & B** – front and rear limit of Center of Gravity (CG) zone.

**Gross Vehicle Weight Rating (GVWR)** – means the value specified by the manufacturer as the loaded weight of a single vehicle.

**Gross Axle Weight Rating (GAWR)** – means the value specified by the vehicle manufacturer as the load carrying capacity of a single axle system measured at the tire-ground interfaces.

**Model Weight** – weight of the vehicle with all items of standard equipment, 68 kilograms (150 pounds) per passenger in each designated seating position and maximum capacity of fuel, oil and coolant.

**Payload Rating** – is the maximum allowable load (including the weight of the driver and all occupants) that the vehicle can carry based on all factory-installed equipment on the vehicle.

**RPO** – Regular Production Option.

**Slide-in Camper** – means a camper having a roof, floor, and sides, designed to be mounted on and removable from the cargo area of a truck by the user.

**Weight Distribution** – the amount of a vehicle's weight that rests on each axle.

**Wheelbase (WB)** – the distance from the centerline of the front axle to the centerline of the rear axle.

## LIMITATIONS

The following General Motors truck models are not recommended for slide-in camper applications:

- Any pickup model with a cargo weight rating (CWR) of less than 226.8 kg. (500 lbs). A statement to this effect is imprinted on the Truck-Camper Loading information label which states whether that vehicle is recommended for use with a slide-in camper.
- S 10/Sonoma (2WD) Pickup with 1905.1 kg. (4200 lbs.) GVWR.
- T 10/Sonoma (4x4) Pickup.
- S/T 10/Sonoma Pickup with 2751 mm (108.3 in.) WB.
- S/T 10/Sonoma Extended Cab Pickup.

**NOTE:** Silverado/Sierra 1500 Pickups should not be used for larger, cab-over type slide-in campers.

## Instructions for Prospective Truck Purchasers

### S Pickups, C/K Pickups, Extended/Club and Crew Cab Pickups

#### Vehicle Selection and Weight Analysis

##### For S 10/Sonoma Models

1. You must order S 10803 – 2995 mm (117.9 in.) WB model with one of the following GVWR Ratings:

|               |                            |            |
|---------------|----------------------------|------------|
| S 10803 (2WD) | 2086.6 kg (4600 lb.) GVWR  | Option C5D |
| S 10803 (2WD) | 2222.6 kg. (4900 lb.) GVWR | Option C5A |

if you intend to use a slide-in camper on your S 10/Sonoma Pickup. Record the model on page 3. Record the model GVWR, front GAWR, and rear GAWR on page 6. These ratings can be found in the S 10/Sonoma section of the GMC Light-Duty Truck Data Book or Chevrolet Light-Duty Technical Guide on the Specifications pages. This information is also available in the Chevrolet Spec Manager computer program.

##### For C/K/Silverado/Sierra Models

From the model selection pages of the C/K/Silverado/Sierra Pickup section of the GMC Light-Duty Truck Data Book, Chevrolet Light-Duty Technical Guide or the Chevrolet Spec Manager System, select the pickup model you desire. Record this information on page 3. Refer to the Specification section for the selected model. Select the GVWR

you require and note any minimum tire size and chassis equipment requirements for that GVWR. (To approximate the GVWR you require, add your loaded camper weight to the vehicle curb weight plus the occupants' weight at 68 kg. (150 lbs.) per designated seating position.) Record the GVWR and the Gross Axle Weight Rating (GAWR), front and rear (from the Specifications section), on line 1 of the camper loading worksheet, page 6.

2. Record the front and rear curb weights of your selected vehicle on line 2, page 6.
3. Record the front and rear passenger weights on line 3, page 6.
4. List all factory-installed options you desire, including any options required by your selected GVWR, with their front and rear weights on the Pickup Camper Loading Worksheet on page 6.
5. Total the front and rear weights of the vehicle model and options to arrive at the total front and rear weight of the vehicle. Follow the directions on page 6, lines 5 through 5C to arrive at the adjusted total vehicle weight.
6. Subtract the adjusted total vehicle weight from the GVWR to arrive at the cargo weight rating (CWR) of your truck.\* Record this information on page 3.
7. Proceed to page 12 and calculate the center of gravity location limits using front and rear GAWRs, cargo weight rating (CWR), and front and rear weight of truck as determined above. Record this information on page 3.

\* The addition of any dealer-installed or other accessories will reduce the cargo-carrying capacity by the weight of the equipment installed.

Worksheet—Cargo Weight Rating

1. Model GVWR \_\_\_\_\_ GAWR Front \_\_\_\_\_ Rear \_\_\_\_\_

2. Curb Weights: Front \_\_\_\_\_ Rear \_\_\_\_\_

3. Passenger Weights: Front \_\_\_\_\_ Rear \_\_\_\_\_

4. Other factory-installed options:

..... \_\_\_\_\_

..... \_\_\_\_\_

..... \_\_\_\_\_

..... \_\_\_\_\_

..... \_\_\_\_\_

..... \_\_\_\_\_

..... \_\_\_\_\_

..... \_\_\_\_\_

..... \_\_\_\_\_

..... \_\_\_\_\_

4a. TOTALS \_\_\_\_\_

5. Front and Rear Weights: \_\_\_\_\_

5a. Vehicle sub-total weight (add front and rear weight) \_\_\_\_\_

5b. Add 22.7 kg. (50 lbs.) for all models\* +22.7 kg. (50 lbs.)

5c. Adjusted total vehicle weight: \_\_\_\_\_

6. Vehicle GVWR: \_\_\_\_\_

Adjusted total vehicle weight (– \_\_\_\_\_)

Cargo Weight Rating \_\_\_\_\_

Record on page 3.

\* If your vehicle is available, drive to a scale and weigh, with occupants, full fuel tank, and other factory-installed options to determine the adjusted total vehicle weight. You will then be able to use your actual total vehicle weight and not have to add the 22.7 kg. (50 lbs.).


## Truck-Camper Loading Dimensions

### S Series Pickup

#### S 10/Sonoma

Long Box (Model S 10/Sonoma 10803)

|          |             | A            | B            | C            | D           | E           | F            | G            | H            | I            |
|----------|-------------|--------------|--------------|--------------|-------------|-------------|--------------|--------------|--------------|--------------|
| Long Box | mm (Inches) | 1321 (52.0") | 1025 (40.4") | 1725 (67.9") | 427 (16.8") | 921 (36.3") | 2370 (93.3") | 1438 (56.6") | 2225 (87.6") | 1438 (56.6") |

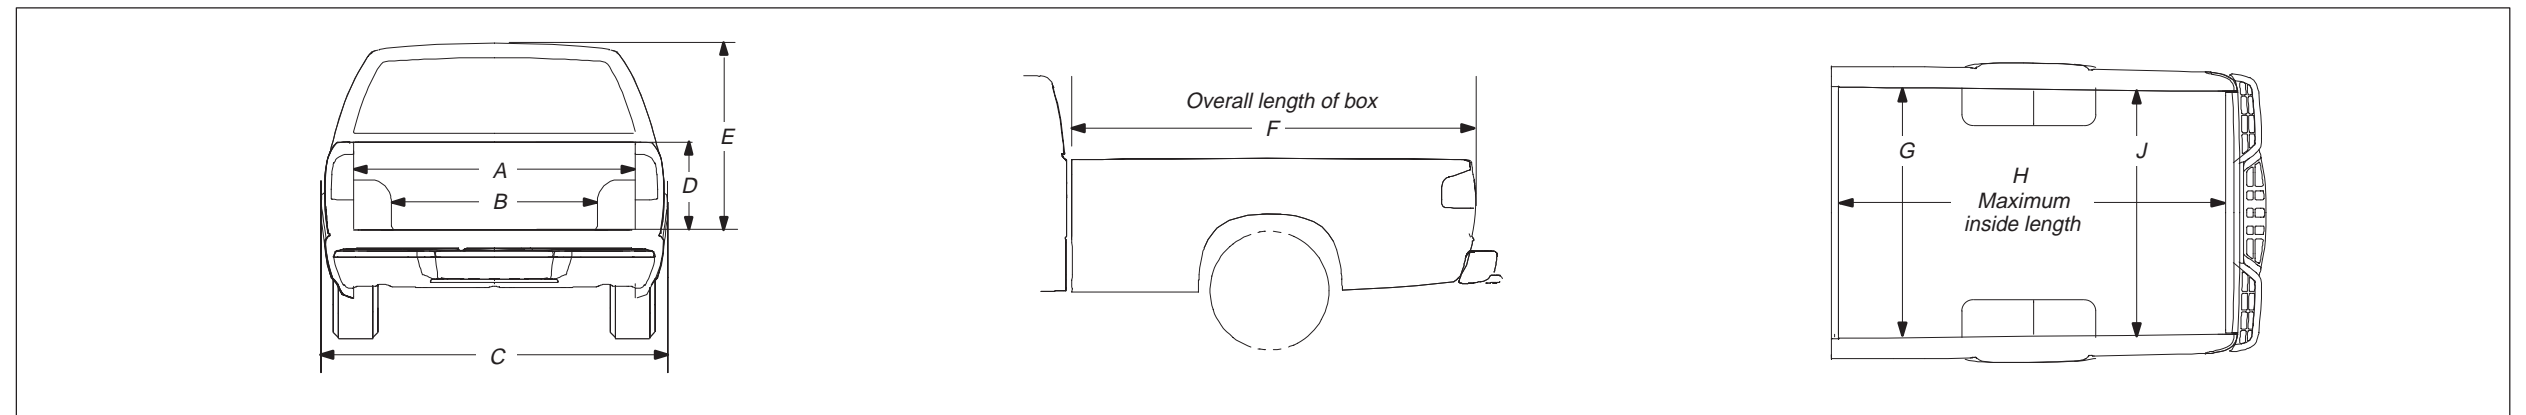


### C/K Series Pickup

#### Fleetside/Wideside

Short Box (Models C/K/Sierra 10753, 20743, 30743)

Long Box (Models C/K/Sierra 30903, 30943, 30953)

|           |             | A            | B            | C            | D           | E            | F             | G            | H            | J            | K            |
|-----------|-------------|--------------|--------------|--------------|-------------|--------------|---------------|--------------|--------------|--------------|--------------|
| Short Box | mm (Inches) | 1530 (60.2") | 1246 (49.1") | 1949 (76.8") | 490 (19.3") | 1053 (41.4") | 2095 (82.5")  | 1620 (63.8") | 1998 (78.7") | 1572 (61.9") | 2395 (94.3") |
| Long Box  | mm (Inches) | 1530 (60.2") | 1246 (49.1") | 1949 (76.8") | 490 (19.3") | 1053 (41.4") | 2575 (101.4") | 1620 (63.8") | 2478 (97.6") | 1572 (61.9") | 2395 (94.3") |

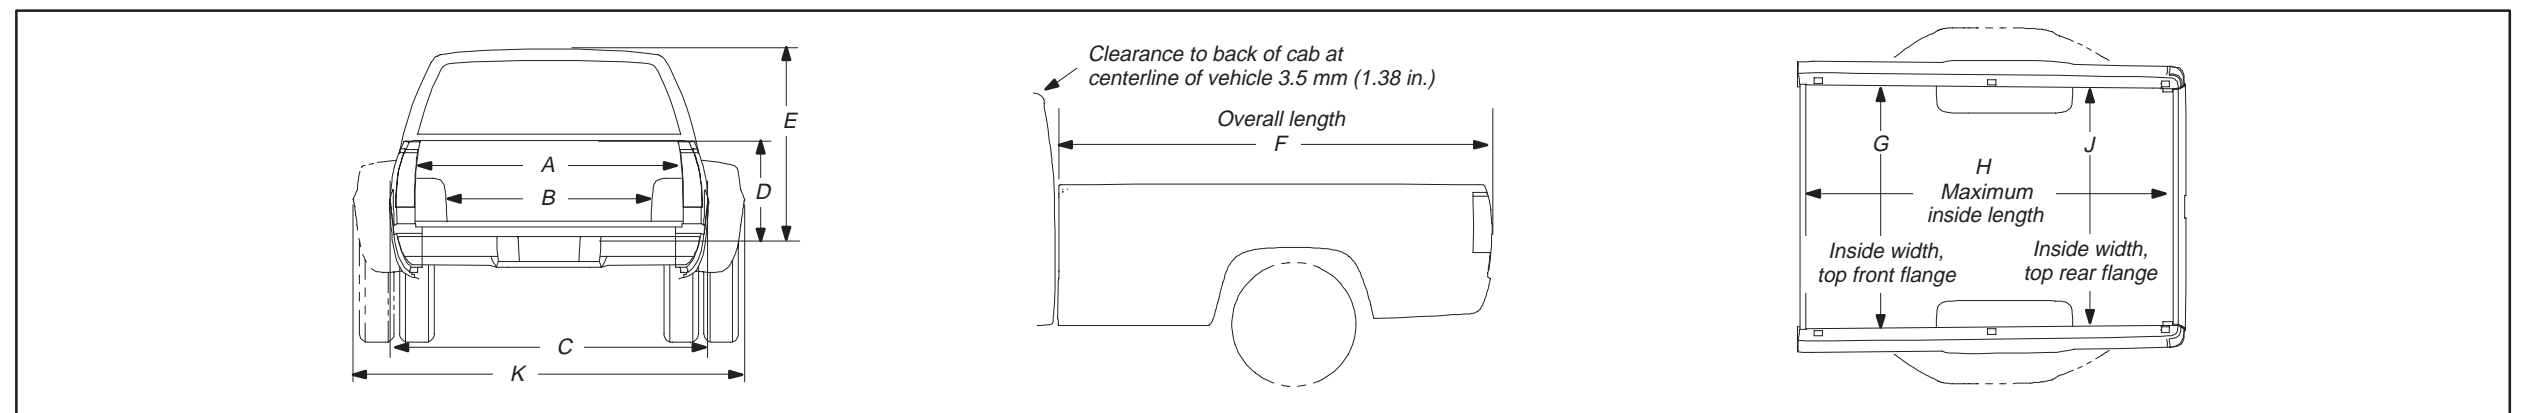


**C/K Series Pickups**

**Fleetside/Wideside**

Short Box (Models Silverado/Sierra 15703, 15753, 25753)


Long Box (Models Silverado/Sierra 15903, 15953, 25903, 22953)

| Option E63 |                    | A            | B            | C            | D           | E            | F             | G            | H            | J            |
|------------|--------------------|--------------|--------------|--------------|-------------|--------------|---------------|--------------|--------------|--------------|
| Short Box  | <i>mm (Inches)</i> | 1572 (61.9") | 1273 (50.1") | 1989 (78.3") | 496 (19.5") | 1073 (42.2") | 2120 (83.5")  | 1621 (63.8") | 1998 (78.7") | 1572 (61.9") |
| Long Box   | <i>mm (Inches)</i> | 1574 (62.0") | 1273 (50.1") | 1989 (78.3") | 496 (19.5") | 1073 (42.2") | 2600 (102.4") | 1620 (63.8") | 2478 (97.7") | 1574 (62.0") |

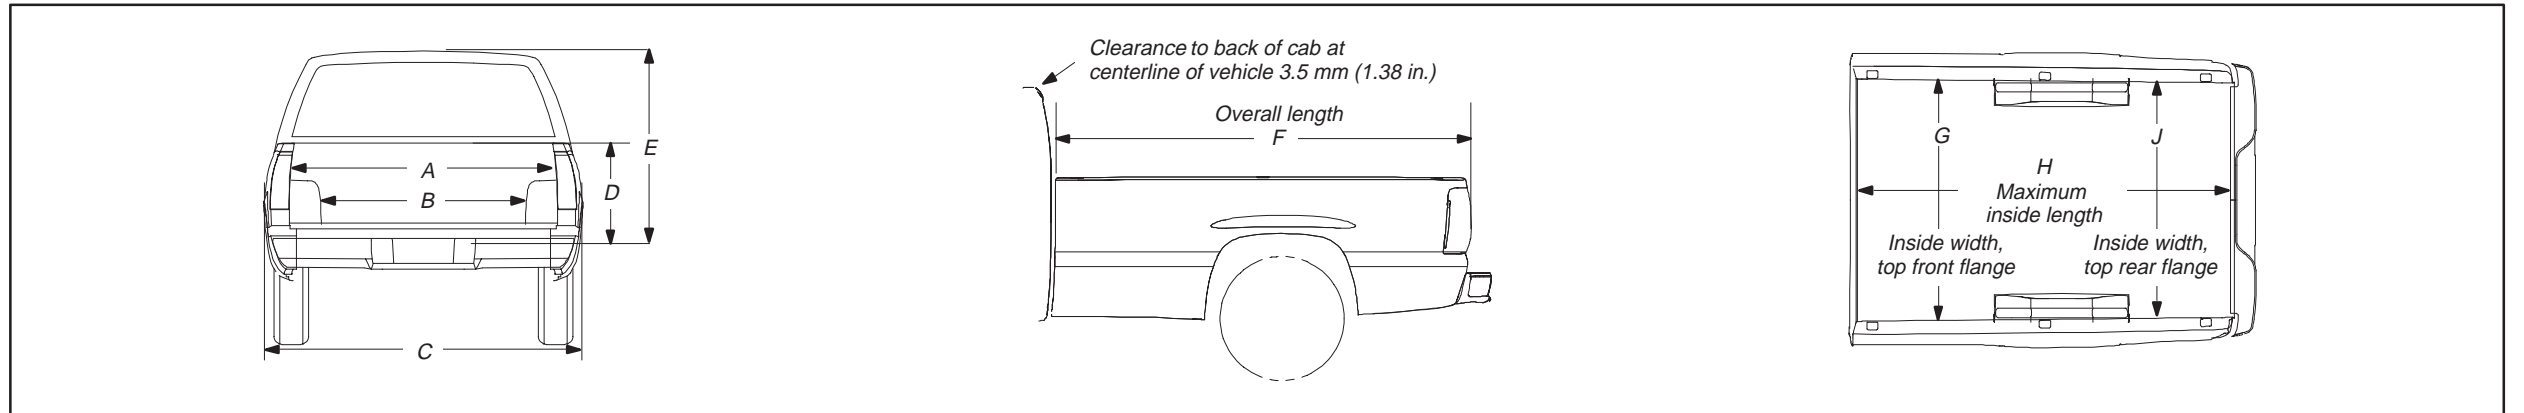

**Sportside** Short Box (Model Silverado/Sierra 15703, 15753)

| Option E62 |                    | A            | B            | C            | D           | E            | F            | G            | H            | J            |
|------------|--------------------|--------------|--------------|--------------|-------------|--------------|--------------|--------------|--------------|--------------|
| Short Box  | <i>mm (Inches)</i> | 1300 (51.1") | 1312 (51.7") | 1994 (78.5") | 499 (19.6") | 1073 (42.2") | 2113 (83.2") | 1246 (49.1") | 1997 (78.6") | 1246 (49.1") |

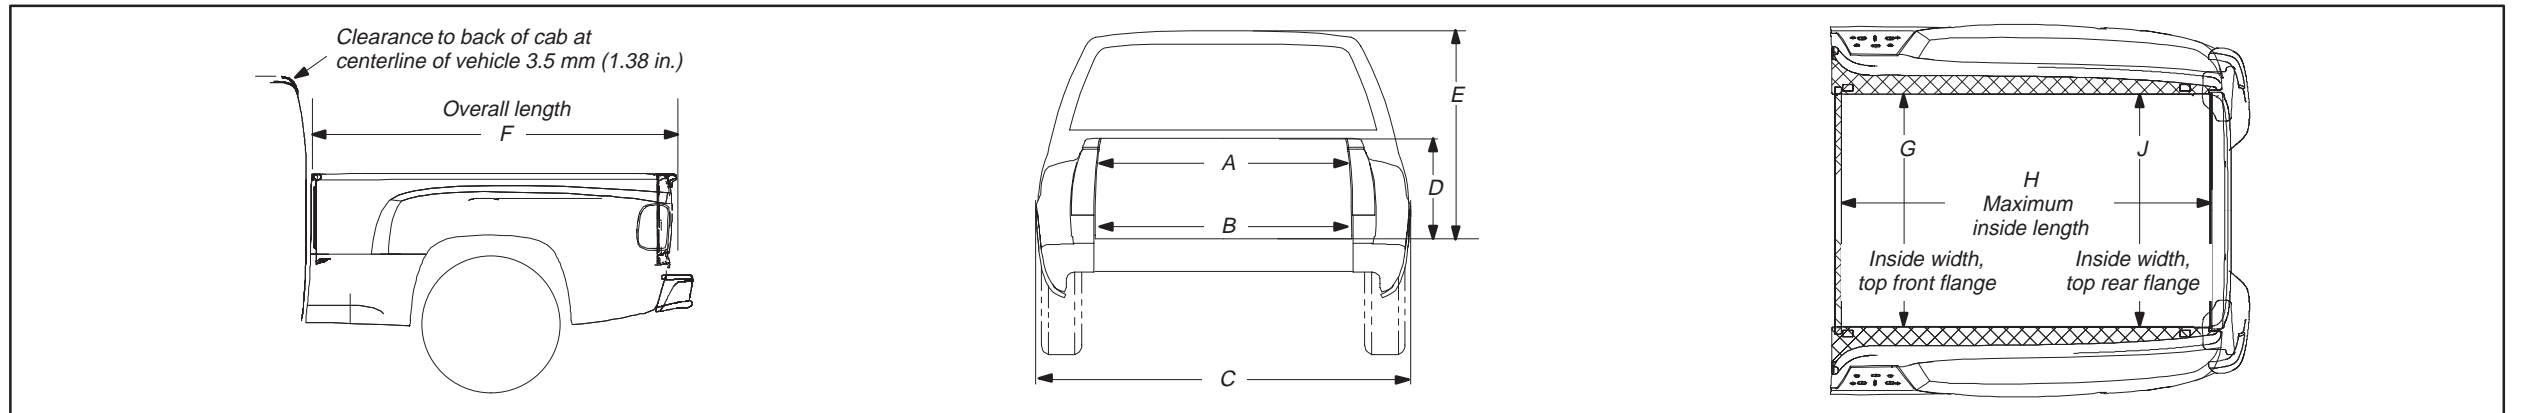





## Model Codes and Dimensions

### Regular Cab Models

| Series      | Model Number | Pickup Box Length<br>mm (ft.) | Pickup Style             | WB mm (in.)   | "C"* mm (in.) |
|-------------|--------------|-------------------------------|--------------------------|---------------|---------------|
| S 10/Sonoma | S 10803      | 2256 (7.4')                   | Fleetside/Wideside (E63) | 2995 (117.9") | 1085 (42.9")  |

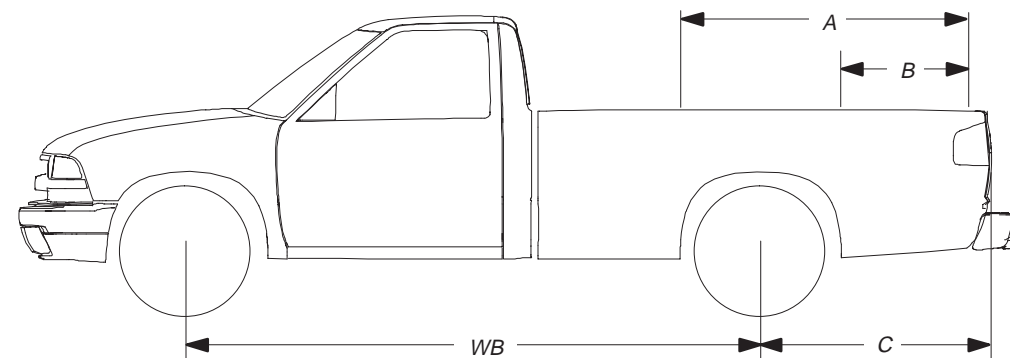


| Series                | Model Number | Pickup Box Length<br>mm (ft.) | Pickup Style                                | WB mm (in.)   | "C"* mm (in.) |
|-----------------------|--------------|-------------------------------|---|---------------|---------------|
| Silverado/Sierra 1500 | C/K 15703    | 1976 (6.5')                   | Fleetside/Wideside (E63)<br>Sportside (E62) | 3023 (119.0") | 988 (38.9")   |
|                       | C/K 15903    | 2456 (8.0')                   | Fleetside/Wideside (E63)                    | 3378 (133.0") | 1113 (43.8")  |
| Silverado/Sierra 2500 | C/K 25903    | 2456 (8.0')                   | Fleetside/Wideside (E63)                    | 3378 (133.0") | 1113 (43.8")  |

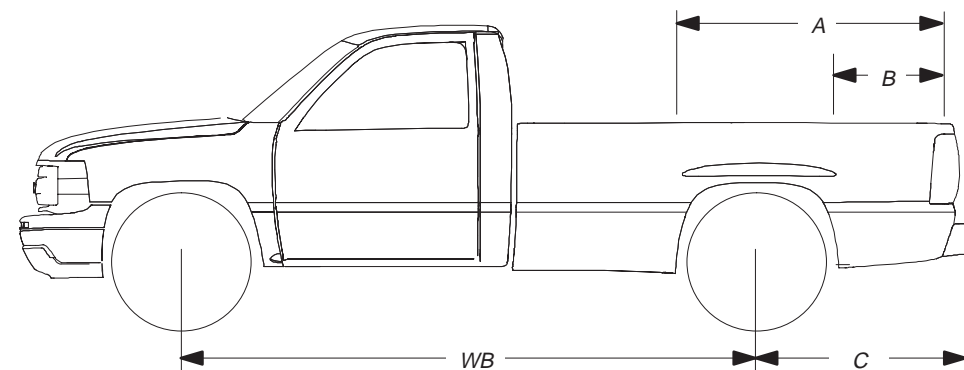


### Extended/Club Cab Models

| Series                | Model Number | Pickup Box Length<br>mm (ft.) | Pickup Style                                | WB mm (in.)   | "C"* mm (in.) |
|-----------------------|--------------|-------------------------------|---|---------------|---------------|
| Silverado/Sierra 1500 | C/K 15753    | 1976 (6.5')                   | Fleetside/Wideside (E63)<br>Sportside (E62) | 3645 (143.5") | 988 (38.9")   |
|                       | C/K 15953    | 2456 (8.0')                   | Fleetside/Wideside (E63)                    | 4000 (157.5") | 1113 (43.8")  |
| Silverado/Sierra 2500 | C/K 25753    | 1976 (6.5')                   | Fleetside/Wideside (E63)                    | 3645 (143.5") | 988 (38.9")   |
|                       | C/K 25953    | 2456 (8.0')                   | Fleetside/Wideside (E63)                    | 4000 (157.5") | 1113 (43.8")  |

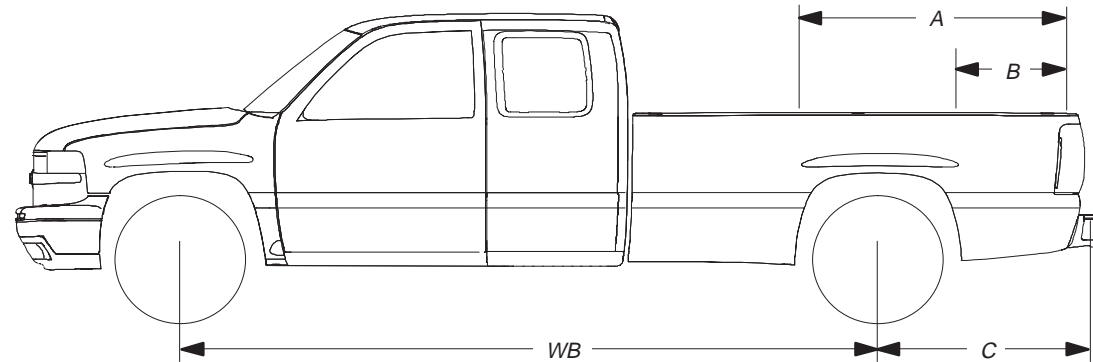


### Regular Cab Models

| Series          | Model Number | Pickup Box Length<br>mm (ft.) | Pickup Style             | WB mm (in.)   | "C"* mm (in.) |
|-----------------|--------------|-------------------------------|--------------------------|---------------|---------------|
| C/K/Sierra 3500 | C/K 30903    | 2438 (8.0')                   | Fleetside/Wideside (E63) | 3340 (131.5") | 1104 (43.5")  |

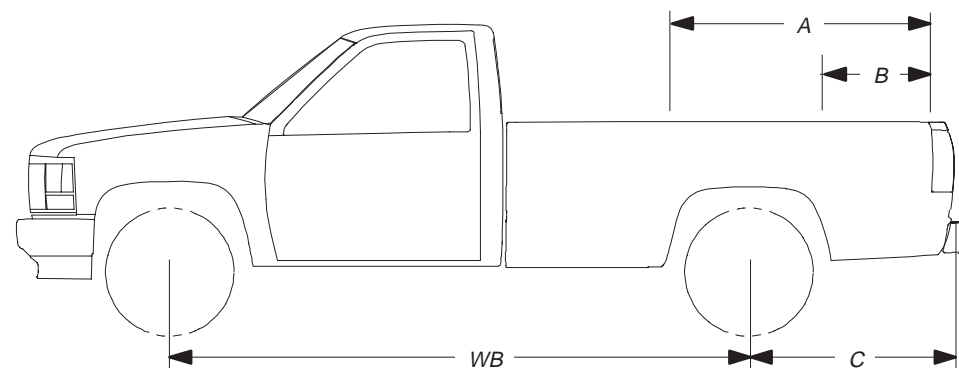

## Extended/Club Cab Models


| Series          | Model Number | Pickup Box Length<br>mm (ft.) | Pickup Style             | WB mm (in.)   | "C"* mm (in.) |
|-----------------|--------------|-------------------------------|--------------------------|---------------|---------------|
| C/K/Sierra 1500 | C/K 10753    | 1981 (6.5')                   | Fleetside/Wideside (E63) | 3595 (141.5") | 979 (38.5")   |
| C/K/Sierra 3500 | C/K 30953    | 2438 (8.0')                   | Fleetside/Wideside (E63) | 3950 (155.5") | 1104 (43.5")  |

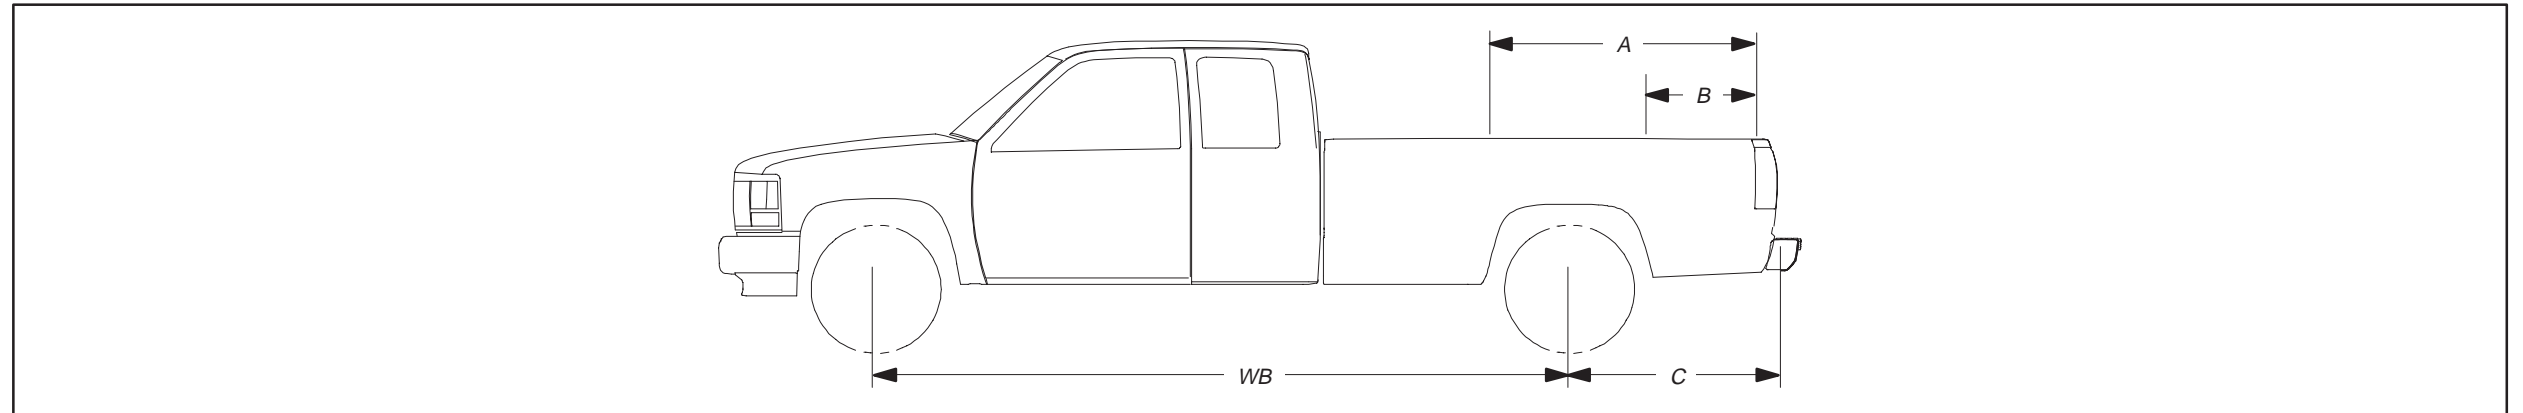

## Crew Cab Models

| Series          | Model Number | Pickup Box Length<br>mm (ft.) | Pickup Style             | WB mm (in.)   | "C"* mm (in.) |
|-----------------|--------------|-------------------------------|--------------------------|---------------|---------------|
| C/K/Sierra 3500 | C/K 20743    | 1981 (6.5')                   | Fleetside/Wideside (E63) | 3924 (154.5") | 979 (38.53")  |
|                 | C/K 30743    | 1981 (6.5')                   | Fleetside/Wideside (E63) | 3924 (154.5") | 979 (38.53")  |
|                 | C/K 30943    | 2438 (8.0')                   | Fleetside/Wideside (E63) | 4280 (168.5") | 1104 (43.46") |

\* Dimension "C" is the distance from the centerline of the rear axle to the end of the pickup box floor. Dimension A and B can be calculated by using the formula on page 12.

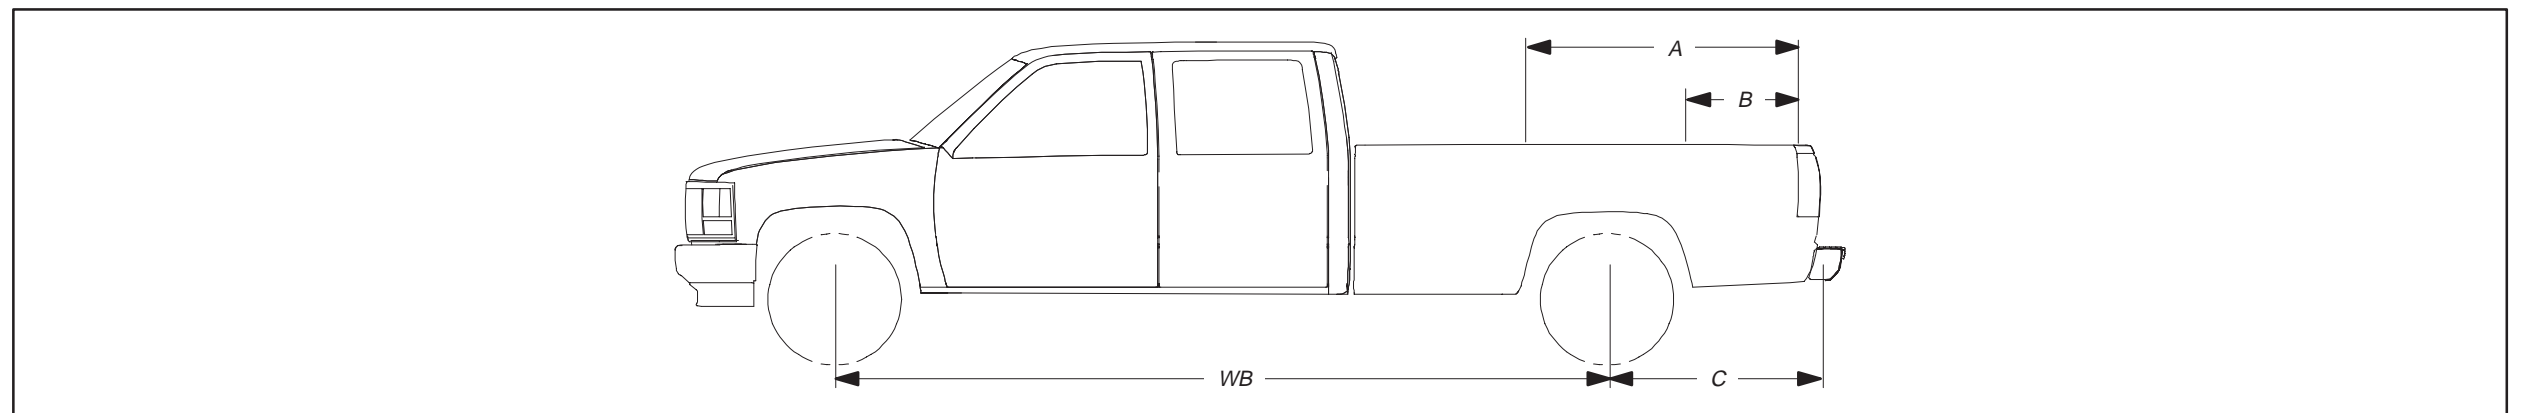

**Calculations to Determine Forward (A) and Rearward (B) Location of Center of Gravity for Cargo Weight Rating**

**Calculations for Dimension A**

$$A = \left\{ \frac{\text{Front GAWR} - (1.05 \times \text{Front Weight}^* \text{ of Truck})}{\text{Cargo Weight Rating}} \right\} \times \text{WB} + C$$

|   |    |       |
|---|----|-------|
| Enter Front GAWR .....  |    | _____ |
| Subtract Front Weight* of Truck x 1.05 .....                            | -  | _____ |
| Answer .....  |    | _____ |
| Divide Answer by Cargo Weight Rating (CWR) ÷                            |    | _____ |
| Answer .....  |    | _____ |
| Multiply Answer by Wheelbase<br>(See Charts on pages 9, 10 or 11) ..... | x  | _____ |
| Answer .....  |    | _____ |
| Add C Dimension to Answer<br>(See Charts on pages 9, 10 or 11) .....    | +C | _____ |
| Dimension A in centimeters (in inches) =                                |    | _____ |

**NOTE:** If "A" is greater than pickup box length, use box length for "A" dimension.

**Calculations for Dimension B**

$$B = \left\{ 1 - \frac{\text{Rear GAWR} - (1.1 \times \text{Rear Weight}^* \text{ of Truck})}{\text{Cargo Weight Rating}} \right\} \times \text{WB} + C$$

|   |    |       |
|---|----|-------|
| Enter Rear GAWR .....   |    | _____ |
| Subtract Rear Weight* of Truck x 1.1 .....                              | -  | _____ |
| Answer .....  |    | _____ |
| Divide Answer by Cargo Weight Rating (CWR) ÷                            |    | _____ |
| Answer .....  |    | _____ |
| Subtract Answer from 1.000 .....  | -  | _____ |
| Multiply Answer by Wheelbase<br>(See Charts on pages 9, 10 or 11) ..... | x  | _____ |
| Answer .....  |    | _____ |
| Add C Dimension to Answer<br>(See Charts on pages 9, 10 or 11) .....    | +C | _____ |
| Dimension B in centimeters (in inches) =                                |    | _____ |

**NOTE:** If "B" dimension is negative, use 0 (zero) for "B" dimension.  
 If "B" dimension is greater than "A" dimension, camper usage is not recommended at the Calculated Cargo Weight Rating. Camper usage may be possible for a lighter camper. Substitute known specific camper weight (less than Cargo Weight Rating) for Cargo Weight Rating in calculations above to determine "A" to "B" range for that specific camper.

**Record dimension A and B on page 3.**

**\*From page 6, line 4a.**

## Method of Certification by GM


### Completed Vehicle

A completed vehicle will have the certification label installed before shipment from the factory.

### Certification Labels


#### Models:

C/K 1500-3500 Pickups, C/K 1500-2500 Tahoe/Yukon, Suburban;  
G 10/1500-30/3500 Chevy Van/Savana, Express/Savana; G30/3500 Cutaway;  
P 30/3500.

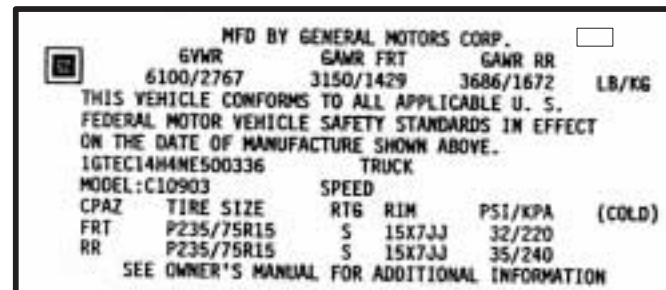

#### Models:

M/L Van Astro/Safari; S 10/15 Pickup,  
S 10/15 Blazer/Jimmy

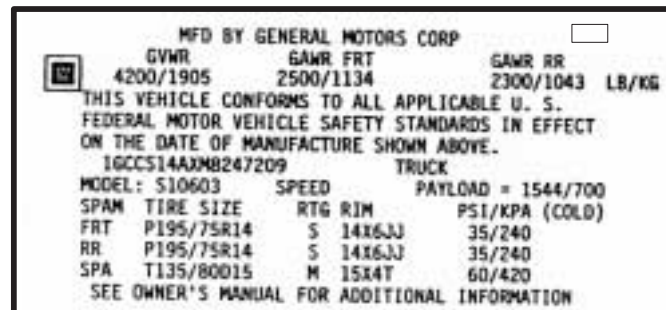

## Method of Certification

### Incomplete Vehicles

Will have a label affixed to the Document for Incomplete Vehicles. This is placed in a clear container and shipped with the incomplete vehicle from the factory.

## DOCUMENT FOR INCOMPLETE VEHICLE

PLACE LABEL HERE

This document is furnished as required by government regulation to aid intermediate and final stage manufacturers in determining conformity to applicable Federal Motor Vehicle Safety Standards. Also included are instructions which must be followed in order to assure that Environmental Protection Agency (EPA) and California emission certification requirements and NHTSA Fuel Economy Regulations are met. As a result of certifying Heavy Duty Vehicles with GVW's up to 10,000 pounds by Federal Light Duty Emission Standards, Part II of this document – U.S. EPA and California Exhaust & Evaporative Emission Requirements and NHTSA Fuel Economy Regulations—has been significantly revised and should be reviewed. This document is not a substitute for knowledge and understanding of the requirements of these standards and regulations. Intermediate and final stage manufacturers should be familiar with all Federal Motor Vehicle Safety Standards and Emission Regulations to be aware of their specific responsibilities as manufacturers.

Any manufacturer making material alterations to this incomplete vehicle during the process of manufacturing the complete vehicle should be constantly vigilant to recognize all the effects, either direct or indirect, on other components, assemblies or systems caused by each such alteration. No alteration should be made to the incomplete vehicle which either directly or indirectly results in any component, assembly or system being in nonconformance with any applicable Federal Motor Vehicle Safety Standard or Emission Regulation.

#### CANADA MOTOR VEHICLE SAFETY STANDARDS

The following statement, which is required by Section 6.(4) (a) of the Canada Motor Vehicle Safety Regulations is applicable only to incomplete vehicles manufactured in or imported to Canada:

THIS INCOMPLETE VEHICLE CONFORMS TO THE APPLICABLE CANADA MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF ITS MANUFACTURE SHOWN ABOVE. THE STANDARDS TO WHICH THIS INCOMPLETE VEHICLE CONFORMS IN FULL ARE DESIGNATED IN THE LIST OF FEDERAL MOTOR VEHICLE SAFETY STANDARDS ON PAGE 3 BY AN ASTERISK (\*) IN THE COLUMN FOR THE BASIC TYPE OF INCOMPLETE VEHICLE.



Printed in U.S.A.

### Models

All incomplete vehicles; C/K 3500 Chassis-Cab; G 30/3500 Cutaway Van;. P 30/3500 Forward Control Chassis; P 30/3500 Motorhome Chassis, Series 60 and 70.

**Vehicle Classification and GM Application**

| Model                | Application<br>(Chevy/GMC)  | Vehicle Classification |                     |                   |
|----------------------|---|------------------------|---------------------|-------------------|
|                      |   | MPV                    | Truck <sup>1)</sup> | Bus <sup>1)</sup> |
| M/L Series           | Astro/Safari–Cargo/<br>Passenger Van                                  | X <sup>3)</sup>        | X                   |                   |
| S/T Series           | S-Series/Sonoma Regular/Ex-<br>tended Cab Pickups                     | X <sup>2)</sup>        | X                   |                   |
| S/T Series           | Blazer/Jimmy (2/4 Door)   | X <sup>3)</sup>        | X                   |                   |
| C/K 1500 Series      | Tahoe (2/4 Door)/<br>Yukon (4 Door)                                   | X <sup>3)</sup>        | X                   |                   |
| C/K 1500-3500 Series | C/K/Silverado/Sierra Chassis-<br>Cabs/Regular/Extended Cab<br>Pickups | X <sup>2)</sup>        | X                   |                   |
| C/K 1500-2500 Series | Suburban  | X <sup>3)</sup>        | X                   |                   |
| G 1500-3500          | Chevy Van/<br>Savanna Cargo Van                                       | X <sup>2)</sup>        | X                   | X                 |
| G 1500-3500          | Express/<br>Savanna Passenger Van                                     | X <sup>3)</sup>        |                     |                   |
| G 3500 Series        | Commercial/RV Cutaway/<br>Savanna Special                             | X <sup>2)</sup>        | X                   | X                 |
| P 3500 Series        | All models  | X <sup>2)</sup>        | X                   | X                 |

<sup>1)</sup> It is assumed that Cab and Chassis only will be completed as a truck. Chassis only with RPO B3D or B3M will be completed into a school bus.

<sup>2)</sup> MPV Classification may apply only when unit is completed as a Recreation Vehicle (Camper)

<sup>3)</sup> MPV is a vehicle with 2 or 3 rows of seats

**Federal Regulation – Tires**

The National Highway Traffic Safety Administration has issued regulations dealing with tire identification and record keeping which became effective May 22, 1971. Under these regulations important legal responsibilities are imposed upon tire manufacturers, brand name owners, retreaders, distributors and dealers, and motor vehicle manufacturers and dealers, to maintain and/or report certain information concerning tires. This information will be used to facilitate interest of safety. If you have any questions concerning the application of these regulations to your business, we suggest you consult with your attorney.

In order for GM to meet its responsibility under these tire regulations we have a record of the tires on each vehicle we shipped to you. If you do not change a tire on a GM vehicle, it is important that you make sure that it is reshipped with the same tires that were on it when the vehicle was received by you. This will mean that any tires which you remove from a vehicle during the course of your work should be put back on the same vehicle.

If you do change a tire on a GM vehicle, it is necessary that you furnish us with such information on vehicles which are returned to us after you have completed your work. It is important that you report to us the full tire identification number (TIN) for each tire you install and the full vehicle identification number (VIN) of the vehicle on which the tire is installed.

If you change a tire on a GM vehicle which is not returned to us, you may be responsible for maintaining records of the vehicle identification number (VIN) and the vehicle owner to allow notification, through your records, if tire problems are found.

In case you should receive a defect notification from a tire manufacturer concerning tires which you installed on vehicle returned to us, you may forward it to us so that we can send it to the vehicle owner whose name will appear on our records.

## GM Fleet & Commercial Operations

| Region        | Mailing Address                                     | Telephone      | Fax            |
|---------------|---|----------------|----------------|
|               |   |                |                |
| Northeast     | 2500 Westchester Ave.<br>Purchase, NY 10577 – 0890  | (914) 251-5050 | (914) 251-5229 |
| North Central | 387 Shuman Blvd.<br>Naperville, IL 60563 – 1217     | (630) 961-6425 | (630) 961-6379 |
| Southeast     | 5730 Glenridge Drive<br>Atlanta, GA 30328           | 1 800 248-0178 | (404) 257-3595 |
| South Central | 130 E. Carpenter Fwy, Ste. #200<br>Irving, TX 75062 | (972) 541-5415 | (972) 541-5424 |
| Western       | 515 Marin St.<br>Thousand Oaks, CA 91360            | 1 800 510-3973 | (805) 373-8432 |

## Base Model Weight Information

### Payload Definition

The maximum allowable weight of cargo to be carried in a vehicle, including occupants; computed by subtracting total curb weight from GVWR.

**NOTE:** Due to option content and product changes, the base payloads listed below are for reference only. If it becomes necessary to have an actual payload figure, the vehicle must be weighed.

### Cargo Weight Definition

The weight of the load carrying capability; computed by subtracting passenger and curb weight from GVWR.

| Model                  | GVWR (lbs.) | GVW RPO | Front Curb Weight<br>GVWR (lbs.) | Rear Curb Weight<br>(lbs.) | Total Curb Weight<br>(lbs.) | Base Payload<br>(lbs.) |
|------------------------|-------------|---------|----------------------------------|----------------------------|-----------------------------|------------------------|
| <b>S-Series Pickup</b> |             |         |                                  |                            |                             |                        |
| S 10603                | 4200        | C5T     | 1721.8                           | 1318.8                     | 3040.6                      | 1159.4                 |
| S 10653                | 4400        | C3A     | 1830.9                           | 1394.4                     | 3225.3                      | 1174.7                 |
| S 10803                | 4600        | C5D     | 1759.7                           | 1352.3                     | 3112.0                      | 1488.0                 |
| T 10603                | 5150        | C6F     | 2250.0                           | 1391.5                     | 3596.5                      | 1553.5                 |
| T 10653                | 5150        | C6F     | 2317.5                           | 1434.3                     | 3751.8                      | 1398.2                 |

| Model                       | GVWR (lbs.) | GVW RPO | Front Curb Weight<br>GVWR (lbs.) | Rear Curb Weight<br>(lbs.) | Total Curb Weight<br>(lbs.) | Base Payload<br>(lbs.) |
|-----------------------------|-------------|---------|----------------------------------|----------------------------|-----------------------------|------------------------|
| <b>C/K Pickup (Current)</b> |             |         |                                  |                            |                             |                        |
| C 20743                     | 8600        | C6P     | 3173.5                           | 2196.4                     | 5369.9                      | 3230.1                 |
| C 20903                     | 8600        | C6P     | 2647.8                           | 1758.2                     | 4405.9                      | 1794.1                 |
| C 20953                     | 8600        | C6P     | 2930.1                           | 2256.0                     | 5186.1                      | 3413.9                 |
| C 30743                     | 9400        | C6E     | 3502.0                           | 2415.1                     | 5917.1                      | 3482.9                 |
| C 30903                     | 9000        | C6U     | 2672.9                           | 2235.0                     | 4907.9                      | 4092.1                 |
| C 30943                     | 9000        | C6U     | 3078.9                           | 2519.0                     | 5597.9                      | 3402.1                 |
| C 30953                     | 10,000      | C7A     | 2939.4                           | 2570.1                     | 5509.4                      | 4490.5                 |
| K 20743                     | 8600        | C6P     | 3394.9                           | 2348.6                     | 5743.5                      | 2856.5                 |
| K 20753                     | 8600        | C6P     | 3139.6                           | 2204.8                     | 5344.4                      | 3255.6                 |
| K 20903                     | 8600        | C6P     | 2974.0                           | 2223.6                     | 5197.6                      | 3402.4                 |
| K 20953                     | 8600        | C6P     | 3248.0                           | 2286.8                     | 5534.8                      | 3065.2                 |
| K 30743                     | 9400        | C6E     | 3592.0                           | 2489.2                     | 6081.2                      | 3318.8                 |
| K 30903                     | 9200        | C6W     | 2951.5                           | 2281.3                     | 5232.8                      | 3967.2                 |
| K 30943                     | 9200        | C6W     | 3384.1                           | 2571.4                     | 5955.5                      | 3244.5                 |
| K 30953                     | 10,000      | C7A     | 3262.1                           | 2617.1                     | 5879.2                      | 4120.8                 |
| <b>C/K Pickup (New)</b>     |             |         |                                  |                            |                             |                        |
| C 15703                     | 6100        | C5M     | 2318.8                           | 1636.7                     | 3955.5                      | 2144.5                 |
| C 15903                     | 6400        | C7H     | 2384.5                           | 1681.7                     | 4066.2                      | 2333.8                 |
| C 15753                     | 6200        | Q4B     | 2555.1                           | 1734.1                     | 4289.2                      | 1910.8                 |
| C 15953                     | 6200        | Q4B     | 2637.1                           | 1874.4                     | 4511.5                      | 1688.5                 |
| C 25753                     | 7200        | C5Z     | 2832.0                           | 1911.4                     | 4743.4                      | 2456.6                 |
| C 25903                     | 7200        | C5Z     | 2666.7                           | 1921.1                     | 4587.8                      | 2612.2                 |
| C 25953                     | 8600        | C6P     | 3030.0                           | 2136.2                     | 5166.2                      | 3433.8                 |
| K 15703                     | 6100        | C5M     | 2493.0                           | 1752.6                     | 4245.6                      | 1854.4                 |
| K 15903                     | 6400        | C7H     | 2576.7                           | 1796.8                     | 4373.5                      | 2026.5                 |
| K 15753                     | 6400        | C7H     | 2797.6                           | 1922.4                     | 4720.0                      | 1680.0                 |
| K 15953                     | 6400        | C7H     | 2814.4                           | 1992.5                     | 4806.9                      | 1593.1                 |
| K 25753                     | 8600        | C6P     | 3235.5                           | 2140.2                     | 5375.7                      | 3224.3                 |
| K 25903                     | 8600        | C6P     | 3120.4                           | 2141.1                     | 5261.5                      | 3338.5                 |
| K 25953                     | 8600        | C6P     | 3248.7                           | 2282.6                     | 5531.3                      | 3068.7                 |
| <b>C/K Chassis Cab</b>      |             |         |                                  |                            |                             |                        |
| C 20903                     | 8600        | C6P     | 2749.1                           | 2134.1                     | 4883.2                      | 3716.8                 |
| C 30903                     | 9000        | C6U     | 2672.0                           | 2235.5                     | 4907.5                      | 4092.5                 |



| Model                        | GVWR (lbs.) | GVW RPO | Front Curb Weight<br>GVWR (lbs.) | Rear Curb Weight<br>(lbs.) | Total Curb Weight<br>(lbs.) | Base Payload<br>(lbs.) |
|------------------------------|-------------|---------|----------------------------------|----------------------------|-----------------------------|------------------------|
| C 31003                      | 10,000      | C7A     | 2799.6                           | 2173.7                     | 4973.3                      | 5026.7                 |
| C 31403                      | 10,000      | C7A     | 2900.8                           | 2150.8                     | 5051.6                      | 4948.4                 |
| K 20903                      | 8600        | C6P     | 2974.0                           | 2224.4                     | 5198.4                      | 3401.6                 |
| K 30903                      | 9200        | C6W     | 2951.9                           | 2281.8                     | 5233.7                      | 3966.3                 |
| K 31003                      | 12,000      | C7L     | 3063.7                           | 2285.1                     | 5348.8                      | 6651.2                 |
| K 31403                      | 12,000      | C7L     | 3116.0                           | 2370.6                     | 5486.6                      | 6513.4                 |
| <b>C/K Chassis Cab (New)</b> |             |         |                                  |                            |                             |                        |
| C 25903                      | 8600        | C6P     | 2841.7                           | 1613.8                     | 4455.5                      | 4144.5                 |
| C 25903                      | 8600        | C6P     | 3123.9                           | 2173.7                     | 5297.6                      | 3302.4                 |
| <b>C 3500 HD Chassis Cab</b> |             |         |                                  |                            |                             |                        |
| C 31003                      | 15,000      | C5B     | 3366.4                           | 2700.6                     | 6067.0                      | 8933.0                 |
| C 31403                      | 15,000      | C5B     | 3551.6                           | 2561.7                     | 6113.3                      | 8886.7                 |
| C 31803                      | 15,000      | C5B     | 3800.5                           | 2584.5                     | 6385.0                      | 8615.0                 |
| <b>S/T Utility</b>           |             |         |                                  |                            |                             |                        |
| S 10516                      | 4450        | C3G     | 1937.4                           | 1666.2                     | 3603.6                      | 931.8                  |
| S 10506                      | 5000        | C5C     | 2032.6                           | 1685.6                     | 3718.2                      | 1281.8                 |
| T 10516                      | 4850        | C6I     | 2158.7                           | 1710.8                     | 3869.5                      | 980.5                  |
| T 10506                      | 5350        | C3T     | 2290.1                           | 1824.5                     | 4114.6                      | 1233.4                 |
| <b>C/K Utility</b>           |             |         |                                  |                            |                             |                        |
| C 10706                      | 6300        | C5Q     | 2517.4                           | 2280.0                     | 4797.4                      | 1502.6                 |
| K 10706                      | 6800        | C5U     | 2759.5                           | 2455.0                     | 5214.5                      | 1585.5                 |
| <b>C/K Utility (New)</b>     |             |         |                                  |                            |                             |                        |
| C 15706                      | 6500        | C7K     | 2452.8                           | 2374.8                     | 4827.6                      | 1672.4                 |
| C 15906                      | 7000        | C5W     | 2556.0                           | 2358.5                     | 4914.5                      | 2085.5                 |
| C 25906                      | 8600        | C6P     | 2739.0                           | 2708.1                     | 5447.1                      | 3152.9                 |
| K 15706                      | 6800        | C5U     | 2641.5                           | 2407.9                     | 5049.4                      | 1750.6                 |
| K 15906                      | 7200        | C5Z     | 2736.3                           | 2386.7                     | 5123.0                      | 2077.0                 |
| K 25906                      | 8600        | C6U     | 3017.2                           | 2743.4                     | 5760.6                      | 2839.4                 |
| <b>M/L Passenger Van</b>     |             |         |                                  |                            |                             |                        |
| M 11006                      | 5950        | C6M     | 2330.7                           | 1992.5                     | 4323.2                      | 1626.8                 |
| L 11006                      | 6100        | C5M     | 2541.9                           | 2051.6                     | 4593.5                      | 1506.5                 |
| <b>M/L Cargo Van</b>         |             |         |                                  |                            |                             |                        |
| M 11005                      | 5600        | C5G     | 2281.8                           | 1633.1                     | 3914.9                      | 1685.1                 |
| L 11005                      | 5850        | C7X     | 2492.1                           | 1692.2                     | 4184.3                      | 1665.7                 |

| Model                     | GVWR (lbs.) | GVW RPO | Front Curb Weight<br>GVWR (lbs.) | Rear Curb Weight<br>(lbs.) | Total Curb Weight<br>(lbs.) | Base Payload<br>(lbs.) |
|---------------------------|-------------|---------|----------------------------------|----------------------------|-----------------------------|------------------------|
| <b>G Van Cargo</b>        |             |         |                                  |                            |                             |                        |
| G 11405                   | 6100        | C5M     | 2458.1                           | 2178.1                     | 4636.2                      | 1463.8                 |
| G 21405                   | 7300        | C6A     | 2487.7                           | 2328.0                     | 4815.7                      | 2484.3                 |
| G 21705                   | 7300        | C6A     | 2604.1                           | 2395.9                     | 5000.0                      | 2300.0                 |
| G 31405                   | 9500        | E23     | 2740.3                           | 2604.5                     | 5344.8                      | 4155.2                 |
| G 31705                   | 9500        | E23     | 2860.7                           | 2679.0                     | 5539.7                      | 3960.3                 |
| <b>G Van Passenger</b>    |             |         |                                  |                            |                             |                        |
| G 11406                   | 7100        | C5Y     | 2614.6                           | 2513.2                     | 5127.8                      | 1972.2                 |
| G 21406                   | 8600        | C6P     | 2857.2                           | 2951.1                     | 5808.3                      | 2791.7                 |
| G 21706                   | 8600        | C6P     | 3010.2                           | 3008.4                     | 6018.6                      | 2581.4                 |
| G 31406                   | 9500        | E23     | 2869.5                           | 3077.2                     | 5946.7                      | 3553.3                 |
| G 31706                   | 9500        | E23     | 3022.9                           | 3134.9                     | 6157.8                      | 3342.2                 |
| <b>Commercial Cutaway</b> |             |         |                                  |                            |                             |                        |
| G 31503                   | 9500        | E23     | 2731.0                           | 1718.3                     | 4449.3                      | 5050.7                 |
| G 31803                   | 10,000      | C7A     | 2784.8                           | 1875.2                     | 4660.0                      | 5340.0                 |
| G 31903                   | 12,000      | C7L     | 2814.4                           | 1870.8                     | 4685.2                      | 7314.8                 |
| <b>R/V Cutaway</b>        |             |         |                                  |                            |                             |                        |
| G 31532                   | 9500        | E23     | 2800.3                           | 1780.9                     | 4581.2                      | 4918.8                 |
| G 31832                   | 11,500      | C7G     | 2853.2                           | 1950.6                     | 4803.8                      | 6696.2                 |
| G 31932                   | 12,300      | C7N     | 2882.3                           | 1945.8                     | 4828.1                      | 7471.9                 |

## Payload Determination

### Payload Definition

Maximum allowable weight of cargo to be carried in a vehicle, including occupants. Computed by subtracting curb weight from GVWR.

Light trucks are designed to offer the customer a selection of payload capacities to meet their varying needs. This section of the Data Book lists the base and max payload capacity of all truck models. It does not list payloads for vehicles with optional suspensions, axles, wheels or tires, aftermarket accessories, equipment or bodies.

The reason is that each additional piece of equipment affects payload. With the number and variety of options, bodies and accessories available, there is an almost infinite number of possible payloads.

When a customer wants to know the payload of a truck in stock or a truck being ordered, and that truck is a model with optional equipment, you must perform a simple calculation to provide the information.

### Here's how to do this

| What to Do  | Where to Find the Information |
|---|-------------------------------|
| 1. Determine truck's Gross Vehicle Weight Rating (GVWR)   | GVWR Selector Section         |
| 2. Determine the truck's Curb Weight (Curb weight = full fuel, no occupants)                      | Model and Option Weights      |
| 3. Determine the truck's option content and the weight of each piece of optional equipment.       | Model and Option Weights      |
| 4. Subtract the Curb Weight and the Option Weight(s) from the truck's Gross Vehicle Weight Rating |                               |

**NOTE:** The following example is based on 2000 model and option weights contained in the 2000 Weights section.

### Example

A customer asks you for the payload of a C 1500 Regular Cab Pickup (TC 15903/C5M) with an optional 5.3L V8 engine, Automatic 4-speed transmission and a chromed rear step bumper. You perform the following calculation:

|   |   |                    |
|---|---|--------------------|
| 1. Gross Vehicle Weight Rating (GVWR) (C5M) ..... |   | <b>6100.0 lbs.</b> |
| 2. Curb Weight .....                              | - | 4032.0 lbs.        |
| 3. 5.3L V8 Engine (LM7) .....                     | - | 120.8 lbs.         |
| (VB3) Rear Step Bumper (Chromed) .....            | - | 00.0 lbs.          |
| <hr/>   |   |                    |
| Payload .....                                     | = | 1938.1 lbs         |

## Incomplete Vehicle Payload Determination

### Payload Definition;

Maximum allowable weight of cargo to be carried in a vehicle, including occupants. Computed by subtracting curb weight from GVWR.

Determining the available payload for an incomplete vehicle (such as a chassis-cab) is similar to a completed vehicle, but the weight of the added body and any accessories must also be subtracted from the GVWR.

| What to Do   | Where to Find the Information |
|--|-------------------------------|
| 1. Determine truck's Gross Vehicle Weight Rating (GVWR)  | GVWR Selector Section         |
| 2. Determine the truck's Curb Weight (Curb weight = full fuel, no occupants)   | Model and Option Weights      |
| 3. Determine the truck's option content and the weight of each piece of optional equipment.  | Model and Option Weights      |
| 4. Subtract the Curb Weight and the Option Weight(s) from the truck's Gross Vehicle Weight Rating to determine the payload capacity. |                               |
| 5. Subtract the determined weight of body and accessories  | Body Manufacturer/Distributor |

**NOTE:** The following example is based on 1999 model and option weights contained in the 1999 Weights section.

### Example

A customer asks you for the payload of a standard C/K Chassis-Cab (C 31003) with a standard 5700 V8 engine, a 5-speed manual transmission, an aftermarket stake body, as well as factory options consisting of exterior west coast style mirrors and air conditioning. You perform the following calculation:

|   |                      |
|---|----------------------|
| 1. Gross Vehicle Weight Rating (GVWR) (C7A) ..... | <b>10,000.0 lbs.</b> |
| 2. Curb Weight (TC31003) .....                    | 4950.4 lbs.          |
| 3. Air Conditioning (C60) .....                   | 40.1 lbs.            |
| 5700 V8 Engine (L31) .....                        | 0.0 lbs.             |
| 5-Speed Manual Transmission (MW 3) .....          | 0.0 lbs.             |
| Mirrors, Exterior West Coast Style (DG 5) .....   | 12.8 lbs.            |
| 5. Stake Body .....                               | 850.0 lbs.           |
| <hr/>   |                      |
| Payload .....                                     | = 4146.7 lbs         |

### Percentage Body and Payload Weight at Front Axle

To determine percentage of load at rear axle, subtract percentage of load at front axle from 100.0%. Tables are calculated using the following formula:

$$100 \times (X) = \% \text{ Body and Payload at Front Axle}$$


Wheelbase

**NOTE:** Body Length is in inches for equation:

- CA = Cab to rear Axle dimension
- BC = Body Clearance between body and cab
- B = Body length
- WB = Wheel Base
- X = Center of gravity of payload to rear axle dimension

$$100 \times CA - [(BC) + B/2] = \% \text{ Body Payload at Front Axle}$$

Wheelbase

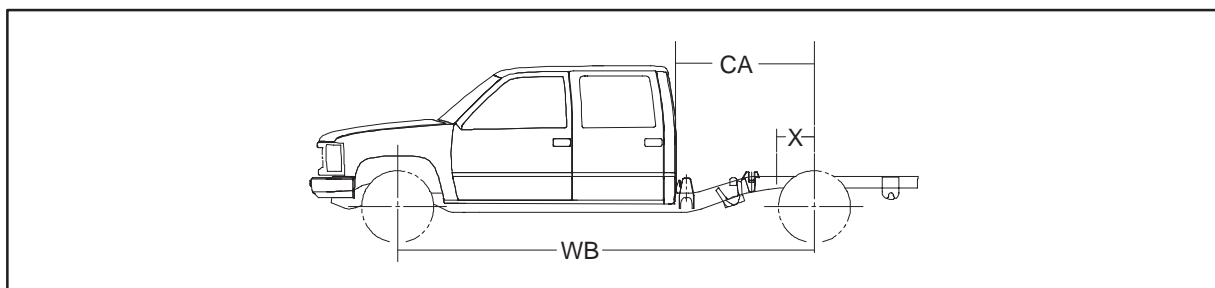

Body lengths, and percentage figures are found in the Body-Payload Weight Distribution Charts located in the model weight section for pickup and C/K chassis cabs. These charts represent all lengths that are possible to use. The shortest length in each case represents the smallest body that will reach the approximate end of the chassis frame at the maximum cut off. The longest length represents the largest body which can be used without placing the center of gravity behind the rear axle.

Body lengths shown in the Body-Payload Weight Distribution Charts represent the entire outside length of the body (not necessarily nominal length) including sills or extensions of any kind. The center of gravity used is the exact center of the body length. For specific cases the exact center of gravity of body and payload should be determined. Body and payload center of gravity should always be ahead of the center line of the rear axle or bogie suspension. If the center of the load is behind the rear axle it will result in reduced steering control and may even lift the front wheels off the ground.

Weight distribution should be computed for all body applications. Some clearance must be maintained between the cab and body.

Results of a weight distribution calculation should show:

1. Weight at front as close as possible, but not exceeding, front suspension capacity
2. Weight at rear as close as possible, but not exceeding, rear axle capacity
3. Front weight at ground of the loaded vehicle must exceed the front weight at ground of the unloaded vehicle

If these conditions do not exist, recalculate the weight distribution using either different body or chassis size or using a different location of the body.

Extreme caution should be exercised in selecting the shortest or longest allowable body lengths. The shortest lengths will usually shift a major portion of the body and payload weight to the front axle of the vehicle. This will limit driver control of steering and reduce traction at the rear wheels. The longest bodies will usually restrict the weight distributed to the front axle. This will reduce the effect the steering mechanism and front wheels have on controlling the vehicle's direction of movement. In cases of special body and/or load distribution or where axle capacities are extremely over or under loaded, consult the factory for recommendations.

### Reserve Capacity Determination

#### Cargo Weight Definition

Weight of the load carrying capability. Computed by subtracting passenger and curb weight from GVWR.

It is important to sell your customer the right truck for the right job. One way to make sure your customer are buying the right truck is to determine what they will be carrying, how much it weight and then recommend a truck capable of carrying the load.

GMC Truck offers a variety of models in each truck line. Each model has specific capacities. It is essential to determine the weight of the payload your customers will be carrying to determine if the truck you're recommending will carry the load.

The following process will help you accomplish that task

| What to Do  | Where to Find the Information  |
|---|--|
| 1. Select the approximate weight of the material your prospect wishes to carry.   | <b>Model/Option Weights</b> section to find approximate weights of a variety of cargos.  |
| 2. Determine which truck the would best suit the customer. Use the pages at the beginning of this section to find a model with a payload in the range of the weight of the cargo the customer wishes to carry.  | Payload/GVWR Calculations  |
| 3. Select the percentage weight distribution of the model you have chosen. If the payload for your vehicle is not at a water level load you must calculate the the percent of weight the payload will put on the front axle using the formula provided. | Consult the <b>Percentage Weight Distribution Table</b> in the <b>Model and Option Weights</b> section for pickup and chassis cab water level loading. |
| 4. Determine the percentage weight distribution of the cargo your prospect wishes to carry. Use the percentage weight distribution figures to determine the front percentage and rear percentage.   |  |
| 5. Determine the front and rear curb weight of the vehicle you are considering (no passenger weight).   | Consult the <b>Model and Option Weights</b> section for weights of the vehicle you are considering.  |
| 6. Determine the front and rear weight of any optional equipment.   | Consult the <b>Model and Option Weights</b> section for the weights of the vehicle you are considering.  |

|  |   |
|--|---|
| 7. Add the total front and rear cargo weights, front and rear curb weight, and the option weights together. The result will be the amount of weight to be supported by the front axle of the vehicle you've chosen, and the amount of weight to be supported by the rear axle. This is called the <b>Front Gross Axle Weight</b> and the <b>Rear Gross Axle Weight</b> .   |   |
| 8. Determine the front and rear <b>Gross Axle Weight Rating</b> of the vehicle you are considering.<br><br>If the Gross Axle Weight Rating of the vehicle you are considering is higher than the Gross Axle Weight you've calculated, the vehicle you are considering should be right for the job. If not, you'll need to find a model with <b>Gross Axle Weight Rating</b> high enough to carry the load you've calculated. | Consult the <b>GVWR Selector</b> of the vehicle ordering sections.  |
| 9. One more step is necessary before recommending the model. Add the front and rear Gross Axle Weight together. This number is the Gross Vehicle Weight.   |   |
| 10. Insert the Gross Vehicle Weight Rating of the model you have selected and compare it to the Gross Vehicle Weight. If the (GVW) is lower, then the model should be right for the job. If not, consult the Base Payload pages at the beginning of this section to find a vehicle with a higher GVWR.   | Consult the <b>Axle/Suspensions</b> pages to find GAWRs in the range required. The models possessing these GAWRs are listed. GVWRs are also listed. |
| 11. Add the front Gross Axle Weight and the rear Gross Axle Weight together to determine the Gross Vehicle Weight. Subtract the Gross Vehicle Weight from the Gross Vehicle Weight Rating.   |   |
| 12. Subtract the passenger weight to determine the total reserve capacity.   | Calculated Value:<br>(Number of passengers and driver x 150 lbs. per person)  |

### Reserve Capacity Determination Sample

**NOTE:** The following example is based on 1999 model and Option Weights contained in the 1998 Weights section.

1. Cargo: Cement (Bags)  
 Weight: 15 Bags x 94 lbs. each = 1,410 lbs.  
 Vehicle: C 1500 4 x 2 Regular Cab 6100 lbs.  
 2. Model # TC 15903 Opt. # C5M

|   | Front<br>7%                         | Rear<br>93%                         |
|---|-------------------------------------|-------------------------------------|
| 3. % Cargo Weight Distribution                                  |                                     |                                     |
| 4. Cargo Weight Distribution                                    | 56.0 lbs.                           | 1,354.0 lbs.                        |
| 5. Curb Weight Distribution                                     | 2311.8 lbs.                         | 1721.0 lbs.                         |
| 6. Option Weight  |                                     |                                     |
| RPO   |                                     |                                     |
| Order Code  |                                     |                                     |
| Air Conditioning  | 42.3 lbs.                           | -2.2 lbs.                           |
| Body  |                                     |                                     |
| Rear Axle   |                                     |                                     |
| Trailer Equipment   |                                     |                                     |
| Engine  | 119.9 lbs.                          | 0.9 lbs.                            |
| Transmission  |                                     |                                     |
| Rear Wheels   |                                     |                                     |
| Rear Bumper   |                                     |                                     |
| Tire  |                                     |                                     |
| Convenience Features  |                                     |                                     |
|   |                                     |                                     |
|   |                                     |                                     |
|   |                                     |                                     |
| 7. Total of Cargo, Curb and Option Weight (GAW)                 | Frt. Gross Axle Wgt.<br>2529.2 lbs. | Rr.. Gross Axle Wgt.<br>3073.7 lbs. |
| 8. Gross Axle Weight Rating for Suggested Vehicle (GAWR)        | 2950 lbs.                           | 3750 lbs.                           |
| 9. Gross Vehicle Weight (GVW) (Front GAW) + (Rear GAW)          | 5602.9 lbs.                         |                                     |
| 10. Gross Vehicle Weight Rating (GVWR)                          | 6100 lbs.                           |                                     |
| 11. (GVWR) – (GVW)  | 497.1 lbs.                          |                                     |
|   | TOTAL                               |                                     |
| 12. Subtract Passenger Weight                                   | 450 lbs.                            |                                     |
| (No. Passengers x 150 lbs.) To Calculate Total Reserve Capacity | 47.1 lbs.                           |                                     |

### Reserve Capacity Determination

1. Cargo: \_\_\_\_\_  
 Weight: \_\_\_\_\_  
 Vehicle: \_\_\_\_\_  
 2. Model # \_\_\_\_\_ GVWR: \_\_\_\_\_

|   | Front                | Rear                 |
|---|----------------------|----------------------|
| 3. % Cargo Weight Distribution                                  |                      |                      |
| 4. Cargo Weight Distribution                                    |                      |                      |
| 5. Curb Weight Distribution                                     |                      |                      |
| 6. Option Weight  |                      |                      |
| RPO   |                      |                      |
| Order Code  |                      |                      |
| Air Conditioning  |                      |                      |
| Body  |                      |                      |
| Rear Axle   |                      |                      |
| Trailer Equipment   |                      |                      |
| Engine  |                      |                      |
| Transmission  |                      |                      |
| Rear Wheels   |                      |                      |
| Rear Bumper   |                      |                      |
| Tire  |                      |                      |
| Convenience Features  |                      |                      |
|   |                      |                      |
|   |                      |                      |
|   |                      |                      |
| 7. Total of Cargo, Curb and Option Weight (GAW)                 | Frt. Gross Axle Wgt. | Rr.. Gross Axle Wgt. |
| 8. Gross Axle Weight Rating for Suggested Vehicle (GAWR)        |                      |                      |
| 9. Gross Vehicle Weight (GVW) (Front GAW) + (Rear GAW)          |                      |                      |
| 10. Gross Vehicle Weight Rating (GVWR)                          |                      |                      |
| 11. (GVWR) – (GVW)  |                      |                      |
|   | TOTAL                |                      |
| 12. Subtract Passenger Weight                                   |                      |                      |
| (No. Passengers x 150 lbs.) To Calculate Total Reserve Capacity |                      |                      |

## TRAILERING ELECTRICAL INFORMATION

### Trailer Harness Release

| Model               | Standard | Optional                  |
|---------------------|----------|---------------------------|
| S/T Pickup          | N/A      | N/A                       |
| S/T Utility         | 6-Wire   | 8-Wire (UY7, part of Z82) |
| M/L Van             | 6-Wire   | 8-Wire (UY7, part of Z82) |
| C/K Truck (Current) | 8-Wire   | N/A                       |
| G Van               | N/A      | 8-Wire (UY7, part of Z82) |

### Trailer Harness Wire Colors

| Wire Color  | Wire Usage                                  |
|-------------|---|
| Blue        | Electric trailer brakes or auxiliary wiring |
| Red/Orange  | Battery charging                            |
| Light Green | Backup lamps                                |
| Brown       | Tail lamps and running lamps                |
| Yellow      | Left, stop and turn signal                  |
| Dark Green  | Right, stop and turn signal                 |
| Thick White | Ground                                      |
| Thin White  | Independent stop lamp (CHMSL)               |

**Vehicle to Trailer Electrical System Setup**

| <b>Model</b>        | <b>Junction Block Location (Battery Feed)</b>                             | <b>Brake Pedal Switch Splice Location</b>      | <b>Interior Ground Location</b>  | <b>Forward Trailer Harness Location</b>   | <b>Rear Trailer Harness Location</b>   |
|---------------------|---|--|--|---|--|
| C/K Truck (Current) | Under hood electrical center stud, left rear corner behind washer bottle. | Under dash at brake pedal switch (white wire). | No interior ground. Use engine block or negative battery terminal.                       | Engine compartment, near brake booster. Orange & blue wires strapped together.                              | Pickups: in front of license plate area of rear bumper (except battery charge, trailer brake and independent stop wires taped back at left frame rail).<br>Utilities: inside left lower quarter panel. Cut straps and route harness over frame rail. |
| G Van               | Under hood electrical center stud, left rear corner behind washer bottle. | Under dash at brake pedal switch (white wire). | No interior ground. Use engine block or negative battery terminal.                       | Engine compartment, near brake booster. Red & blue wires strapped together.                                 | Inside vehicle, right rear corner, in jack compartment (Above jack).   |
| M/L Van             | Front of dash, left side under steering column (covered).                 | Under dash at brake pedal switch (white wire). | Under left side trim panel. Use self tapping screw & ring terminal to plenum side panel. | Passenger compartment, under dash. Orange & blue wires strapped together.                                   | Inside vehicle, right rear corner, in jack compartment (behind jack).  |
| S/T Truck           | Under hood electrical center stud near left front fender (covered).       | Under dash at brake pedal switch (white wire). | No interior ground. Use engine block or negative battery terminal.                       | Engine compartment, near under hood electrical center. Red & blue wires strapped together. N/A for pickups. | Inside left frame rail.  |

**General Information**

To provide battery charging to the trailer, place ring terminal on red (or orange) wire over one of the junction block studs. When installing an electrical connector to the vehicle's trailer wiring harness, follow the color codes shown in the chart above.



## How to Use GCWRs to Determine Powertrain and Rear Axle Ratio for Trailering

Use Gross Combination Weight Ratings (GCWRs) to determine the engine, transmission, and rear axle ratio you will require to tow a trailer with your vehicle. The chart below shows you the maximum allowable GCWR based on all the available engines and rear axle ratios with automatic or manual transmissions.

**The GCWR includes the total loaded weight of both the vehicle and trailer.** Any available engine may be used for trailering if the GCWR shown is not exceeded. The trailer weight can be increased by 25% if the vehicle speed will not exceed 25 mph.

### GCWR Rating For Rear Axle Ratio and Engine Combination with Automatic Transmission

| GCWR Rating          |      |      |      |      |                    |        |        |        |        |        |        |        |        |        |        |        |        |
|----------------------|------|------|------|------|--------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Engine               | 6500 | 8500 | 9000 | 9500 | 10,000             | 10,500 | 11,000 | 11,500 | 12,000 | 12,500 | 13,000 | 13,500 | 14,500 | 15,000 | 16,000 | 17,000 | 19,000 |
| 2.2L L4 Gas          | 4.10 |      |      |      |                    |        |        |        |        |        |        |        |        |        |        |        |        |
| 4.3L V6 Gas          |      | 3.08 | 3.23 | 3.42 | 3.73 <sup>1)</sup> | 4.10   | 4.56   |        |        |        |        |        |        |        |        |        |        |
| 5.0L V8 Gas          |      |      |      | 3.08 |                    | 3.42   |        | 3.73   |        |        |        |        |        |        |        |        |        |
| 5.7L V8 Gas          |      |      |      |      | 3.08               |        | 3.42   |        | 3.73   |        |        | 4.10   |        | 4.56   |        |        |        |
| 6.5L V8 Turbo Diesel |      |      |      |      |                    |        | 3.08   |        | 3.42   |        | 3.73   |        | 4.10   |        | 4.56   | 5.13   |        |
|                      |      |      |      |      |                    |        |        |        |        |        |        |        |        |        | 4.63   |        |        |
| 7.4L V8 Gas          |      |      |      |      |                    |        |        |        |        |        |        | 3.42   |        | 3.73   |        | 4.10   | 4.56   |
|                      |      |      |      |      |                    |        |        |        |        |        |        |        |        |        |        |        | 4.63   |
|                      |      |      |      |      |                    |        |        |        |        |        |        |        |        |        |        |        | 5.13   |

Maximum GCWR for S/T models is 9500 lbs.

<sup>1)</sup> GCWR reduced 500 lbs. for all S/T models, reduced 1000 lb. for S/T models with ZR2 suspension package. To attain GCWR, KC4 engine oil cooler is required on C/K models with 3.08 or 3.42 axle ratio.

| GCWR Rating Sierra (All-New Model) |      |      |        |        |        |        |        |        |        |        |
|------------------------------------|------|------|--------|--------|--------|--------|--------|--------|--------|--------|
| Engine                             | 9000 | 9500 | 10,000 | 11,000 | 12,000 | 13,000 | 14,000 | 15,000 | 16,000 | 17,000 |
| 4.3L L35 Gas                       | 3.08 | 3.42 | 3.73   |        |        |        |        |        |        |        |
| 4.8L LR4 Gas                       |      |      |        | 3.42   | 3.73   | 4.10   |        |        |        |        |
| 5.3L LM7 Gas                       |      |      |        |        | 3.42   | 3.73   | 4.10   |        |        |        |
| 6.0L LQ4 Gas                       |      |      |        |        |        |        | 3.73   |        | 4.10   |        |

\* 9.5 RG on C25 & C5Z

**GCWR Rating For Rear Axle Ratio and Engine Combination with Manual Transmission**

| GCWR Rating          |      |      |                    |                    |                    |      |      |        |        |        |        |        |        |        |        |        |        |
|----------------------|------|------|--------------------|--------------------|--------------------|------|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Engine               | 5000 | 5500 | 6500               | 7000               | 7500               | 8000 | 9000 | 10,000 | 11,000 | 12,000 | 13,000 | 13,500 | 14,500 | 15,000 | 16,000 | 17,000 | 19,000 |
| 2.2L L4 Gas          | 3.73 | 4.10 |                    |                    |                    |      |      |        |        |        |        |        |        |        |        |        |        |
| 4.3L V6 Gas          |      |      | 3.08 <sup>2)</sup> | 3.42 <sup>2)</sup> | 3.73 <sup>2)</sup> | 4.10 | 4.56 |        |        |        |        |        |        |        |        |        |        |
| 5.0L V8 Gas          |      |      |                    | 3.08               |                    | 3.42 | 3.73 |        |        |        |        |        |        |        |        |        |        |
| 5.7L V8 Gas          |      |      |                    |                    |                    |      |      | 3.08   | 3.42   | 3.73   |        | 4.10   |        | 4.56   |        |        |        |
| 6.5L V8 Turbo Diesel |      |      |                    |                    |                    |      |      |        | 3.08   | 3.42   | 3.73   |        | 4.10   |        | 4.56   | 5.13   |        |
|                      |      |      |                    |                    |                    |      |      |        |        |        |        |        |        |        | 4.63   |        |        |
| 7.4L V8 Gas          |      |      |                    |                    |                    |      |      |        |        |        |        | 3.42   |        | 3.73   |        | 4.10   | 4.56   |
|                      |      |      |                    |                    |                    |      |      |        |        |        |        |        |        |        |        |        | 4.63   |
|                      |      |      |                    |                    |                    |      |      |        |        |        |        |        |        |        |        |        | 5.13   |

<sup>2)</sup> GCWR increased by 1000 lbs. on all S/T models.

To attain GCWR, KC4 engine oil cooler is required on C/K models with 3.08 or 3.42 axle ratio.

| GCWR Rating Sierra (All-New Model) |      |      |      |        |        |        |        |        |        |        |  |
|------------------------------------|------|------|------|--------|--------|--------|--------|--------|--------|--------|--|
| Engine                             | 8000 | 8500 | 9000 | 10,000 | 11,000 | 13,000 | 14,000 | 15,000 | 16,000 | 17,000 |  |
| 4.3L L35 Gas                       | 3.08 | 3.42 | 3.73 |        |        |        |        |        |        |        |  |
| 4.8L LR4 Gas                       |      |      | 3.42 | 3.73   | 4.10   |        |        |        |        |        |  |
| 6.0L LQ4 Gas                       |      |      |      |        |        |        | 3.73   |        | 4.10   |        |  |

**Trailer Special Packages**

For towing a light trailer (up to 2000 lbs. gross weight), the optional rear step bumper is an appropriate deadweight hitch and requires 1 7/8"-diameter hitch ball, available as an accessory.

For towing a medium trailer (up to 4000 lbs. gross weight, or with a tongue weight of 400 lbs. or under), a 2" diameter hitch ball (also available as an accessory) is required for the Sierra's rear step bumper.

For towing a heavy trailer (up to 10,000 lbs. gross weight), a weight-distributing hitch platform is required. It's included in RPO Z82-Heavy-Duty Trailering Special Package-Note: after you have purchased our Z82 Heavy-Duty Trailering Special Package, you will also need to purchase from an outside supplier the rest of the components that make up the weight distributing hitch. They are the ball mount and ball, the equalizing arms and snap up brackets, and the sway control system and all attachments. If you plan to "fifth wheel" a trailer, please take special note of the following.

There are two types of pickup fifth-wheel hitch installations. The first has the fifth wheel on a bar mounted on brackets attached to the frame and the bed of the pickup and supported by braces on the fender housings.

**NOTE:** Diagonal bracing between the brackets is required. The kingpin is mounted on the trailer. With the second type, the kingpin is mounted in the bed of the pickup box, and the fifth wheel is mounted on the trailer. This type of hitch is supplied and installed by the trailer manufacturer.

Fifth wheel trailers have a greater percentage of their weight on the kingpin (tongue load) than a conventional trailer. Because of this fact, greater attention must be given to the maximum allowable payload and GVWR. The maximum allowable payload and GVWR for each application should not be exceeded. The weight of any additional equipment and all passengers must be subtracted from the payload weight to determine the available kingpin load.

You will also have to splice a wiring harness into your pickup special connector to activate your trailer lights and other electrical systems. A 8-wire electrical harness is standard on Sierra.

*Other important trailering information is available in the Owner's Manual of every Chevrolet/GMC Truck.*

**Chassis Cab Maximum Trailer Weight can be calculated using the following formula:**

$$\begin{aligned} &\text{Vocational Body Weight} - 500 \text{ lbs.} = X \text{ lbs.} \\ &X \text{ lbs.} + \text{Additional Options, Passengers and Cargo} = Y \text{ lbs.} \\ &\text{Published Towing Capacity} - Y = \text{True Towing Capacity} \end{aligned}$$

## All-New Sierra Maximum Trailer Ratings

### Trailering Information

A vehicle control setting provides the All-New Sierra with an automatic transmission 1-2 shift point (at approximately 22 mph) and 2-3 & 3-4 (at appropriately higher vehicle speeds) in the tow/haul mode. This provides more power to get the load moving, and keep it moving in stop and go traffic and hilly terrain; but generates only the power necessary for good truck performance and greater fuel economy. Automatic transmission line pressure ensures smooth, crisp transmission shifts for heavily

loaded/towing conditions in high gear. The automatic transmission shift stabilization also selects the proper gear and only shifts to a higher gear if operating conditions determine that the higher gear can be maintained. (See Transmission Section for further explanation.) Electronic dynamic brake proportioning makes better use of rear brakes, improved braking performance, prevents tire squeal and reduces front brake wear, and provides the maximum braking forces at rear wheels. (See Brake Section for further explanation.)

### Suspension Chart

| (RPO) Chassis Package   | Customer Benefits  | Content Description  | Model Availability       |
|-------------------------|--|--|--------------------------|
| Z85 Handling/Trailering | Provides increased damping for firmer highway ride and improved handling while trailering. | <ul style="list-style-type: none"> <li>• Same load carrying capacity springs as Z83</li> <li>• 1500 Series—Blue color Monroe™ Shock Absorber Tubes (high pressure gas charged 36 mm piston diameter)</li> <li>• 2500 Series Black color shock absorber tubes (low pressure gas charged with 35 mm piston dia.)</li> <li>• Heavy duty engine and transmission oil cooling capability is provided with internal cooling</li> <li>• Wider aspect ratio tires with greater load carrying capacity than standard Z83</li> </ul> | All 1500 and 2500 Series |

|                            | Vortec 4.3L V6 Engine   |                 | Vortec 4.8L V8 Engine   |                 | Vortec 5.3L V8 Engine   |                 | Vortec 6.0L V8 Engine   |                 |
|----------------------------|-------------------------|-----------------|-------------------------|-----------------|-------------------------|-----------------|-------------------------|-----------------|
|                            | Automatic Transmission  |                 |                         |                 |                         |                 |                         |                 |
|                            | Max. Trailer Wt. (lbs.) | Req. Axle Ratio | Max. Trailer Wt. (lbs.) | Req. Axle Ratio | Max. Trailer Wt. (lbs.) | Req. Axle Ratio | Max. Trailer Wt. (lbs.) | Req. Axle Ratio |
| 1500 2WD Reg. Cab/Ext. Cab | 5000                    | 3.73            | 7000                    | 3.73            | 8200                    | 3.73            | —                       | —               |
| 1500 4WD Reg. Cab/Ext. Cab | 4500                    | 3.73            | 7500                    | 4.10            | 8000                    | 4.10            | —                       | —               |
| 2500 2WD Reg. Cab/Ext. Cab | —                       | —               | —                       | —               | 8500                    | 4.10            | 10,500                  | 4.10            |
| 2500 4WD Reg. Cab/Ext. Cab | —                       | —               | —                       | —               | —                       | —               | 10,000                  | 4.10            |

**Sway Control**

Even if your vehicle and trailer are set up properly, you may occasionally encounter trailer sway. A common way to dampen minor trailer oscillations and help maintain stability is a sliding friction device developed for this purpose. Sway control devices are required when towing over 3500 lbs. with S/T, M/L models and when towing over 4000 lbs. with G Van models, and 5000 lbs. with C/K models.

**Weight Carrying Trailer Hitch**


To Qualify for "Weight Carrying Type": GM Trucks equipped with a rear step bumper (except G Van) may add a hitchball or, GM Trucks equipped with RPO Z82 trailer provisions, special equipment, HD (or its equivalent) without equalizer bars and snap-up brackets up to the trailer ratings shown below.

| Product Line   | Maximum Rating Trailer/Tongue Weight |
|----------------|--------------------------------------|
| S/T            | 3500/350 lb.                         |
| M/L            | 2000/200 lb.                         |
| G              | 4000/400 lb.                         |
| C/K (Current)* | 5000/500 lb.                         |

\* Maximum trailer rating may be less based upon powertrain combinations. Reference attached charts.

**Weight Distributing Trailer Hitch Platform**

GM Truck products equipped with RPO Z82 trailer provisions, special equipment, HD (or its equivalent) and including equalizer bars and snap-up brackets will use the trailer ratings shown on charts following this section.

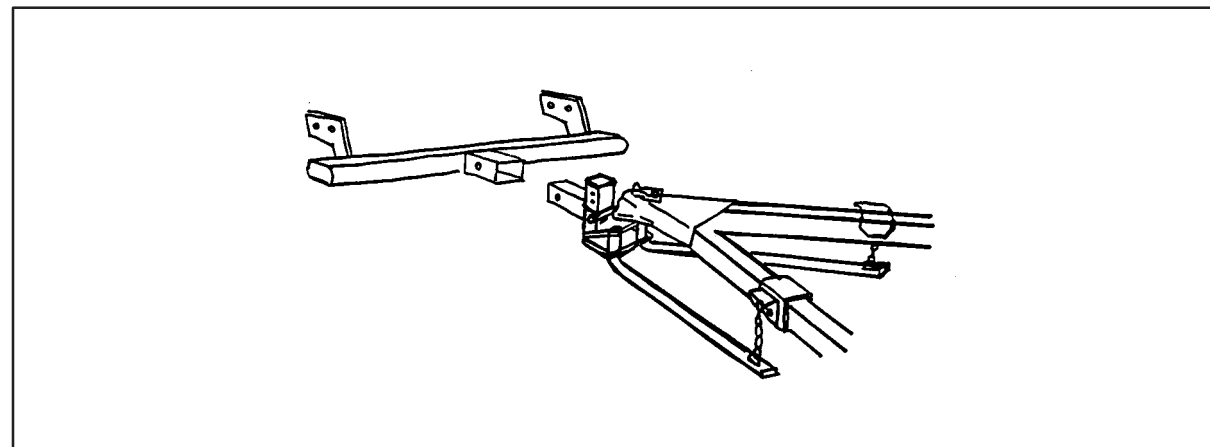**Fifth-Wheel Trailer Hitch**

Pickup and chassis cab models can be equipped with a fifth-wheel or gooseneck trailer hitch. Follow the hitch manufacturer's directions for installation, but note that the hitch must be attached to the truck frame. Do not use the pickup bed for additional support. For proper kingpin tongue load distribution and control of the trailer, the hitch must be mounted so the kingpin load is placed ahead of the rear axle centerline. Fifth-wheel trailer kingpin loads are higher than conventional trailer tongue loads, so pay careful attention to the truck's payload capacity and rear-axle weight ratings.

## C/K Pickup Maximum Trailer Ratings (Manual Transmission)

Weight Carrying Hitch Limit: 5000 lb. Trailer with 500 lb. Tongue Weight.  
Weight Distributing Hitch Required Over 5000 lb. Trailer Weight

| Current C/K Model Only   | Vortec 4.3L L35 Engine |                           |                        | Vortec 5.0L L30 Engine |                           |                        |
|--------------------------|------------------------|---------------------------|------------------------|------------------------|---------------------------|------------------------|
|                          | Manual Transmission    |                           |                        |                        |                           |                        |
|                          | Axle Ratio             | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) | Axle Ratio             | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) |
| C 1500 Series Pickup 2WD | 3.08                   | 2500                      | 200                    | 3.08                   | 2000                      | 200                    |
|                          | 3.42                   | 2500                      | 250                    | 3.42                   | 3000                      | 300                    |
| K 1500 Series Pickup 4WD |                        |                           |                        | 3.42                   | 2500                      | 250                    |
|                          | 3.73                   | 2500                      | 250                    | 3.73                   | 3500                      | 350                    |
| C 2500 Series Pickup 2WD |                        |                           |                        | 3.42                   | 3000                      | 300                    |
|                          |                        |                           |                        | 3.73                   | 4000                      | 400                    |

| Current C/K Model Only | Vortec 5.7L L31 Engine |                           |                        | 6.5L L65 Turbo Diesel Engine |                           |                        | Vortec 7.4L L29 Engine |                           |                        |
|------------------------|------------------------|---------------------------|------------------------|------------------------------|---------------------------|------------------------|------------------------|---------------------------|------------------------|
|                        | Manual Transmission    |                           |                        |                              |                           |                        |                        |                           |                        |
|                        | Axle Ratio             | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) | Axle Ratio                   | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) | Axle Ratio             | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) |
| C 1500 2WD             | 3.08                   | 5000                      | 600                    |                              |                           |                        |                        |                           |                        |
|                        | 3.42                   | 6000                      | 750                    |                              |                           |                        |                        |                           |                        |
|                        | 3.73                   | 7000                      | 850                    |                              |                           |                        |                        |                           |                        |
| K 1500 4WD             | 3.42                   | 5500                      | 700                    | 3.42                         | 6000                      | 750                    |                        |                           |                        |
|                        | 3.73                   | 6500                      | 800                    | 3.73                         | 7000                      | 850                    |                        |                           |                        |
| C 2500 2WD             | 3.42                   | 6000                      | 750                    | 3.42                         | 6500                      | 800                    |                        |                           |                        |
|                        | 3.73                   | 7000                      | 850                    | 3.73                         | 7500                      | 900                    | 3.73                   | 9000                      | 1000                   |
|                        | 4.10                   | 8000                      | 950                    | 4.10                         | 8500                      | 1000                   | 4.10                   | 10,000                    | 1000                   |
| K 2500 4WD             | 3.73                   | 6000                      | 750                    | 3.73                         | 6500                      | 800                    | 3.73                   | 8500                      | 1000                   |
|                        | 4.10                   | 7500                      | 900                    | 4.10                         | 8000                      | 950                    | 4.10                   | 10,000                    | 1000                   |
| C 3500 2WD             | 4.10                   | 7500                      | 900                    | 4.10                         | 8000                      | 950                    | 4.10                   | 10,000                    | 1000                   |
|                        | 4.56                   | 9000                      | 1000                   |                              |                           |                        | 4.56                   | 10,000                    | 1000                   |
| K 3500 4WD             | 4.10                   | 7000                      | 850                    | 4.10                         | 7500                      | 900                    | 4.10                   | 10,000                    | 1000                   |
|                        |                        |                           |                        |                              |                           |                        | 4.56                   | 10,000                    | 1000                   |

| Current C/K Model Only | Vortec 5.7L L31 Engine |                           |                        | 6.5L L65 Turbo Diesel Engine |                           |                        | Vortec 7.4L L29 Engine |                           |                        |
|------------------------|------------------------|---------------------------|------------------------|------------------------------|---------------------------|------------------------|------------------------|---------------------------|------------------------|
|                        | Manual Transmission    |                           |                        |                              |                           |                        |                        |                           |                        |
|                        | Axle Ratio             | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) | Axle Ratio                   | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) | Axle Ratio             | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) |
| C 3500 HD Chassis Cab  |                        |                           |                        | 4.63                         | 9000                      | 1000                   | 4.63                   | 10,000                    | 1000                   |
|                        |                        |                           |                        | 5.13                         | 10,000                    | 1000                   | 5.13                   | 10,000                    | 1000                   |
| C 3500 2WD Crew Cab    | 4.10                   | 7000                      | 850                    |                              |                           |                        | 4.10                   | 10,000                    | 1000                   |
|                        | 4.56                   | 8500                      | 1000                   | 4.10                         | 8000                      | 950                    | 4.56                   | 10,000                    | 1000                   |
| K 3500 4WD Crew Cab    | 4.10                   | 6500                      | 800                    |                              |                           |                        | 4.10                   | 10,000                    | 1000                   |
|                        | 4.56                   | 8000                      | 950                    | 4.10                         | 7500                      | 900                    | 4.56                   | 10,000                    | 1000                   |

\* Max trailer weight is calculated assuming the driver and one passenger are in the tow vehicle and it has all required trailering equipment. The weight of additional optional equipment, passengers and cargo in the tow vehicle must be subtracted from the max trailer weight. Above 2000 lb. trailer rating, engine oil cooler (KC4) is required on models with gas engine and 3.08 or 3.42 axle ratio. Engine oil cooler is standard on all other models. Above 5000 lb. trailer rating, heavy duty or gas shock absorbers (F51/FG5) are required on C 1500 models, and heavy duty shock absorbers or off-road chassis package (F51/Z71) is required on K 1500 models. 8-Wire trailer wiring harness is standard on all C/K pickup models. Z82 Heavy duty trailering equipment package includes weight distributing hitch platform, engine oil cooler and heavy duty shock absorbers (where required).

### *C/K Pickup Maximum Trailer Ratings (Automatic Transmission)*

**Weight Carrying Hitch Limit: 5000 lb. Trailer with 500 lb. Tongue Weight  
Weight Distributing Hitch Required Over 5000 lb. Trailer Weight**

| Current C/K Model Only   | Vortec 4.3L L35 Engine |                           |                        | Vortec 5.0L L30 Engine |                           |                        |
|--------------------------|------------------------|---------------------------|------------------------|------------------------|---------------------------|------------------------|
|                          | Automatic Transmission |                           |                        |                        |                           |                        |
|                          | Axle Ratio             | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) | Axle Ratio             | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) |
| C 1500 Series Pickup 2WD | 3.08                   | 4000                      | 500                    | 3.08                   | 4500                      | 550                    |
|                          | 3.42                   | 5000                      | 600                    | 3.42                   | 5500                      | 700                    |
|                          |                        |                           |                        | 3.73                   | 6500                      | 800                    |
| K 1500 Series Pickup 4WD |                        |                           |                        | 3.42                   | 5000                      | 600                    |
|                          | 3.73                   | 5000                      | 600                    | 3.73                   | 6000                      | 750                    |
| C 2500 Series Pickup 2WD |                        |                           |                        | 3.42                   | 5500                      | 700                    |
|                          |                        |                           |                        | 3.73                   | 6500                      | 800                    |

| Current C/K Model Only | Vortec 5.7L L31 Engine |                           |                        | 6.5L L56/L65 Turbo Diesel Engine |                           |                        | Vortec 7.4L L29 Engine |                           |                        |
|------------------------|------------------------|---------------------------|------------------------|----------------------------------|---------------------------|------------------------|------------------------|---------------------------|------------------------|
|                        | Automatic Transmission |                           |                        |                                  |                           |                        |                        |                           |                        |
|                        | Axle Ratio             | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) | Axle Ratio                       | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) | Axle Ratio             | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) |
| C 1500 2WD             | 3.08                   | 5000                      | 600                    |                                  |                           |                        |                        |                           |                        |
|                        | 3.42                   | 6000                      | 750                    |                                  |                           |                        |                        |                           |                        |
|                        | 3.73                   | 7000                      | 850                    |                                  |                           |                        |                        |                           |                        |
| K 1500 4WD             | 3.42                   | 5500                      | 700                    | 3.42                             | 6000                      | 750                    |                        |                           |                        |
|                        | 3.73                   | 6500                      | 800                    | 3.73                             | 7000                      | 850                    |                        |                           |                        |
| C 2500 2WD             | 3.42                   | 6000                      | 750                    | 3.42                             | 6500                      | 800                    |                        |                           |                        |
|                        | 3.73                   | 7000                      | 850                    | 3.73                             | 7500                      | 900                    | 3.73                   | 9000                      | 1000                   |
|                        | 4.10                   | 8000                      | 950                    | 4.10                             | 8500                      | 1000                   | 4.10                   | 10,000                    | 1000                   |
| K 2500 4WD             | 3.73                   | 6000                      | 750                    | 3.73                             | 6500                      | 800                    | 3.73                   | 8500                      | 1000                   |
|                        | 4.10                   | 7500                      | 900                    | 4.10                             | 8000                      | 950                    | 4.10                   | 10,000                    | 1000                   |
| C 3500 2WD             | 4.10                   | 7500                      | 900                    | 4.10                             | 8000                      | 950                    | 4.10                   | 10,000                    | 1000                   |
|                        | 4.56                   | 9000                      | 1000                   |                                  |                           |                        | 4.56                   | 10,000                    | 1000                   |
| K 3500 4WD             | 4.10                   | 7000                      | 850                    | 4.10                             | 7500                      | 900                    | 4.10                   | 10,000                    | 1000                   |
|                        |                        |                           |                        |                                  |                           |                        | 4.56                   | 10,000                    | 1000                   |
| C 3500 HD Chassis Cab  |                        |                           |                        | 4.63                             | 9000                      | 1000                   | 4.63                   | 10,000                    | 1000                   |
|                        |                        |                           |                        | 5.13                             | 10,000                    | 1000                   | 5.13                   | 10,000                    | 1000                   |
| C 3500 2WD Crew Cab    | 4.10                   | 7000                      | 850                    | 4.10                             | 8000                      | 950                    | 4.10                   | 10,000                    | 1000                   |
|                        | 4.56                   | 8500                      | 1000                   |                                  |                           |                        | 4.56                   | 10,000                    | 1000                   |
| K 3500 4WD Crew Cab    | 4.10                   | 6500                      | 800                    |                                  |                           |                        | 4.10                   | 10,000                    | 1000                   |
|                        | 4.56                   | 8000                      | 950                    | 4.10                             | 7500                      | 900                    | 4.56                   | 10,000                    | 1000                   |

Max trailer weight is calculated assuming the driver and one passenger are in the tow vehicle and it has all required trailering equipment. The weight of additional optional equipment, passengers and cargo in the tow vehicle must be subtracted from the max trailer weight. Transmission oil cooler is standard. Additional air-to-oil cooler (KNP) is standard on 8600 (or more) lb. GVWR models and available on all other models. Above 2000 lb. trailer rating, engine oil cooler (KC4) is required on models with gas engine and 3.08 or 3.42 axle ratio. Engine oil cooler is standard on all other models. Above 5000 lb. trailer rating, heavy duty or gas shock absorbers (F51/FG5) are required on C 1500 models, and heavy duty shock absorbers or off-road chassis package (F51/Z71) is required on K 1500 models. 8-Wire trailer wiring harness is standard on all C/K pickup models. Z82 Heavy duty trailering equipment package includes weight distributing hitch platform, engine oil cooler and heavy duty shock absorbers (where required).

**C/K Pickup Maximum Trailer Ratings (5th Wheel Hitch)**

| Current C/K Model Only   | Vortec 5.0L L30 Engine |                           |                         |
|--------------------------|------------------------|---------------------------|-------------------------|
|                          | Automatic Transmission |                           |                         |
|                          | Axle Ratio             | Max Trailer Weight (lbs.) | Max Kingpin Load (lbs.) |
| C 1500 Series Pickup 2WD | 3.42                   | 5500                      | 1200                    |
|                          | 3.73                   | 6500                      | 1200                    |
| K 1500 Series Pickup 4WD | 3.42                   | 5000                      | 1000                    |
|                          | 3.73                   | 6000                      | 1000                    |
| C 2500 Series Pickup 2WD | 3.42                   | 5500                      | 2000                    |
|                          | 3.73                   | 6500                      | 2000                    |

| Current C/K Model Only      | Vortec 5.7L L31 Engine      |                           |                         | 6.5L L56/L65 Turbo Diesel Engine |                           |                         | 6.5L L56/L65 Turbo Diesel Engine |                           |                         | Vortec 7.4L L29 Engine      |                           |                         |
|-----------------------------|-----------------------------|---------------------------|-------------------------|----------------------------------|---------------------------|-------------------------|----------------------------------|---------------------------|-------------------------|-----------------------------|---------------------------|-------------------------|
|                             | Auto or Manual Transmission |                           |                         | Manual Transmission              |                           |                         | Auto Transmission                |                           |                         | Auto or Manual Transmission |                           |                         |
|                             | Axle Ratio                  | Max Trailer Weight (lbs.) | Max Kingpin Load (lbs.) | Axle Ratio                       | Max Trailer Weight (lbs.) | Max Kingpin Load (lbs.) | Axle Ratio                       | Max Trailer Weight (lbs.) | Max Kingpin Load (lbs.) | Axle Ratio                  | Max Trailer Weight (lbs.) | Max Kingpin Load (lbs.) |
| C 1500 2WD                  | 3.42                        | 6000                      | 1200                    |                                  |                           |                         |                                  |                           |                         |                             |                           |                         |
|                             | 3.73                        | 7000                      | 1200                    |                                  |                           |                         |                                  |                           |                         |                             |                           |                         |
| K 1500 4WD                  | 3.42                        | 5500                      | 1000                    |                                  |                           |                         |                                  |                           |                         |                             |                           |                         |
|                             | 3.73                        | 6500                      | 1000                    |                                  |                           |                         |                                  |                           |                         |                             |                           |                         |
| C 2500 2WD<br>7200 lb. GVWR | 3.42                        | 6000                      | 2000                    | 3.42                             | 5500                      | 1600                    | 3.42                             | 6500                      | 1600                    |                             |                           |                         |
|                             | 3.73                        | 7000                      | 2000                    | 3.73                             | 6500                      | 1600                    | 3.73                             | 7500                      | 1600                    |                             |                           |                         |
| C 2500 2WD<br>8600 lb. GVWR | 3.73                        | 6500                      | 3000                    | 3.73                             | 6000                      | 2500                    | 3.73                             | 7000                      | 2500                    | 3.73                        | 9000                      | 2500                    |
|                             | 4.10                        | 8000                      | 3000                    | 4.10                             | 7500                      | 2500                    | 4.10                             | 8500                      | 2500                    | 4.10                        | 11,000                    | 2500                    |
| K 2500 2WD<br>8600 lb. GVWR | 3.73                        | 6000                      | 2500                    | 3.73                             | 5500                      | 2000                    | 3.73                             | 6500                      | 2000                    | 3.73                        | 8500                      | 2000                    |
|                             | 4.10                        | 7500                      | 2500                    | 4.10                             | 7000                      | 2000                    | 4.10                             | 8000                      | 2000                    | 4.10                        | 10,500                    | 2000                    |
| C 3500 2WD                  | 4.10                        | 7500                      | 3000                    | 4.10                             | 7000                      | 3000                    | 4.10                             | 8000                      | 3000                    | 4.10                        | 10,500                    | 3000                    |
|                             | 4.56                        | 9000                      | 3000                    |                                  |                           |                         |                                  |                           |                         | 4.56                        | 12,500                    | 3000                    |
| K 3500 4WD                  | 4.10                        | 7000                      | 3000                    | 4.10                             | 6500                      | 3000                    | 4.10                             | 7500                      | 3000                    | 4.10                        | 10,000                    | 3000                    |
|                             |                             |                           |                         |                                  |                           |                         |                                  |                           |                         | 4.56                        | 12,000                    | 3000                    |
| C 3500 HD<br>Chassis Cab    |                             |                           |                         | 4.63                             | 8000                      | 4000                    | 4.63                             | 9000                      | 4000                    | 4.63                        | 12,000                    | 4000                    |
|                             |                             |                           |                         | 5.13                             | 9000                      | 4000                    | 5.13                             | 10,000                    | 4000                    | 5.13                        | 12,000                    | 4000                    |



| Current C/K Model Only | Vortec 5.7L L31 Engine      |                           |                         | 6.5L L56/L65 Turbo Diesel Engine |                           |                         | 6.5L L56/L65 Turbo Diesel Engine |                           |                         | Vortec 7.4L L29 Engine      |                           |                         |
|------------------------|-----------------------------|---------------------------|-------------------------|----------------------------------|---------------------------|-------------------------|----------------------------------|---------------------------|-------------------------|-----------------------------|---------------------------|-------------------------|
|                        | Auto or Manual Transmission |                           |                         | Manual Transmission              |                           |                         | Auto Transmission                |                           |                         | Auto or Manual Transmission |                           |                         |
|                        | Axle Ratio                  | Max Trailer Weight (lbs.) | Max Kingpin Load (lbs.) | Axle Ratio                       | Max Trailer Weight (lbs.) | Max Kingpin Load (lbs.) | Axle Ratio                       | Max Trailer Weight (lbs.) | Max Kingpin Load (lbs.) | Axle Ratio                  | Max Trailer Weight (lbs.) | Max Kingpin Load (lbs.) |
| C 3500 Crew Cab        | 4.10                        | 7000                      | 3000                    |                                  |                           |                         |                                  |                           |                         | 4.10                        | 10,500                    | 3000                    |
|                        | 4.56                        | 8500                      | 3000                    | 4.10                             | 7000                      | 3000                    | 4.10                             | 8000                      | 3000                    | 4.56                        | 12,500                    | 3000                    |
| K 3500 Crew Cab        | 4.10                        | 6500                      | 3000                    |                                  |                           |                         |                                  |                           |                         | 4.10                        | 10,000                    | 3000                    |
|                        | 4.56                        | 8000                      | 3000                    | 4.10                             | 6500                      | 3000                    | 4.10                             | 7500                      | 3000                    | 4.56                        | 12,000                    | 3000                    |

Max trailer weight is calculated assuming the driver and one passenger are in the tow vehicle and it has all required trailering equipment. The weight of additional optional equipment, passengers and cargo in the tow vehicle must be subtracted from the max trailer weight. Kingpin weight cannot exceed available payload. Subtract vehicle weight plus passengers and cargo from the GVWR to determine available payload. C/K 1500 model rating may be limited by insufficient payload for kingpin weight. Transmission oil cooler is standard equipment on all automatic transmission models. Additional air-to-oil cooler (KNP) is standard on 8600 lb. (or more) GVWR models, and available on all other models. Engine oil cooler (KC4) is required on all models with gas engine and 3.42 axle ratio. Engine cooler is standard on all other models.

## C/K Utility Maximum Trailer Ratings

**Weight Carrying Hitch Limit: 5000 lb. Trailer with 500 lb. Tongue Weight**  
**Weight Distributing Hitch Required Over 5000 lb. Trailer Weight**

| Current C/K Model Only | Vortec 5.7L L31 Engine      |                           |                        | 6.5L L56/L65 Turbo Diesel Engine |                           |                        |
|------------------------|-----------------------------|---------------------------|------------------------|----------------------------------|---------------------------|------------------------|
|                        | Auto or Manual Transmission |                           |                        |                                  |                           |                        |
|                        | Axle Ratio                  | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) | Axle Ratio                       | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) |
| C 1500 Series 2WD      | 3.08                        | 5000                      | 600                    |                                  |                           |                        |
|                        | 3.42                        | 6000                      | 750                    |                                  |                           |                        |
|                        | 3.73                        | 7000                      | 850                    |                                  |                           |                        |
| K 1500 Series 4WD      | 3.42                        | 5500                      | 700                    | 3.42                             | 6000                      | 750                    |
|                        | 3.73                        | 6500                      | 800                    | 3.73                             | 7000                      | 850                    |

### Suburban Maximum Trailer Ratings

Weight Carrying Hitch Limit: 5000 lb. Trailer with 500 lb. Tongue Weight  
Weight Distributing Hitch Required Over 5000 lb. Trailer Weight

| Current C/K Model Only | Vortec 5.7L L31 Engine      |                           |                        | 6.5L L56/L65 Turbo Diesel Engine |                           |                        | Vortec 7.4L L29 Engine      |                           |                        |
|------------------------|-----------------------------|---------------------------|------------------------|----------------------------------|---------------------------|------------------------|-----------------------------|---------------------------|------------------------|
|                        | Auto or Manual Transmission |                           |                        | Auto or Manual Transmission      |                           |                        | Auto or Manual Transmission |                           |                        |
|                        | Axle Ratio                  | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) | Axle Ratio                       | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) | Axle Ratio                  | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) |
| C 1500 2WD             | 3.42                        | 5500                      | 700                    | 3.42                             | 5500                      | 700                    |                             |                           |                        |
|                        | 3.73                        | 6500                      | 800                    |                                  |                           |                        |                             |                           |                        |
| K 1500 4WD             | 3.42                        | 5000                      | 600                    | 3.42                             | 5000                      | 600                    |                             |                           |                        |
|                        | 3.73                        | 6000                      | 750                    |                                  |                           |                        |                             |                           |                        |
| C 2500 2WD             | 3.73                        | 6000                      | 750                    | 3.73                             | 6500                      | 800                    | 3.73                        | 8500                      | 1000                   |
|                        | 4.10                        | 7500                      | 900                    | 4.10                             | 8000                      | 950                    | 4.10                        | 10,000                    | 1000                   |
| K 2500 4WD             |                             |                           |                        | 3.73                             | 6000                      | 750                    | 3.73                        | 8000                      | 950                    |
|                        | 4.10                        | 7000                      | 850                    | 4.10                             | 7500                      | 900                    | 4.10                        | 10,000                    | 1000                   |

Max trailer weight is calculated assuming the driver and one passenger are in the tow vehicle and it has all required trailering equipment. The weight of additional optional equipment, passengers and cargo in the tow vehicle must be subtracted from the max trailer weight. Transmission oil cooler is standard equipment. Additional air-to-oil cooler (KNP) is standard on 8600 lb. GVWR models and available on all other models. Above 2000 lb. trailer rating, engine oil cooler (KC4) is required on models with gas engine and 3.08 or 3.42 axle ratio. Engine oil cooler is standard on all other models. 8-Wire trailer wiring harness is standard on all models. Z82 Heavy duty trailering equipment package includes weight distributing hitch platform and engine oil cooler (where required).

## S/T Pickup Maximum Trailer Ratings

Weight Carrying Hitch Limit: 2000 lb. Trailer with 200 lb. Tongue Weight  
Weight Distributing Hitch Required Over 2000 lb. Trailer Weight

|              | 2.2L LN2 Engine             |                           |                        | Vortec 4.3L L35/LF6 Engine |                           |                        | Vortec 4.3L L35/LF6 Engine |                           |                        |
|--------------|-----------------------------|---------------------------|------------------------|----------------------------|---------------------------|------------------------|----------------------------|---------------------------|------------------------|
|              | Auto or Manual Transmission |                           |                        | Automatic Transmission     |                           |                        | Manual Transmission        |                           |                        |
|              | Axle Ratio                  | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) | Axle Ratio                 | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) | Axle Ratio                 | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) |
| 2WD S Pickup | 3.73                        | 2000                      | 200                    | 3.08                       | 4500                      | 550                    | 3.08                       | 3500                      | 450                    |
|              | 4.10                        | 2000                      | 200                    | 3.42                       | 5500                      | 650                    |                            |                           |                        |
| 4WD T Pickup |                             |                           |                        | 3.08                       | 4500                      | 550                    | 3.08                       | 3500                      | 450                    |
|              |                             |                           |                        | 3.42                       | 5500                      | 650                    | 3.42                       | 4000                      | 500                    |
|              |                             |                           |                        | 3.73                       | 5500                      | 650                    | 3.73                       | 4500                      | 550                    |

Max trailer weight reduced 500 lb. on 4WD models with extended cab.

**NOTE:** No wiring harness is available on all S/T pickup models.

## S/T Utility Maximum Trailer Ratings

Weight Carrying Hitch Limit: 2000 lb. Trailer with 200 lb. Tongue Weight  
Weight Distributing Hitch Required Over 2000 lb. Trailer Weight

|               | Vortec 4.3L L35 Engine |                           |                        | Vortec 4.3L L35 Engine |                           |                        |
|---------------|------------------------|---------------------------|------------------------|------------------------|---------------------------|------------------------|
|               | Automatic Transmission |                           |                        | Manual Transmission    |                           |                        |
|               | Axle Ratio             | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) | Axle Ratio             | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) |
| S Utility 2WD | 3.08                   | 4500                      | 550                    |                        |                           |                        |
|               | 3.42                   | 5500                      | 650                    | 3.42                   | 4000                      | 500                    |
| T Utility 4WD | 3.08                   | 4000                      | 500                    |                        |                           |                        |
|               | 3.42                   | 5000                      | 600                    | 3.42                   | 3500                      | 450                    |
|               | 3.73                   | 5000                      | 600                    | 3.73                   | 4000                      | 500                    |

Max trailer weight is calculated assuming the driver and one passenger are in the tow vehicle and it has all required trailering equipment. The weight of additional optional equipment, passengers and cargo in the tow vehicle must be subtracted from the max trailer weight. Z82 Heavy duty trailering equipment package includes weight distributing hitch platform and 8-wire trailer wiring harness. Some models when loaded with driver, passenger and max tongue load may exceed the minimum GVW rating for that model.

**M/L Van Weight Distributing Hitch Trailering Chart**

**Weight Carrying Hitch Limit: 2000 lb. Trailer with 200 lb. Tongue Weight  
Weight Distributing Hitch Required Over 2000 lb. Trailer Weight**

|                  | <b>Vortec 4.3L L35 Engine</b> |                                  |                               |
|------------------|-------------------------------|----------------------------------|-------------------------------|
|                  | <b>Automatic Transmission</b> |                                  |                               |
|                  | <b>Axle Ratio</b>             | <b>Max Trailer Weight (lbs.)</b> | <b>Max Tongue Load (lbs.)</b> |
| <b>M Van 2WD</b> | 3.23                          | 4500                             | 550                           |
|                  | 3.42                          | 5000                             | 600                           |
|                  | 3.73                          | 5500                             | 650                           |
| <b>L Van AWD</b> | 3.42                          | 4500                             | 550                           |
|                  | 3.73                          | 5000                             | 600                           |

Max trailer weight is calculated assuming the driver and one passenger are in the tow vehicle and it has all required trailering equipment. The weight of additional optional equipment, passengers and cargo in the tow vehicle must be subtracted from the max trailer weight. Z82 Heavy duty trailering equipment package includes weight distributing hitch platform and 8-wire trailer wiring harness.

**G Van Maximum Trailer Ratings**

**Weight Carrying Hitch Limit: 4000 lb. Trailer with 400 lb. Tongue Weight  
Weight Distributing Hitch Required Over 4000 lb. Trailer Weight**

|               | <b>Vortec 4.3L L35 Engine</b>      |                                  |                               | <b>Vortec 5.0L L30 Engine</b> |                                  |                               |
|---------------|------------------------------------|----------------------------------|-------------------------------|-------------------------------|----------------------------------|-------------------------------|
|               | <b>Auto or Manual Transmission</b> |                                  |                               |                               |                                  |                               |
|               | <b>Axle Ratio</b>                  | <b>Max Trailer Weight (lbs.)</b> | <b>Max Tongue Load (lbs.)</b> | <b>Axle Ratio</b>             | <b>Max Trailer Weight (lbs.)</b> | <b>Max Tongue Load (lbs.)</b> |
| <b>G 1500</b> | 3.42                               | 4000                             | 500                           | 3.42                          | 5000                             | 600                           |
|               | 3.73                               | 4500                             | 550                           |                               |                                  |                               |
| <b>G 2500</b> | 3.42                               | 4000                             | 500                           | 3.42                          | 5000                             | 600                           |
|               | 4.10                               | 5000                             | 500                           |                               |                                  |                               |

|               | Vortec 5.7L L31 Engine      |                           |                        | 6.5L L56/L65 Turbo Diesel Diesel |                           |                        | Vortec 7.4L L29 Engine |                           |                        |
|---------------|-----------------------------|---------------------------|------------------------|----------------------------------|---------------------------|------------------------|------------------------|---------------------------|------------------------|
|               | Auto or Manual Transmission |                           |                        |                                  |                           |                        |                        |                           |                        |
|               | Axle Ratio                  | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) | Axle Ratio                       | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) | Axle Ratio             | Max Trailer Weight (lbs.) | Max Tongue Load (lbs.) |
| <b>G 1500</b> | 3.42                        | 5500                      | 700                    |                                  |                           |                        |                        |                           |                        |
|               | 3.73                        | 6500                      | 800                    |                                  |                           |                        |                        |                           |                        |
| <b>G 2500</b> | 3.42                        | 5500                      | 700                    | 3.73                             | 6500                      | 800                    |                        |                           |                        |
|               | 3.73                        | 5500                      | 700                    | 4.10                             | 8000                      | 950                    |                        |                           |                        |
|               | 4.10                        | 7000                      | 850                    |                                  |                           |                        |                        |                           |                        |
| <b>G 3500</b> | 3.73                        | 5500                      | 700                    | 3.73                             | 6000                      | 750                    | 3.42                   | 6500                      | 800                    |
|               | 4.10                        | 7000                      | 850                    | 4.10                             | 7500                      | 900                    | 3.73                   | 8000                      | 950                    |
|               |                             |                           |                        |                                  |                           |                        | 4.10                   | 10,000                    | 1000                   |

Max trailer weight is calculated assuming the driver and one passenger are in the tow vehicle and it has all required trailering equipment. The weight of additional optional equipment, passengers and cargo in the tow vehicle must be subtracted from the max trailer weight. Base cooling system for each powertrain includes all content required to attain max trailer rating. No optional cooling equipment available. Z82 Heavy duty trailering equipment package includes weight distributing hitch platform and 8-wire trailer wiring harness.

## WEIGHTS AND MEASURES

## Standard Weights and Measures

| Length                    |  |
|---------------------------|--|
| 12 inches                 | = 1 foot   |
| 3 feet                    | = 1 yard   |
| 5 1/2 yards               | = 16 1/2 feet  |
|                           | = 1 rod  |
| 1760 yards                | = 5820 feet  |
|                           | = 1 mile   |
| Area                      |  |
| 144 square inches         | = 1 square foot  |
| 9 square feet             | = 1 square yard  |
| 30 1/2 sq. yards          | = 1 square rod   |
| 160 sq. rods              | = 43,560 sq. feet or 1 acre  |
| 640 acres                 | = 27,878,400 sq. feet or 1 sq. mile  |
| 1 circular inch           | = Area of circle 1 in diameter   |
| 1 square inch             | = 1.2732 circular inches   |
| Volume                    |  |
| 1728 cubic inches         | = 1 cubic foot   |
| 27 cubic feet             | = 1 cubic yard   |
| 1 cord wood               | = 128 cubic feet. One cord is 8 feet long, 4 feet wide and 4 feet high       |
| 1 board foot              | = 144 cubic inches or volume of board 1 foot square and 1 inch thick         |
| 1 cylindrical inch        | = Volume of cylinder 1 inch in diameter and 1 inch long or 0.7854 cubic inch |
| 1 cubic inch              | = 1.2732 cylindrical inches  |
| Liquid or Fluid Measures  |  |
| 4 gills (16 fluid ounces) | = 1 pint   |
| 2 pints                   | = 1 quart  |
| 4 quarts                  | = 1 gallon   |
| 31 11/32 gallons          | = 1 barrel (there is no standard liquid 'barrel')                            |
| 1 U.S. gallon             | = 231 cubic inches or 0.13373 cubic feet                                     |
| 7.4805 gallons            | = 1 cubic foot   |

When water is at its maximum density, 1 cubic foot weighs 62.428 pounds and 1 gallon weighs 8.345 pounds. For approximations, 1 cubic foot of water equals 7 1/2 gallons.

## Dry Measure

|               |   |                                 |
|---------------|---|---------------------------------|
| 2 pints       | = | 1 quart                         |
| 8 quarts      | = | 1 peck                          |
| 4 pecks       | = | 1 bushel                        |
| 1 U.S. bushel | = | 2150.42 cubic inches            |
|               | = | 1.2445 cubic feet               |
| 1 cubic yard  | = | 21.7 U.S. bushels (approximate) |

## Measures of Angles or Arcs

|                 |   |                           |
|-----------------|---|---------------------------|
| 60 seconds (")  | = | 1 minute (')              |
| 60 minutes (')  | = | 1 degree (°)              |
| 90 degrees (°)  | = | 1 right angle or quadrant |
| 360 degrees (°) | = | 1 circle                  |

## Avoirdupois Weight (U.S.)

|                         |   |                  |
|-------------------------|---|------------------|
| 437.5 grains (16 drams) | = | 1 ounce          |
| 16 ounces               | = | 1 pound          |
| 100 pounds              | = | 1 hundred weight |
| 2000 pounds             | = | 1 ton            |
| 2240 pounds             | = | 1 long ton       |

## Metric Weights and Measures

## Length

|                      |   |                   |
|----------------------|---|-------------------|
| 10 millimeters (mm.) | = | 1 centimeter      |
| 10 centimeters (cm.) | = | 1 decimeter       |
| 10 decimeters (dm.)  | = | 100 centimeters   |
|                      | = | 1 meter           |
| 1000 meters (m.)     | = | 1 kilometer (km.) |

## Area

|                                  |   |                     |
|----------------------------------|---|---------------------|
| 100 square millimeters (sq. mm.) | = | 1 square centimeter |
| 100 square centimeter (sp. cm.)  | = | 1 square decimeter  |
| 100 square decimeters (sq. dm.)  | = | 1 square meter      |

## Volume

|                                  |   |                    |
|----------------------------------|---|--------------------|
| 1000 cubic millimeters (cu. mm.) | = | 1 cubic centimeter |
| 1000 cubic centimeters (cu. mm.) | = | 1 cubic decimeter  |
| 1000 cubic decimeters (cu. mm.)  | = | 1 cubic meter      |

## Capacity

|                      |   |                           |
|----------------------|---|---------------------------|
| 10 milliliters (ml.) | = | 1 centiliter              |
| 10 centiliters (cl.) | = | 1 deciliter               |
| 10 deciliters (dl.)  | = | 100 centiliter or 1 liter |
| 1000 liters (l.)     | = | 1 kiloliter               |

## Weight

|                                  |   |                       |
|----------------------------------|---|-----------------------|
| 10 milligrams (mg.)              | = | 1 centigram           |
| 10 centigrams (cg.)              | = | 1 decigram            |
| 10 decigrams (dg.)               | = | 100 centigrams 1 gram |
| 1000 grams (g.)                  | = | 1 kilogram            |
| 1000 kilograms (kg.)             | = | 1 ton (metric)        |
| 1000 cubic centimeters (cu. cm.) | = | 1 cubic decimeter     |
| 1000 cubic decimeters (cu. dm.)  | = | 1 cubic meter         |

## Equivalent Weights and Measures

## Length

|              |   |                             |
|--------------|---|-----------------------------|
| 1 inch       | = | 2.54 centimeters            |
| 1 foot       | = | 30.48 centimeters           |
| 1 yard       | = | 0.9144 meters               |
| 1 mile       | = | 1.609 kilometers            |
| 1 centimeter | = | 0.3937 inch                 |
| 1 meter      | = | 39.37 inches or 3.281 feet  |
| 1 kilometer  | = | 0.6214 mile or 1093.3 yards |

## Area

|                     |   |                        |
|---------------------|---|------------------------|
| 1 square inch       | = | 6.452 sq. centimeters  |
| 1 square foot       | = | 0.093 square meter     |
| 1 square yard       | = | 0.836 square meter     |
| 1 acre              | = | 4047 square meters     |
| 1 square mile       | = | 2.59 square kilometers |
| 1 square centimeter | = | 0.155 square inch      |
| 1 square meter      | = | 10.76 square feet      |
| 1 square kilometer  | = | 0.3861 square mile     |

## Volume

|                    |   |                                      |
|--------------------|---|--------------------------------------|
| 1 cubic inch       | = | 16.39 cubic centimeters              |
| 1 cubic foot       | = | 0.0283 cubic meter                   |
| 1 cubic yard       | = | 0.7646 cubic meter                   |
| 1 (U.S.) gallon    | = | 3.785 liters                         |
| 1 cubic centimeter | = | 0.061 cubic inch                     |
| 1 cubic meter      | = | 35.31 cubic feet                     |
| 1 liter            | = | 61.02 cubic inches or 0.2642 gallons |

| Weight       |   |                  |
|--------------|---|------------------|
| 1 ounce      | = | 28.35 grams      |
| 1 pound      | = | 0.4536 kilograms |
| 1 ton        | = | 907.2 kilograms  |
| 1 gram       | = | 15.43 grains     |
| 1 kilogram   | = | 2.205 pounds     |
| 1 metric ton | = | 2205 pounds      |

| Decimal Equivalents of Parts of an Inch |          |       |          |
|---|----------|-------|----------|
| 1/64                                    | 0.015625 | 33/64 | 0.515625 |
| 1/32                                    | 0.03125  | 17/32 | 0.53125  |
| 3/64                                    | 0.046875 | 35/64 | 0.546875 |
| 1/16                                    | 0.0625   | 9/16  | 0.5625   |
| 5/64                                    | 0.078125 | 37/64 | 0.578125 |
| 3/32                                    | 0.09375  | 19/32 | 0.59375  |
| 7/64                                    | 0.109375 | 39/64 | 0.609375 |
| 1/8                                     | 0.125    | 5/8   | 0.625    |
| 9/64                                    | 0.140625 | 41/64 | 0.640625 |
| 5/32                                    | 0.15625  | 21/32 | 0.65626  |
| 11/64                                   | 0.171875 | 43/64 | 0.671875 |
| 3/16                                    | 0.1875   | 11/16 | 0.6875   |
| 13/64                                   | 0.203125 | 45/64 | 0.703125 |
| 7/32                                    | 0.21875  | 23/32 | 0.71875  |
| 15/64                                   | 0.234375 | 47/64 | 0.734375 |
| 1/4                                     | 0.25     | 3/4   | 0.75     |
| 17/64                                   | 0.265625 | 49/64 | 0.765625 |
| 9/32                                    | 0.28125  | 25/32 | 0.781255 |
| 19/64                                   | 0.296875 | 51/64 | 0.796875 |
| 5/16                                    | 0.3125   | 13/16 | 0.8125   |
| 21/64                                   | 0.328125 | 53/64 | 0.828125 |
| 11/32                                   | 0.34375  | 27/32 | 0.84375  |
| 23/64                                   | 0.359375 | 55/64 | 0.859375 |
| 3/8                                     | 0.375    | 7/8   | 0.875    |
| 25/64                                   | 0.390625 | 57/64 | 0.890625 |
| 13/32                                   | 0.40625  | 29/32 | 0.90625  |
| 27/64                                   | 0.421875 | 59/64 | 0.921875 |
| 7/16                                    | 0.4375   | 15/16 | 0.9375   |
| 29/64                                   | 0.453125 | 61/64 | 0.953125 |
| 15/32                                   | 0.46875  | 31/32 | 0.96875  |
| 31/64                                   | 0.484375 | 63/64 | 0.984375 |
| 1/2                                     | 0.5      | 1     | 1.0      |

| Approximate Weight of Materials  |            |         |
|--|------------|---------|
| Most materials and commodities vary in weight and containers vary in shape and size. Therefore it is impossible to list any but average weights per cubic foot or per unit of measurement and the following weights should be used only or approximation purposes. When it is necessary to figure weights accurately for recommendation of truck or tractor-trailer equipment, exact weights and dimensions should be obtained from local sources. This is particularly true of fruits and vegetables, containers for which vary widely in type, size and shape according to commodity and locality. |            |         |
| Building Supplies, other than lumber and stone   |            |         |
|  | Pounds per |         |
|  | Cu. Ft.    | Cu. Yd. |
| Asbestos   | 153        | 4130    |
| Asphalt  |            |         |
| Brick  | 125        | 3375    |
| Lumps  | 85         | 2300    |
| Paving   | 100        | 2700    |
| Cinders  | 50         | 1350    |
| Clay(dry lumps)  | 85         | 2300    |
| Wet lumps  | 110        | 2970    |
| Wet packed   | 135        | 3650    |
| Fire   | 125        | 3375    |
| Concrete   |            |         |
| Cinder or slag   | 120        | 3250    |
| Gravel or stone  | 150        | 4050    |
| Ave. wet mi x  | 138        | 3730    |
| Crushed stone, ave.  | 100        | 2700    |
| Earth(loam)-loose  | 76         | 2050    |
| Shaken   | 87         | 2350    |
| Packed   | 95         | 2565    |
| Moist  | 100        | 2700    |
| Wet  | 125        | 3375    |
| Gravel-dry   | 95         | 2565    |
| Wet  | 125        | 3375    |
| Motor-lime   | 110        | 2970    |
| Rubble-dry   | 138        | 3730    |
| Wet  | 154        | 4160    |
| Pitch  | 70         | 1900    |
| Plaster of Paris (gypsum)  | 150        | 4050    |
| Quicklime-solid  | 95         | 2550    |
| Ground-loose   | 55         | 1485    |
| Shaken   | 75         | 2030    |
| Rock crushed, ave.   | 100        | 2700    |
| Sand-fine-dry  | 110        | 2970    |
| Wet  | 125        | 3735    |
| Course-dry   | 95         | 2565    |
| Wet  | 120        | 3240    |

|   | Pounds per |          |
|---|------------|----------|
|   | Cu. Ft.    | Cu. Yd.  |
| Tar   | 65         | 1755     |
| Terra Cotta   | 110        | 2970     |
| Tile-solid  | 115        | 3100     |
| Construction  | 40         | 1080     |
| Brick   |            | Thousand |
| Soft, 2.5 x 4 x 8.25                                  |            | 4320     |
| Common, 2.25 x 4 8.25                                 |            | 5400     |
| Hard, 2.25 x 4.25 x 8.5                               |            | 6480     |
| Pressed, 2.375 x 4 x 8.375                            |            | 7500     |
| Paving, 2.5 x 4 x 8.5                                 |            | 6750     |
| Paving block, 3.5 x 4.5 x 8.5                         |            | 8750     |
| Fire, 2.5 x 4.5 x 9                                   |            | 7000     |
| Cement block  |            |          |
| 8 x 8 x 16  | 42         | each     |
| 8 x 12 x 16   | 58         | each     |
| Cinder block  |            |          |
| 8 x 8 x 16  | 35         | each     |
| 8 x 12 x 16   | 45         | each     |
| Glass   |            |          |
| Common window   | 162        | cu. ft.. |
| Plate, 1/4 thick                                      | 3.3        | sq. ft.. |
| Lime-   |            |          |
| Small barrel  | 210        | barrel   |
| Large barrel  | 320        | barrel   |
| Farm and Dairy Products, except Fruits and Vegetables |            |          |
|   | Pounds     | Per      |
| Alfalfa seed  | 60         | bushel   |
| Barley  | 48         | bushel   |
| Bran  | 20         | bushel   |
| Buckwheat   | 49         | bushel   |
| Butter-15 dia x 15                                    | 25         | tub      |
| 15 dia. x 15  | 70         | tub      |
| 10.25 x 8.75 x 10.5                                   | 32         | case     |
| (30 lb.) bricks                                       |            |          |
| 9 lb. pail  | 10         | each     |
| Calf, live (avg.)                                     | 150        | head     |
| Cheese-15 dia x 5.25                                  | 25         | box      |
| 15 dia. x 7.5   | 35         | box      |
| 15 dia x 15   | 70         | box      |
| Chickens  |            |          |
| Live-broilers (20 avg.)                               | 58         | crate    |
| Fowl (12 avg.)  | 78         | crate    |
| Std. crate, empty                                     |            |          |
| 24 x 35 x 13  | 18         | each     |
| Clover seed   | 60         | bushel   |

|                               | Pounds | Per        |
|-------------------------------|--------|------------|
| Corn-ear                      | 35     | bushel     |
| Shelled                       | 56     | bushel     |
| Sweet corn(green)             | 43     | bushel     |
| Corn Meal                     | 44     | bushel     |
| Cotton                        |        |            |
| Gin bale, 20 x 48 x 54        | 515    | each       |
| Std. bale, 24 x 28 x 56       | 515    | each       |
| Comp bale, 20 x 24 x 56       | 515    | each       |
| Cotton seed                   | 32     | bushel     |
| Cow, live-feeder (avg.)       | 600    | head       |
| Butcher (avg.)                | 800    | head       |
| Heavy steer (avg.)            | 1000   | head       |
| Eggs, 30 doz.<br>12 x 12 x 26 | 55     | crate      |
| Flax seed                     | 56     | bushel     |
| Flour, 19 1/8 head, 30 stave  | 215    | barrel     |
| Hay, baled                    |        |            |
| 17 x 22 x 40                  | 60     | bale       |
| 14 x 16 x 43                  | 85     | bale       |
| Hemp seed                     | 44     | bushel     |
| Hog, live (avg.)              | 235    | head       |
| Horse, live (avg.)            | 1350   | head       |
| Ice cream                     |        |            |
| 2.5 gal., 9 dia x 11          | 18     | can        |
| 5 gal., 9 dia x 21            | 35     | can        |
| Lamb, live (avg.)             | 80     | head       |
| Malt-barley                   | 28     | bushel     |
| Rye                           | 32     | bushel     |
| Brewer's grain                | 40     | bushel     |
| Millet                        | 50     | bushel     |
| Oats                          | 32     | bushel     |
| Popcorn-ear                   | 35     | bushel     |
| Shelled                       | 56     | bushel     |
| Rice, unhulled                | 43     | bushel     |
| Rye                           | 56     | bushel     |
| Sheep, live (avg.)            | 138    | each       |
| Shorts                        | 20     | bushel     |
| Soy beans                     | 60     | bushel     |
| Straw, baled                  |        |            |
| 17 x 22 x 40                  | 45     | bale       |
| Tallow                        | 60     | cu. ft..   |
| Timothy seed                  | 45     | bushel     |
| Vetch seed                    | 60     | bushel     |
| Wheat, bulk                   | 60     | bushel     |
| Bag                           | 90     | 1.5 bushel |
| Wool, pressed                 | 82     | cu. ft..   |

| Fruits, Vegetables and Nuts<br>(In bulk, unless container specified) |                        |                              |
|--|------------------------|------------------------------|
|  | Size Container         | Lbs. Per Bushel or Container |
| Apples, fresh  | bushel                 | 48                           |
| Western, box   | 11.5 x 12 x 20         | 50                           |
| New England, box   | 11.25 x 14.25 x 17.5   | 56                           |
| Standard barrel  | 17hc. 28.5 stone       | 160                          |
| Apricots, fresh  | bushel                 | 48                           |
| Western, box   | 5.5 x 12 x 20          | 23                           |
| Artichokes, box  | 10 x 11.5 x 22         | 44                           |
| Asparagus, pr. crate   | 11.5 high 19.375 long, |                              |
| Loose  | 9.75 wide top, 11 bot- | 38                           |
| Bunches  | tom                    | 31                           |
| Avocados-box   | 5.75 x 11.25 x 17.5    | 16                           |
| Bananas-carton   | 4.25 x 14.25 x 30      | 38                           |
| Single stem  | bunch                  | 55                           |
| Beans, dry-castor  | bushel                 | 46                           |
| White  | bushel                 | 60                           |
| Lima   | bushel                 | 56                           |
| Fresh-lima   | bushel                 | 39                           |
| String   | bushel                 | 36                           |
| (Hamper) string  | 5 peck                 | 45                           |
| Beets (avg.)   | bushel                 | 55                           |
| Small crate  | 9.75 x 13.25 x 24      | 50                           |
| Western crate  | 14 x 19 x 24.5         | 95                           |
| Berries-crate 24 pt  | 9.75 x 9.75 x 20       | 25                           |
| 24 qt.   | 11.75 x 11.75 x 24     | 48                           |
| 32 at.   | 15.5 x 11.75 x 24      | 63                           |
| Broccoli-bu. crate   | 12.75 x 12.75 x 17     | 30                           |
| Burssel sprouts, crate   | 7.75 x 10.75 x 21.375  | 26                           |
| Cabbage-hamper   | 1.5 bushel             | 58                           |
| Crate  | 12.75 x 18.5 x 19      | 60                           |
| Western crate  | 14 x 19 x 24.5         | 85                           |
| Bbl. crate   | 12.75 x 18.75 x 37.375 | 110                          |
| Cantaloupe, crate  |                        |                              |
| Pony   | 11.75 x 11.75 x 23.5   | 58                           |
| Standard   | 12.75 x 12.75 x 23.5   | 68                           |
| Jumbo  | 13.75 x 13.75 x 23.5   | 78                           |
| Pony flat  | 4.75 x 12.75 x 23.5    | 26                           |
| Standard flat  | 5.25 x 14.25 x 23.5    | 28                           |
| Jumbo flat   | 5.75 x 15.25 x 23.5    | 32                           |
| Carrots-topped   | bushel                 | 55                           |
| With tops  | bushel                 | 40                           |
| Crate  | 11.75 x 14.125 x 24    | 60                           |
| Cauliflower  | bushel                 | 30                           |
| Crate  | 9.375 x 19 x 24        | 50                           |
| Celery-std. crate  | 11.625 x 22 x 22.625   | 70                           |
| 1/2 crate  | 10.75 x 13 x 20.375    | 35                           |
| Northern crate   | 16.5 x 21.25 x 22      | 85                           |

|                      | Size Container         | Lbs. Per Bushel or Container |
|----------------------|------------------------|------------------------------|
| Cherries-unstemmed   | bushel                 | 56                           |
| Stemmed              | bushel                 | 64                           |
| Lug box              | 5.625 x 11.875 x 19.75 | 17                           |
| Chestnuts            | bushel                 | 50                           |
| Cranberries          |                        |                              |
| 1/4 bbl. box         | 9.5 x 11 x 14          | 28                           |
| 1/2 bbl. box         | 12.5 x 14.75 x 22      | 60                           |
| Cucumbers            | bushel                 | 55                           |
| Crate                | 9.75 x 13.75 x 24      | 75                           |
| Case                 | 5 x 13.25 x 19         | 26                           |
| Eggplant-hamper      | bushel                 | 40                           |
| Crate                | 14 x 11.75 x 24        | 54                           |
| Endive-basket        | bushel                 | 25                           |
| Hamper               | 1.5 bushel             | 36                           |
| Grapefruit-Wstrn box | 11.5 x 11.5 x 24       | 68                           |
| Southern box         | 12.75 x 12.75 x 27     | 90                           |
| Grapes-basket        | bushel                 | 48                           |
| Lug box              | 5.375 x 16.375 x 17.5  | 30                           |
| Western box          | 15.5 x dia x 14        | 45                           |
| Basket               | 12 quarts              | 18                           |
| Greens               | bushel                 | 25                           |
| Hickory nuts         | bushel                 | 45                           |
| Horseradish roots    | bushel                 | 35                           |
| Kale                 | bushel                 | 25                           |
| Lemons, Limes-       |                        |                              |
| Western box          | 10 x 13 x 25           | 80                           |
| Southern box         | 12.75 x 12.75 x 27     | 90                           |
| Lentils              | bushel                 | 60                           |
| Lettuce-hamper       | bushel                 | 25                           |
| Hamper               | 1.5 bushel             | 38                           |
| Basket               | 8.5 x 11.75 x 21.375   | 17                           |
| Crate                | 13.75 x 17.5 x 24.5    | 75                           |
| 1/2 crate            | 9.5 x 13.5 x 24.5      | 40                           |
| Okra-hamper          | .5 bushel              | 18                           |
| Hamper               | bushel                 | 34                           |
| Onions-dry-basket    | bushel                 | 55                           |
| Bag                  | 17 x 32                | 50                           |
| Crate                | 20.5 x 11.5 x 10.5     | 58                           |
| Green, with tops     | bushel                 | 32                           |
| Oranges-Wstrn box    | 11.5 x 11.5 x 24       | 80                           |
| Southern box         | 12.75 x 12.75 x 27     | 90                           |
| Bushel box           | 10.75 x 10.75 x 23.5   | 65                           |
| Parsley-bushel crate | 12.75 x 12.75 x 17     | 30                           |
| Parsnips             | bushel                 | 48                           |



|                    | Size Container         | Lbs. Per Bushel or Container |
|--------------------|------------------------|------------------------------|
| Peaches-basket     | bushel                 | 48                           |
| Basket             | .5 bushel              | 25                           |
| Crate              | 10.5 x 11.25 x 24      | 50                           |
| Western box        | 5.5 x 11.25 x 24       | 22                           |
| Peanuts, unshelled | bushel                 | 22                           |
| Bag                |                        | 100                          |
| Pears-basket       | bushel                 | 50                           |
| Western box        | 9.625 x 12.125 x 19.75 | 51                           |
| Peas-dry           | bushel                 | 60                           |
| Fresh-hamper       | bushel                 | 35                           |
| Hamper             | 40 quarts              | 45                           |
| Pecans-large bag   |                        | 100                          |
| Small bag          |                        | 50                           |
| Peppers-basket     | bushel                 | 25                           |
| Crate              | 14.125 x 11.75 x 24    | 45                           |
| Pineapples-crate   | 11 x 12.5 x 36         | 85                           |
| Plums-basket       | bushel                 | 56                           |
| Western box        | 5.625 x 16.375 x 17.5  | 25                           |
| Potatoes-sweet     | bushel                 | 55                           |
| White or Irish     | bushel                 | 60                           |
| Bag                | 1 2/3 bushel           | 102                          |
| Barrel             | barrel                 | 185                          |
| Prunes-box         | 5.625 x 16.375 x 17.5  | 25                           |
| Quinces            | bushel                 | 50                           |
| Radishes-basket    | bushel                 | 34                           |
| Crate              | 9.75 x 13.75 x 24      | 40                           |
| Rhubarb-box        | 5.125 x 11.5 x 22      | 24                           |
| Romaine-crate      | 13.875 x 18.875 x 24.5 | 64                           |
| Crate              | 12.25 x 13 x 15.25     | 27                           |
| Rutabagas          | bushel                 | 56                           |
| Spinach            | bushel                 | 27                           |
| Squash             | bushel                 | 46                           |
| Sweet corn-basket  | bushel                 | 45                           |
| Crate              | 13 x 13 x 24           | 60                           |
| Tomatoes-basket    | bushel                 | 55                           |
| Lug box            | 7.25 x 14 x 17.5       | 35                           |
| Crate              | 10.5 x 11.25 x 24      | 48                           |
| Basket             | 8.5 x 8.75 x 20        | 18                           |
| Turnips            | bushel                 | 54                           |
| Walnuts-bulk       | bushel                 | 50                           |
| Bag                |                        | 100                          |

|                     | Liquids    |        |
|---------------------|------------|--------|
|                     | Pounds Per |        |
|                     | Cu. ft..   | Gallon |
| Acetone             | 50         | 6.6    |
| Alcohol, commercial | 51         | 6.8    |
| Asphalt, hot oil    | 71         | 9.5    |
| Carbolic acid       | 60         | 8.0    |
| Castor oil          | 61         | 8.1    |
| Chloroform          | 95         | 12.7   |
| Coconut oil         | 58         | 7.8    |
| Corn oil            | 58         | 7.8    |
| Corn syrup          | 86         | 11.5   |
| Cotton seed oil     | 58         | 7.8    |
| Cream               | 64         | 8.5    |
| Creosote            | 69         | 9.2    |
| Crude oil           | 56         | 7.5    |
| Ether               | 46         | 6.2    |
| Fuel oil-Diesel     | 52         | 7.0    |
| Fuel oil-Furnace    | 56         | 7.5    |
| Gasoline            | 45         | 6.0    |
| Glycerine           | 79         | 10.5   |
| Honey               | 90         | 12.0   |
| Kerosene            | 50         | 6.6    |
| Linseed oil         | 59         | 7.9    |
| Lubricating         | 52         | 7.0    |
| Maple syrup         | 82         | 11.0   |
| Milk, bulk          | 64         | 8.6    |
| Molasses            | 90         | 12.0   |
| Muriatic acid, 40%  | 40         | 10.0   |
| Naphtha, petroleum  | 42         | 5.6    |
| Nitric acid, 91%    | 94         | 12.5   |
| Olive oil           | 58         | 7.7    |
| Peanut oil          | 57         | 7.6    |
| Petroleum           | 56         | 7.5    |
| Sorghum syrup       | 86         | 11.5   |
| Soybean oil         | 58         | 7.7    |
| Sugar cane syrup    | 85         | 11.3   |
| Sulfuric acid, 87%  | 112        | 15.0   |
| Turpentine          | 54         | 7.3    |
| Vinegar             | 64         | 8.5    |
| Water, fresh        | 63         | 8.4    |

|                     | Size Container          | Lbs. Per Container |
|---------------------|-------------------------|--------------------|
| Beer-wood barrel    | .25 barrel              |                    |
| Steel barrel        | .25 barrel              |                    |
| Wood barrel         | .25 barrel              |                    |
| Steel barrel        | .25 barrel              |                    |
| Carton 24 12oz..    |                         |                    |
| Regular bottles     | 17.25 x 11.5 x 9.875    |                    |
| Steinie bottles     | 18.375 x 12.125 x 7.375 |                    |
| Tin cans            | 16.25 x 11 x 5.125      |                    |
| Wood case-24 12oz.. |                         |                    |
| Regular bottles     | 21 x 13.5 x 10          |                    |
| Stenin bottles      | 22 x 13.75 x 7.5        |                    |

**Note:** Beer cases are of many types with variable size and weight. Cases shown are average for popular full depth type with partitions.

|                       | Size Container | Lbs. Per Container |
|-----------------------|----------------|--------------------|
| Milk-5 gal. can       | 10.25 dia x 19 | 62                 |
| 10 gal. can           | 13 dia x 23    | 115                |
| Crate-21.5 pt bottles |                | 33                 |
| 20 pt. bottles        |                | 54                 |
| 12 qt. bottles        |                | 64                 |

**Note:** Milk bottle crates vary widely in dimensions and weights. Those shown are average weights.

|                        | Size Container         | Lbs. Per Container |
|------------------------|------------------------|--------------------|
| Molasses-50 gal. bbl.  | 20.25 hd.,<br>34 stave | 675                |
| Soft drinks            |                        |                    |
| Half depth bottle box  |                        |                    |
| 24-6 to 8 oz.. bottles | 12.25 x 18.75 x 8.5    | 39                 |
| Full depth bottle box  |                        |                    |
| 12-24 to 32 oz.. btl   | 13.375 x 18.5 x 12.25  | 60                 |

| Lumber-Air Dried   |            |                    |
|--|------------|--------------------|
| Kiln dried lumber averages 10% to 15% lighter, and green lumber 40% to 50% heavier than air dried. |            |                    |
|  | Pounds Per |                    |
|  | Cu.        | Thousand Board Ft. |
| Ash-black or red   | 40         | 3330               |
| White  | 46         | 3830               |
| Bamboo   | 22         |                    |
| Basswood   | 30         | 2500               |
| Beech  | 30         | 2500               |
| Birch  | 48         | 4000               |
| Butternut  | 30         | 2500               |
| Cedar  | 30         | 2500               |
| Cherry   | 44         | 3670               |
| Chestnut   | 37         | 3080               |

|  | Pounds Per |                    |
|--|------------|--------------------|
|  | Cu.        | Thousand Board Ft. |
| Cottonwood   | 37         | 3080               |
| Cypress  | 30         | 2500               |
| Elm-soft   | 38         | 3170               |
| Rock   | 45         | 3750               |
| Fir-Douglas  | 32         | 2670               |
| Eastern  | 25         | 2080               |
| Gum  | 40         | 3330               |
| Hemlock  | 29         | 2420               |
| Hickory  | 54         | 4500               |
| Locust   | 42         | 3500               |
| Mahogany   | 42         | 3500               |
| Maple-hard   | 44         | 3670               |
| soft   | 34         | 2830               |
| Oak-black  | 42         | 3500               |
| Red  | 42         | 3500               |
| White  | 48         | 4080               |
| Pine-long leaf   | 44         | 3670               |
| North Carolina   | 36         | 3000               |
| Oregon   | 32         | 2670               |
| Red  | 30         | 2500               |
| White  | 26         | 2170               |
| Yellow-Northern  | 34         | 2830               |
| Southern   | 45         | 3750               |
| Short leaf   | 38         | 3170               |
| Long leaf  | 44         | 3670               |
| Poplar   | 27         | 2250               |
| Redwood  | 30         | 2500               |
| Spruce   | 28         | 2330               |
| Sycamore   | 37         | 3080               |
| Walnut   | 43         | 3580               |
| Willow   | 31         | 2580               |
| Lath-Standard length 29 in. Put up in bundles of 50. Ave. bundle; dia. 9 in., weight 25 lbs.         |            |                    |
| Shingles-Bundles contains the equivalent of 250 shingles, measures 24 x 20 x 10, ave. weight 50 lbs. |            |                    |

| Metals, Minerals, Ores, Rock, Stone, Coal |            |         |
|---|------------|---------|
|   | Pounds Per |         |
|   | Cu. Ft.    | Cu. Yd. |
| Alabaster, gypseous                       | 160        | 4320    |
| Aluminum, pure                            | 165        | 4450    |
| Andesita stone                            | 180        | 4850    |
| Antimony                                  | 420        | 11650   |
| Asbestos                                  | 153        | 4130    |
| Babbit                                    | 440        | 11900   |
| Barytes, mineral                          | 280        | 7560    |
| Basalt rock                               | 185        | 5000    |
| Bauxite                                   | 160        | 4320    |
| Bluestone                                 | 120        | 3240    |
| Borax                                     | 110        | 2970    |
| Brass-cast                                | 525        | 14175   |
| Rolled                                    | 534        | 14420   |
| Drawn                                     | 542        | 14635   |
| Bronze                                    | 550        | 14850   |
| Chalk                                     | 137        | 3700    |
| Charcoal-oak                              | 33         | 890     |
| pine                                      | 23         | 620     |
| Coal, broken                              |            |         |
| Anthracite                                | 60         | 1600    |
| Bituminous                                | 45         | 1200    |
| Pocahontas                                | 50         | 1350    |
| Cannel                                    | 50         | 1350    |
| Coke                                      | 27         | 730     |
| Copper-cast                               | 550        | 14850   |
| Rolled                                    | 560        | 15120   |
| Diabase                                   | 185        | 5000    |
| Dolomite                                  | 181        | 4890    |
| Emery                                     | 250        | 6750    |
| Feldspar                                  | 160        | 4320    |
| Flint                                     | 185        | 5000    |
| Gneiss-solid                              | 160        | 4320    |
| Crushed                                   | 95         | 2565    |

|  | Pounds Per |          |
|--|------------|----------|
|  | Cu. Ft.    | Cu. Yd.  |
| Granite-solid  | 175        | 4725     |
| Crushed  | 96         | 2590     |
| Graphite   | 170        | 4590     |
| Greenstone-solid   | 187        | 5050     |
| Crushed  | 107        | 2900     |
| Gypsum   | 150        | 4050     |
| Iron-cast  | 450        | 12150    |
| Wrought  | 485        | 13100    |
| Hornblend  | 187        | 5050     |
| Lead-cast  | 710        | 19170    |
| Limestone-solid  | 166        | 4480     |
| Crushed  | 95         | 2565     |
| Magnesite  | 187        | 5050     |
| Manganese  | 475        | 12825    |
| Marble-solid   | 165        | 4455     |
| Crushed  | 95         | 2565     |
| Marl   | 140        | 3800     |
| Mercury  | 850        |          |
| Mica   | 185        | 5000     |
| Nickel   | 537        | 14500    |
| Ore: Most ores are 15% to 20% heavier than the rock which forms the bulk of the ore. |            |          |
| Peat   | 50         | 1350     |
| Phosphate rock   | 200        | 5400     |
| Porcelain  | 150        | 4050     |
| Porphyry   | 172        | 4645     |
| Pumice   | 40         | 1080     |
| Pyrites  | 315        | 8500     |
| Quartz   | 165        | 4455     |
| Rip-rap stone  | 65         | 1750     |
| Salt-rock, solid   | 136        | 3670     |
| Very coarse  | 35         | 950      |
| Coarse   | 45         | 1215     |
| Fine   | 50         | 1350     |
| Barrel, .  | 280        | per bbl. |
| Saltpeter  | 69         | 1860     |

|                 | Pounds Per |         |
|-----------------|------------|---------|
|                 | Cu. Ft.    | Cu. Yd. |
| Sandstone-solid | 147        | 3970    |
| Crushed         | 86         | 2325    |
| Shale-solid     | 172        | 4645    |
| Crushed         | 92         | 2485    |
| Silica          | 135        | 3650    |
| Slag-solid      | 175        | 4750    |
| Crushed         | 75         | 2025    |
| Screenings      | 100        | 2700    |
| Slate           | 175        | 4725    |
| Soapstone       | 169        | 4565    |
| Steel-cast      | 490        | 13250   |
| Rolled          | 495        | 13365   |

|                      | Pounds Per |         |
|----------------------|------------|---------|
|                      | Cu. Ft.    | Cu. Yd. |
| Stone-crushed, avg.  | 100        | 2700    |
| Sulphur              | 125        | 3375    |
| Talc                 | 170        | 4600    |
| Tin                  | 460        | 12400   |
| Trap rock            | 187        | 5050    |
| Zinc                 | 440        | 11880   |
| <b>Miscellaneous</b> |            |         |
|                      | Pounds per |         |
|                      | Cu. Ft.    | Cu. Yd. |
| Ashes, cool (packed) | 45         | 1215    |
| Bone                 | 115        | 3110    |

|                    | Pounds per |         |
|--------------------|------------|---------|
|                    | Cu. Ft.    | Cu. Yd. |
| Cork               | 15         | 405     |
| Furniture          | 6          | 160     |
| Garbage            |            |         |
| Dry, paper wrapped | 15-30      | 400-800 |
| Wet                | 50         | 1240    |
| Groceries-misc.    | 30         | 810     |
| Ice                | 57         | 1540    |
| Paper-solid, avg.  | 58         | 1565    |
| Rubber goods       | 94         | 2540    |
| Snow, moist-packed | 50         | 1350    |
| Street sweepings   | 32         | 865     |

## Metric/U.S. Customary Conversion Table

|              | Multiply  | By  | To Get/Multiply  | By  | To Get   |
|--------------|---|---|--|---|--|
| Linear       | inches<br>inches<br>feet  | x 25.4<br>x 2.54<br>x 0.3048  | millimeters (mm)<br>centimeters (cm)<br>meters (m)   | x 0.03937<br>x 0.3937<br>x 3.281  | inches<br>inches<br>feet   |
| Area         | square inches<br>square inches<br>square feet   | x 645.16<br>x 6.452<br>x 0.0929   | square millimeters (sq. mm)<br>square centimeters (sq. cm)<br>square meters (sq. m)  | x 0.00155<br>x 0.155<br>x 10.764  | square inches<br>square inches<br>square feet  |
| Volume       | cubic inches<br>cubic inches<br>cubic inches<br>quarts<br>gallons<br>cubic feet<br>cubic feet<br>fluid oz.. | x 16387.0<br>x 16.387<br>x 0.01639<br>x 0.94635<br>x 3.7854<br>x 28.317<br>x 0.02832<br>x 29.57 | cubic millimeters (cu. mm)<br>cubic centimeters (cu. cm)<br>liters (l)<br>liters (l)<br>liters (l)<br>liters (l)<br>cubic meters (cu. m)<br>milliliters (ml) | x 0.000061<br>x 0.06102<br>x 61.024<br>x 1.0567<br>x 0.2642<br>x 0.03531<br>x 35.315<br>x 0.03381 | cubic inches<br>cubic inches<br>cubic inches<br>quarts<br>gallons<br>cubic feet<br>cubic feet<br>fluid oz. |
| Mass         | ounces (av)<br>pounds (av)<br>tons (2000 lb)<br>tons (2000 lb)  | x 28.35<br>x 0.4536<br>x 907.18<br>x 0.90718  | grams (g)<br>kilograms (kg)<br>kilograms (kg)<br>tonne (t)   | x 0.03527<br>x 2.2046<br>x 0.001102<br>x 1.1023   | ounces (av)<br>pounds (av)<br>tons (2000 lb)<br>tons (2000 lb)   |
| Fuel Economy | miles/gal<br>gal/mile<br>gal/mile   | x 0.42514<br>x 2.3522<br>x 235.22   | kilometers/liters (km/l)<br>liters/kilometer (l/km)<br>liters/100 kilometers (1/100 km)  | x 2.3522<br>x 0.42514<br>x 0.004251   | miles/gal<br>gal/mile<br>gal/mile  |
| Power        | horsepower<br>ft.-lb./min   | x 0.746<br>x 0.0226   | kilowatts (kW)<br>watts (W)  | x 1.34<br>x 44.25   | horsepower<br>ft.-lb./min  |
| Torque       | pound-inches<br>pound-feet  | x 0.11298<br>x 1.3558   | newton-meters (N-m)<br>newton-meters (N-m)   | x 8.851<br>x 0.7376   | pound-inches<br>pound-feet   |
| Velocity     | miles/hour<br>kilometers/hour<br>miles/hour   | x 1.6093<br>x 0.27778<br>x 0.4470   | kilometers/hour (km/h)<br>meters/sec (m/s)<br>meters/sec (m/s)   | x 0.6214<br>x 3.600<br>x 2.237  | miles/hour<br>kilometers/hour<br>miles/hour  |

### Common Metric Prefixes

mega (M) = 1,000,000  
kilo (k) = 1,000

centi (c) = 0.01  
milli (m) = 0.001

hecto (h) = 100  
micro (μ) = 0.000001


### U.S. Imperial Gallon Comparison

1 U.S. Gallon = 0.833 Imperial Gallon  
1 Imperial Gallon = 1.201 U.S. Gallon

## LIGHT DUTY 10/1500 – 30/3500 SERIES MODEL IDENTIFICATION SYSTEM

The designation consists of 7 characters, two letters followed by five numbers. The first letter indicates the selling division and second identifies the chassis type. The first number designates the GVWR range, the second and third identify the cab-to-axle dimension (CA) or model type, and the last two identify the cab or body style.

For example:

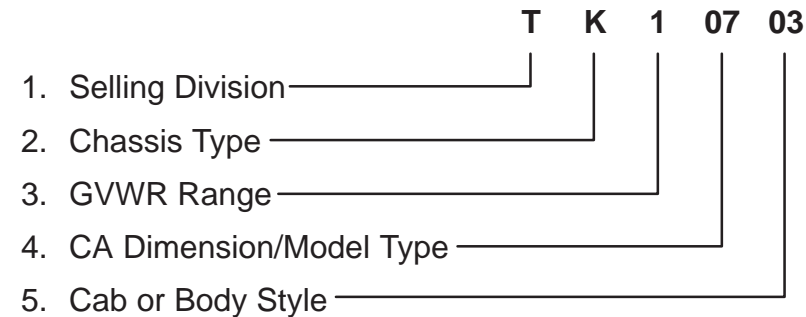

### 1. Selling Division<sup>4</sup>

- T** – GMC Truck
- C** – Chevrolet Truck

### 2. Chassis Type

- C** – Pickup 4 x 2 (Two-Wheel Drive)
- G** – Van, Cargo/Passenger, Savana
- K** – Pickup 4 x 4 (Four-Wheel Drive)
- L** – Mid-Size Van (AWD)  
Astro/Safari
- M** – Mid-Size Van (4 x 2)  
Astro/Safari
- S** – 4 x 2 (Two-Wheel Drive)  
S10 Pickup/Sonoma Jimmy/  
Blazer
- T** – 4 x 4 (Four-Wheel Drive) S10  
Pickup/Sonoma Jimmy/Blazer

### 3. Series/GVWR Range

- 1** – 3400 to 7300
- 2** – 6400 to 8600
- 3** – 7400 to 16,000

### 4. Model Type/CA Dimensions

- 05** – Blazer/Jimmy (S/T Utility)
- 06** – Series/Sonoma Pickup 39"  
(S/T 6.1' Cargo Box)
- 07** – C/K Pickup/Sierra 42" CA  
(C/K 6.5' Cargo Box)  
Tahoe/Yukon (4-Door Utility)
- 08** – S Series Pickup Box/Sonoma  
47" (S/T 7.4' Cargo Box)
- 09** – C/K Pickup/Sierra 56" CA  
(C/K 8.0' Cargo Box)  
C/K Chassis-Cab 56" CA
- 10** – Chassis-Cab 60" (C/K) Astro/Sa-  
fari (M/L Van)
- 57** – C/K New Pickup/6.5 Cargo Box  
Tahoe/Yukon 4 Door
- 59** – C/K New Pickup/8.0 Cargo Box  
Suburban

- 14** – Chassis Cab 84" (C/K)  
Chevy-Van and Express/Savana  
(G Van)
- 15** – Cutaway/Savana Special 80"  
Commercial Recreational (G Van)
- 17** – Express and Chevy Van/Savana  
(G Van)
- 18** – Chassis Cab 108" (C/K) Cut-  
away/Savana Special 100" Com-  
mercial & RV (G Van)
- 19** – Cutaway/Savana Special 118"  
Commercial & RV (G Van)

### 5. Cab or Body Type

- 03** – Pickup Conventional Cab  
(S/T, C/K) G-Cutaway Van,  
Savana Special
- 05** – Astro/Safari/Savana Cargo  
Chevy Van
- 06** – (4-Door) Suburban,  
Yukon/Tahoe, Blazer/Jimmy  
Astro/Express Passenger Van
- 16** – (2-Door) Jimmy/Blazer,  
Yukon/Tahoe
- 43** – Crew Cab (C/K Models)
- 53** – Extended Cab  
(S/T, C/K Models)

---

## ***Notes***