

FRAME HEIGHT AND RAMP ANGLE DATA

S/T SMALL TRUCK

S/T 10516 2-Door Small Utility	1
Heights (To Ground)	1
Angle	1
Approach Angle(s) (Bottom of)	1
Departure Angle(s) (Bottom of)	1
100.5" Wheelbase – S 10516	2
100.5" Wheelbase – T 10516	2
S/T 10506 4-Door Small Utility	3
Heights (To Ground)	3
Angle	3
Approach Angle(s) (Bottom of)	3
Departure Angle(s) (Bottom of)	3
107.0" Wheelbase – S 10506	4
107.0" Wheelbase – T 10506	4

S/T MIDSIZE TRUCK

S/T 15403 Midsize Regular Cab Pickup	5
Heights (To Ground)	5
Angle	5
Approach Angle(s) (Bottom of)	5
Departure Angle(s) (Bottom of)	5
111.0" Wheelbase – S 15403	6
111.0" Wheelbase – T 15403	6

FRAME HEIGHT AND RAMP ANGLE DATA

S/T MIDSIZE TRUCK – (Continued)

S/T 15653 Midsize Extended Cab Pickup	7
Heights (To Ground)	7
Angle	7
Approach Angle(s) (Bottom of)	7
Departure Angle(s) (Bottom of)	7
126.0” Wheelbase – S 15653	8
126.0” Wheelbase – T 15653	8
S/T 15643 Midsize Crew Cab Pickup	9
Heights (To Ground)	9
Angle	9
Approach Angle(s) (Bottom of)	9
Departure Angle(s) (Bottom of)	9
126.0” Wheelbase – S 15643	10
126.0” Wheelbase – T 15643	10
S/T 15603 Midsize Chassis Cab	11
Heights (To Ground)	11
Angle	11
Approach Angle(s) (Bottom of)	11
Departure Angle(s) (Bottom of)	11
126.0” Wheelbase – S 15603	12
S/T 15506, S/T 15806, S/T 15836 4-Door Midsize Utility	13
Heights (To Ground)	13
Angle	13

FRAME HEIGHT AND RAMP ANGLE DATA

S/T MIDSIZE TRUCK – (Continued)

Approach Angle(s) (Bottom of)	13
Departure Angle(s) (Bottom of)	13
113.0” Wheelbase – S 15506	14
129.0” Wheelbase – S 15806	14
129.0” Wheelbase – S 15836	15
113.0” Wheelbase – T 15506	15
129.0” Wheelbase – T 15806	16
129.0” Wheelbase – T 15836	16

C/K FULLSIZE TRUCK

C/K Fullsize Pickups	17
Heights (To Ground)	17
Angle	17
Approach Angle(s) (Bottom of)	17
Departure Angles(s) (Bottom of)	17
C/K Fullsize Chassis-Cabs	18
Heights (To Ground)	18
Angle	18
Approach Angle(s) (Bottom of)	18
Departure Angles(s) (Bottom of)	18
119.0” Wheelbase – C 15703	19
133.0” Wheelbase – C 15903	19
143.5” Wheelbase – C 15753	19
157.5” Wheelbase – C 15953	20

FRAME HEIGHT AND RAMP ANGLE DATA

C/K FULLSIZE TRUCK – *Continued*

143.5" Wheelbase – C 15543	20
153.0" Wheelbase – C 15743	20
119.0" Wheelbase – K 15703	21
133.0" Wheelbase – K 15903	21
143.5" Wheelbase – K 15753	22
157.5" Wheelbase – K 15953	23
153.0" Wheelbase – K 15543	23

C/K 25000 Fullsize Pickups & Chassis-Cabs

133.0" Wheelbase – C 25903	24
143.5" Wheelbase – C 25753	24
157.5" Wheelbase – C 25953	25
143.5" Wheelbase – C 25743	25
157.5" Wheelbase – C 25943	25
133.0" Wheelbase – K 25903	26
143.5" Wheelbase – K 25753	26
157.5" Wheelbase – K 25953	27
153.0" Wheelbase – K 25743	27
167.0" Wheelbase – K 25943	28

C/K 35000 Fullsize Pickups & Chassis-Cabs

157.5" Wheelbase – C 35953	28
167.0" Wheelbase – C 35943	28
133.0" Wheelbase – K 35903	29
157.5" Wheelbase – K 35953	29

FRAME HEIGHT AND RAMP ANGLE DATA

C/K FULLSIZE TRUCK – *Continued*

167.0" Wheelbase – K 35943	30
C/K 36000 Fullsize Chassis-Cabs	
137.0" Wheelbase – C 36003	30
161.5" Wheelbase – C 36053	30
161.5" Wheelbase – C 36403	31
137.0" Wheelbase – K 36003	31
161.5" Wheelbase – K 36053	31
161.5" Wheelbase – K 36403	32
C/K 15000/25000 Fullsize Utility	33
Heights (To Ground)	33
Angle	33
Approach Angle(s) (Bottom of)	33
Departure Angles(s) (Bottom of)	33
116.0" Wheelbase – C 15706	34
130.0" Wheelbase – C 15906	35
116.0" Wheelbase – K 15706	36
130.0" Wheelbase – K 15906	37
130.0" Wheelbase – C 25906	37
130.0" Wheelbase – K 25906	38
C/K 15000/25000 Fullsize Avalanche	39
Heights (To Ground)	39
Angle	39
Approach Angle(s) (Bottom of)	39

FRAME HEIGHT AND RAMP ANGLE DATA

C/K FULLSIZE TRUCK – *Continued*

Departure Angles(s) (Bottom of)	39
130.0” Wheelbase – C 15936	40
130.0” Wheelbase – K 15936	40
130.0” Wheelbase – K 25936	40

M/L MIDSIZE VAN

M/L 110(05, 06)	41
Heights (To Ground)	41
Angle	41
Approach Angle(s) (Bottom of)	41
Departure Angle(s) (Bottom of)	41
111.2” Wheelbase – M 11005	42
111.2” Wheelbase – M 11006	42
111.2” Wheelbase – L 11005	43
111.2” Wheelbase – L 11006	43

G/H FULLSIZE VAN

G/H Full Body Van	44
Heights (To Ground)	44
Angle	44
Approach Angle(s) (Bottom of)	44
Departure Angle(s) (Bottom of)	44
135.0” Wheelbase – G 13405	45
135.0” Wheelbase – G 13406	45
135.0” Wheelbase – H 13405	45


FRAME HEIGHT AND RAMP ANGLE DATA

G/H FULLSIZE VAN – *Continued*

135.0" Wheelbase – H 13406	46
135.0" Wheelbase – G 23405	46
135.0" Wheelbase – G 23406	46
155.0" Wheelbase – G 23705	47
135.0" Wheelbase – H 23405	47
135.0" Wheelbase – G 33405	48
135.0" Wheelbase – G 33406	48
155.0" Wheelbase – G 33705	48
155.0" Wheelbase – G 33706	49
G/H Fullsize Cutaway Van	50
Heights (To Ground)	50
Angle	50
Approach Angle(s) (Bottom of)	50
Departure Angle(s) (Bottom of)	50
139.0" Wheelbase – G 33503	51
159.0" Wheelbase – G 33803	51
177.0" Wheelbase – G 33903	52

FRAME HEIGHT AND RAMP ANGLE DATA

S/T 10516 2-Door Small Utility

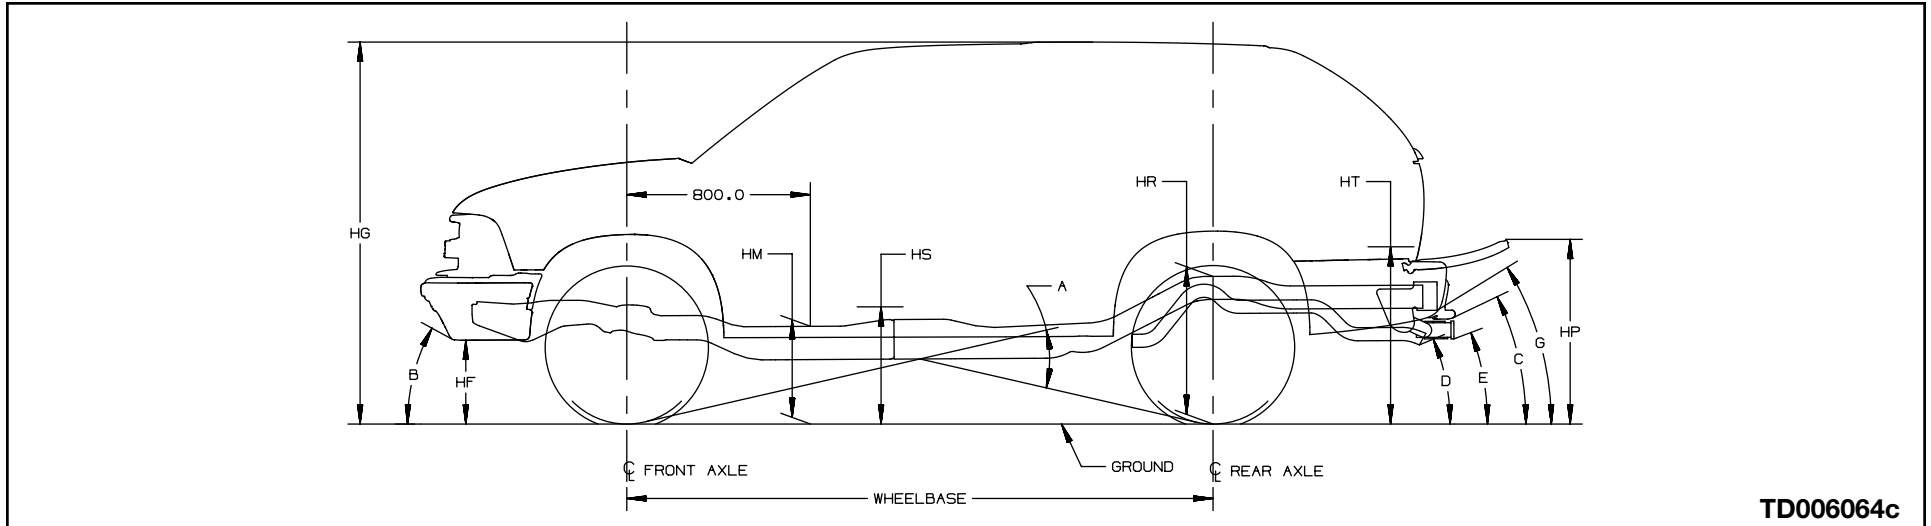

Heights (To Ground)

- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Normal Top of Frame
- HP Top of Tailgate (Down)
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HT Rear Cargo Load Height

Angle

- A Ramp Breakover

Approach Angle(s) (Bottom of)

- B Front Air Deflector

Departure Angle(s) (Bottom of)

- C Rear Bumper
- D Tail pipe
- E Platform Hitch

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

S 10516		100.5" Wheelbase				Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																			
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 4450 & Z85 P205/75R15	1900	1664	3564	2200	2600	-	13.7	65.1	16.3	32.1	25.0	19.6	-	30.2	-	13.1	63.7	15.2	28.3	22.5	18.3	-	27.0	22.8	27.5	22.2	19.9	17.1	-	-	-	-
²⁾ 4450 & Z85 P235/70R15	1900	1664	3564	2200	2600	-	14.1	65.5	16.7	32.5	25.4	20.0	-	30.6	-	13.4	64.1	15.6	28.7	22.9	18.7	-	27.4	23.8	28.4	22.8	20.7	17.7	-	-	-	-
²⁾ 5000 & ZR2 P265/75R15	1967	1844	3811	2500	2700	-	17.7	67.7	19.4	33.6	27.2	22.4	-	32	-	16.3	66.2	17.9	31.1	25.2	21.0	-	29.7	29.7	34.6	26.3	25.3	21.3	-	-	-	-

T 10516		100.5" Wheelbase				Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																			
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 4850 & Z85 P235/70R15	2078	1726	3804	2500	2700	-	14.3	65.1	16.5	31.7	24.9	19.7	-	29.9	-	13	63.8	15.2	28.6	22.8	18.4	-	27.3	24.1	27.8	22.7	20.6	17.6	-	-	-	-
²⁾ 4850 & ZM6 P235/75R15	2070	1790	3860	2500	2700	-	14.8	65.5	17	31.9	25.2	20.1	-	30.2	-	13.5	64.3	15.7	29.1	23.3	18.9	-	27.8	25.2	28.7	23.4	21.5	18.3	-	-	-	-
²⁾ 5000 & ZR2 P265/75R15	2139	1849	3988	2500	2700	-	15.1	67.1	18	34.5	27.1	21.5	-	32.5	-	14.3	65.7	16.9	31.7	25.1	20.2	-	30	28.9	31	27.1	26	22.1	-	-	-	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.


1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

S/T 10506 4-Door Small Utility

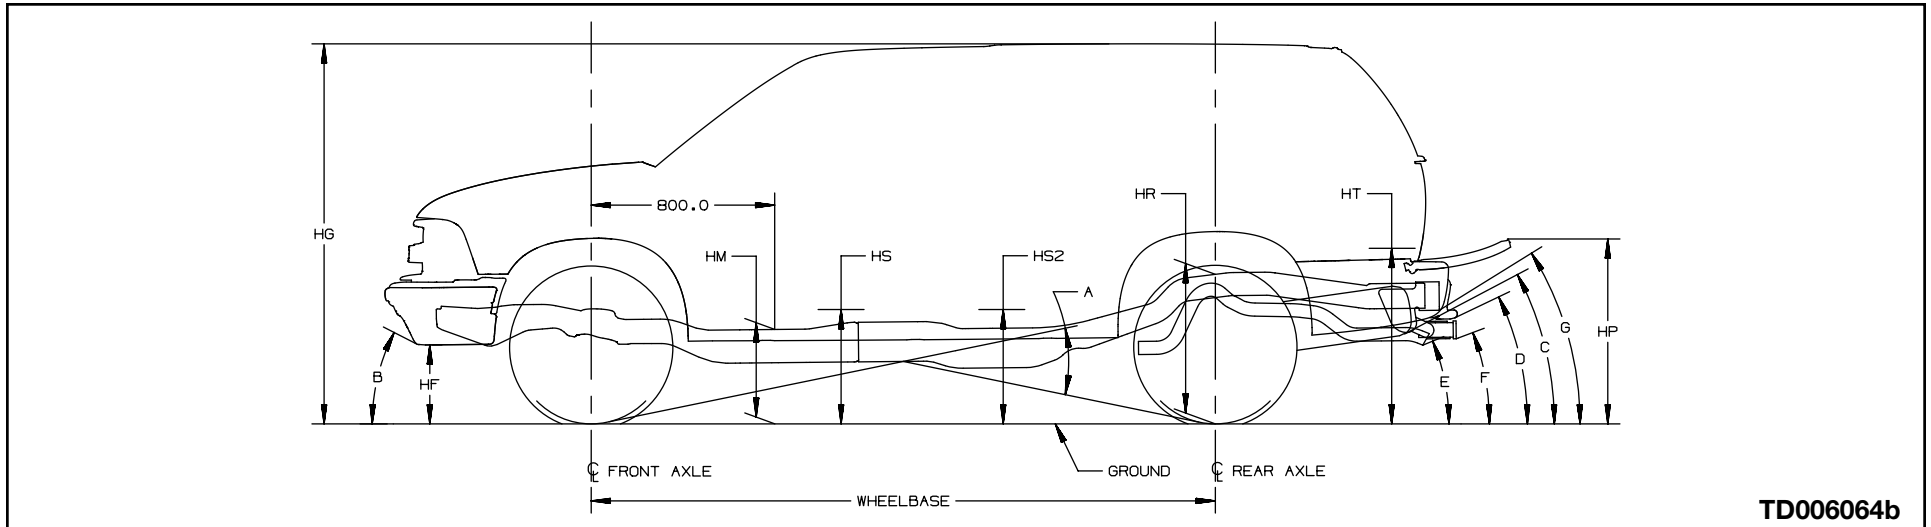

Heights (To Ground)

- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Normal Top of Frame
- HP Top of Tailgate (Down)
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

Angle

- A Ramp Breakover

Approach Angle(s) (Bottom of)

- B Front Air Deflector

Departure Angle(s) (Bottom of)

- C Spare Tire
- D Rear Bumper
- E Tail pipe
- F Platform Hitch

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

S 10506		107.0" Wheelbase					Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 5000 & ZW7 P235/70R15	1996	1707	3703	2500	2800	-	13.8	65.1	16.4	32.1	25.1	19.7	19.6	30.5	-	12.6	63.1	14.7	28	22.1	17.8	17.3	26.8	20.6	27	21.2	21.9	19.6	16.8	-	-	-
²⁾ 5000 & Z85 P205/75R15	1996	1707	3703	2500	2800	-	14	64.9	16.3	31.7	24.8	19.5	19.4	30.1	-	12.9	63.0	14.8	27.7	22	17.8	17.2	26.6	20.5	27.5	20.7	21.5	19.1	16.4	-	-	-

T 10506		107.0" Wheelbase					Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 5350 & ZW7 P235/70R15	2167	1871	4038	2800	2900	-	15.3	65.0	16.9	31	24.7	20.0	19.6	29.7	-	13.3	63.2	15	27.3	22	18.0	17.3	26.3	21.3	28.5	20.4	21.2	18.7	16.1	-	-	-
²⁾ 5350 & Z85 P235/70R15	2167	1871	4038	2800	2900	-	14.4	64.7	14.5	31.1	24.5	19.5	19.2	29.6	-	12.2	63.1	14.5	28.4	22.4	17.8	17.4	27.1	20.7	26.7	21.8	22.4	20.2	17.3	-	-	-
²⁾ 5350 & Z85 P235/75R15	2167	1871	4038	2800	2900	-	14.9	65.2	16.9	31.6	25.0	20	19.8	30.1	-	12.7	63.6	15.1	28.9	22.9	18.3	18	27.7	21.7	27.5	22.8	23.1	21.1	18	-	-	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.


1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

S/T 15403 Midsize Regular Cab Pickup

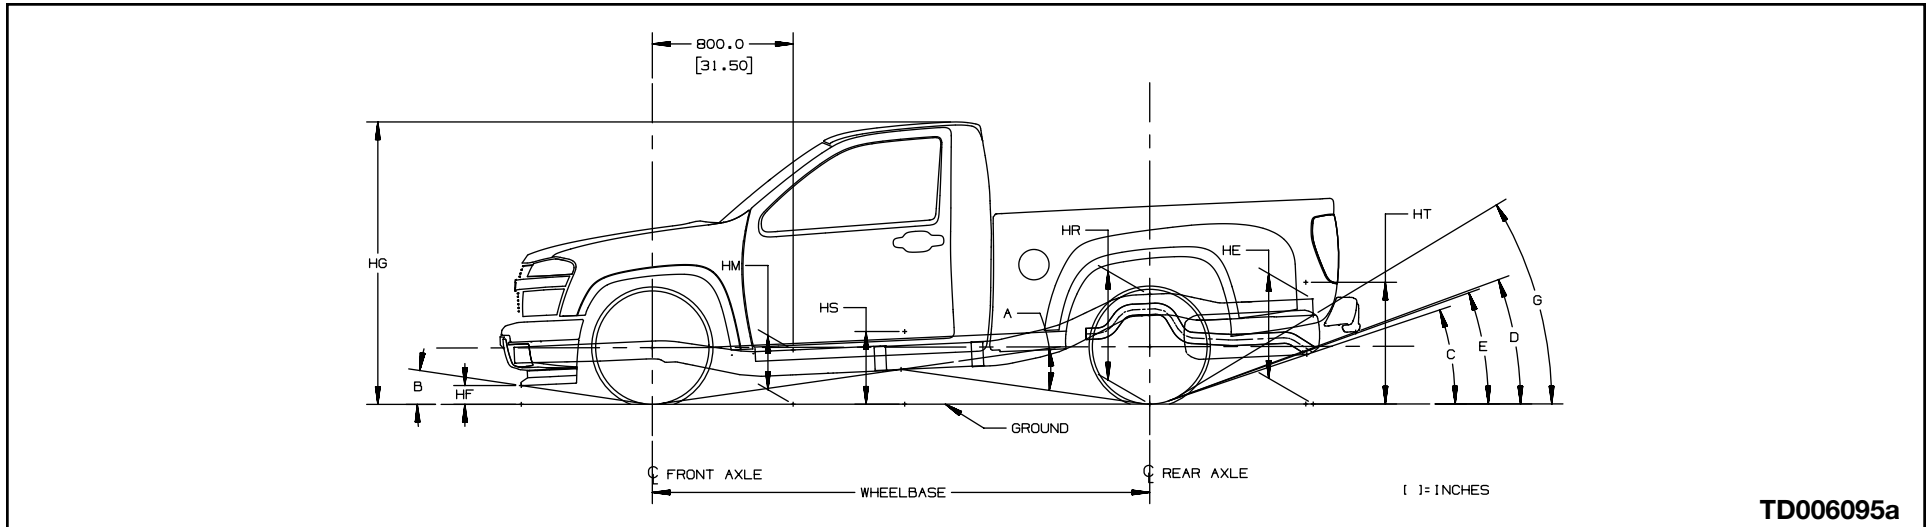

Heights (To Ground)

- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Normal Top of Frame
- HP Top of Tailgate (Down)
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

Angle

- A Ramp Breakover

Approach Angle(s) (Bottom of)

- B Front Air Deflector

Departure Angle(s) (Bottom of)

- C Spare Tire
- D Rear Bumper
- E Tail pipe
- F Platform Hitch

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

S 15403		111.0" Wheelbase				Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																			
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 4400 & ZQ8 P235/50R17	1988	1410	3398	2533	2447	-	9.7	63.2	13.4	-	23.6	17.0	-	25.6	-	7.9	61.5	11.7	-	20.8	15.3	-	21.5	16.5	19.2	8.3	10.2	9.7	-	-	-	24
²⁾ 4850 & Z85 P225/75R15	1916	1396	3312	2533	2896	-	11.8	65.5	15.6	-	26.0	19.3	-	28.1	-	10	63.1	13.5	-	22.2	17.0	-	22.5	20.5	24.1	9.9	11.5	11.4	-	-	-	26.4
²⁾ 4850 & Z85 P205/75R15	1916	1396	3312	2533	2896	-	11.3	65.0	15.2	-	25.5	18.8	-	27.6	-	9.5	62.6	13	-	21.7	16.5	-	22.0	19.2	22.7	9.2	10.9	10.6	-	-	-	25.4
²⁾ 5150 & Z71 P265/75R15	1942	1448	3390	2753	2896	-	14.6	69.1	18.9	-	29.9	22.8	-	32.4	-	12.3	66.6	16.5	-	26.2	20.3	-	27.5	28	29.7	15.7	16.4	17.5	-	-	-	33.7

T 15403		111.0" Wheelbase				Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																			
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 5150 & Z85 P235/75R15	2022	1645	3667	2753	2896	-	13.9	68.3	18.2	-	29.1	22.0	-	31.6	-	11.7	66.2	16	-	25.9	19.8	-	25.9	26.7	27.8	15.2	16	16.9	-	-	-	-
²⁾ 5150 & Z71 P265/75R15	2047	1675	3722	2753	2896	-	14.6	69.0	18.9	-	29.8	22.7	-	32.3	-	12.4	64.1	16.8	-	26.6	20.7	-	27.9	28.8	30.1	16.2	16.9	18.1	-	-	-	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.


1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

S/T 15653 Midsize Extended Cab Pickup

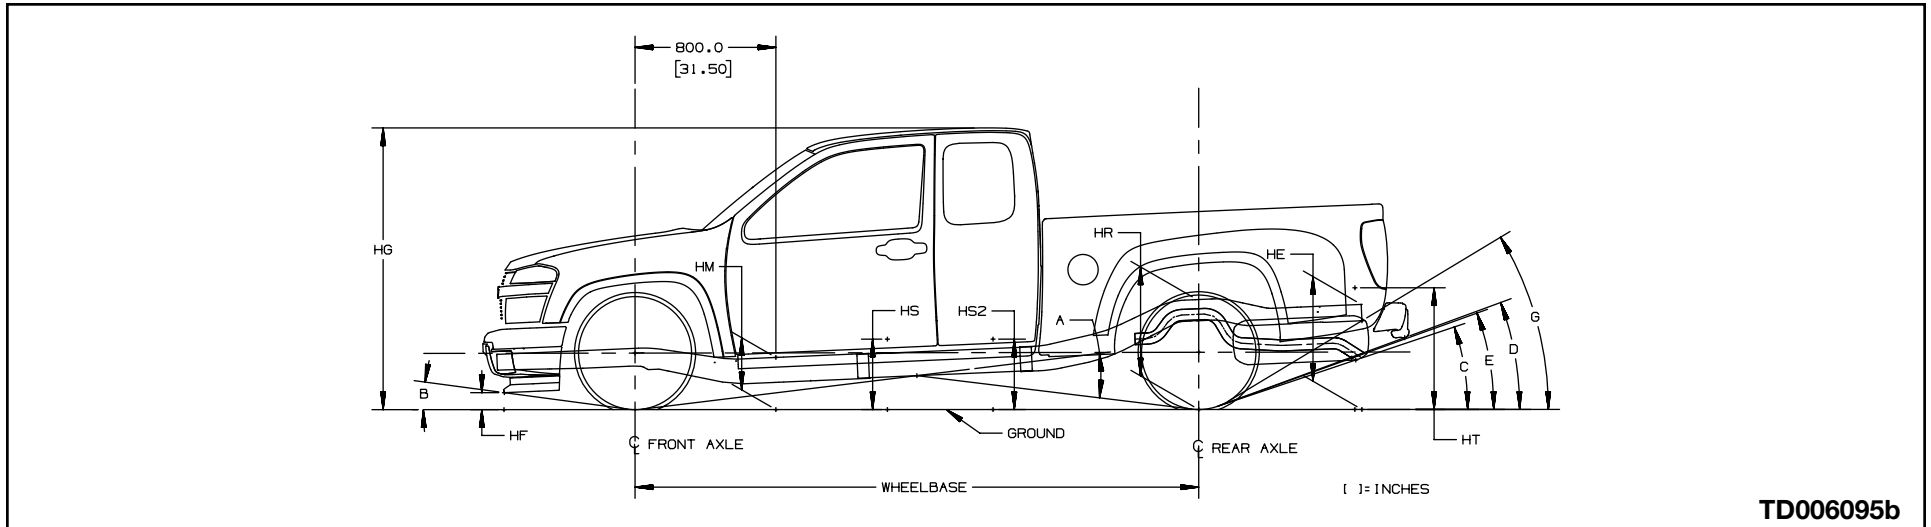

TD006095b

Heights (To Ground)

- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Normal Top of Frame
- HP Top of Tailgate (Down)
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

Angle

- A Ramp Breakover

Approach Angle(s) (Bottom of)

- B Front Air Deflector

Departure Angle(s) (Bottom of)

- C Spare Tire
- D Rear Bumper
- E Tail pipe
- F Platform Hitch

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

S 15653		126.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 4600 & ZQ8 P235/50R17	1988	1599	3587	2533	2447	-	9.7	63.3	13.3	-	23.5	16.8	17.1	25.1	-	8	61.7	11.6	-	21.1	15.1	15.4	22.2	14	19.4	13	14.6	15.5	-	-	-	24.9
²⁾ 5000 & Z85 P225/75R15	1913	1590	3503	2533	2896	-	11.8	65.7	15.6	-	26.0	19.1	19.4	27.7	-	10	63.4	13.4	-	22.6	16.9	17.1	23.5	17.6	24.1	15.7	16.5	18.4	-	-	-	27.4
²⁾ 5000 & Z85 P205/75R15	1913	1590	3503	2533	2896	-	11.4	65.2	15.1	-	25.5	18.6	18.9	27.2	-	9.5	62.9	12.9	-	22.1	16.4	16.6	22.9	16.5	26.3	14.6	15.7	17.3	-	-	-	26.4
²⁾ 5300 & Z71 P265/75R15	1939	1640	3579	2753	2896	-	14.9	68.7	18.6	-	29.0	22.2	22.5	30.7	-	12.6	66.0	16.1	-	25.4	19.5	19.7	26.5	22.8	30.4	21	20.5	24.2	-	-	-	32.3

T 15653		126.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 5300 & Z85 P235/75R15	2211	1601	3812	2753	2896	-	14.1	67.9	17.8	-	28.3	21.4	21.7	30	-	12.7	65.6	15.9	-	24.6	19.2	19.3	25.5	21.7	29.9	18.9	18.9	22	-	-	-	30.3
²⁾ 5300 & Z71 P265/75R15	2235	1632	3867	2753	2896	-	14.8	68.7	18.5	-	29.0	22.1	22.4	30.7	-	13.5	66.3	16.7	-	25.4	20.0	20.1	26.2	23.5	32.3	20.5	20.1	23.8	-	-	-	31.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.


1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

S/T 15643 Midsize Crew Cab Pickup

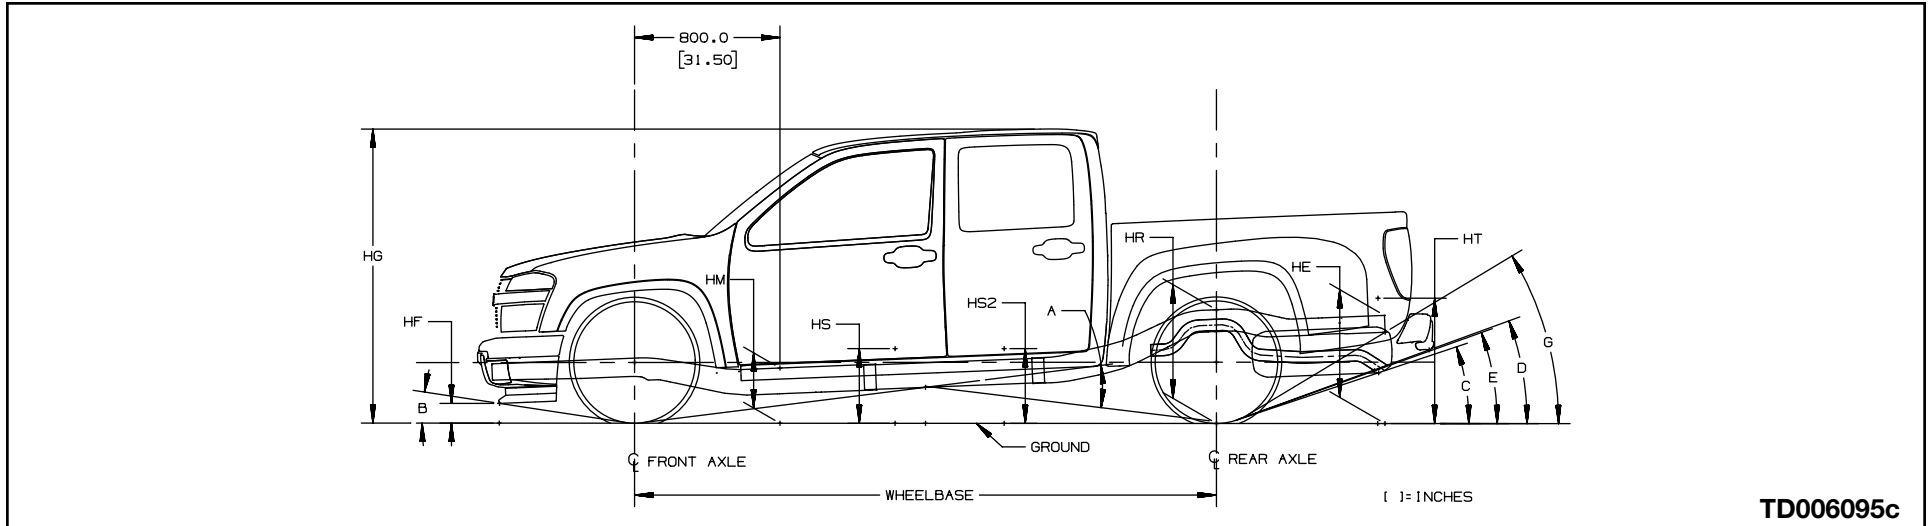

TD006095c

Heights (To Ground)

- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Normal Top of Frame
- HP Top of Tailgate (Down)
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

Angle

- A Ramp Breakover

Approach Angle(s) (Bottom of)

- B Front Air Deflector

Departure Angle(s) (Bottom of)

- C Spare Tire
- D Rear Bumper
- E Tail pipe
- F Platform Hitch

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

S 15643		126.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 4700 & ZQ8 P235/50R17	2110	1680	3790	2533	2447	-	9.7	63.6	13.2	-	23.5	16.7	17.2	25.1	-	8.4	62.0	11.8	-	21.3	15.3	15.5	22.4	14.3	20.2	13.3	14.8	15.8	-	-	-	25.2
²⁾ 4700 & Z85 P235/50R18	2110	1680	3790	2533	2447	-	11.6	65.7	15.3	-	25.7	18.8	19.3	27.4	-	10.3	64.2	13.9	-	23.5	17.4	17.7	24.7	17.9	24	16.8	17.5	19.7	-	-	-	28.4
²⁾ 5000 & Z85 P225/75R15	2028	1658	3686	2533	2896	-	11.6	66.0	15.4	-	26.1	19.1	19.7	27.9	-	10.1	63.9	13.6	-	22.8	17.1	17.3	24.3	18	24.4	16	16.8	18.8	-	-	-	27.7
²⁾ 5300 & Z71 P265/75R15	2066	1733	3799	2753	2896	-	14.9	69.0	18.6	-	28.9	22.1	22.6	30.5	-	12.9	66.5	16.3	-	25.5	19.8	19.9	26.5	23.2	31.1	21	20.5	24.3	-	-	-	32.3

T 15643		126.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 5300 & Z85 P235/75R15	2184	1808	3992	2753	2896	-	14.1	68.3	17.8	-	28.2	21.4	21.9	29.9	-	12.6	66.0	15.9	-	25	19.3	19.4	25.9	22	29.6	19.7	19.5	22.8	-	-	-	31
²⁾ 5300 & Z71 P265/75R15	2260	1872	4132	2753	2896	-	14.8	68.9	18.5	-	28.9	22.1	22.6	30.6	-	13.4	66.8	16.7	-	25.8	20.1	20.3	26.7	23.9	32.2	21.3	20.7	24.7	-	-	-	32.5

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.


1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

S/T 15603 Midsize Chassis Cab

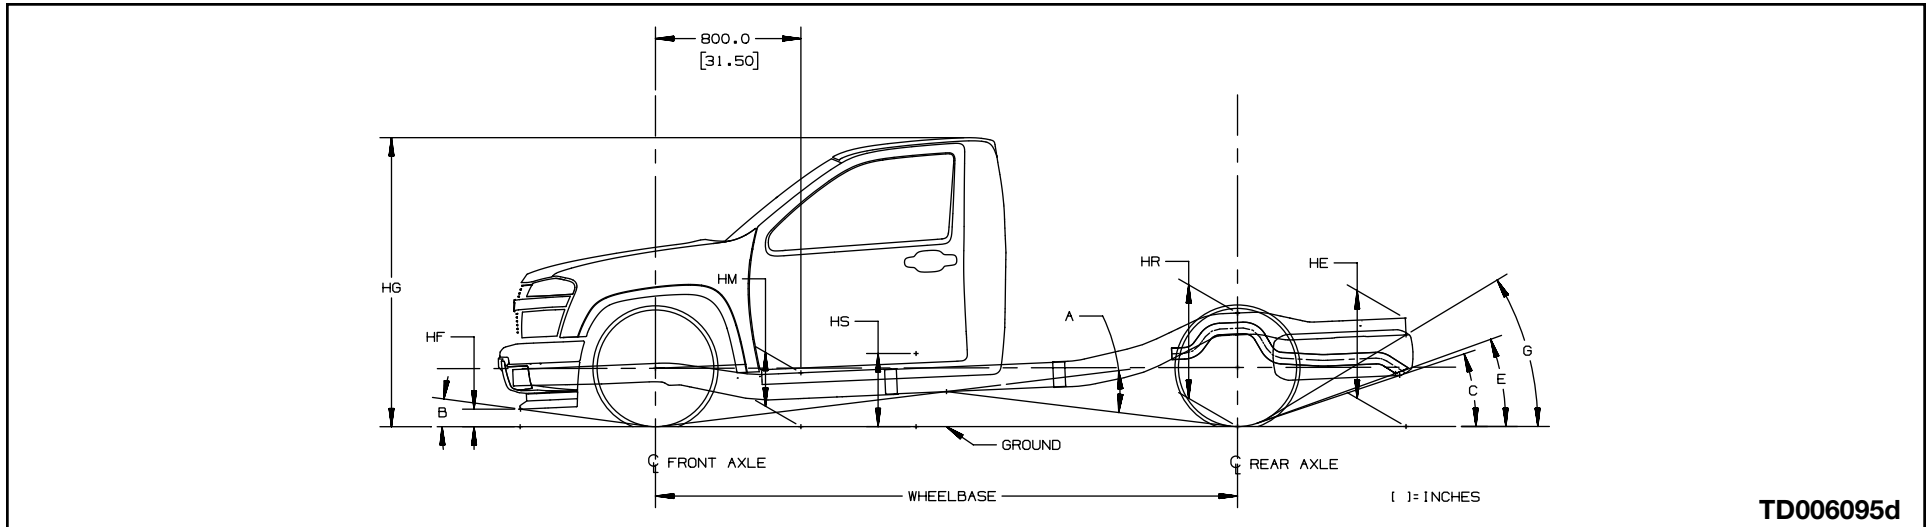

TD006095d

Heights (To Ground)

- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Normal Top of Frame
- HP Top of Tailgate (Down)
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

Angle

- A Ramp Breakover

Approach Angle(s) (Bottom of)

- B Front Air Deflector

Departure Angle(s) (Bottom of)

- C Spare Tire
- D Rear Bumper
- E Tail pipe
- F Platform Hitch

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

S 15603		126.0" Wheelbase			Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 5300 & Z71 P265/75R15	2025	1196	3221	2753	2896	-	14.7	68.4	18.8	-	30.0	22.6	-	-	-	12.8	65.5	16.3	-	25.9	19.8	-	-	23.4	30.7	21.9	-	25.3	-	-	-	56.6

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.


1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

S/T 15506, S/T 15806, S/T 15836 4-Door Midsize Utility

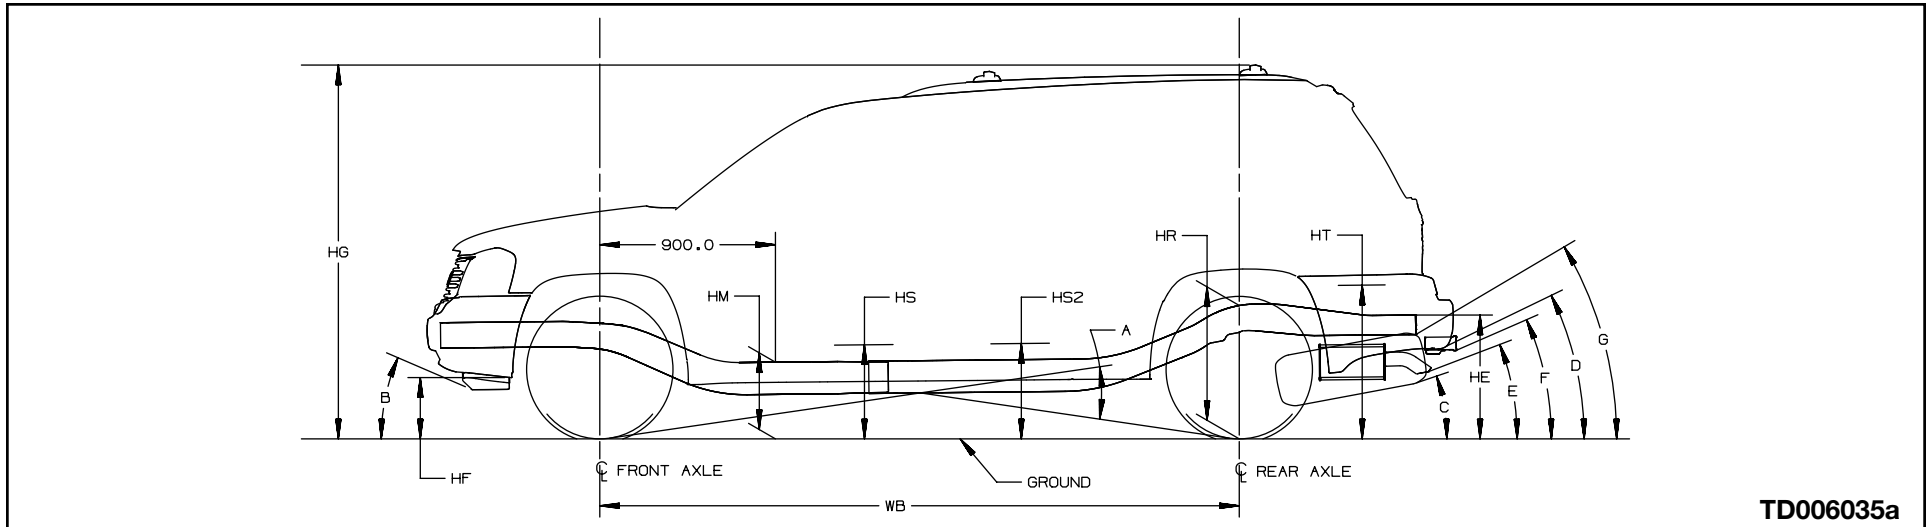

Heights (To Ground)

- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Normal Top of Frame
- HP Top of Tailgate (Down)
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

Angle

- A Ramp Breakover

Approach Angle(s) (Bottom of)

- B Front Air Deflector

Departure Angle(s) (Bottom of)

- C Spare Tire
- D Rear Bumper
- E Tail pipe
- F Platform Hitch

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

S 15506		113.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Fr	Rr	Ttl	Fr	Rr																											
¹⁾ 5550 P245/65R17	2293	1964	4257	2950	3200	-	9	73.1	15.6	-	28.6	18.7	20	33.6	-	6.7	70.8	13.3	-	24.7	16.4	17.1	28.6	16.5	19	18.1	22.4	18.5	20.9	-	-	-
²⁾ 5550 P245/70R16	2293	1964	4257	2950	3200	-	10.2	73.4	16.6	-	28.7	19.5	20.4	33.4	-	7.9	71.1	14	-	24.8	17.2	17.5	28.4	16.4	19.4	17.6	21.9	17.9	20.4	-	-	-
²⁾ 5550 P235/75R16	2293	1964	4257	2950	3200	-	9.2	73.3	15.8	-	28.9	18.9	20.2	33.9	-	6.8	71.1	13.5	-	24.9	16.6	17.3	28.8	16.8	19.4	18.4	22.6	18.8	21.1	-	-	-
²⁾ 6001 & W49 P245/65R17	2351	2031	4382	2950	3200	-	8.9	73.0	15.5	-	28.5	18.6	19.9	33.5	-	7.2	69.9	13	-	24.8	16.2	16.8	29.2	15.6	20.2	19.1	23.3	19.5	21.8	-	-	-

S 15806		129.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Fr	Rr	Ttl	Fr	Rr																											
¹⁾ 6200 P245/65R17	2478	2283	4761	3100	3400	-	8.9	76.2	15.3	-	29.6	18.4	19.5	32.9	-	6.9	74.3	13.3	-	26.8	16.4	17.3	29.7	15.7	20	21.1	23.2	20.9	23.2	-	-	-
²⁾ 6200 & LH6 P245/65R17	2516	2294	4810	3100	3400	-	8.9	76.1	15.2	-	29.5	18.4	19.4	32.8	-	7	74.3	13.4	-	26.9	16.5	17.4	29.8	15.8	20.3	21.3	23.4	21.1	23.3	-	-	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

S 15836		129.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 6125 P245/65R17	2489	2433	4923	3100	3400	-	8.9	72.2	15.5	-	27.7	18.5	19.5	32.9	-	6.8	70.9	13.7	-	25.6	16.7	17.9	30.4	16.3	19.6	22.3	24	22	23	-	-	-
²⁾ 6200 & LH6 P245/65R17	2547	2405	4953	3100	3400	-	8.9	72.1	15.4	-	27.6	18.4	19.4	32.8	-	7.1	70.5	13.7	-	25.2	16.7	17.7	30.1	16.1	20.4	21.6	23.4	21.4	22.5	-	-	-

T 15506		113.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 5750 P245/65R17	2440	2004	4444	2950	3200	-	8.9	73.0	15.5	-	28.5	18.6	19.9	33.5	-	7.4	70.5	13.4	-	24.7	16.6	17.1	28.7	16.4	20.7	18.3	22.6	18.7	21.1	-	-	-
²⁾ 5750 P245/70R16	2440	2004	4444	2950	3200	-	10.1	73.3	16.2	-	28.7	19.4	20.3	33.4	-	8.6	70.8	14.1	-	24.8	17.3	17.4	28.5	16.4	21.1	17.8	22.1	18.1	20.5	-	-	-
²⁾ 5750 & Z70 P255/75R17	2496	2002	4498	2950	3200	-	9.4	72.1	15.2	-	27.3	18.4	19.1	31.8	-	7.8	71.4	13.9	-	26.4	17.0	17.9	30.8	17.3	21.7	21.7	25.4	22.1	23.9	-	-	-
²⁾ 6001 & W49 P245/65R17	2497	2071	4568	2950	3200	-	9.2	71.8	14.9	-	27.0	18.2	18.8	31.6	-	7.5	71.1	13.8	-	26.2	17.0	17.9	30.8	17.6	21	21.9	25.6	22.2	24	-	-	-
²⁾ 6001 & W49 P255/55R18	2497	2071	4568	2950	3200	-	9.3	71.8	15	-	27.0	18.2	18.8	31.5	-	7.6	71.1	13.8	-	26.2	17.0	17.9	30.7	16.4	21.1	17.8	22.1	18.1	20.5	-	-	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

T 15806		129.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 6400 P245/65R17	2600	2347	4948	3200	3400	-	8.8	76.3	15.3	-	29.6	18.4	19.5	33	-	7	74.3	13.4	-	27.1	16.6	17.4	30.1	15.9	20.4	21.9	23.9	21.7	23.9	-	-	-
²⁾ 6400 & LH6 P245/65R17	2640	2359	5000	3200	3400	-	8.9	76.2	15.2	-	29.6	18.4	19.4	32.9	-	7.2	74.4	13.5	-	27.3	16.7	17.6	30.2	16	20.8	22.1	24.1	21.9	24	-	-	-

T 15836		129.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 6300 P245/65R17	2638	2464	5103	3100	3400	-	8.8	72.2	15.4	-	27.7	18.4	19.5	32.9	-	7.4	70.6	13.9	-	25.6	16.9	17.8	30.5	16.4	21	22.4	24.1	22.1	23.1	-	-	-
²⁾ 6375 & LH6 P245/65R17	2689	2438	5128	3100	3400	-	8.7	72.2	15.4	-	27.7	18.4	19.5	33	-	7.6	70.5	13.9	-	25.6	17.0	17.8	30.5	16.4	21.6	22.4	24.1	22.1	23.2	-	-	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.


1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

C/K Fullsize Pickups

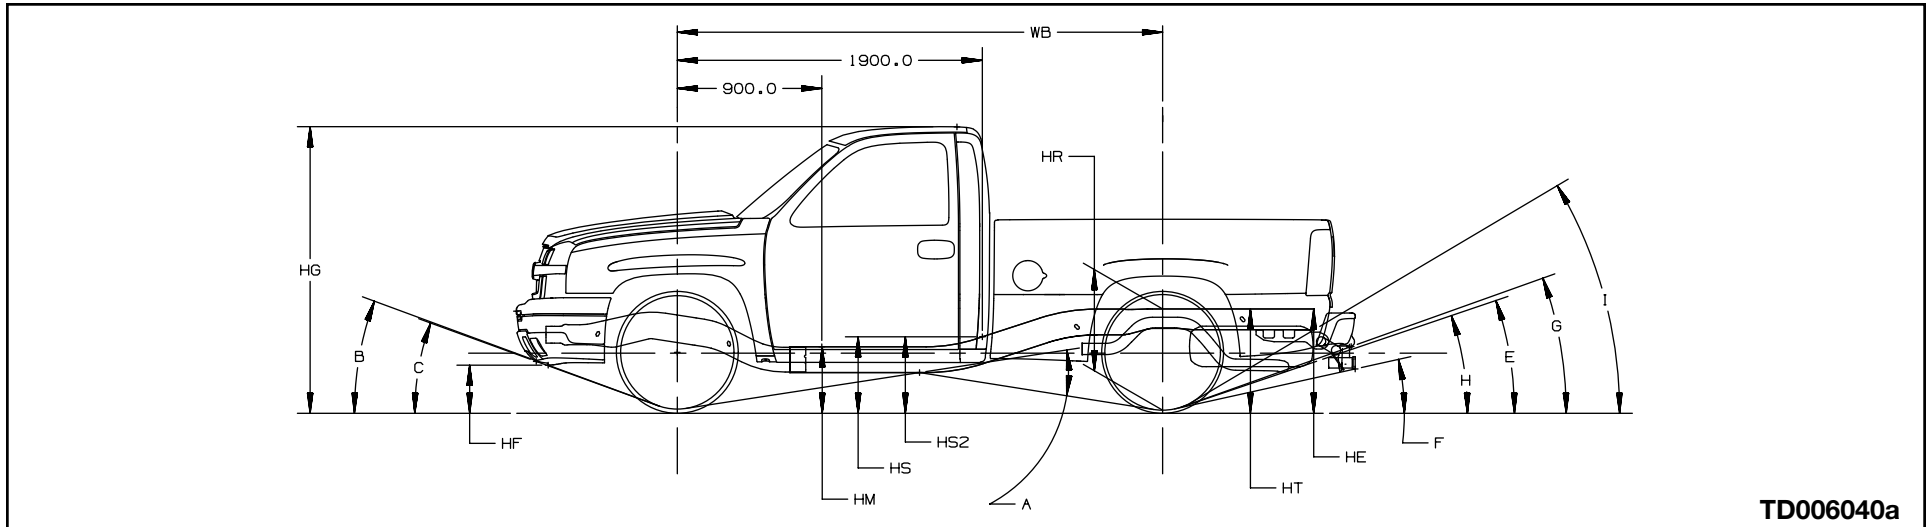

TD006040a

Heights (To Ground)

- HE Top of Frame at End
- HF Bottom of Front Air Deflector or Bumper
- HG Roof height to ground
- HM Normal Top of Frame
- HP Top of Tailgate
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

Angle

- A Ramp Breakover

Approach Angle(s) (Bottom of)

- B Front Bumper
- C Front Air Deflector


Departure Angle(s) (Bottom of)

- D Fuel Tank and Shield
- E Spare Tire
- F Platform Hitch
- G Rear Bumper
- H Exhaust
- I Frame at End

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

C/K Fullsize Chassis-Cabs

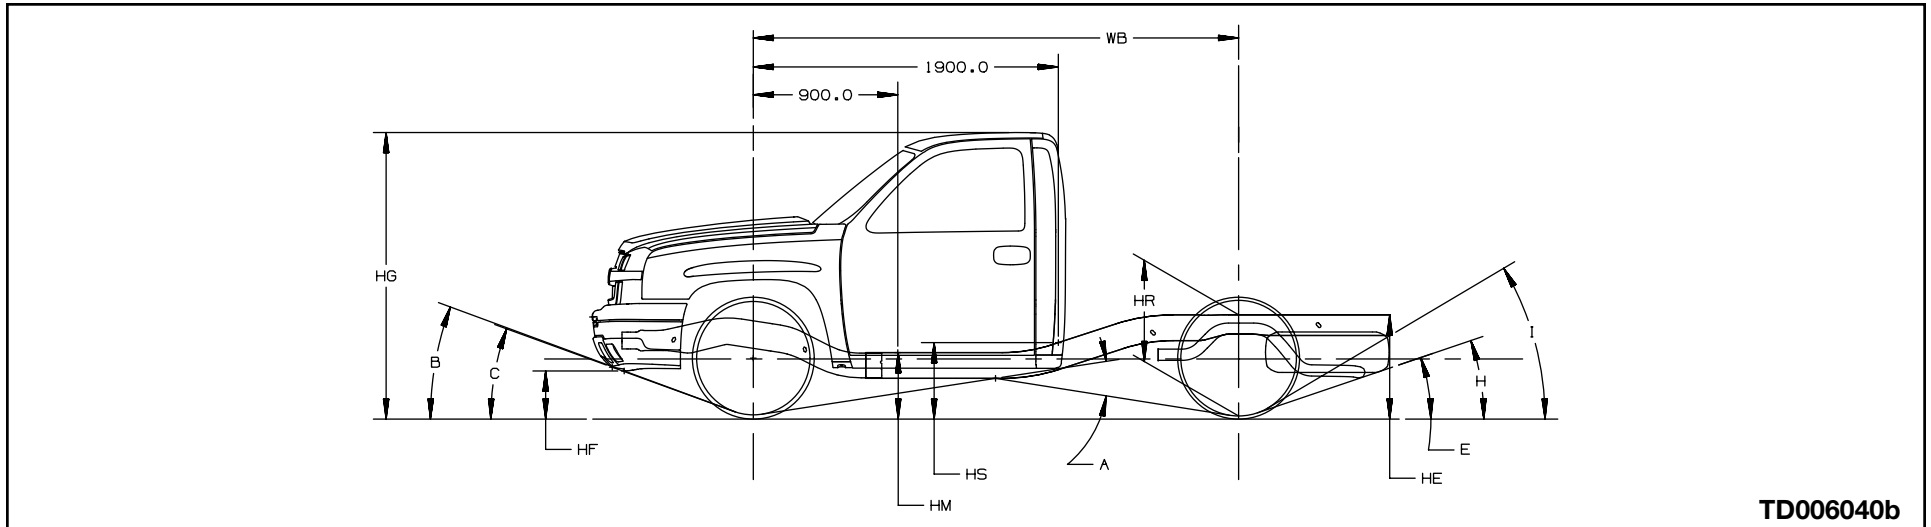

TD006040b

Heights (To Ground)

- HE Top of Frame at End
- HF Bottom of Front Air Deflector or Bumper
- HG Roof height to ground
- HM Normal Top of Frame
- HP Top of Tailgate
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

Angle

- A Ramp Breakover

Approach Angle(s) (Bottom of)

- B Front Bumper
- C Front Air Deflector

Departure Angle(s) (Bottom of)

- D Fuel Tank and Shield
- E Spare Tire
- F Platform Hitch
- G Rear Bumper
- H Exhaust
- I Frame at End

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

C 15703		119.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 6100 P245/70R17	2457	1704	4161	3150	3686	30.3	10.3	72.0	17.1	—	29.1	20.4	—	33	23.9	9	69.2	14.8	—	24.2	18.1	—	26.3	19.8	31.2	21.3	—	20	14.6	21.1	20.1	31.5

C 15903		133.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 6400 P245/70R17	2536	1779	4315	3150	3686	30.3	10.4	71.8	17	—	29.1	20.3	—	33	24.4	9.4	69.1	14.9	—	24.5	18.2	—	26.8	17.7	32	22.2	—	20.8	13.8	19.6	20.9	28.4

C 15753		143.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 6200 P235/75R16	2689	1859	4548	3600	3686	29.3	10.1	71.5	16.4	—	28.3	19.7	20.7	31.9	23.6	8	69.4	14.3	—	24	17.6	18.5	26.1	16.4	29.4	19.7	—	19.7	14.4	20.9	19.7	31.2
²⁾ 6200 P245/70R17	2689	1859	4548	3600	3686	29.6	10.4	71.9	16.8	—	28.7	20.1	21.1	32.3	24	8.4	69.7	14.6	—	24.3	18.0	18.9	30	16.9	30.2	20.4	—	19.8	14.8	21.4	20.4	31.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

C 15953		157.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 6400 P245/70R17	2886	1915	4801	3600	3686	29.5	10.6	71.6	16.7	—	28.6	20.0	20.8	32	24	9.2	69.5	14.9	—	24.3	18.2	18.8	26.5	15.4	32	22.2	—	20.3	13.4	19.2	20.4	28

C 15543		143.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 6800 P245/70R17	2881	2102	4984	3650	4000	27.3	10.9	71.3	16.6	—	29.1	19.7	20.3	30.1	22.5	9.2	68.2	14.6	—	23.4	17.8	18.2	25.3	23.8	20.3	20.1	—	16.2	11.8	19	18.2	30.2

C 15743		153.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 8600 LT245/75R16	3111	2330	5442	4410	6000	34	13.3	77.2	20.2	—	33.2	24.9	25.6	36.5	28.5	11.3	75.0	18	—	28.9	22.7	23.2	31.0	17.3	35.8	26	—	20.3	17.2	25.1	26.8	32.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 15703		119.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 6400 P265/70R17	2678	1753	4431	3925	3750	32.7	12.7	74.4	19.5	—	31.5	22.8	—	35.3	26.3	9.5	71.9	16.8	—	26.7	20.1	—	28.8	24.5	33	23	—	23.8	17.6	24.2	25	35

K 15903		133.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 6400 P265/70R17	2764	1818	4582	3925	3750	32.5	12.8	74.1	19.3	—	31.3	22.6	—	35.1	26.3	9.8	71.7	16.7	—	26.7	20.1	—	28.7	22	33.7	23.7	—	23.8	15.8	21.7	25	30.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 15753		143.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 6400 P245/75R16	3054	1924	4979	3650	3600	31.1	12.8	73.5	18.4	—	30.2	21.7	22.7	33.7	25.8	11	71.7	16.7	—	26.2	20.1	20.7	28.3	19.8	35.6	25.8	—	23	17	23.5	23.9	34.2
²⁾ 6400 P265/70R17	3054	1924	4979	3650	3600	31.7	12.8	74.1	19.1	—	30.8	22.4	23.3	34.3	26.5	11.6	72.3	17.4	—	26.9	20.7	21.3	28.9	20.7	37.1	27.1	—	23.9	17.7	24.3	25.2	35.1
²⁾ 6400 P275/55R20	3159	2076	5236	3650	3600	31.5	13.2	74.1	19.2	—	30.7	22.5	23.3	34	26.8	12.4	72.5	18	—	27.7	21.3	21.8	29.2	21.3	38.4	28.4	—	23.4	17.9	24.5	25.6	35.4
¹⁾ 6900 P245/75R16	3023	2302	5326	3925	4000	30.8	12.3	73.3	18.4	—	30.0	21.7	22.5	33.4	25.6	10.1	71.4	16.2	—	26.5	19.6	20.4	28.1	19.5	34	24.1	—	22.9	16.9	23.5	23.8	34.1
²⁾ 6900 & NYS LT245/75R16	3023	2302	5326	3925	4000	31	12.7	73.7	18.7	—	30.3	22.1	22.9	33.6	26.2	10.6	71.8	16.7	—	27.0	20.0	20.8	28.6	19.5	34	24.2	—	22.9	17	23.5	23.9	34.2
²⁾ 6900 & NYS P265/75R16	3023	2302	5326	3925	4000	31.4	12.9	74.0	19	—	30.6	22.3	23.2	34	26.3	10.7	72.0	16.9	—	27.2	20.2	21.1	28.7	20.5	35.5	25.5	—	23.1	17.7	24.3	25.2	35.1
²⁾ 6900 P265/70R17	3023	2302	5326	3925	4000	30.6	12.7	73.9	18.9	—	30.6	22.2	23.1	34	26.3	10.5	72.0	16.7	—	27.2	20.0	21	28.8	20.5	35.3	25.4	—	23.1	17.8	24.3	25.2	35.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 15953		157.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 6400 P265/70R17	3118	1992	5111	3925	3750	32.2	12.8	74.2	19.1	—	31.2	22.4	23.3	34.8	26.5	11.1	72.6	17.5	—	26.9	20.8	21.8	28.9	19.7	36.2	26.3	—	24.2	16	21.9	25.4	31.1

K 15543		153.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 7000 P265/70R17	3137	2170	5308	3925	4000	29.8	13.2	73.8	19	—	29.7	22.1	22.7	32.7	25	11.7	71.8	17.2	—	25.9	20.4	20.7	27.8	19.9	24.6	25	—	20	14.8	22	23.2	33.7
²⁾ 7000 P265/70R17	3137	2170	5308	3925	4000	29.8	13.1	73.7	18.9	—	29.6	22.0	22.6	32.6	24.8	11.6	71.7	17.1	—	25.8	20.3	20.5	27.7	19.9	24.6	25	—	20	14.8	22	23.1	33.7
²⁾ 7000 P275/55R20	3137	2170	5308	3925	4000	30.1	13.5	74.1	19.3	—	30.0	22.4	23	33	25.3	12.1	72.1	17.5	—	26.2	20.7	21	28.1	20.2	24.9	25.3	—	20.3	15	22.2	23.5	34

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

C 25903		133.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 9200 AF LT245/75R16	3395	1942	5338	4410	6084	35.6	12.9	74.7	20.5	-	34.2	23.4	-	36.1	28.6	11.8	72.2	18.3	-	29	20.9	-	29.0	18.8	36.8	26.9	-	20.5	15.6	21.4	27	29.2
¹⁾ 8500 LT245/75R16	2990	2610	5601	4100	6000	33.4	13.3	73.9	20.2	-	32.6	22.9	-	33.9	28.4	11.7	72.3	18.3	-	28.9	20.9	-	28.8	18.9	36.4	26.6	-	20.2	15.3	21.1	26.7	28.9
²⁾ 8500 & ZW9 LT245/75R16	3011	2329	5341	4100	6000	34.2	13.2	74.2	20.3	-	33.1	23.1	-	-	28.4	11.7	72.3	18.3	-	28.9	21.0	-	-	18.9	36.4	26.6	-	-	-	-	26.7	28.9
¹⁾ 9200 LT245/75R16	2866	2177	5044	4410	6084	34.6	13.2	76.4	20.4	-	33.4	25.2	-	37.1	28.6	11	73.8	17.7	-	28.9	22.4	-	31.1	18.1	35	25.2	-	20.6	15.7	22.9	27	29.3
²⁾ 9200 & ZW9 LT245/75R16	2870	1813	4683	4410	6084	35.5	13	76.8	20.6	-	34.1	25.4	-	-	28.6	11	73.8	17.7	-	28.9	22.4	-	-	18.1	35.1	25.2	-	-	-	-	27	29.3

C 25753		143.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 9200 LT245/75R16	3033	2187	5221	4410	6084	34.5	13.2	76.8	20.4	-	33.6	25.1	25.7	37.1	28.7	11.3	74.0	17.9	-	28.9	22.5	22.9	31.2	18.1	35.6	25.8	-	20.6	17.5	25.5	21.2	33.3

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

C 25953		157.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
²⁾ 8500 LT245/75R16	3226	2806	6033	4500	6084	33	13.4	75.9	20	-	32.4	24.6	25	35.5	28.3	11.3	74.9	18.1	-	28.9	22.7	23.2	30.8	17	35.8	26	-	22	15.3	22.4	26.6	28.9
¹⁾ 9200 LT245/75R16	3119	2247	5367	4500	6084	33.5	13.2	76.5	20.2	-	33.5	24.9	25.5	36.9	28.7	11.2	74.1	17.8	-	28.9	22.4	22.8	31.1	16.5	35.7	25.8	-	22.4	15.8	22.9	27.1	29.4
²⁾ 9200 AF LT245/75R16	3687	2336	6024	4500	6084	34.4	13	76.4	20.1	-	33.4	24.8	25.4	36.9	28.5	12.1	74.6	18.4	-	29	23.0	23.3	31	17.1	37.5	27.7	-	22.2	15.5	22.7	26.9	29.2

C 25743		143.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 9200 LT245/75R16	3068	2304	5373	4410	6084	34.2	13.2	77.4	20.3	-	33.4	25.0	25.7	36.7	28.7	11.4	74.5	17.9	-	28.9	22.5	23	31.2	17	35.8	26	-	20.6	17.5	25.5	27.1	33.2

C 25943		157.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 9200 LT245/75R16	3172	2368	5541	4670	6084	34.1	13.2	77.1	20.1	-	33.2	24.8	25.5	-	28.7	11	74.4	17.7	-	28.9	22.3	22.8	-	15.5	35.3	25.5	-	-	-	-	22	29.4
²⁾ 9200 & ZW9 LT245/75R16	3184	1999	5184	4670	6084	35	13.1	77.5	20.3	-	34.0	25	25.8	-	28.7	11	74.4	17.7	-	28.9	22.3	22.8	-	15.5	35.3	25.5	-	-	-	-	22	29.3

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 25903		133.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
²⁾ 8500 AF LT245/75R16	3293	2704	5998	4500	6084	33.3	13.2	75.6	20.1	-	32.5	24.8	-	35.8	28.1	11.3	74.8	18.2	-	28.8	22.9	-	30.5	19.1	35.9	26	-	19.9	15.1	22.2	26.4	28.7
¹⁾ 9200 & ZW9 LT245/75R16	3133	1802	4936	4500	6084	35.6	12.9	76.3	20.6	-	34.2	25.4	-	-	28.5	11.2	74.0	17.9	-	28.8	22.6	-	-	18.4	35.6	25.8	-	-	-	-	27	29.2
²⁾ 9200 & E63 LT245/75R16	3184	2163	5348	4500	6084	34.7	13	76.0	20.4	-	33.5	25.1	-	37.2	28.5	11.3	74.1	18	-	28.8	22.6	-	31.0	18.5	35.8	25.9	-	20.5	15.6	22.8	27	29.2
²⁾ 9200 & VYU LT245/75R16	3192	2163	5356	4800	6084	34.7	13.1	76.0	20.4	-	33.5	25.2	-	37.2	28.5	10.8	74.1	17.7	-	28.8	22.4	-	30.9	18.3	34.7	24.9	-	20.5	15.6	22.7	26.9	29.2

K 25753		143.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 9200 LT245/75R16	3337	2249	5587	4800	6084	34.3	13.1	76.7	20.3	-	33.4	25.0	25.6	36.8	28.5	10.9	74.2	17.8	-	28.8	22.4	22.9	31.0	18.2	35.2	25.4	-	20.3	17.3	25.3	21	33.1
²⁾ 9200 & VYU LT245/75R16	3386	2353	5740	4800	6084	33.9	13.2	76.5	20.2	-	33.0	24.9	25.4	36.4	28.4	11.1	74.3	17.9	-	28.8	22.5	22.9	30.9	18.2	35.4	25.6	-	20.2	17.2	25.1	20.8	32.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 25953		157.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
²⁾ 8500 AF LT245/75R16	3472	2811	6284	4500	6084	33	13.3	75.9	19.9	—	32.3	24.5	24.9	35.5	28.1	11.7	75.1	18.3	—	28.8	22.9	23.3	30.6	17.2	36.6	26.8	—	21.9	15.2	22.3	26.5	28.8
¹⁾ 9200 LT245/75R16	3374	2258	5633	4670	6084	34.3	13.1	76.5	20.2	—	33.4	24.9	25.4	36.8	28.5	11.3	74.3	17.9	—	28.9	22.5	22.9	31.0	16.6	35.9	26.1	—	22.3	15.6	22.7	27	29.2
²⁾ 9200 & VYU LT245/75R16	3383	2258	5642	4800	6084	34.3	13.2	76.5	20.2	—	33.4	24.9	25.4	36.8	28.5	11.2	74.3	17.8	—	28.9	22.5	22.9	30.9	16.6	35.5	25.7	—	22.3	15.6	22.7	26.9	29.2

K 25743		153.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 8600 LT245/75R16	3414	2404	5819	4410	6000	33.8	13.3	77.1	20.1	—	33.0	24.8	25.5	36.3	28.3	11.7	75.1	18.3	—	28.9	22.9	23.4	30.8	17.6	36.8	26.9	—	20.2	17	25	26.7	32.8
¹⁾ 9200 LT245/75R16	3340	2446	5787	4670	6084	33.9	13.2	77.1	20.1	—	33.1	24.8	25.5	36.4	28.6	11.2	74.7	17.9	—	28.9	23.8	23	31.0	17.1	35.8	25.9	—	20.5	17.4	25.3	27	33.1
²⁾ 9200 & VYU LT245/75R16	3419	2532	5952	4800	6084	33.6	13.2	77.1	20.1	—	32.9	24.8	25.4	36.1	28.5	11.2	74.8	17.9	—	28.9	22.5	23.1	31	17.1	35.6	25.7	—	20.5	17.3	25.3	27	33.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 25943		167.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 9200 LT245/75R16	3451	2577	6029	4800	6084	33.6	13.3	76.8	20	-	32.8	24.7	25.3	36.1	28.5	11.3	74.9	17.9	-	28.9	22.5	23	31.0	15.7	35.8	25.9	-	20.4	15.6	22.7	21.9	29.2
²⁾ 9200 & ZW9 LT245/75R16	3463	2208	5672	4800	6084	34.5	13.2	77.2	20.2	-	33.5	24.9	25.6	37	28.5	11.3	74.9	17.9	-	28.9	22.5	23	31	15.7	35.8	26	-	-	-	-	21.9	29.2

C 35953		157.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 11400 LT215/85R16	3156	2767	5924	4670	8550	35.7	13.1	76.8	20.3	-	34.0	25.1	25.7	37.6	28.6	11.1	74.4	17.6	-	28.9	22.2	22.6	31.0	16.1	35.3	25.4	-	22.3	15.6	22.7	26.9	29.2

C 35943		167.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 11400 LT215/85R16	3244	2760	6005	4670	8550	35	13.1	77.5	20.3	-	34.0	25.0	25.8	37.5	28.5	11.3	75.0	17.7	-	28.9	22.3	22.7	31.0	15.2	35.6	25.8	-	22.2	15.5	22.7	21.8	29.1
²⁾ 11400 & ZW9 LT215/85R16	3260	2347	5608	4670	8550	35.9	13	77.9	20.5	-	34.7	25.3	26.2	-	28.5	11.4	75.0	17.7	-	28.9	22.3	22.7	-	15.2	35.7	25.9	-	-	-	-	21.7	29.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 35903		133.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 9900 & VYU LT265/75R16	3141	2014	5156	4800	6500	37.2	13.4	77.3	21.4	-	35.5	26.3	-	39.7	30.1	11.3	74.7	18.3	-	30.1	23.0	-	32.6	19.3	36.1	26.1	-	24.8	17.5	24.7	30.4	31.4
¹⁾ 9900 & VYU LT265/75R16	3139	2332	5472	4800	6500	36.4	13.5	77.0	21.2	-	34.9	26.1	-	-	30.1	11.3	74.7	18.3	-	30.1	23.0	-	-	19.3	36	26.1	-	-	-	-	30.4	31.4
¹⁾ 11400 LT215/85R18	3137	2565	5703	4500	8550	35.7	13	76.4	20.7	-	34.3	25.5	-	38.2	28.5	11.4	74.3	17.9	-	28.9	22.5	-	30.9	18.1	35.7	25.9	-	22.1	15.4	22.6	26.7	29
²⁾ 11400 & ZW9 LT215/85R16	3143	2238	5382	4500	8550	36.5	12.8	76.7	20.8	-	34.9	25.7	-	-	28.4	11.4	74.3	17.9	-	28.9	22.5	-	-	18.1	35.7	25.9	-	-	-	-	26.7	29
²⁾ 11400 & VYU LT215/85R16	3146	2565	5712	4800	8550	35.7	12.9	76.4	20.6	-	34.3	25.5	-	38.2	28.5	10.8	74.3	17.6	-	28.9	22.3	-	30.9	17.8	34.7	24.8	-	22.1	15.4	22.6	26.7	29
²⁾ 11400 & VYU LT215/85R16	3151	2238	5390	4800	8550	36.5	12.8	76.7	20.8	-	34.9	25.7	-	-	28.4	10.8	74.3	17.6	-	28.9	22.3	-	-	17.8	34.7	24.8	-	-	-	-	26.7	29

K 35953		157.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 9900 & SRW LT265/75R16	3372	2463	5836	4800	6500	35.2	13.8	77.2	20.9	-	34.2	25.6	26.1	37.7	29.1	11.8	74.6	18.3	-	29.4	23.0	23.3	31.6	17.2	37.1	27.2	-	23.4	16.4	23.6	28.5	30.2
²⁾ 11400 LT215/85R16	3388	2712	6101	4800	8550	35	13.1	76.8	20.3	-	33.9	25.1	25.7	37.5	27.5	11.4	74.4	17.6	-	28.2	22.2	22.4	30	16.2	35.8	26	-	21.8	15.2	22.3	26.5	28.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 35943		167.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 9900 LT265/75R16	3478	2788	6267	4800	6500	35.3	13.8	77.9	20.8	—	34.3	25.5	26.3	37.8	30	12	75.7	18.5	—	30.1	23.2	23.7	32.5	16.7	37.3	27.4	—	24.8	17.4	24.6	24.6	31.3
²⁾ 9900 & ZW9 LT265/75R16	3492	2373	5866	4800	6500	36.3	13.6	78.4	21	—	35.1	25.7	26.7	—	30	12	75.7	18.5	—	30.1	23.2	23.7	—	16.7	37.4	27.4	—	—	—	—	24.6	31.3
¹⁾ 11400 LT215/85R16	3499	2888	6388	4800	8550	34.7	13.2	77.4	20.2	—	33.7	25.0	25.7	37.2	28.4	11.5	75.1	17.8	—	28.9	22.4	22.8	30.9	15.4	36	26.2	—	22.1	15.4	22.5	21.6	29
²⁾ 11400 & ZW9 LT215/85R16	3513	2472	5986	4800	8550	35.7	13	77.8	20.4	—	34.5	25.2	26.1	—	28.4	11.5	75.2	17.9	—	28.9	22.5	22.8	—	15.4	36	26.2	—	—	—	—	21.6	29

C 36003		137.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 11400 LT215/85R16	2990	2275	5266	4500	8550	33.5	13	76.2	20.6	—	32.0	25.3	—	—	26.8	11	74.4	17.8	—	27.1	22.4	—	—	17.4	35.1	25.2	27.9	—	—	—	23.1	23.6

C 36053		161.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 11400 LT215/85R16	3232	2497	5730	4670	8550	33	13.1	76.7	20.4	—	31.7	25.0	25.6	—	26.8	11.2	74.6	17.8	—	27.1	22.4	22.8	—	14.8	35.4	25.6	27.9	—	—	—	23.1	23.5

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

C 36403		161.5" Wheelbase			Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Fr	Rr	Ttl	Fr	Rr																											
¹⁾ 11400 LT215/85R16	3120	2229	5350	4670	8550	33.4	13.1	76.0	20.5	-	32.0	25.1	-	-	26.8	11	74.5	17.7	-	27.1	22.3	-	-	14.7	35	25.2	27.9	-	-	-	23.1	23.6

K 36003		137.0" Wheelbase			Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Fr	Rr	Ttl	Fr	Rr																											
¹⁾ 12000 LT215/85R16	3249	2300	5550	4670	8600	33.2	13	76.1	20.5	-	31.7	25.2	-	-	25.8	11.3	72.5	17.7	-	26.3	22.2	-	-	17.4	35.7	25.9	27.7	-	-	-	22.9	23.4
²⁾ 12000 & VYU LT215/85R16	3249	2300	5550	4800	8600	33.3	13	76.2	20.6	-	31.8	25.3	-	-	25.9	11.1	73.8	17.6	-	26.4	22.2	-	-	17.2	35.2	25.4	27.7	-	-	-	23	23.4

K 36053		161.5" Wheelbase			Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Fr	Rr	Ttl	Fr	Rr																											
¹⁾ 12000 LT215/85R16	3537	2510	6048	4800	8600	32.7	13.1	76.6	20.3	-	31.5	25.0	25.5	-	25.9	11.6	74.1	17.9	-	26.4	22.4	22.6	-	14.9	36.3	26.5	27.7	-	-	-	23	23.4

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 36403		161.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 12000 LT215/85R16	3401	2273	5675	4800	8600	33.2	13.1	75.9	20.4	-	31.8	25.1	-	-	25.9	11.4	74.0	17.7	-	26.4	22.2	-	-	14.8	35.8	26	27.7	-	-	-	23	23.4

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.


1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

C/K 15000/25000 Fullsize Utility

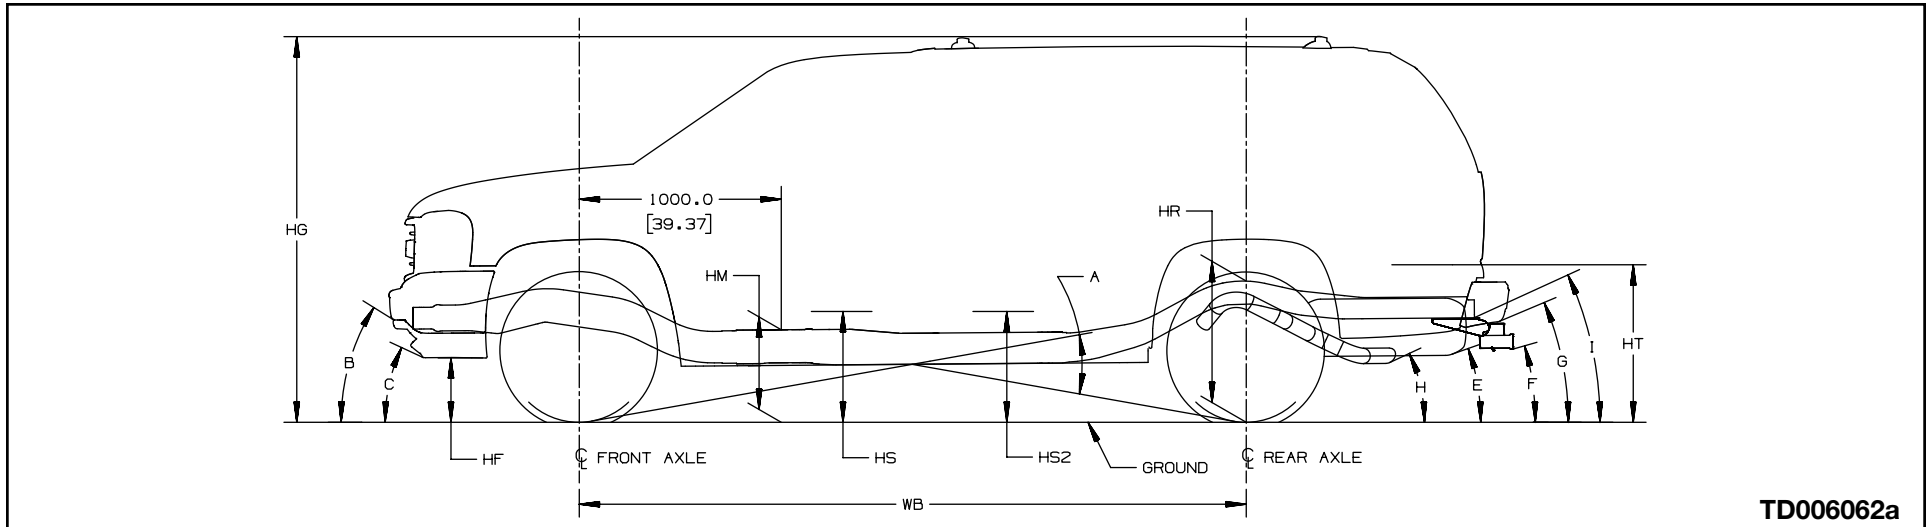

TD006062a

Heights (To Ground)

- HE Top of Frame at End
- HF Bottom of Front Air Deflector or Bumper
- HG Roof height to ground
- HM Normal Top of Frame
- HP Top of Tailgate
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

Angle

- A Ramp Breakover

Approach Angle(s) (Bottom of)

- B Front Bumper
- C Front Air Deflector

Departure Angle(s) (Bottom of)

- D Fuel Tank and Shield
- E Spare Tire
- F Platform Hitch
- G Rear Bumper
- H Exhaust
- I Frame at End

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

C 15706		116.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 6500 P265/70R17	2583	2382	4966	3200	3750	-	13.1	77.0	18	-	28.9	22.3	22.8	31.5	-	11.1	75.2	16.6	-	26.8	20.4	20.9	29.0	23.7	42.8	25.2	-	24	18.1	30.4	30	-
²⁾ 6500 P265/70R16	2583	2382	4966	3200	3750	-	12.6	76.6	18	-	28.4	21.8	22.3	31	-	10.6	74.7	16.2	-	26.4	19.9	20.5	28.5	22.6	41.3	24.1	-	23.1	17.4	29.5	28.7	-
²⁾ 6500 P245/75R16	2583	2382	4966	3200	3750	-	12.6	76.5	18	-	28.4	21.8	22.3	31	-	10.6	74.7	16.1	-	26.3	19.9	20.4	28.5	22.5	41.1	24	-	23	17.3	29.4	28.5	-
²⁾ 6800 P265/70R17	2583	2382	4966	3200	3750	-	13	77.0	18.4	-	28.8	22.2	22.7	31.4	-	11	75.1	16.5	-	26.8	20.3	20.9	28.9	23.7	42.8	25.2	-	24	18.1	30.4	30	-
¹⁾ 6800 P265/70R17	2580	2478	5059	3200	4000	-	13.2	77.1	18.3	-	28.6	22.2	22.6	31.2	-	11.1	75.5	16.6	-	26.8	20.4	20.9	29.0	23.8	42.8	25.2	-	24.2	18.3	30.6	30.3	-
²⁾ 6800 P265/70R16	2580	2478	5059	3200	4000	-	12.7	76.7	17.9	-	28.2	21.7	22.1	30.7	-	10.6	75.0	16.1	-	26.4	19.9	20.5	28.6	22.7	41.3	24.1	-	23.3	17.6	29.7	29	-
²⁾ 6800 P245/75R16	2580	2478	5059	3200	4000	-	12.6	76.6	17.8	-	28.1	21.7	22.1	30.7	-	10.6	75.0	16.1	-	26.3	19.9	20.4	28.5	22.6	41.1	23.9	-	23.2	17.5	29.6	28.8	-
²⁾ 6800 P265/70R17	2580	2478	5059	3200	4000	-	13.1	77.1	18.3	-	28.6	22.1	22.6	31.1	-	11	75.4	16.5	-	26.8	20.3	20.9	28.9	23.8	42.8	25.2	-	24.2	18.3	30.6	30.3	-
²⁾ 6800 & Z55 P265/70R17	2590	2498	5089	3200	4000	-	13.2	77.0	18.2	-	28.4	22.1	22.5	30.9	-	11.3	75.7	16.2	-	26.3	20.1	20.4	28.7	23	43.2	25.7	-	24.6	18.5	30.9	30.7	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

C 15906		130.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 7000 P265/70R17	2719	2499	5219	3200	4000	-	13	76.8	18.4	-	29.1	22.2	22.8	31.8	-	12	74.3	16.4	-	25.9	20.4	20.4	27.8	21	44.7	27.1	-	22.2	14.5	24.2	27.7	-
²⁾ 7000 P265/70R16	2719	2499	5219	3200	4000	-	12.6	76.4	18	-	28.6	21.8	22.4	31.3	-	11.6	73.8	16	-	25.4	20.0	20	27.4	20.1	43.2	25.9	-	21.3	14	23.5	26.3	-
²⁾ 7000 P245/75R16	2719	2499	5219	3200	4000	-	12.5	76.3	19.6	-	27.5	21.7	22.3	31.2	-	11.5	73.8	17.5	-	24.3	19.9	19.9	27.3	19.1	43	25.8	-	17.2	13.9	23.4	26.6	-
²⁾ 7000 P265/70R17	2719	2499	5219	3200	4000	-	13	76.8	20.1	-	27.9	22.2	22.8	31.7	-	12	74.2	17.9	-	24.7	20.4	20.4	27.7	20.1	44.7	27.1	-	18.2	14.5	24.2	28.2	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 15706		116.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 6800 P245/75R16	2764	2426	5191	3600	3750	-	12.4	77.1	18.2	-	28.8	21.9	22.5	31.5	-	10.1	75.3	16.2	-	27.8	19.9	20.2	27.8	22.7	40.3	23.2	-	22	16.5	28.5	27.1	-
²⁾ 6800 P265/70R16	2764	2426	5191	3600	3750	-	12.4	77.2	18.2	-	28.9	22.0	22.6	31.6	-	10.1	75.4	16.2	-	25.9	19.9	20.3	27.9	22.9	40.5	23.4	-	22.1	16.7	28.6	27.3	-
²⁾ 6800 P265/70R17	2764	2426	5191	3600	3750	-	12.9	77.7	18.7	-	29.3	22.4	23.1	32.1	-	10.4	75.8	16.5	-	26.3	20.4	20.7	28.4	23.9	42	24.5	-	23	17.3	29.5	28.7	-
²⁾ 6800 LT245/75R16	2764	2426	5191	3600	3750	-	12.6	77.4	18.4	-	29.0	22.1	22.8	31.8	-	10.4	75.6	16.5	-	26.1	20.2	20.5	28.2	22.8	40.3	23.2	-	22	16.6	28.5	27.2	-
²⁾ 6800 P255/70R16	2764	2426	5191	3600	3750	-	12.1	76.9	17.9	-	28.5	21.6	22.3	31.3	-	9.8	75.0	15.9	-	25.5	19.6	19.9	27.6	22.3	39.7	22.7	-	21.6	16.3	28.1	26.6	-
²⁾ 6800 & Z71 & BPH P265/70R17	2769	2439	5209	3600	3750	-	13	77.2	18.3	-	28.7	22.2	22.6	31.3	-	10.4	75.5	16.5	-	26.8	20.2	20.9	29.0	23.5	41.9	24.3	-	24.2	18.3	30.6	30.2	-
²⁾ 6900 P245/75R16	2762	2522	5285	3600	4000	-	12.4	77.0	18	-	28.6	21.8	22.4	31.3	-	10.1	75.1	16	-	25.2	19.8	19.9	27.0	22.5	40.4	23.3	-	20.7	15.4	27.2	25.5	-
²⁾ 6900 P265/70R16	2762	2522	5285	3600	4000	-	12.5	77.0	18.1	-	28.7	21.9	22.5	31.3	-	10.2	75.2	16.1	-	25.3	19.8	20	27.1	22.7	40.6	23.5	-	20.9	15.6	27.4	25.7	-
²⁾ 6900 P265/70R17	2762	2522	5285	3600	4000	-	13	77.5	18.6	-	29.1	22.3	22.9	31.8	-	10.6	75.6	16.6	-	25.7	20.3	20.4	27.5	23.7	42.1	24.6	-	21.8	16.2	28.3	27.1	-
²⁾ 7000 P265/70R17	2852	2644	5497	3550	4000	-	13.1	76.6	17.9	-	28.0	21.9	22.1	30.4	-	10.9	75.0	16.2	-	25.6	20.0	20.3	27.5	23.1	42.7	25.1	-	21.8	16.2	28.3	27.1	-
²⁾ 7000 P275/55R20	2852	2644	5497	3550	4000	-	13.6	77.1	18.4	-	28.5	22.3	22.6	30.9	-	11.4	75.5	16.7	-	26.2	20.5	20.8	28	23.4	43.1	25.5	-	22.1	16.5	28.6	27.5	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 15906		130.0" Wheelbase				Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																			
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 7200 P245/75R16	2898	2552	5451	3600	4000	-	12.5	76.2	17.8	-	28.5	21.7	22.2	31.1	-	10.7	74.0	15.8	-	25.4	19.7	19.9	27.3	19.9	41.6	24.5	-	21.3	13.9	23.5	26.2	-
²⁾ 7200 P265/70R16	2898	2552	5451	3600	4000	-	12.5	76.3	17.9	-	28.5	21.7	22.3	31.2	-	10.8	74.0	15.9	-	25.5	19.7	20	27.4	20	41.8	24.6	-	21.4	14	23.6	26.4	-
²⁾ 7200 P265/70R17	2898	2552	5451	3600	4000	-	13	76.8	18.4	-	29.0	22.2	22.8	31.7	-	11.2	74.5	16.3	-	25.9	20.2	20.4	27.9	21	43.3	28.4	-	22.3	14.6	24.3	27.8	-
²⁾ 7200 P265/70R17	2898	2552	5451	3600	4000	-	12.9	76.7	18.3	-	28.9	22.1	22.7	31.6	-	11.1	74.4	16.3	-	25.8	20.1	20.4	27.8	21	43.3	28.4	-	22.3	14.6	24.3	27.8	-
²⁾ 7200 P255/70R16	2898	2552	5451	3600	4000	-	12.2	75.8	17.6	-	28.2	21.4	22	30.9	-	10.4	73.7	15.5	-	25.1	19.4	19.7	27.1	19.5	41	24	-	20.9	13.7	23.2	25.7	-
²⁾ 7200 P265/70R17	3072	2638	5711	3450	4000	-	13	76.0	17.9	-	28.2	21.8	22.2	30.7	-	12.3	74.9	16.4	-	26.1	20.4	20.5	28.2	21.1	45.5	27.8	-	24.4	16.1	26	30.6	-

C 25906		130.0" Wheelbase				Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																			
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 8600 LT245/75R16	2940	2826	5767	3800	5500	-	13.3	77.5	18.9	-	29.7	22.7	23.4	32.5	-	12.1	75.5	17.3	-	27.3	21.1	21.7	27.3	21.9	43.9	26.6	-	23.8	15.7	25.5	29.7	-
¹⁾ 8600 LT245/75R16	2940	3127	6068	3800	5600	-	13.3	77.7	19	-	29.9	22.8	23.5	32.8	-	12.1	75.6	17.3	-	27.2	21.2	21.6	29.2	21.9	43.9	26.6	-	23.5	15.5	25.3	29.4	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

K 25906		130.0" Wheelbase				Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																			
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 8600 LT245/75R16	3208	2883	6092	4180	5500	-	13.3	77.4	20.6	-	28.5	22.6	23.3	32.4	-	11.7	75.9	19	-	26.2	21.1	21.8	29.3	21	43.3	26	-	19.6	15.5	25.4	30.2	-
¹⁾ 8600 & NYS LT245/75R16	3208	3183	6392	4180	5600	-	13.2	77.7	20.7	-	28.8	22.7	23.5	32.7	-	11.7	76.1	19.1	-	26.1	21.2	21.8	29.1	21.2	43.3	26	-	19.3	15.3	25.1	29.8	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.


1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

C/K 15000/25000 Fullsize Avalanche

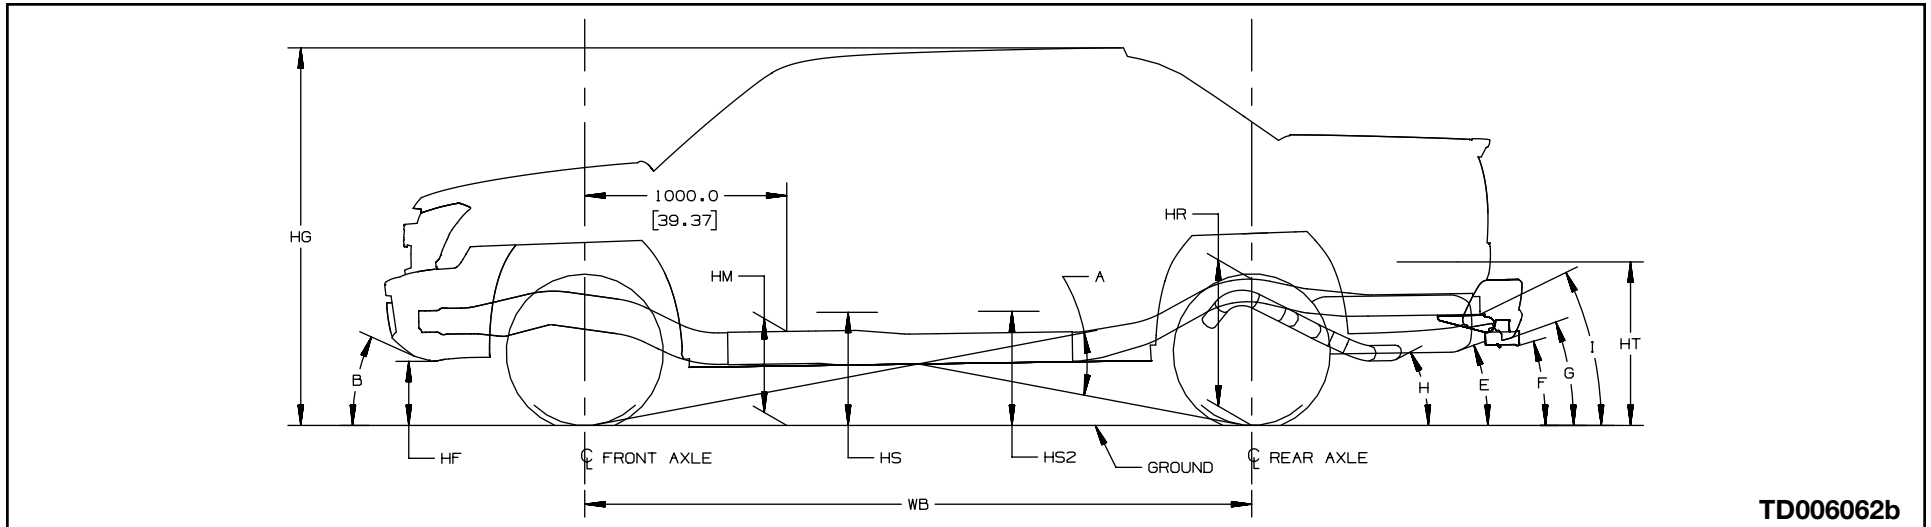

TD006062b

Heights (To Ground)

- HE Top of Frame at End
- HF Bottom of Front Air Deflector or Bumper
- HG Roof height to ground
- HM Normal Top of Frame
- HP Top of Tailgate
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

Angle

- A Ramp Breakover

Approach Angle(s) (Bottom of)

- B Front Bumper
- C Front Air Deflector

Departure Angle(s) (Bottom of)

- D Fuel Tank and Shield
- E Spare Tire
- F Platform Hitch
- G Rear Bumper
- H Exhaust
- I Frame at End

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

C 15936		130.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 6800 P265/70R16	2782	2640	5423	3400	4000	-	12	76.2	17.9	-	28.4	21.7	22.2	32.5	-	10.3	74.5	16.1	-	25.3	20.0	20.1	28.3	20.4	26.7	-	-	20.7	13.4	22.4	26.2	-
²⁾ 6800 P265/70R17	2791	2657	5449	3400	4000	-	12.6	76.2	18	-	28.3	22	22.3	32.1	-	10.7	75.2	16.8	-	26.9	20.6	21.2	30.3	21.6	27.9	-	-	23.9	15.7	24.6	30.6	-

K 15936		130.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 7000 P265/70R16	2973	2686	5660	3800	4000	-	12	76.1	17.8	-	28.3	21.6	22.1	32.4	-	9.6	74.7	16.1	-	25.3	19.8	20.1	28.4	20.4	25.3	-	-	20.8	13.5	22.4	26.2	-
²⁾ 7000 & Z55 P265/70R17	3028	2787	5816	3800	4000	-	12.9	75.7	17.7	-	27.6	21.7	21.8	31.2	-	10.5	75.1	16.3	-	26.9	20.1	20.8	30.3	20.9	23.3	-	-	24	15.8	19.7	30.7	-

K 25936		130.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 8600 LT245/75R16	3556	3141	6698	4380	5500	-	12.7	76.8	20.1	-	27.9	22.4	22.9	33	-	11.5	75.4	18.7	-	25.3	21.0	21.4	29.3	20.7	28.9	-	-	17.6	14	22.9	29.5	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.


1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

M/L 110(05, 06)

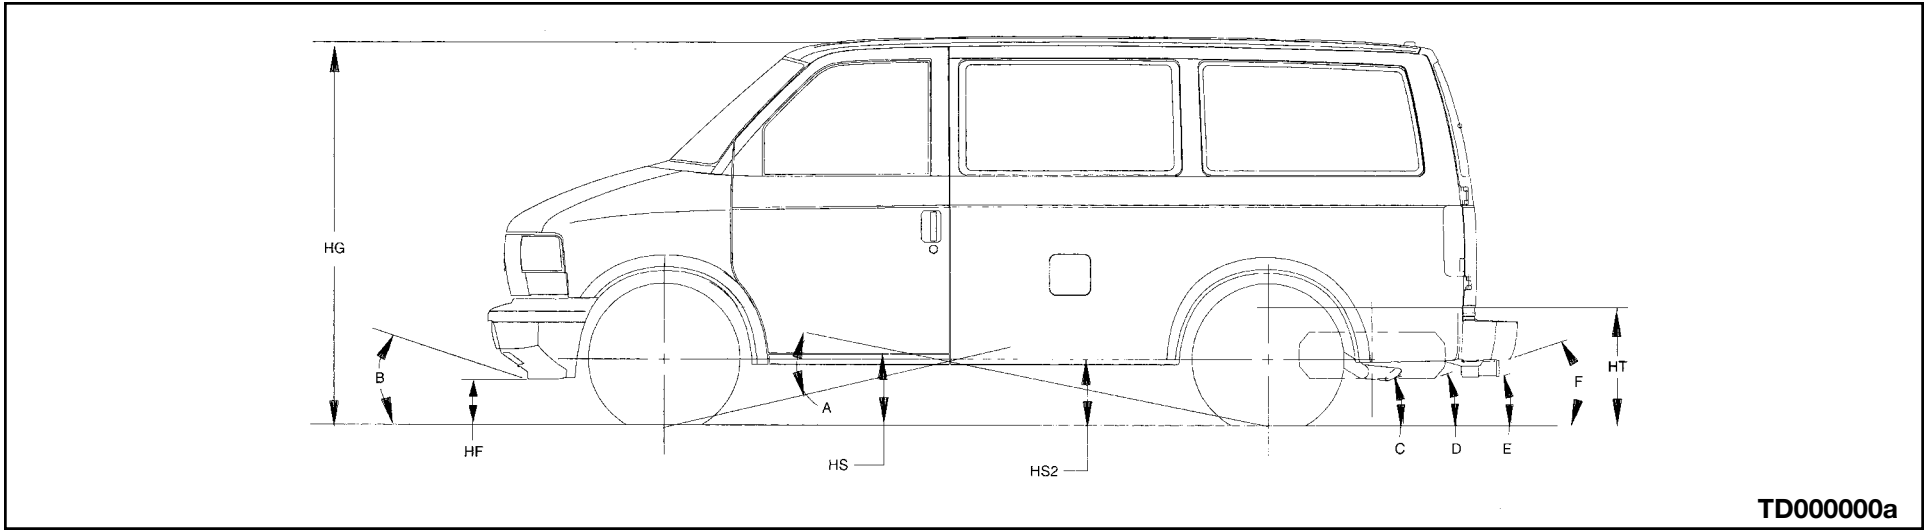

TD000000a

Heights (To Ground)

- HF Bottom of Front Bumper
- HG Top of Roof
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

Angle

- A Ramp Breakover

Approach Angle(s) (Bottom of)

- B Air Dam

Departure Angle(s) (Bottom of)

- C Tail pipe
- D Spare Tire
- E Hitch
- F Rear Bumper

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

M 11005		111.2" Wheelbase				Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																			
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Fr	Rr	Ttl	Fr	Rr																											
¹⁾ 5600 P215/70R16	2343	1647	3990	2800	3100	-	9.5	77.1	-	-	-	19.0	20.8	26.8	-	8.9	74.5	-	-	-	17.1	17.9	21.6	28.9	25.3	16.4	17.5	13.8	17.5	-	-	-
²⁾ 5900 P215/70R16	2334	1632	3966	2800	3100	-	9.6	77.0	-	-	-	19	20.7	26.7	-	8.8	73.7	-	-	-	16.6	17.5	21.7	27.8	25.1	16.6	17.7	14	17.7	-	-	-

M 11006		111.2" Wheelbase				Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																			
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Fr	Rr	Ttl	Fr	Rr																											
¹⁾ 5900 P215/70R16	2451	1916	4367	2800	3100	-	9.1	76.7	-	-	-	18.6	20.4	26.5	-	8.5	74.1	-	-	-	16.7	17.8	22.4	28.3	24.5	17.8	18.8	15	18.7	-	-	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

L 11005		111.2" Wheelbase			Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																			
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 5850 P215/70R16	2558	1688	4246	3050	3100	-	9.7	77.0	-	-	-	19.0	20.6	26.4	-	8.8	74.4	-	-	-	17.0	17.8	21.4	28.8	25.5	16.1	17.3	13.5	17.3	-	-	-
²⁾ 6050 P215/70R16	2549	1672	4221	3050	3100	-	9.7	77.0	-	-	-	19	20.7	26.5	-	9	74.0	-	-	-	16.8	17.6	21.6	28.4	25.8	16.4	17.5	13.8	17.5	-	-	-

L 11006		111.2" Wheelbase			Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																			
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 6100 P215/70R16	2664	1946	4610	3050	3100	-	9.5	76.8	-	-	-	18.8	20.5	26.4	-	9	74.4	-	-	-	17.0	18	22.4	28.9	25.8	17.6	18.7	14.9	18.6	-	-	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.


1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

G/H Van - Full Body

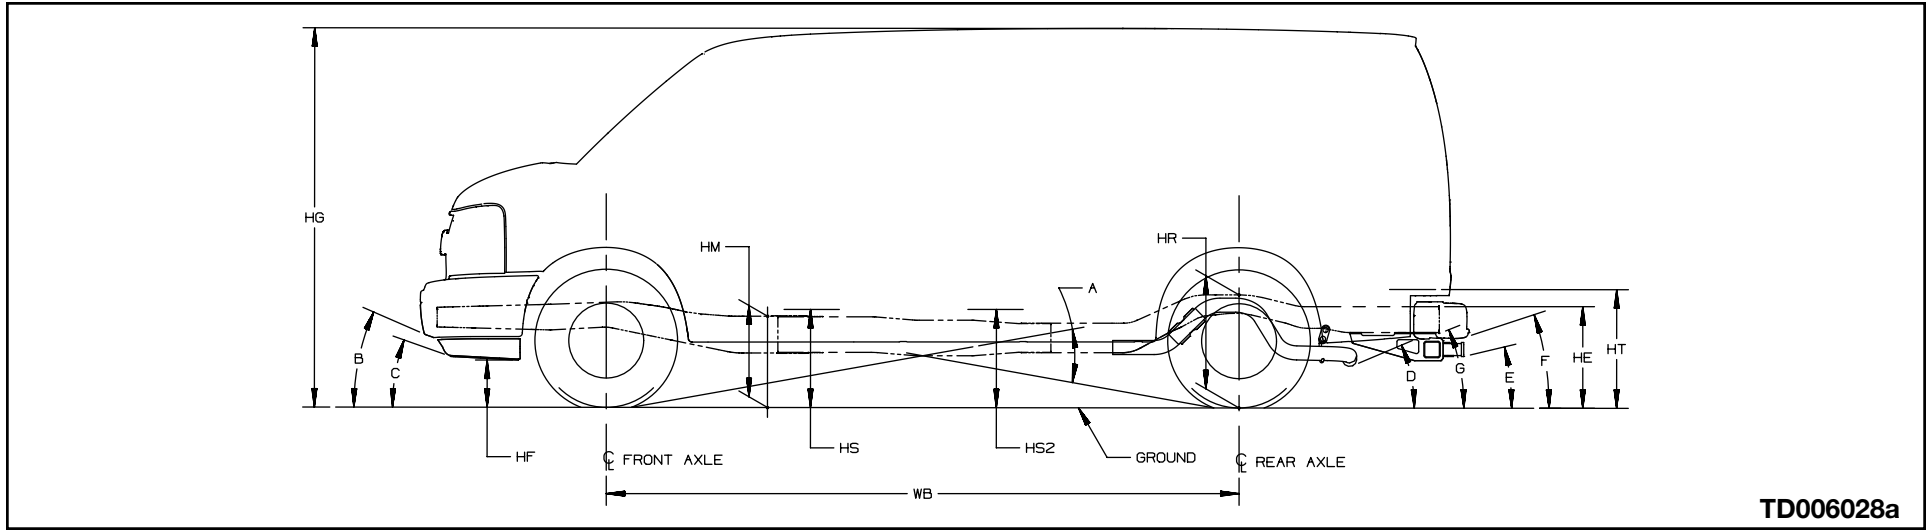

TD006028a

Heights (To Ground)

- HE Top of Frame at End
- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Normal Top of Frame
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

Angle

- A Ramp Breakover

Approach Angle(s) (Bottom of)

- B Front Air Deflector
- C Air Dam

Departure Angle(s) (Bottom of)

- D Tail pipe
- E Platform Hitch
- F Rear Bumper
- G Frame at End

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

G 13405		135.0" Wheelbase				Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																			
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Fr	Rr	Ttl	Fr	Rr																											
¹⁾ 6200 P235/75R16	2671	2131	4802	3300	3200	-	15.6	80.8	17.6	-	24.1	17.8	18.2	25.3	-	14.3	79.5	16.3	-	22.2	16.5	16.8	23.2	19.7	29.9	22.8	21.4	12.3	17.5	-	-	-
²⁾ 7200 P235/75R16	2656	2030	4686	3600	4000	-	15.3	81.7	17.9	-	25.3	18.1	19	26.9	-	13.7	79.1	15.8	-	21.9	16.0	16.4	22.8	19.2	28.9	21.7	21	12.2	17.4	-	-	-

G 13406		135.0" Wheelbase				Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																			
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Fr	Rr	Ttl	Fr	Rr																											
¹⁾ 7200 P235/75R16	2772	2465	5238	3600	4000	-	15.2	81.1	17.5	-	24.5	17.7	18.3	25.9	-	13.7	79.1	15.8	-	21.9	16.0	16.4	22.8	19.2	28.8	21.7	21	12.2	17.4	-	-	-

H 13405		135.0" Wheelbase				Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																			
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Fr	Rr	Ttl	Fr	Rr																											
¹⁾ 7200 P235/75R16	2904	2026	4931	3600	4000	-	14.9	81.8	17.7	-	25.4	17.9	18.8	27.1	-	13.9	79.2	15.9	-	21.9	16.1	16.5	22.8	19.4	29.2	22.2	21	12.2	17.4	-	-	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

H 13406		135.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Fr	Rr	Ttl	Fr	Rr																											
¹⁾ 7200 P235/75R16	3004	2442	5447	3600	4000	-	15	81.1	17.4	-	24.5	17.6	18.3	26	-	14.1	79.2	16	-	21.9	16.2	16.5	22.7	19.5	29.6	22.5	20.9	12.1	17.3	-	-	-

G 23405		135.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Fr	Rr	Ttl	Fr	Rr																											
¹⁾ 7300 LT245/75R16	2703	2124	4827	3600	4380	-	15.5	83.3	18.6	-	26.7	18.8	20	28.6	-	14	80.3	16.6	-	22.9	16.8	17.5	23.8	20.1	28.8	21.6	22.8	13	18.2	-	-	-
²⁾ 8500 LT245/75R16	2915	2191	5107	4100	5360	-	17.2	84.1	20	-	27.6	20.2	21.1	29.3	-	15.2	81.6	17.7	-	24.4	18.0	18.8	25.2	22.2	31	24.2	26.3	14.5	19.7	-	-	-
²⁾ 8600 LT225/75R16	2912	2182	5095	4100	5360	-	16.6	83.5	19.4	-	27.1	19.6	20.6	28.8	-	14.7	80.9	17.2	-	24.5	17.4	18.2	24.7	21.1	29.8	22.9	24.6	13.8	19	-	-	-

G 23406		135.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Fr	Rr	Ttl	Fr	Rr																											
¹⁾ 8500 LT245/75R16	3070	2582	5653	4100	5360	-	17	83.4	19.6	-	26.9	19.8	20.6	28.5	-	15.2	81.6	17.7	-	24.4	18.0	18.8	25.2	22.2	31	24.2	26.3	14.5	19.7	-	-	-
²⁾ 8600 LT225/75R16	3070	2582	5653	4100	5360	-	16.5	82.8	19	-	26.3	19.2	20	27.9	-	14.7	80.9	17.2	-	23.8	17.4	18.2	24.7	21.1	29.8	22.9	24.6	13.8	19	-	-	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

G 23705		155.0" Wheelbase					Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 7300 LT245/75R16	2806	2182	4989	3600	4380	-	15.6	83.0	18.4	-	26.5	18.7	19.7	28.2	-	14.4	80.3	16.7	-	22.8	16.9	17.5	23.7	17.6	29.4	22.3	22.5	12.8	18	-	-	-
²⁾ 8500 LT245/75R16	3030	2239	5270	4300	5360	-	17.2	83.8	19.8	-	27.4	20.0	20.8	29	-	15.1	81.6	17.6	-	24.3	17.9	18.7	25.2	19.3	30.9	24	26.1	14.4	19.6	-	-	-
²⁾ 8600 LT225/75R16	2994	2189	5184	4100	5360	-	16.8	83.3	19.3	-	26.9	19.6	20.4	28.5	-	15	81.0	17.3	-	23.7	17.5	18.1	24.6	18.5	30.4	23.5	24.4	13.7	18.9	-	-	-
²⁾ 8600 LT245/75R16	2994	2189	5184	4100	5360	-	17.3	83.9	19.9	-	27.5	20.1	20.9	29.1	-	15.5	81.5	17.8	-	24.3	18.0	18.7	25.2	19.4	31.6	24.8	26.2	14.5	19.7	-	-	-

H 23405		135.0" Wheelbase					Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 7300 LT245/75R16	2938	2196	5135	3600	4380	-	15.4	83.2	18.5	-	26.6	18.7	19.9	28.5	-	14.6	80.4	16.9	-	22.9	17.1	17.7	23.7	20.5	29.7	22.7	22.7	12.8	18.1	-	-	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

G 33405		135.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 9600 LT245/75R16	2930	2317	5248	4300	6084	-	17.6	84.1	20.1	-	27.6	20.4	21.3	29.3	-	15.5	81.4	17.8	-	24.3	18.1	18.7	25.2	22.3	31.7	24.9	26.5	14.6	19.9	-	-	-

G 33406		135.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 9600 LT245/75R16	3077	2504	5582	4300	6084	-	17.1	83.8	19.7	-	27.3	20.0	20.9	29	-	15.1	81.3	17.5	-	24.3	17.8	18.6	25.3	22	31	24.1	26.6	14.8	20	-	-	-

G 33705		155.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 9600 LT245/75R16	3078	2378	5457	4300	6084	-	17.4	83.8	19.9	-	27.4	20.1	20.9	29	-	15.5	81.4	17.8	-	24.3	18.0	18.6	25.2	19.4	31.8	25	26.4	14.6	19.9	-	-	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

G 33706		155.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 9600 LT245/75R16	3245	2653	5899	4300	6084	-	17.2	83.4	19.7	-	27.0	19.8	20.5	28.5	-	15.5	81.4	17.8	-	24.3	18.0	18.6	25.2	19.9	31.8	25	26.4	14.6	19.9	-	-	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.


1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

G/H Van - Fullsize Cutaway

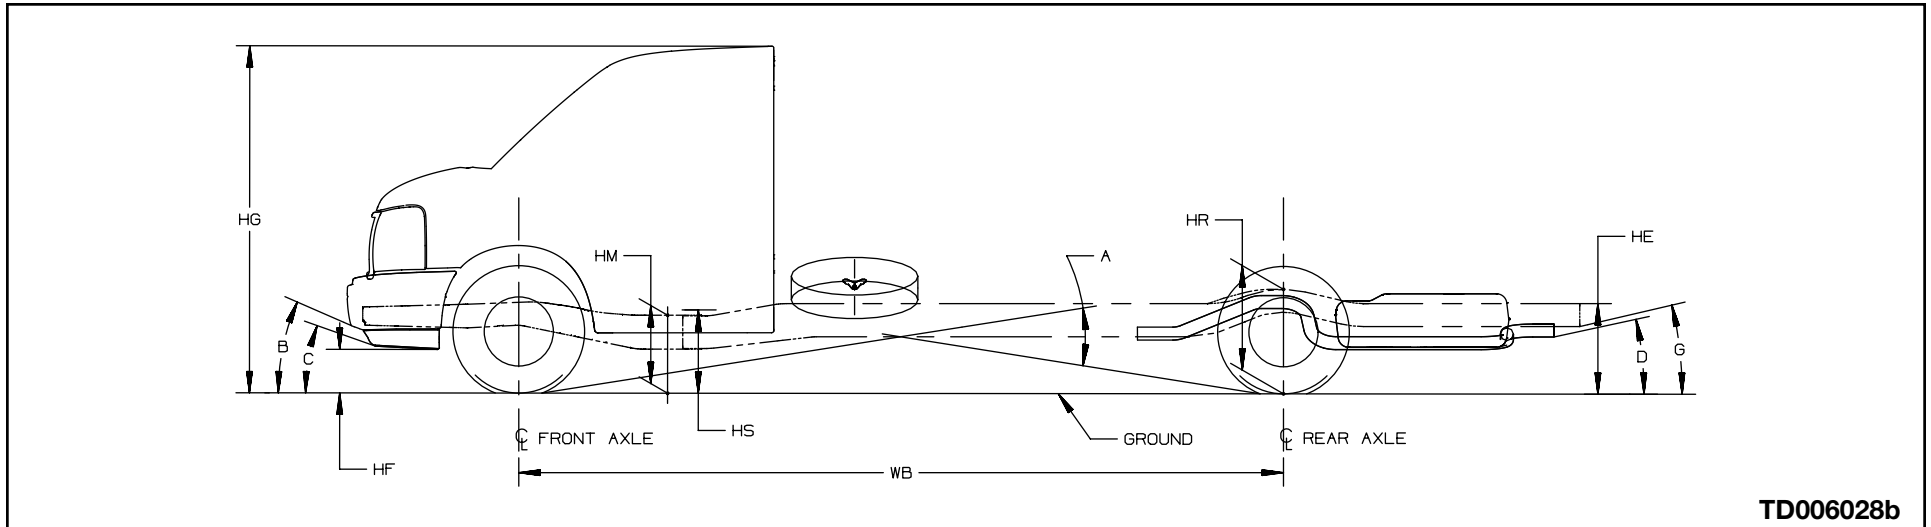

TD006028b

Heights (To Ground)

- HE Top of Frame at End
- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Normal Top of Frame
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

Angle

- A Ramp Breakover

Approach Angle(s) (Bottom of)

- B Front Air Deflector
- C Air Dam

Departure Angle(s) (Bottom of)

- D Tail pipe
- E Platform Hitch
- F Rear Bumper
- G Frame at End

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

G 33503		139.0" Wheelbase				Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																			
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 9600 LT245/75R16	2996	1626	4622	4100	6084	-	16.5	83.6	24.8	-	29.9	20.7	-	28.9	-	14.7	81.8	22.5	-	27.1	18.6	-	25.0	23.6	30.1	23.3	21.4	-	-	17.5	-	-
²⁾ 10,000 LT225/75R16	3064	1782	4846	4100	7500	-	15.9	83.1	24.3	-	29.5	20.2	-	28.5	-	14.2	81.0	22.1	-	26.1	18.2	-	23.0	22.6	28.9	22	18.6	-	-	15.6	-	-
²⁾ 12,000 LT225/75R16	3064	1782	4846	4600	8600	-	16.1	83.2	24.4	-	29.5	20.3	-	28.4	-	13.7	81.4	21.6	-	26	17.7	-	23.5	22	28	21	19.2	-	-	16.1	-	-
²⁾ 12,300 LT225/75R16	3118	1871	4990	4600	8600	-	16	83.2	24.4	-	29.6	20.3	-	28.6	-	13.7	81.1	21.6	-	26.1	17.7	-	23.8	21.9	28.1	21	19.5	-	-	16.4	-	-

G 33803		159.0" Wheelbase				Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																			
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 9600 LT245/75R16	3102	1849	4952	4100	6084	-	16.5	83.2	24.3	-	29.8	20.4	-	28.5	-	14.8	81.8	22.3	-	27.1	18.5	-	24.9	22.6	30.4	23.6	16.9	-	-	17.4	-	-
²⁾ 10,000 LT225/75R16	3102	1849	4952	4100	7500	-	16	82.7	23.9	-	29.4	20.0	-	28.1	-	14.4	80.8	21.8	-	26.1	18.0	-	22.9	21.6	29.2	22.3	14.8	-	-	15.5	-	-
²⁾ 12,000 LT225/75R16	3102	1849	4952	4600	8600	-	16.2	82.9	24	-	29.4	20.1	-	28.1	-	13.8	80.3	21.3	-	26	17.5	-	23.4	21.1	28.2	21.2	15.3	-	-	16	-	-
²⁾ 12,300 LT225/75R16	3152	1938	5091	4600	8600	-	16.1	82.9	24	-	29.5	20.1	-	28.3	-	13.8	80.2	21.3	-	26	17.5	-	23.6	21	28.3	21.3	15.5	-	-	16.2	-	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

G 33903		177.0" Wheelbase				Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																			
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frnt	Rr	Ttl	Frnt	Rr																											
¹⁾ 12,000 LT225/75R16	3044	1782	4826	4600	8600	-	16.6	82.9	23.9	-	29.5	20.2	-	27.9	-	14.3	80.4	21.3	-	26	17.7	-	23.2	19.1	29.1	22.1	15.2	-	-	15.9	-	-
²⁾ 12,300 LT225/75R16	3096	1865	4962	4600	8600	-	16.5	82.9	24	-	29.6	20.2	-	28.1	-	14.3	80.3	21.2	-	26.1	17.6	-	23.5	19.1	29.1	22.2	15.4	-	-	16.1	-	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight. Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model