

VEHICLE AND FRAME HEIGHT CHARTS

S/T MIDSIZE TRUCK

S/T 15403 Midsize Regular Cab Pickup	1
Heights (To Ground).....	1
111.0" Wheelbase – S 15403.....	2
111.0" Wheelbase – T 15403	2
S/T 15653 Midsize Extended Cab Pickup	3
Heights (To Ground).....	3
126.0" Wheelbase – S 15653.....	4
126.0" Wheelbase – T 15653	4
S/T 15643 Midsize Crew Cab Pickup.....	5
Heights (To Ground).....	5
126.0" Wheelbase – S 15643.....	6
126.0" Wheelbase – T 15643	6
S/T 15603 Midsize Chassis Cab	7
Heights (To Ground).....	7
126.0" Wheelbase – S 15603.....	8

C/K FULLSIZE TRUCK

C/K 10000/20000 Light Duty Fullsize Utility	9
Heights (To Ground).....	9
116.0" Wheelbase – C 10706.....	10
130.0" Wheelbase – C 10906.....	11
116.0" Wheelbase – K 10706.....	12
130.0" Wheelbase – K 10906.....	13
130.0" Wheelbase – C 20906.....	13
130.0" Wheelbase – K 20906.....	14

VEHICLE AND FRAME HEIGHT CHARTS

C/K FULLSIZE TRUCK – (Continued)

C/K 10000/20000 Light Duty Fullsize Pickups	15
Heights (To Ground).....	15
119.0" Wheelbase – C 10703.....	16
133.0" Wheelbase – C 10903.....	16
133.9" Wheelbase – C 10553.....	16
143.5" Wheelbase – C 10753.....	17
157.5" Wheelbase – C 10953.....	17
143.5" Wheelbase – C 10543.....	17
119.0" Wheelbase – K 10703.....	18
133.0" Wheelbase – K 10903.....	18
133.9" Wheelbase – K 10553.....	18
143.5" Wheelbase – K 10753.....	19
157.5" Wheelbase – K 10953.....	19
143.5" Wheelbase – K 10543.....	19
C/K 20000 Fullsize Pickups & Chassis-Cabs	20
Heights (To Ground).....	20
133.0" Wheelbase – C 20903.....	21
143.5" Wheelbase – C 20753.....	22
157.5" Wheelbase – C 20953.....	23
153.0" Wheelbase – C 20743.....	24
167.0" Wheelbase – C 20943.....	25
133.0" Wheelbase – K 20903.....	26
143.5" Wheelbase – K 20753.....	27
157.5" Wheelbase – K 20953.....	28

VEHICLE AND FRAME HEIGHT CHARTS

PAGE **iii**

C/K FULLSIZE TRUCK – C/K 20000 Fullsize Pickups & Chassis-Cabs – (Continued)

153.0" Wheelbase – K 20743.....	29
167.0" Wheelbase – K 20943.....	30
C/K 30000 Fullsize Pickups & Chassis-Cabs	31
Heights (To Ground).....	31
133.0" Wheelbase – C 30903.....	32
157.5" Wheelbase – C 30953.....	33
167.0" Wheelbase – C 30943.....	34
133.0" Wheelbase – K 30903.....	35
157.5" Wheelbase – K 30953.....	36
167.0" Wheelbase – K 30943.....	37
C/K 31000 Fullsize Chassis-Cabs	38
Heights (To Ground).....	38
137.0" Wheelbase – C 31003.....	39
161.5" Wheelbase – C 31053.....	40
161.5" Wheelbase – C 31403.....	41
137.0" Wheelbase – K 31003.....	42
161.5" Wheelbase – K 31053.....	43
161.5" Wheelbase – K 31403.....	44

CLASSIC C/K FULLSIZE TRUCK

C/K Fullsize Pickups	45
Heights (To Ground).....	45
C/K Fullsize Chassis-Cabs	46
Heights (To Ground).....	46
119.0" Wheelbase – C 15703.....	47

VEHICLE AND FRAME HEIGHT CHARTS

PAGE iv

CLASSIC C/K FULLSIZE TRUCK – C/K *Fullsize Chassis-Cabs* – (Continued)

133.0" Wheelbase – C 15903.....	47
143.5" Wheelbase – C 15753.....	47
157.5" Wheelbase – C 15953.....	48
143.5" Wheelbase – C 15543.....	48
153.0" Wheelbase – C 15743.....	48
119.0" Wheelbase – K 15703.....	49
133.0" Wheelbase – K 15903.....	49
143.5" Wheelbase – K 15753.....	49
157.5" Wheelbase – K 15953.....	50
153.0" Wheelbase – K 15543.....	50

C/K 25000 Fullsize Pickups & Chassis-Cabs

133.0" Wheelbase – C 25903.....	51
143.5" Wheelbase – C 25753.....	51
157.5" Wheelbase – C 25953.....	52
143.5" Wheelbase – C 25743.....	52
157.5" Wheelbase – C 25943.....	52
133.0" Wheelbase – K 25903.....	53
143.5" Wheelbase – K 25753.....	53
157.5" Wheelbase – K 25953.....	54
153.0" Wheelbase – K 25743.....	54
167.0" Wheelbase – K 25943.....	55

C/K 35000 Fullsize Pickups & Chassis-Cabs

157.5" Wheelbase – C 35953.....	55
167.0" Wheelbase – C 35943.....	55

VEHICLE AND FRAME HEIGHT CHARTS

PAGE V

CLASSIC C/K FULLSIZE TRUCK – C/K 35000 Fullsize Pickups & Chassis-Cabs – (Continued)

133.0" Wheelbase – K 35903.....	56
157.5" Wheelbase – K 35953.....	56
167.0" Wheelbase – K 35943.....	57

C/K 36000 Fullsize Chassis-Cabs

137.0" Wheelbase – C 36003.....	57
161.5" Wheelbase – C 36053.....	57
161.5" Wheelbase – C 36403.....	58
137.0" Wheelbase – K 36003.....	58
161.5" Wheelbase – K 36053.....	58
161.5" Wheelbase – K 36403.....	59

G/H FULLSIZE VAN

G/H Full Body Van	60
Heights (To Ground).....	60
135.0" Wheelbase – G 13405	61
135.0" Wheelbase – G 13406	61
135.0" Wheelbase – H 13405.....	62
135.0" Wheelbase – H 13406.....	62
135.0" Wheelbase – G 23405	63
135.0" Wheelbase – G 23406	63
155.0" Wheelbase – G 23705	64
135.0" Wheelbase – H 23405.....	64
135.0" Wheelbase – G 33405	65
135.0" Wheelbase – G 33406	65
155.0" Wheelbase – G 33705	65

VEHICLE AND FRAME HEIGHT CHARTS

PAGE VI

G/H FULLSIZE VAN – G/H Full Body Van – (Continued)

155.0" Wheelbase – G 33706 66

G/H Fullsize Cutaway Van 67

Heights (To Ground) 67

139.0" Wheelbase – G 33503 68

159.0" Wheelbase – G 33803 68

177.0" Wheelbase – G 33903 69

U/X CROSSOVER SPORT VAN

U/X Crossover Sport Van 70

Heights (To Ground) 70


113.0" Wheelbase – U 11416 71

121.0" Wheelbase – U 12216 71

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 1

S/T 15403 Midsize Regular Cab Pickup

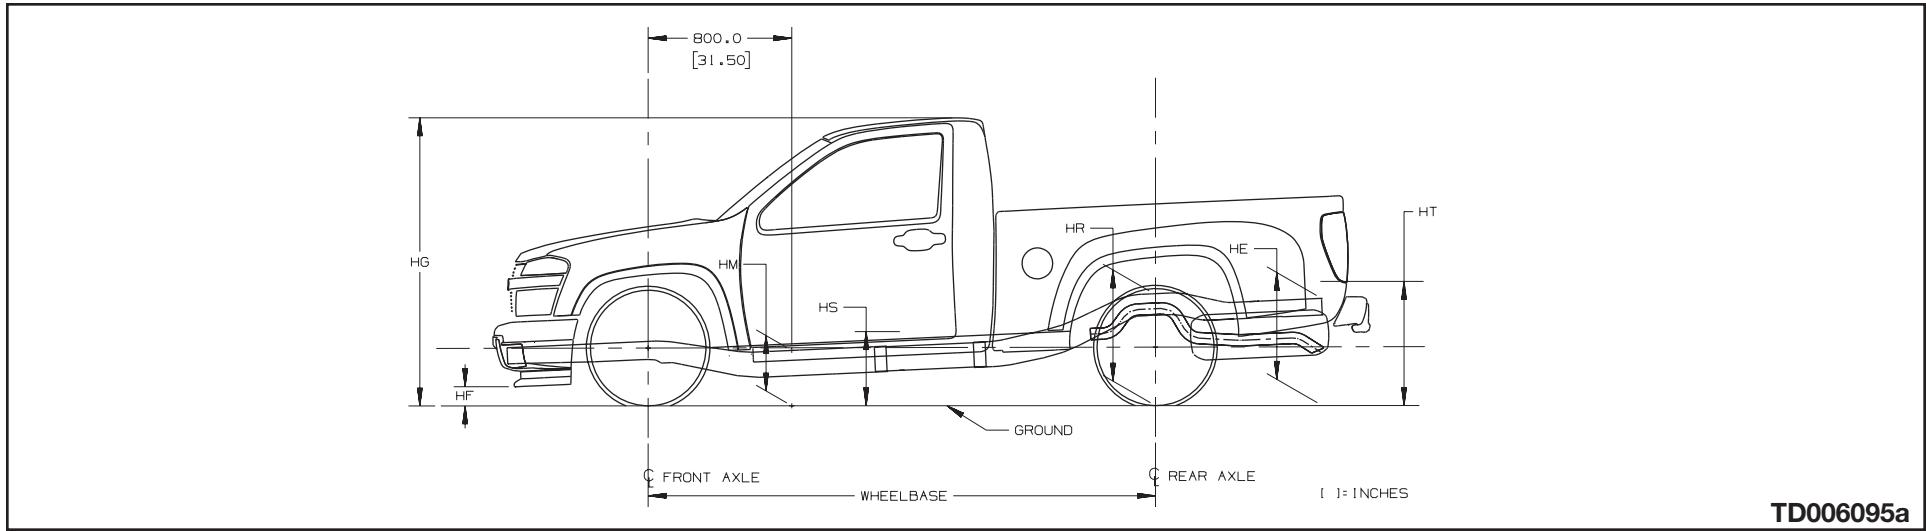

TD006095a

Heights (To Ground)

- HF Bottom of Front Air Deflector or Bumper
HG Roof Height
HM Normal Top of Frame
HP Top of Tailgate (Down)
HR Top of Frame at Centerline of Rear Axle
HS Step H-Point-Front
HS2 Step H-Point-Second
HT Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

S 15403			111.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 4400 & ZQ8 P235/50R18	1896	1461	3357	2533	2447	—	10.0	63.8	13.9	—	24.3	17.6	—	26.5	—	7.9	62.1	12.1	—	21.7	15.8	—	22.6
²⁾ 4850 & Z85 P225/75R15	1823	1448	3271	2533	2896	—	11.4	65.5	15.5	—	26.1	19.2	—	28.5	—	9.2	63.0	13.1	—	22.4	16.8	—	23.1
²⁾ 4850 & Z85 P205/75R15	1823	1448	3271	2533	2896	—	10.9	65.0	15.0	—	25.7	18.7	—	28.0	—	8.7	62.5	12.6	—	21.9	16.3	—	22.5
²⁾ 5150 & Z71 P265/75R15	1832	1517	3349	2753	2896	—	14.7	69.0	18.9	—	29.8	22.7	—	32.2	—	11.9	66.5	16.3	—	26.3	20.2	—	27.8

T 15403			111.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 5150 & Z85 P235/75R15	2049	1610	3659	2753	2896	—	13.9	68.2	18.1	—	28.9	21.9	—	31.3	—	11.8	66.1	16.0	—	25.7	19.8	—	26.9
²⁾ 5150 & Z71 P265/75R15	2074	1640	3714	2753	2896	—	14.6	68.9	18.8	—	29.7	22.6	—	32.1	—	12.6	66.9	16.8	—	26.5	20.6	—	27.7

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required


2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 3

S/T 15653 Midsize Extended Cab Pickup

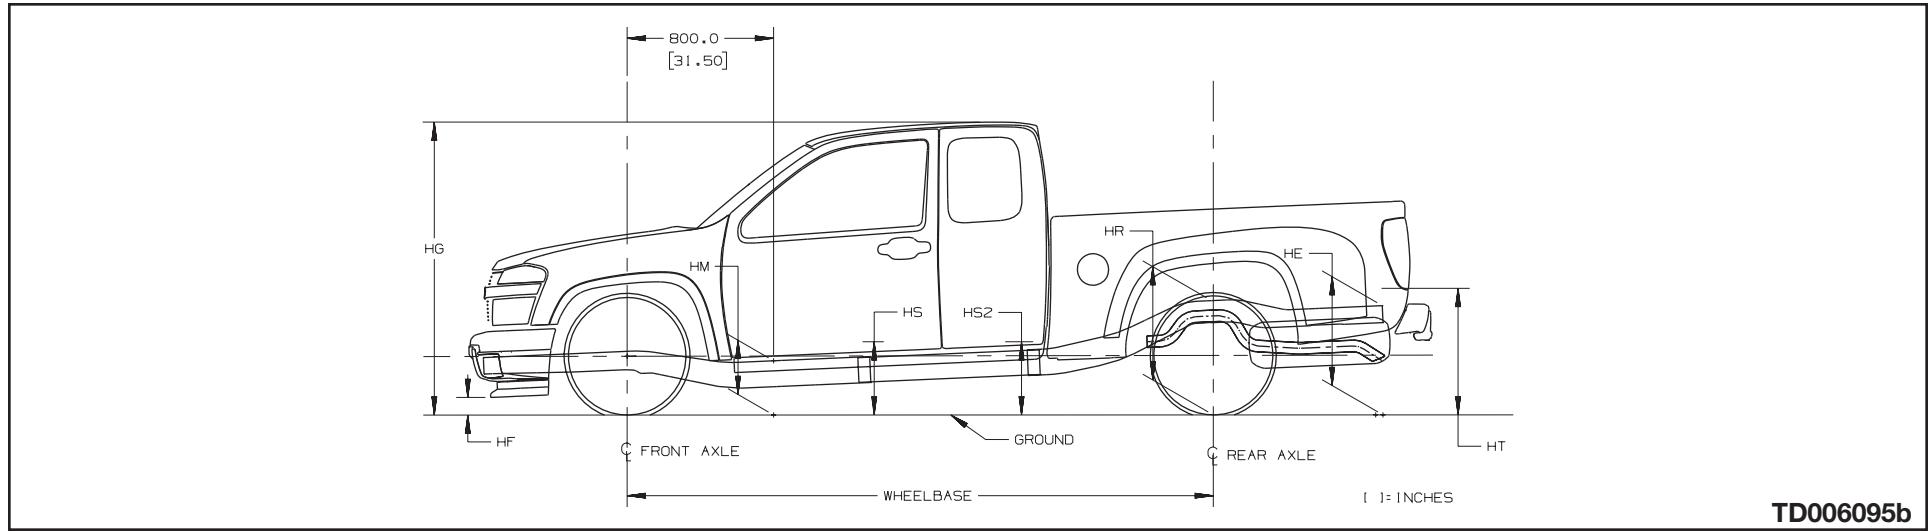

Heights (To Ground)

- HF Bottom of Front Air Deflector or Bumper
HG Roof Height
HM Normal Top of Frame
HP Top of Tailgate (Down)
HR Top of Frame at Centerline of Rear Axle
HS Step H-Point-Front
HS2 Step H-Point-Second
HT Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 4

S 15653	126.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 4600 & ZQ8 P235/50R18	1945	1602	3547	2533	2447	—	10.1	64.0	13.8	—	24.3	17.4	17.7	26.0	—	8.2	62.3	12.1	—	21.9	15.7	16.0	23.1
²⁾ 5000 & Z85 P225/75R15	1871	1593	3464	2533	2896	—	11.5	65.6	15.4	—	26.1	19.0	19.4	27.9	—	9.5	63.3	13.2	—	22.6	16.7	17.0	23.6
²⁾ 5000 & Z85 P205/75R15	1871	1593	3464	2533	2896	—	11.1	65.1	14.9	—	25.6	18.6	18.9	27.4	—	9.0	62.8	12.7	—	22.1	16.2	16.5	23.1
²⁾ 5300 & Z71 P265/75R15	1889	1673	3562	2753	2896	—	15.0	68.8	18.7	—	29.1	22.2	22.5	30.8	—	12.4	66.0	16.0	—	25.5	19.5	19.7	26.7

T 15653	126.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 5300 & Z85 P235/75R15	2200	1649	3849	2753	2896	—	14.1	67.8	17.8	—	28.1	21.3	21.6	29.7	—	12.7	65.5	15.8	—	24.6	19.1	19.2	25.4
¹⁾ 5300 & Z71 P265/75R15	2224	1679	3903	2753	2896	—	14.9	68.5	18.5	—	28.7	22.0	22.2	30.4	—	13.5	66.3	16.6	—	25.3	19.9	20.0	26.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required


2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 5

S/T 15643 Midsize Crew Cab Pickup

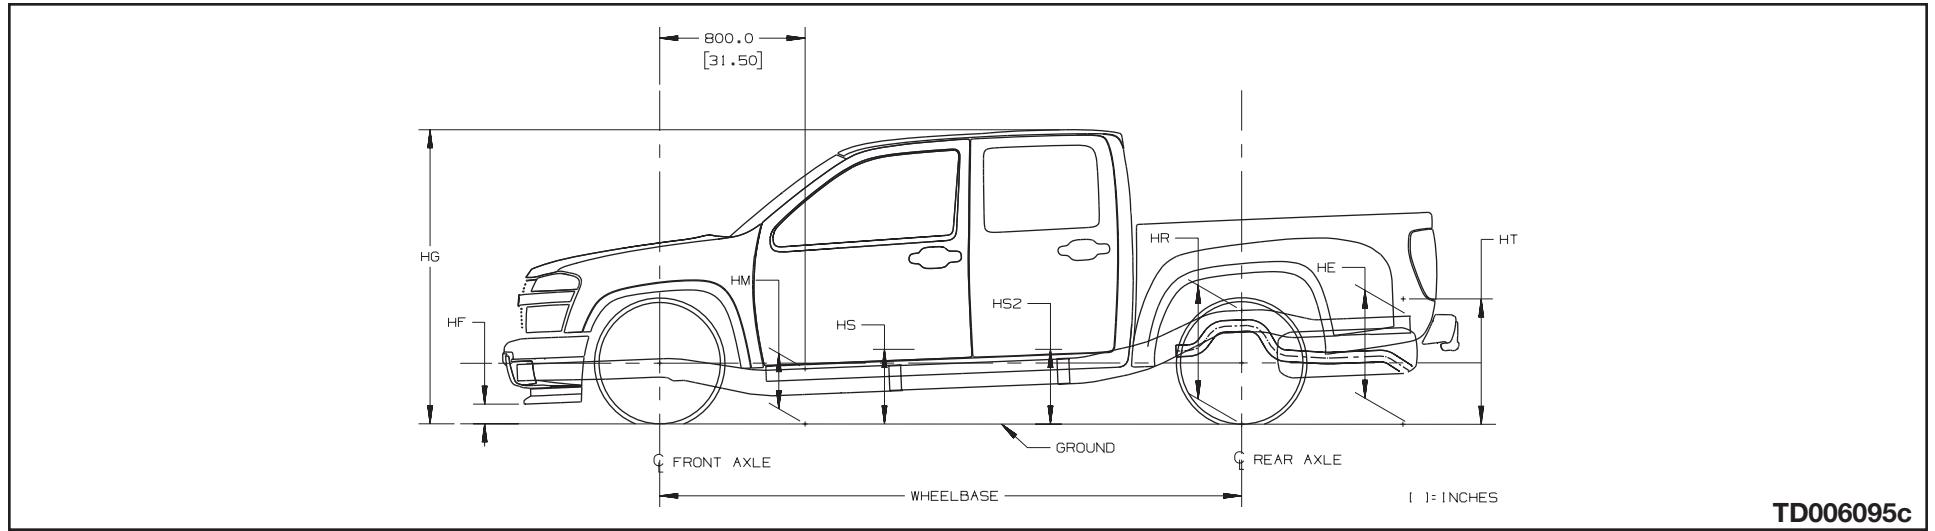

Heights (To Ground)

- HF Bottom of Front Air Deflector or Bumper
HG Roof Height
HM Normal Top of Frame
HP Top of Tailgate (Down)
HR Top of Frame at Centerline of Rear Axle
HS Step H-Point-Front
HS2 Step H-Point-Second
HT Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 6

S 15643			126.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 4900 & ZQ8 P235/50R18	2056	1684	3740	2533	2447	—	10.1	64.3	13.8	—	24.3	17.4	17.9	26.0	—	8.7	62.4	12.2	—	22.0	15.6	16.0	23.4
²⁾ 5000 & Z85 P225/75R15	1974	1661	3635	2533	2896	—	11.5	66.0	15.4	—	26.0	19.0	19.6	27.8	—	9.8	63.8	13.4	—	22.7	16.9	17.2	23.7
²⁾ 5300 & Z71 P265/75R15	2010	1759	3769	2753	2896	—	14.9	69.1	18.6	—	29.1	22.2	22.7	30.8	—	12.7	66.6	16.3	—	25.7	19.8	20.0	26.8

T 15643			126.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 5300 & Z85 P235/75R15	2097	1844	3941	2753	2896	—	14.2	68.1	17.8	—	28.0	21.3	21.7	29.6	—	12.3	65.9	15.7	—	24.9	19.2	19.3	25.9
¹⁾ 5300 & Z71 P265/75R15	2172	1882	4054	2753	2896	—	14.9	68.8	18.5	—	28.7	22.0	22.4	30.3	—	13.3	66.7	16.6	—	25.7	20.0	20.1	26.7

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required


2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 7

S/T 15603 Midsize Chassis Cab

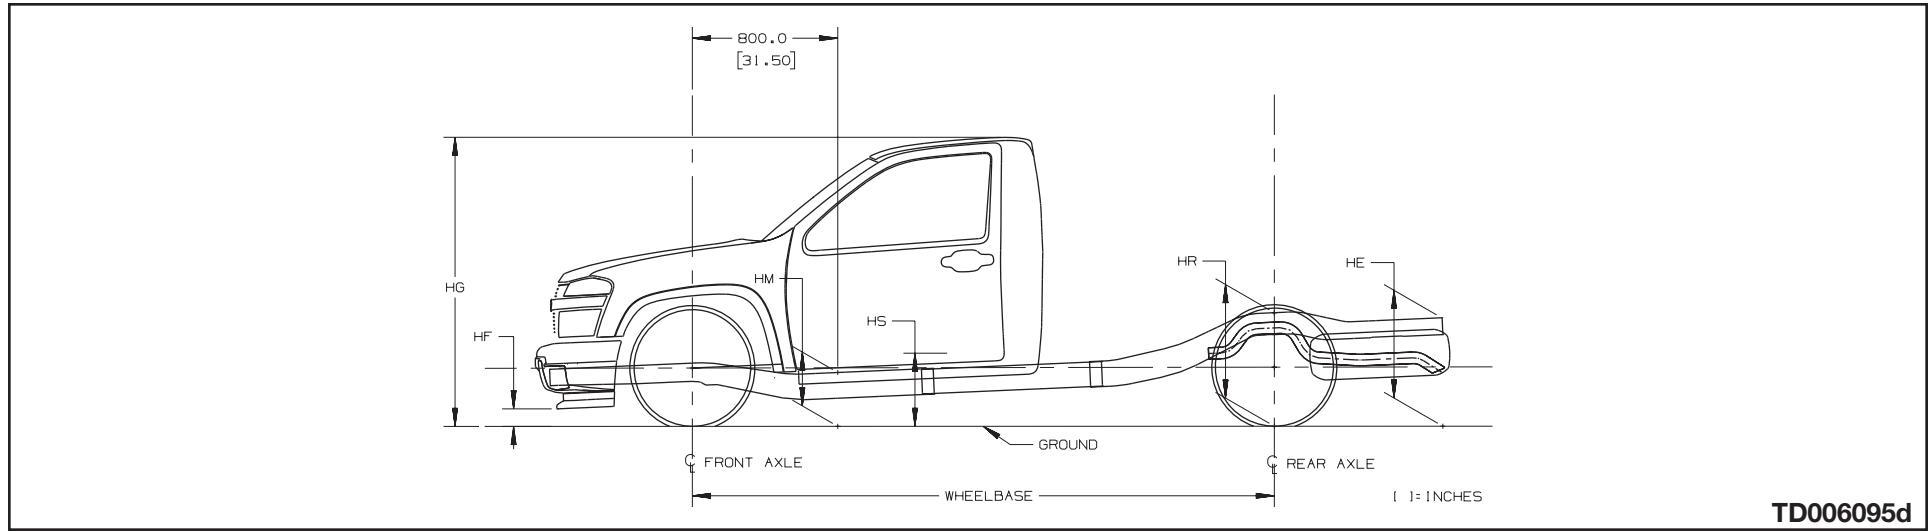

Heights (To Ground)

- HF Bottom of Front Air Deflector or Bumper
HG Roof Height
HM Normal Top of Frame
HP Top of Tailgate (Down)
HR Top of Frame at Centerline of Rear Axle
HS Step H-Point-Front
HS2 Step H-Point-Second
HT Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

S 15603		126.0" Wheelbase		Frame Heights at Minimum Curb Weight										Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Fr	Rr																											
¹⁾ 5300 & Z71 P265/75R15	1967	1171	3138	2753	2896	-	14.7	68.8	18.8	-	29.5	22.6	-	-	-	12.6	65.9	16.2	-	25.8	19.7	-	-	23.1	30.4	22.0	-	25.3	-	-	-	-
¹⁾ 5300 & Z71 P235/75R15	1967	1171	3138	2753	2896	-	14.1	68.2	18.2	-	28.9	21.9	-	-	-	11.9	65.3	15.5	-	25.2	19.0	-	-	21.5	28.2	20.4	-	23.6	-	-	-	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.

Actual heights may vary due to production tolerances.


1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

C/K 10000/20000 Light Duty Fullsize Utility

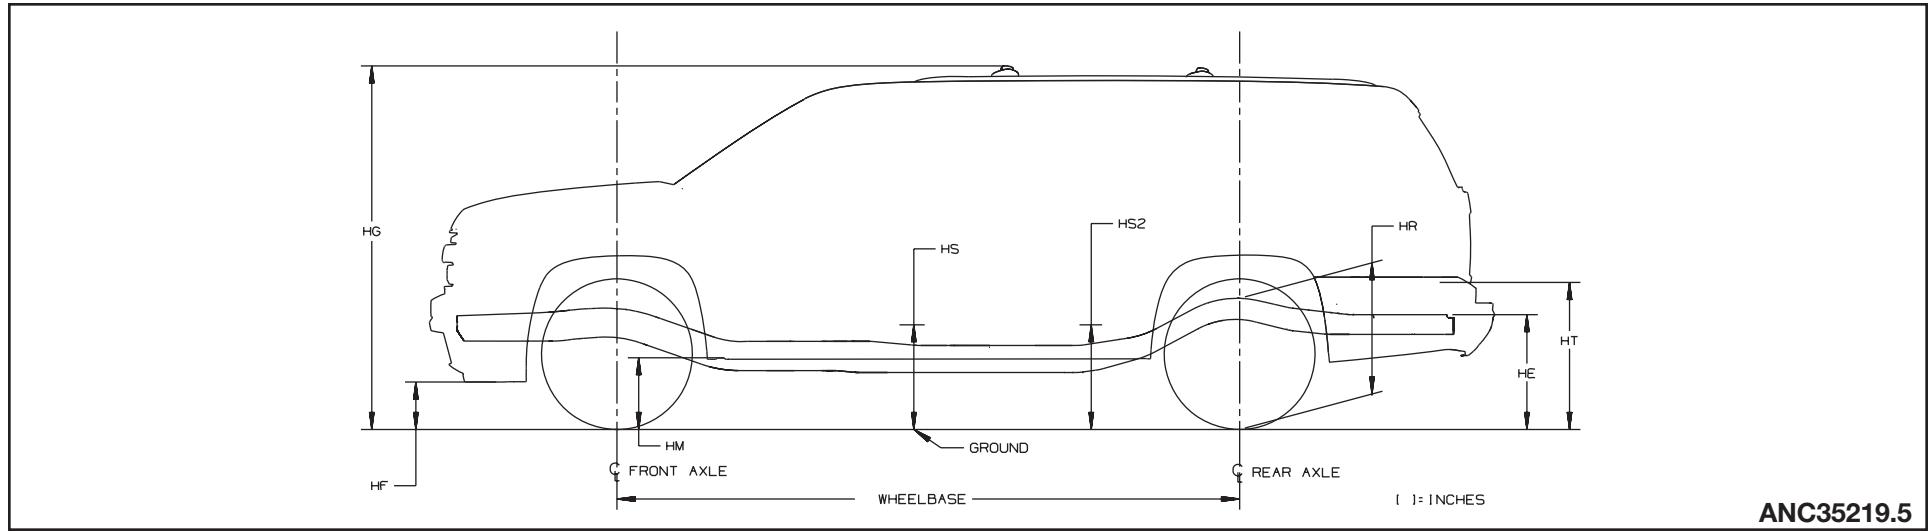

ANC35219.5

Heights (To Ground)

- HF Bottom of Front Facia or Air Deflector
HG Roof Rack
HM Chassis Datum Hole
HR Top of Frame at Centerline of Rear Axle
HS Step H-Point-Front
HS2 Step H-Point-Second
HT Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 10

C 10706			116.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 7100 P265/65R18	2873	2688	5561	3200	4200	25.7	8.4	75.4	14.8	35.0	28.5	22.0	22.4	15.2	22.5	7.7	75.3	13.6	34.0	26.1	20.5	20.7	12.8
²⁾ 7200 & Z55 P265/65R18	2974	2861	5835	3250	4200	25.0	8.4	75.0	14.6	34.3	28.0	21.7	22.0	14.5	23.7	7.7	75.0	13.8	33.5	27.0	20.9	21.1	13.5
²⁾ 6700 & PPV P255/60R17	2756	2493	5249	3200	3600	23.7	7.0	73.6	13.2	33.0	26.7	20.4	20.7	13.2	21.6	6.2	72.9	12.1	32.0	24.9	19.0	19.2	11.3
²⁾ 7100 & Z55 & AS3 P275/55R20	2590	2610	5200	3200	4100	25.3	8.8	75.3	15.0	34.6	28.4	22.1	22.4	14.9	24.5	7.0	74.2	13.5	32.9	27.5	20.8	21.2	13.7
²⁾ 7100 & Z55 & AS3 P265/70R17	2590	2610	5200	3200	4100	25.0	8.5	75.0	14.7	34.3	28.1	21.8	22.1	14.6	24.2	6.7	73.9	13.2	32.7	27.1	20.5	20.9	13.4
²⁾ 7000 & Z55 P265/65R18	2687	2626	5313	3250	4100	25.1	8.5	75.0	14.6	34.4	28.1	21.8	22.1	14.6	24.3	7.0	74.4	13.3	32.9	27.1	20.6	21.0	13.7
²⁾ 7000 & Z55 P265/65R18	2687	2626	5313	3250	4100	25.4	8.9	75.4	15.0	34.7	28.4	22.2	22.5	15.0	24.4	7.4	74.8	13.7	33.3	27.5	21.0	21.4	14.2
²⁾ 7100 & ZW7 & AS3 P265/70R17	2590	2610	5200	3200	4100	25.6	8.4	75.3	14.7	34.9	28.5	22.0	22.4	15.1	22.6	7.0	74.2	13.0	33.3	25.9	20.0	20.3	12.6
²⁾ 7100 & ZW7 & AS3 P275/55R20	2590	2610	5200	3200	4100	25.9	8.7	75.6	15.0	35.2	28.7	22.3	22.7	15.4	22.9	7.3	74.5	13.4	33.7	26.3	20.4	20.6	12.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 11

C 10906	130.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 7200 & Z55 P265/70R17	2660	2527	5187	3300	4200	25.7	8.5	75.5	14.7	34.7	28.5	22.0	22.4	15.2	24.4	6.7	74.5	13.2	33.1	27.3	20.5	21.2	14.2
¹⁾ 7200 & Z55 P275/55R20	2660	2527	5187	3300	4200	25.9	8.7	75.8	15.0	35.0	28.8	22.2	22.7	15.4	24.8	7.0	74.5	13.5	33.3	27.7	20.8	21.5	14.5
¹⁾ 7200 & ZW7 P265/70R17	2736	2669	5405	3300	4200	25.6	8.4	75.4	14.7	34.7	28.6	21.9	22.4	15.1	21.6	6.8	74.7	12.8	32.9	25.3	19.7	20.0	12.2
¹⁾ 7200 & ZW7 P275/55R20	2736	2669	5405	3300	4200	25.9	8.7	75.7	14.9	34.9	28.7	22.2	22.6	15.4	22.0	7.1	75.0	13.1	33.2	25.6	20.0	20.3	12.6

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 12

K 10706	116.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 7300 & ZW7 P265/65R18	3063	2736	5799	3600	4200	26.1	8.3	75.5	14.8	35.5	28.8	22.1	22.6	15.6	22.9	7.0	75.5	13.4	34.2	26.4	20.5	20.9	13.6
²⁾ 7400 & Z55 P265/65R18	3124	2910	6034	3600	4200	25.4	8.3	75.2	14.6	34.8	28.3	21.9	22.2	14.9	24.2	7.0	75.0	13.5	33.5	27.3	20.8	21.3	14.2
²⁾ 7300 & Z55 & AS3 P265/70R17	2811	2635	5446	3600	4100	24.9	9.3	75.1	14.9	34.2	28.1	22.0	22.2	14.5	24.1	7.1	74.0	13.2	32.2	27.1	20.6	21.1	13.4
²⁾ 7300 & Z55 & AS3 P275/55R20	2811	2635	5446	3600	4100	25.2	9.7	75.4	15.2	34.5	28.4	22.3	22.5	14.8	24.4	7.4	74.3	13.5	32.5	27.5	20.9	21.4	13.7
²⁾ 7100 & Z55 P265/65R18	2844	2778	5622	3550	4100	24.9	9.4	75.1	14.9	34.1	28.0	21.9	22.1	14.4	23.7	7.3	74.7	13.3	32.3	27.0	20.6	21.1	13.9
²⁾ 7100 & Z55 P275/55R20	2844	2778	5622	3550	4100	25.2	9.6	75.4	15.2	34.4	28.3	22.2	22.4	14.7	20.4	7.6	74.9	13.6	32.6	27.3	20.9	21.4	14.2
²⁾ 7100 & Z55 P285/45R22	2841	2778	5619	3550	4100	25.3	9.7	75.5	15.3	34.5	28.4	22.3	22.5	14.8	24.1	7.7	75.0	13.7	32.7	27.4	21.0	21.5	14.3
²⁾ 7300 & ZW7 & AS3 P265/70R17	2809	2641	5450	3600	4100	26.0	9.2	75.7	15.1	35.3	28.8	22.3	22.7	15.5	23.1	7.1	74.6	13.1	33.3	26.4	20.4	20.8	13.6
²⁾ 7300 & ZW7 & AS3 P275/55R20	2809	2641	5450	3600	4100	26.3	9.5	76.0	15.4	35.6	29.1	22.6	23.0	15.8	23.4	7.5	74.9	13.4	33.6	26.7	20.7	21.1	13.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 13

K 10906			130.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 7400 & Z55 P265/70R17	2802	2597	5399	3600	4200	26.0	9.2	75.8	15.0	35.1	28.8	22.3	22.8	15.5	24.9	7.0	74.5	13.2	33.0	27.7	20.6	21.4	14.4
¹⁾ 7400 & Z55 P275/55R20	2802	2597	5399	3600	4200	26.3	9.5	76.1	15.3	35.4	29.1	22.6	23.1	15.8	25.2	7.3	75.0	13.5	33.3	28.1	21.0	21.8	14.7
¹⁾ 7400 & Z55 P265/65R18	2977	2875	5852	3600	4200	25.1	9.3	75.3	14.9	34.2	28.2	21.9	22.2	14.6	24.0	7.5	74.7	13.4	32.5	27.1	20.7	21.2	14.0
¹⁾ 7400 & Z55 P275/55R20	2977	2875	5852	3600	4200	25.4	9.6	75.6	15.2	34.5	28.5	22.2	22.5	14.9	24.3	7.8	75.0	13.7	32.8	27.5	21.0	21.5	14.3
¹⁾ 7400 & Z55 P285/45R22	2895	2672	5567	3600	4200	25.6	9.7	75.8	15.3	34.6	28.6	22.4	22.7	15.1	24.5	7.7	74.9	13.7	32.9	27.6	21.0	21.5	14.2
²⁾ 7400 & ZW7 P265/70R17	2878	2700	5578	3600	4200	26.0	9.2	75.8	15.0	35.1	28.8	22.2	22.8	15.5	22.1	7.1	74.9	12.9	32.9	25.7	20.0	20.4	13.1
²⁾ 7400 & ZW7 P275/55R20	2878	2700	5578	3600	4200	26.3	9.5	76.1	15.3	35.3	29.1	22.5	23.0	15.8	22.5	7.4	75.2	13.2	33.2	26.0	20.3	20.7	13.4

C 20906			130.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 8400 & Z55 LT245/75R16E																							
¹⁾ 8400 & Z85 LT245/75R16E																							
²⁾ 8400 & Z85 LT265/70R17E																							

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 14

K 20906	130.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 8600 & Z55 LT245/75R16E	2745	2665	5410	4180	5500	27.5	9.4	76.5	15.5	36.1	28.6	22.8	23.4	16.6	24.1	7.0	76.0	13.3	33.7	25.9	20.6	21.3	14.7
¹⁾ 8600 & Z85 LT245/75R16E	2977	2747	5724	4180	5500	27.3	9.3	76.3	15.4	35.8	28.4	22.6	23.3	16.3	24.1	7.3	76.2	13.6	33.9	26.0	20.8	21.5	14.7
²⁾ 8600 & Z85 LT265/70R17E	2745	2665	5410	4180	5500	28.1	10.0	77.1	16.1	36.6	29.1	23.4	24.0	17.1	24.6	7.7	76.6	13.9	34.3	26.4	21.2	21.9	15.2

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required


2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 15

C/K 10000/20000 Light Duty Fullsize Pickups

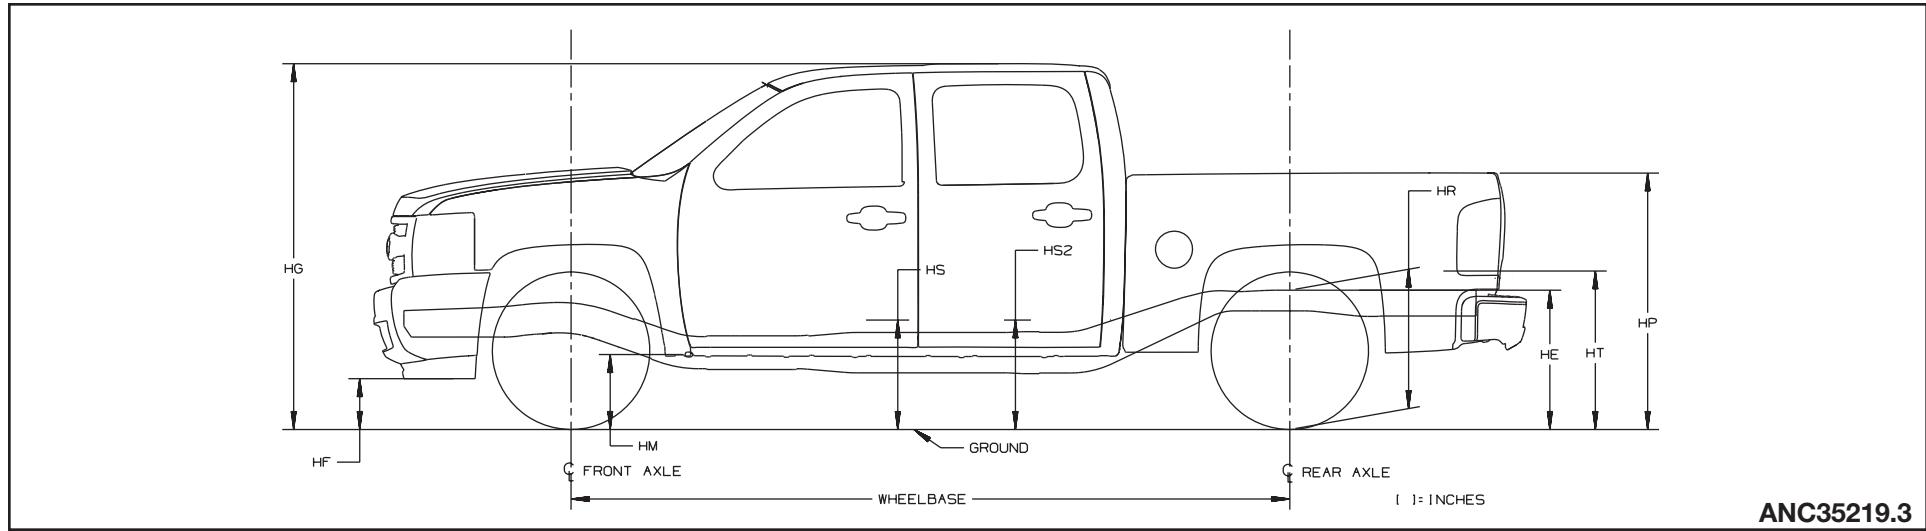

Heights (To Ground)

- HE Top of Frame Rail at End
- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Chassis Datum Hole
- HP Top of Tailgate
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 16

C 10703			119.0" Wheelbase			Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
6400 & Z83 P265/70R17	2456	1704	4160	3200	3750	32.2	9.0	74.1	15.3	55.7	31.1	23.2	—	36.3	26.5	7.4	71.3	13.1	49.9	26.6	20.5	—	30.3

C 10903			133.0" Wheelbase			Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
6400 & Z83 P265/70R17	2535	1779	4314	3300	3750	32.0	9.0	73.7	15.1	55.4	30.9	22.9	—	36.1	26.4	7.3	71.2	13.0	49.8	26.6	20.4	—	30.2

C 10553			133.9" Wheelbase			Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 6600 P265/70R17	2676	1944	4620	3600	3950	31.3	9.0	73.8	15.0	54.7	30.4	22.6	23.2	35.3	26.0	6.8	71.4	12.7	49.3	26.3	20.2	20.7	29.7

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 17

C 10753			143.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
6800 & -NHT P265/70R17	2689	1858	4547	3600	3950	31.7	9.0	73.9	15.0	55.1	30.8	22.7	23.3	35.7	26.3	7.1	71.3	12.8	49.6	26.4	20.2	20.6	30.1
7000 & NHT P265/70R17	2826	1900	4726	3600	4200	31.8	8.9	73.8	15.0	55.3	30.8	22.7	23.3	35.9	26.3	7.3	71.3	12.9	49.7	26.5	20.2	20.7	30.1

C 10953			157.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
6900 & Z83 P265/70R17	2917	1931	4848	3700	3950	31.3	9.0	73.5	14.9	54.8	30.5	22.4	22.9	35.3	26.0	7.3	71.2	12.9	49.4	26.3	20.2	20.5	29.8

C 10543			143.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
6800 & Z83 P265/70R17	2880	2101	4981	3650	3950	30.7	9.0	74.1	14.9	54.1	30.0	22.3	23.0	34.7	26.0	7.3	71.9	13.0	49.4	26.3	20.3	20.7	29.8
7100 & NHT P265/70R17	2881	2123	5004	3650	4200	31.1	8.9	74.3	14.9	54.6	30.3	22.4	23.2	35.2	26.4	7.3	71.9	12.9	49.7	26.5	20.2	20.8	30.2

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 18

K 10703			119.0" Wheelbase		Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
6400 & Z83 P265/70R17	2678	1753	4431	3950	3750	31.9	9.3	74.1	15.5	55.4	30.9	23.3	—	36.0	26.2	6.3	71.8	12.8	49.6	26.6	20.9	—	29.9

K 10903			133.0" Wheelbase		Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
6800 & Z83 P265/70R17	2764	1819	4583	3950	3950	31.9	8.9	73.6	15.1	55.3	30.8	22.8	—	35.9	26.0	6.3	71.0	12.4	49.4	26.3	20.1	—	29.8

K 10553			133.9" Wheelbase		Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 6800 P265/70R17	2881	2035	4916	3950	3950	30.9	9.4	73.8	15.2	54.3	30.2	22.7	23.2	34.9	25.9	6.9	71.5	12.9	49.2	26.3	20.4	20.9	29.6

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 19

K 10753			143.5" Wheelbase			Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
7000 & -NHT P265/70R17	3058	1923	4981	3950	3950	31.2	9.3	73.9	15.2	54.7	30.5	22.7	23.3	35.3	25.9	7.5	71.5	13.2	49.3	26.3	20.4	20.8	29.7
7200 & NHT P265/70R17	3058	1940	4998	3950	4200	31.6	9.2	74.0	15.2	55.0	30.7	22.8	23.4	35.6	26.2	7.3	71.4	13.1	49.6	26.5	20.4	20.8	30.0

K 10953			157.5" Wheelbase			Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
7000 & Z83 P265/70R17	3146	2007	5153	3950	3950	31.0	9.4	73.6	15.1	54.4	30.2	22.5	23.0	35.0	25.9	7.6	71.5	13.2	49.2	26.3	20.4	20.8	29.6

K 10543			143.5" Wheelbase			Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
7000 & -NHT P265/70R17	2961	2081	5042	3950	3950	30.7	9.4	74.3	15.2	54.1	30.0	22.6	23.2	34.7	26.0	7.3	71.9	13.0	49.3	26.3	20.3	20.7	29.7
7300 & NHT P265/70R17	3137	2169	5306	3950	4200	30.6	9.3	74.2	15.1	54.0	30.0	22.5	23.1	34.6	26.1	7.6	72.0	13.2	49.5	26.4	20.4	20.9	29.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required


2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 20

C/K 20000 Fullsize Pickups & Chassis-Cabs

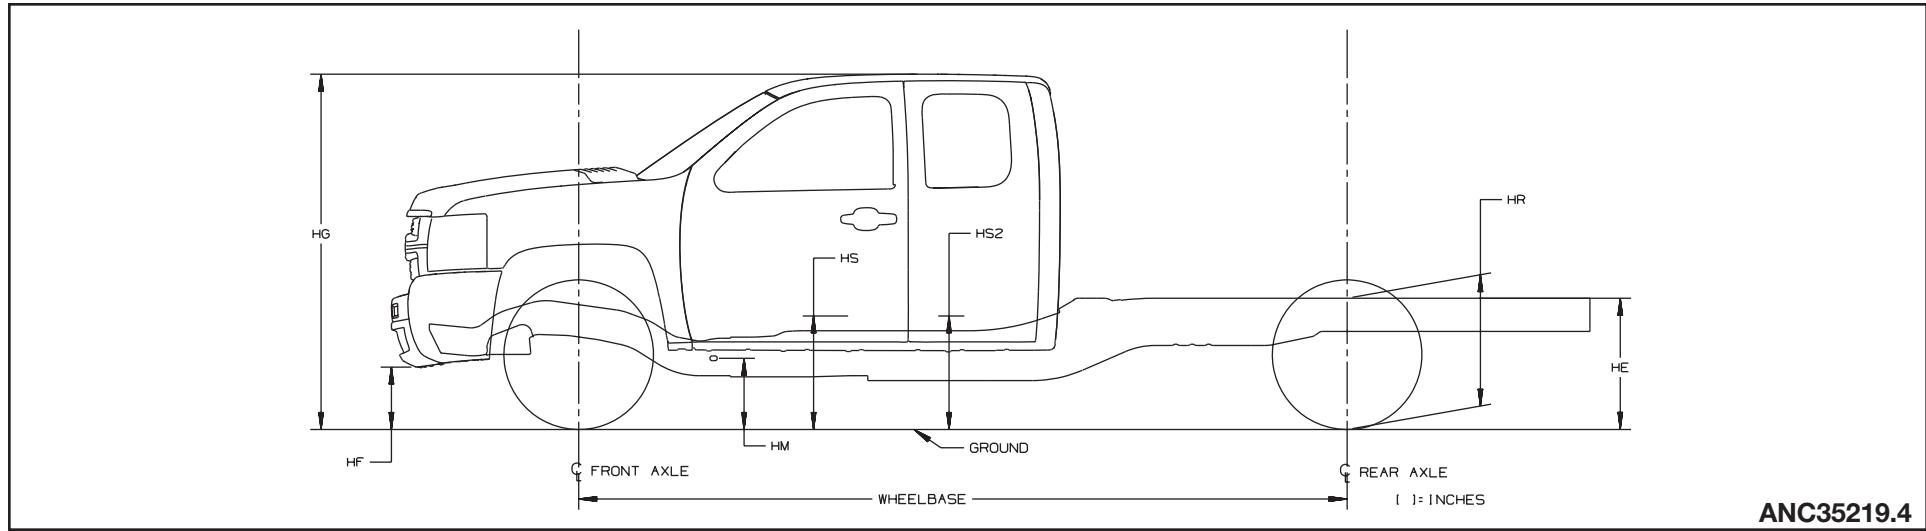

ANC35219.4

Heights (To Ground)

- HE Top of Frame Rail at End
- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Chassis Datum Hole
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 21

C 20903	133.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. LY6 & X88 LT265/70R17	3025	2111	5136	4411	6084	37.7	14.7	79.1	18.4	61.2	36.4	28.2	—	41.8	32.3	12.8	76.5	16.2	55.8	32.3	25.7	—	36.2
9200 lb. LY6 & Z88 LT265/70R17 at 50 PSI Rear	3025	2111	5136	4411	6084	37.7	14.3	79.1	18.4	61.2	36.4	28.2	—	41.8	32.3	12.4	76.5	16.2	55.8	32.3	25.7	—	36.2
9200 lb. LMM & X88 LT265/70R17	3560	2182	5742	4411	6084	37.6	14.5	79.0	18.3	61.1	36.3	28.1	—	41.7	32.1	13.7	76.8	16.7	55.5	32.3	26.0	—	36.0
9200 lb. LMM & Z88 LT265/70R17 at 50 PSI Rear	3560	2182	5742	4411	6084	37.6	14.1	79.0	18.3	61.1	36.3	28.1	—	41.7	32.1	13.3	76.8	16.7	55.5	32.3	26.0	—	36.0

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE **22**

C 20753	143.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. LY6 & X88 LT265/70R17	3135	2289	5424	4411	6084	37.2	14.8	79.2	18.3	60.7	36.2	28.0	28.7	41.3	32.3	13.1	76.8	16.2	55.7	32.3	25.7	26.1	36.2
9200 lb. LY6 & X88 LT265/70R17 at 50 PSI Rear	3135	2289	5424	4411	6084	37.2	14.4	79.2	18.3	60.7	36.2	28.0	28.7	41.3	32.3	12.6	76.8	16.2	55.7	32.3	25.7	26.1	36.2
9200 lb. LMM & Z88 LT265/70R17	3786	2360	6146	4411	6084	37.1	14.6	79.0	18.2	60.6	36.1	27.8	28.6	41.2	32.1	14.1	77.2	16.9	55.5	32.3	26.1	26.3	35.9
9200 lb. LMM & Z88 LT265/70R17 at 50 PSI Rear	3786	2360	6146	4411	6084	37.1	14.1	79.0	18.2	60.6	36.1	27.8	28.6	41.2	32.1	13.7	77.2	16.9	55.5	32.3	26.1	26.3	35.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 23

C 20953	157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. LY6 & X88 LT265/70R17	3210	2305	5515	4500	6084	37.2	14.8	79.0	18.2	60.7	36.2	27.8	28.5	41.4	32.3	13.1	76.6	16.2	55.7	32.3	25.3	26.0	36.1
9200 lb. LY6 & Z88 LT265/70R17 at 50 PSI Rear	3210	2305	5515	4500	6084	37.2	14.4	79.0	18.2	60.7	36.2	27.8	28.5	41.4	32.3	12.6	76.6	16.2	55.7	32.3	25.3	26.0	36.1
9200 lb. LMM & X88 LT265/70R17	3849	2389	6238	4500	6084	37.1	14.6	78.8	18.1	60.6	36.1	27.7	28.4	41.2	32.1	14.0	77.1	16.8	55.5	32.3	26.1	26.4	35.9
9200 lb. LMM & Z88 LT265/70R17 at 50 PSI Rear	3849	2389	6238	4500	6084	37.1	14.2	78.8	18.1	60.6	36.1	27.7	28.4	41.2	32.1	13.6	77.1	16.8	55.5	32.3	26.1	26.4	35.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 24

C 20743	153.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. LY6 & X88 LT225/75R17	3148	2374	5522	4670	6084	37.0	14.9	79.7	18.2	60.5	36.1	27.8	28.8	41.1	32.3	12.6	77.2	15.9	55.7	32.3	25.4	26.2	36.2
9200 lb. LY6 & Z88 LT225/75R17 at 65 PSI Rear	3148	2374	5522	4670	6084	37.0	14.4	79.7	18.2	6035	36.1	27.8	28.8	41.0	32.3	12.2	77.2	15.9	55.7	32.3	25.4	26.2	35.9
9200 lb. LMM & X88 LT265/70R17	3777	2446	6223	4670	6084	36.9	14.7	79.6	18.1	60.4	36.0	27.7	28.7	41.0	32.1	13.5	77.6	16.6	55.5	32.3	25.9	26.5	35.9
9200 lb. LMM & Z88 LT265/70R17 at 50 PSI Rear	3777	2446	6223	4670	6084	36.9	14.2	79.6	18.1	60.4	36.0	27.7	28.7	41.0	32.1	13.1	77.6	16.6	55.5	32.3	25.9	26.5	35.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 25

C 20943	167.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. LY6 & X88 LT265/70R17	3230	2387	5617	4800	6084	37.0	14.9	79.5	18.2	60.5	36.1	27.7	28.6	41.1	32.3	12.5	77.1	15.8	55.7	32.3	25.3	26.1	36.1
9200 lb. LY6 & Z88 LT265/70R17 at 50 PSI Rear	3230	2387	5617	4800	6084	37.0	14.5	79.5	18.2	60.5	36.1	27.7	28.6	41.1	32.3	12.1	77.1	15.8	55.7	32.3	25.3	26.1	36.1
9200 lb. LMM & X88 LT265/70R17	3841	2456	6297	4800	6084	36.9	14.7	79.4	18.0	60.4	36.0	27.6	28.5	41.0	32.1	13.4	77.5	16.4	55.5	32.3	25.8	26.4	35.9
9200 lb. LMM & Z88 LT265/70R17 at 50 PSI Rear	3841	2456	6297	4800	6084	36.9	14.3	79.4	18.0	60.4	36.0	27.6	28.5	41.0	32.1	13.0	77.5	16.4	55.5	32.3	25.8	26.4	35.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE **26**

K 20903			133.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. LY6 & X88 LT265/70R17 at 50 PSI Rear	3173	2124	5297	4500	6084	37.7	14.7	79.0	18.4	61.2	36.4	28.2	—	41.8	32.3	12.9	76.5	16.2	55.7	32.3	25.7	—	36.1
9200 lb. LY6 & Z88 LT265/70R17 at 50 PSI Rear	3173	2124	5297	4500	6084	37.7	14.2	79.0	18.4	61.2	36.4	28.2	—	41.7	32.3	12.5	76.5	16.2	55.7	32.3	25.7	—	35.8
9200 lb. LMM & X88 LT265/70R17 at 50 PSI Rear	3772	2197	5969	4500	6084	37.6	14.5	78.9	18.3	61.1	36.3	28.0	—	41.7	32.0	13.8	76.9	16.8	55.4	32.3	26.1	—	35.8
9200 lb. LMM & Z88 LT265/70R17 at 50 PSI Rear	3772	2197	5969	4500	6084	37.6	14.0	78.9	18.3	61.1	36.3	28.0	—	41.7	32.0	13.4	76.9	16.8	55.4	32.3	26.1	—	35.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 27

K 20753	143.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. LY6 & X88 LT265/70R17 at 50 PSI Rear	3421	2252	5673	4500	6084	37.2	14.7	79.1	18.3	60.7	36.2	27.9	28.7	41.4	32.2	13.3	76.9	16.4	55.6	32.3	25.8	26.2	36.1
9200 lb. LY6 & Z88 LT265/70R17 at 50 PSI Rear	3421	2252	5673	4500	6084	37.2	14.3	79.1	18.3	60.7	36.2	27.9	28.7	41.4	32.2	12.9	76.9	16.4	55.6	32.3	25.8	26.2	36.1
9200 lb. LMM & X88 LT265/70R17 at 50 PSI Rear	4083	2327	6410	4500	6084	37.2	14.4	79.0	18.1	60.7	36.1	27.8	28.6	41.3	32.0	14.3	77.3	17.1	55.4	32.3	26.3	26.4	35.8
9200 lb. LMM & Z88 LT265/70R17 at 50 PSI Rear	4083	2327	6410	4500	6084	37.2	14.0	79.0	18.1	60.7	36.1	27.8	28.6	41.3	32.0	13.9	77.3	17.1	55.4	32.3	26.3	26.4	35.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 28

K 20953	157.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. LY6 & X88 LT265/70R17 at 50 PSI Rear	3464	2319	5783	4670	6084	37.2	14.8	78.9	18.2	60.7	36.1	27.8	28.5	41.3	32.2	13.1	76.7	16.2	55.6	32.3	25.6	26.1	36.0
9200 lb. LY6 & Z88 LT265/70R17 at 50 PSI Rear	3464	2319	5783	4670	6084	37.2	14.3	78.9	18.2	60.7	36.1	27.8	28.5	41.3	32.2	12.7	76.7	16.2	55.6	32.3	25.6	26.1	36.0
9200 lb. LMM & X88 LT265/70R17 at 50 PSI Rear	4113	2395	6508	4670	6084	37.1	14.5	78.8	18.0	60.6	36.0	27.6	28.4	41.2	32.0	14.1	77.2	16.9	55.4	32.3	26.1	26.3	35.8
9200 lb. LMM & Z88 LT265/70R17 at 50 PSI Rear	4113	2395	6508	4670	6084	37.1	14.1	78.8	18.0	60.6	36.0	27.6	28.4	41.2	32.0	13.7	77.2	16.9	55.4	32.3	26.1	26.3	35.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE **29**

GVW/Tire	153.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. LY6 & X88 LT265/70R17 at 50 PSI Rear	3384	2371	5755	4670	6084	37.0	14.8	79.7	18.2	60.5	36.1	27.8	28.8	41.1	32.2	12.9	77.4	16.2	55.6	32.3	25.6	26.3	36.1
9200 lb. LY6 & Z88 LT265/70R17 at 50 PSI Rear	3384	2371	5755	4670	6084	37.0	14.4	79.7	18.2	60.5	36.1	27.8	28.8	41.1	32.2	12.5	77.4	16.2	55.6	32.3	25.6	26.3	36.1
9200 lb. LMM & X88 LT265/70R17 at 50 PSI Rear	4015	2440	6455	4670	6084	36.9	14.6	79.6	18.1	60.4	36.0	27.7	28.7	41.0	32.0	13.9	77.7	16.8	55.4	32.3	26.1	26.6	35.8
9200 lb. LMM & Z88 LT265/70R17 at 50 PSI Rear	4015	2440	6455	4670	6084	36.9	14.1	79.6	18.1	60.4	36.0	27.7	28.7	41.0	32.0	13.5	77.7	16.8	55.4	32.3	26.1	26.6	35.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE **30**

GVW/Tire	167.0" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. LY6 & X88 LT265/70R17 at 50 PSI Rear	3463	2427	5890	4800	6084	37.0	14.8	79.5	18.1	60.4	36.0	27.6	28.6	41.0	32.2	12.9	77.2	16.1	55.6	32.3	25.2	26.2	36.1
9200 lb. LY6 & Z88 LT265/70R17 at 50 PSI Rear	3463	2427	5890	4800	6084	37.0	14.4	79.5	18.1	60.4	36.0	27.6	28.6	41.0	32.2	12.4	77.2	16.1	55.6	32.3	25.2	26.2	36.1
9200 lb. LMM & X88 LT265/70R17 at 50 PSI Rear	4090	2496	6586	4800	6084	36.9	14.6	79.3	18.0	60.4	35.9	27.5	28.4	40.9	32.0	13.8	77.6	16.7	55.4	32.3	26.0	26.5	35.8
9200 lb. LMM & Z88 LT265/70R17 at 50 PSI Rear	4090	2496	6586	4800	6084	36.9	14.2	79.3	18.0	60.4	35.9	27.5	28.4	40.9	32.0	13.4	77.6	16.7	55.4	32.3	26.0	26.5	35.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required


2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 31

C/K 30000 Fullsize Pickups & Chassis-Cabs

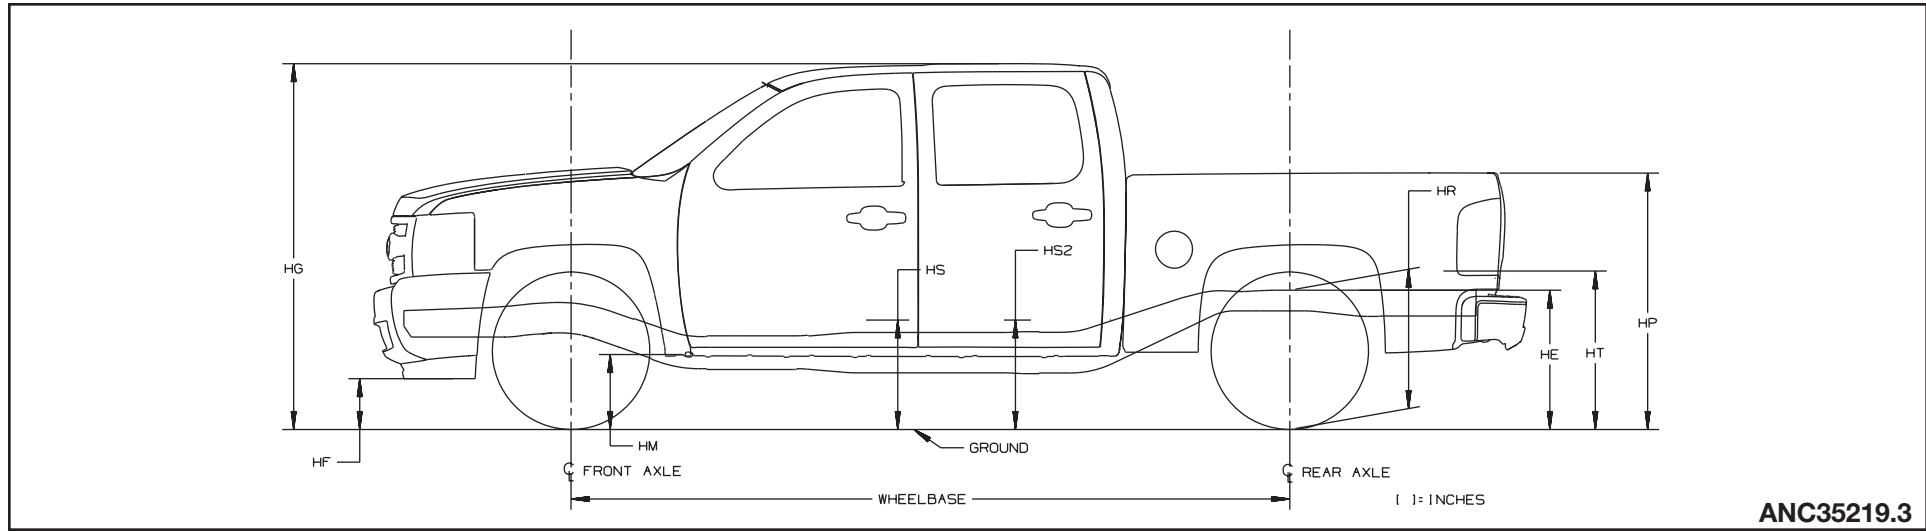

Heights (To Ground)

- HE Top of Frame Rail at End
- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Chassis Datum Hole
- HP Top of Tailgate
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

PAGE **32**

C 30903			133.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9700 lb. LY6 & X88 LT265/70R17	3067	2410	5477	4200	6500	37.4	14.9	79.0	18.5	60.9	36.2	28.2	29.0	41.5	31.3	13.8	76.3	16.4	54.7	31.6	25.6	25.8	35.1
9700 lb. LY6 & Z88 LT265/70R17 at 60 PSI Rear	3067	2410	5477	4200	6500	37.4	14.4	79.0	18.5	60.9	36.2	28.2	29.0	41.5	31.3	13.3	76.3	16.4	54.7	31.6	25.6	25.8	35.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 33

C 30953			157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9900 lb. LY6 & X88 LT265/70R17 at 60 PSI Rear	3190	2610	5800	4800	6500	36.9	15.0	78.9	18.3	60.3	35.9	27.8	28.4	40.9	31.4	12.8	76.2	15.8	54.8	31.6	25.1	25.5	35.2
9900 lb. LY6 & Z88 LT265/70R17 at 60 PSI Rear	3190	2610	5800	4800	6500	36.9	14.6	78.9	18.3	60.3	35.9	27.8	28.4	40.9	31.4	12.4	76.2	15.8	54.8	31.6	25.1	25.5	35.2
11400 lb. LY6 & X88 LT225/75R17 at 65 PSI Rear	3252	2781	6033	4800	8200	36.8	14.2	78.4	17.7	60.3	35.7	27.3	28.0	40.9	30.3	12.4	75.2	15.0	53.7	30.7	24.2	24.4	34.1
11400 lb. LY6 & Z88 LT225/75R17 at 65 PSI Rear	3252	2781	6033	4800	8200	36.8	13.8	78.4	17.7	60.3	35.7	27.3	28.0	40.9	30.3	12.0	75.2	15.0	53.7	30.7	24.2	24.4	34.1
11400 lb. LMM & X88 LT225/75R17 at 65 PSI Rear	3840	2850	6690	4800	8200	36.7	14.0	78.3	17.5	60.2	35.6	27.2	27.9	40.8	30.1	13.3	75.6	15.6	53.5	30.7	24.6	24.8	33.9
11400 lb. LMM & Z88 LT225/75R17 at 65 PSI Rear	3840	2850	6690	4800	8200	36.7	13.6	78.3	17.5	60.2	35.6	27.2	27.9	40.8	30.1	12.9	75.6	15.6	53.5	30.7	24.6	24.8	33.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE **34**

C 30943			167.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9900 lb. LY6 & X88 LT265/70R17 at 60 PSI Rear	3224	2638	5862	4800	6500	36.8	15.1	79.5	18.2	60.2	35.9	27.7	28.5	40.8	31.4	12.9	76.7	15.8	54.8	31.6	25.1	25.7	35.2
9900 lb. LY6 & Z88 LT265/70R17 at 60 PSI Rear	3224	2638	5862	4800	6500	36.8	14.6	79.5	18.2	60.2	35.9	27.7	28.5	40.8	31.4	12.4	76.7	15.8	54.8	31.6	25.1	25.7	35.2
11400 lb. LY6 & X88 LT225/75R17 at 65 PSI Rear	3293	2862	6155	4800	8200	36.6	14.3	79.0	17.6	60.1	35.6	27.1	28.1	40.7	30.3	12.5	75.6	15.1	53.7	30.7	24.2	24.5	34.1
11400 lb. LY6 & Z88 LT225/75R17 at 65 PSI Rear	3293	2862	6155	4800	8200	36.6	13.8	79.0	17.6	60.1	35.6	27.1	28.1	40.7	30.3	12.0	75.6	15.1	53.7	30.7	24.2	24.5	34.1
11400 lb. LMM & X88 LT225/75R17 at 65 PSI Rear	3853	2919	6772	4800	8200	36.5	14.1	78.9	17.5	60.0	35.5	27.0	28.0	40.6	30.2	13.3	76.0	15.6	53.5	30.7	24.6	24.9	33.9
11400 lb. LMM & Z88 LT225/75R17 at 65 PSI Rear	3853	2919	6772	4800	8200	36.5	13.7	78.9	17.5	60.0	35.5	27.0	28.0	40.6	30.2	12.9	76.0	15.6	53.5	30.7	24.6	24.9	33.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE **35**

K 30903			133.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9900 lb. LY6 & X88 LT265/70R17 at 60 PSI Rear	3165	2368	5533	4800	6500	37.5	14.8	79.0	18.4	60.9	36.2	28.2	29.0	41.6	31.4	12.6	76.1	15.9	54.8	31.6	25.3	25.8	35.2
9900 lb. LY6 & Z88 LT265/70R17 at 60 PSI Rear	3165	2368	5533	4800	6500	37.5	14.4	79.0	18.4	60.9	36.2	28.2	29.0	41.6	31.4	12.2	76.1	15.9	54.8	31.6	25.3	25.8	35.2
9900 lb. LMM & X88 LT265/70R17 at 60 PSI Rear	3752	2429	6181	4800	6500	37.4	14.6	78.9	18.3	60.9	36.2	28.0	28.9	41.5	31.1	13.5	76.5	16.4	54.5	31.6	25.7	26.1	34.9
9900 lb. LMM & Z88 LT265/70R17 at 60 PSI Rear	3752	2429	6181	4800	6500	37.4	14.2	78.9	18.3	60.9	36.2	28.0	28.9	41.5	31.1	13.1	76.5	16.4	54.5	31.6	25.7	26.1	34.9
11400 lb. LY6 & X88 LT225/75R17 at 65 PSI Rear	3259	2634	5893	4800	8200	37.2	14.0	78.5	17.8	60.7	35.9	27.6	—	41.4	30.3	12.3	75.1	15.1	53.7	30.7	24.3	—	34.1
11400 lb. LY6 & Z88 LT225/75R17 at 65 PSI Rear	3259	2634	5893	4800	8200	37.2	13.6	78.5	17.8	60.7	35.9	27.6	—	41.4	30.3	11.9	75.1	15.1	53.7	30.7	24.3	—	34.1
11400 lb. LMM & X88 LT225/75R17 at 65 PSI Rear	3846	2695	6541	4800	8200	37.2	13.8	78.4	17.7	60.7	35.8	27.5	—	41.3	30.0	13.3	75.4	15.7	53.4	30.7	24.7	—	33.8
11400 lb. LMM & Z88 LT225/75R17 at 65 PSI Rear	3846	2695	6541	4800	8200	37.2	13.4	78.4	17.7	60.7	35.8	27.5	—	41.3	30.0	12.8	75.4	15.7	53.4	30.7	24.7	—	33.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE **36**

K 30953			157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9900 lb. LY6 & X88 LT265/70R17 at 60 PSI Rear	3402	2535	5937	4800	6500	37.0	14.9	78.9	18.2	60.5	36.0	27.8	28.5	41.1	31.3	13.1	76.3	16.0	54.7	31.6	25.3	25.7	35.1
9900 lb. LY6 & Z88 LT265/70R17 at 60 PSI Rear	3402	2535	5937	4800	6500	37.0	14.5	78.9	18.2	60.5	36.0	27.8	28.5	41.1	31.3	12.7	76.3	16.0	54.7	31.6	25.3	25.7	35.1
9900 lb. LMM & X88 LT265/70R17 at 60 PSI Rear	4001	2601	6602	4800	6500	36.9	14.7	78.8	18.1	60.4	35.9	27.7	28.4	41.0	31.1	14.0	76.7	16.6	54.5	31.6	25.8	26.0	34.9
9900 lb. LMM & Z88 LT265/75R17 at 60 PSI Rear	4001	2601	6602	4800	6500	36.9	14.3	78.8	18.1	60.4	35.9	27.7	28.4	41.0	31.1	13.6	76.7	16.6	54.5	31.6	25.8	26.0	34.9
11400 lb. LMM & X88 LT225/75R17 at 65 PSI Rear	4094	2868	6962	4800	8200	36.7	14.0	78.3	17.5	60.2	35.6	27.1	27.9	40.8	30.1	13.7	75.7	15.9	53.4	30.7	24.8	25.0	33.8
11400 lb. LMM & Z88 LT225/75R17 at 65 PSI Rear	4094	2868	6962	4800	8200	36.7	13.5	78.3	17.5	60.2	35.6	27.1	27.9	40.8	30.1	13.2	75.7	15.9	53.4	30.7	24.8	25.0	33.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 37

K 30943			167.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9900 lb. LY6 & X88 LT265/70R17 at 60 PSI Rear	3474	2621	6095	4800	6500	36.8	15.0	79.4	18.2	60.3	35.9	27.7	28.5	40.9	31.3	13.2	76.9	16.1	54.7	31.6	25.3	25.8	35.1
9900 lb. LY6 & Z88 LT265/70R17 at 60 PSI Rear	3474	2621	6095	4800	6500	36.8	14.5	79.4	18.2	60.3	35.9	27.7	28.5	40.9	31.3	12.8	76.9	16.1	54.7	31.6	25.3	25.8	35.1
11400 lb. LY6 & X88 LT225/75R17 at 65 PSI Rear	3564	2892	6456	4800	8200	36.6	14.2	78.9	17.5	60.0	35.6	27.1	28.0	40.6	30.3	12.9	75.8	15.3	53.7	30.7	24.4	24.7	33.8
11400 lb. LY6 & Z88 LT225/75R17 at 65 PSI Rear	3564	2892	6456	4800	8200	36.6	13.8	78.9	17.5	60.0	35.6	27.1	28.0	40.6	30.3	12.5	75.8	15.3	53.7	30.7	24.4	24.7	33.8
11400 lb. LMM LT225/75R17	4150	2956	7106	4800	8200	36.5	14.0	13.6	78.8	17.4	60.0	35.5	27.0	27.9	30.1	13.7	13.3	76.2	15.9	53.4	30.7	24.9	25.0

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required


2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 38

C/K 31000 Fullsize Chassis-Cabs

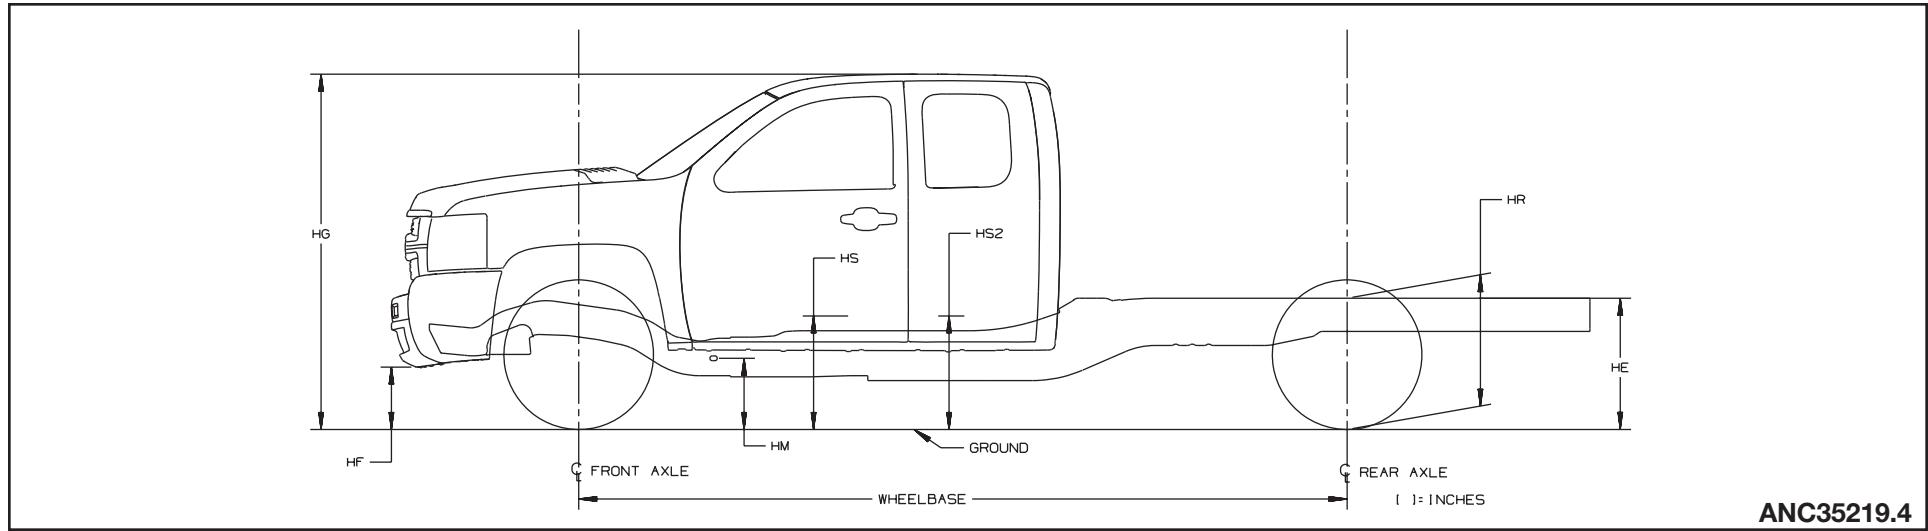

Heights (To Ground)

- HE Top of Frame Rail at End
- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Chassis Datum Hole
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

PAGE **39**

C 31003	137.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
11400 lb. LY6 & X88 LT215/85R16 at 65 PSI Rear	3156	2323	5479	4500	8600	35.5	14.0	78.5	17.9	—	33.9	27.7	—	—	28.6	12.4	75.5	15.4	—	29.0	24.7	—	—
11400 lb. LY6 & Z88 LT215/85R16 at 65 PSI Rear	3156	2323	5479	4500	8600	35.5	13.6	78.5	17.9	—	33.9	27.7	—	—	28.6	12.0	75.5	15.4	—	29.0	24.7	—	—
11400 lb. LMM & X88 LT215/85R16 at 65 PSI Rear	3655	2376	6031	4500	8600	35.4	13.9	78.4	17.8	—	33.8	27.6	—	—	28.3	13.2	75.8	15.9	—	29.0	25.1	—	—
11400 lb. LMM & Z88 LT215/85R16 at 65 PSI Rear	3655	2376	6031	4500	8600	35.4	13.5	78.4	17.8	—	33.8	27.6	—	—	28.3	12.8	75.8	15.9	—	29.0	25.1	—	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 40

C 31053	161.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
11400 lb. LY6 & X88 LT215/85R16 at 70 PSI Rear	3377	2589	5966	4800	8600	34.6	14.3	78.4	17.7	—	33.4	27.2	28.0	—	27.5	12.5	75.1	15.1	—	28.2	24.2	24.4	—
11400 lb. LY6 & Z88 LT215/85R16 at 70 PSI Rear	3377	2589	5966	4800	8600	34.6	13.9	78.4	17.7	—	33.4	27.2	28.0	—	27.5	12.0	75.1	15.1	—	28.2	24.2	24.4	—
11400 lb. LMM & X88 LT215/85R16 at 70 PSI Rear	3965	2655	6620	4800	8600	34.5	14.1	78.2	17.5	—	33.3	27.1	27.9	—	27.2	13.4	75.6	15.7	—	28.2	24.7	24.8	—
11400 lb. LMM & Z88 LT215/85R16 at 70 PSI Rear	3965	2655	6620	4800	8600	34.5	13.7	78.2	17.5	—	33.3	27.1	27.9	—	27.2	13.0	75.6	15.7	—	28.2	24.7	24.8	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 41

C 31403			161.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
11400 lb. LY6 & X88 LT215/85R16 at 70 PSI Rear	3269	2300	5569	4800	8600	35.3	14.2	78.3	17.8	—	33.9	27.4	—	—	27.5	12.3	74.8	15.0	—	28.2	24.1	—	—
11400 lb. LY6 & Z88 LT215/85R16 at 70 PSI Rear	3269	2300	5569	4800	8600	35.3	13.8	78.3	17.8	—	33.9	27.4	—	—	27.5	11.8	74.8	15.0	—	28.2	24.1	—	—
11400 lb. LMM & X88 LT215/85R16 at 70 PSI Rear	3764	2357	6121	4800	8600	35.2	14.1	78.2	17.7	—	33.8	27.3	—	—	27.3	13.1	75.3	15.5	—	28.2	24.5	—	—
11400 lb. LMM & Z88 LT215/85R16 at 70 PSI Rear	3764	2357	6121	4800	8600	35.2	13.6	78.2	17.7	—	33.8	27.3	—	—	27.3	12.7	75.3	15.5	—	28.2	24.5	—	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 42

GVW/Tire	137.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
12000 lb. LY6 & X88 LT215/85R16 at 70 PSI Rear	3403	2375	5778	4800	8600	35.4	14.0	78.5	17.9	—	33.8	27.6	—	—	28.8	12.3	75.3	15.3	—	29.0	24.6	—	—
12000 lb. LY6 & Z88 LT215/85R16 at 70 PSI Rear	3403	2375	5778	4800	8600	35.4	13.6	78.5	17.9	—	33.8	27.6	—	—	28.8	11.9	75.3	15.3	—	29.0	24.6	—	—
12000 lb. LMM & X88 LT215/85R16 at 70 PSI Rear	3996	2439	6435	4800	8600	35.3	13.9	78.4	17.7	—	33.7	27.5	—	—	28.5	13.3	75.8	15.9	—	29.0	25.0	—	—
12000 lb. LMM & Z88 LT215/85R16 at 70 PSI Rear	3996	2439	6435	4800	8600	35.3	13.4	78.4	17.7	—	33.7	27.5	—	—	28.5	12.9	75.8	15.9	—	29.0	25.0	—	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 43

GVW/Tire	161.5" Wheelbase					Frame Heights at Minimum Curb Weight									Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
12000 lb. LY6 & X88 LT215/85R16 at 70 PSI Rear	3695	2610	6305	4800	8600	34.6	14.2	78.3	17.6	—	33.4	27.2	27.9	—	27.6	13.0	75.3	15.4	—	28.2	24.4	24.5	—
12000 lb. LY6 & Z88 LT215/85R16 at 70 PSI Rear	3695	2610	6305	4800	8600	34.6	13.8	78.3	17.6	—	33.4	27.2	27.9	—	27.6	12.6	75.3	15.4	—	28.2	24.4	24.5	—
12000 lb. LMM & X88 LT215/85R16 at 70 PSI Rear	4293	2676	6969	4800	8600	34.5	14.0	78.2	17.5	—	33.3	27.0	27.8	—	27.4	14.0	75.7	16.0	—	28.2	24.9	24.9	—
12000 lb. LMM & Z88 LT215/85R16 at 70 PSI Rear	4293	2676	6969	4800	8600	34.5	13.6	78.2	17.5	—	33.3	27.0	27.8	—	27.4	13.6	75.7	16.0	—	28.2	24.9	24.9	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 44

C 31403			161.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
12000 lb. LY6 & X88 LT215/85R16 at 70 PSI Rear	3467	2419	5886	4800	8600	35.0	14.2	78.2	17.7	—	33.7	27.3	—	—	27.7	12.7	74.9	15.1	—	28.2	24.2	—	—
12000 lb. LY6 & Z88 LT215/85R16 at 70 PSI Rear	3467	2419	5886	4800	8600	35.0	13.8	78.2	17.7	—	33.7	27.3	—	—	27.7	12.2	74.9	15.1	—	28.2	24.2	—	—
12000 lb. LMM & X88 LT215/85R16 at 70 PSI Rear	4057	2487	6544	4800	8600	34.9	14.0	78.0	17.6	—	33.6	27.2	—	—	27.5	13.6	75.4	15.8	—	28.2	24.7	—	—
12000 lb. LMM & Z88 LT215/85R16 at 70 PSI Rear	4057	2487	6544	4800	8600	34.9	13.6	78.0	17.6	—	33.6	27.2	—	—	27.5	13.2	75.4	15.8	—	28.2	24.7	—	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required


2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 45

Classic C/K Fullsize Pickups

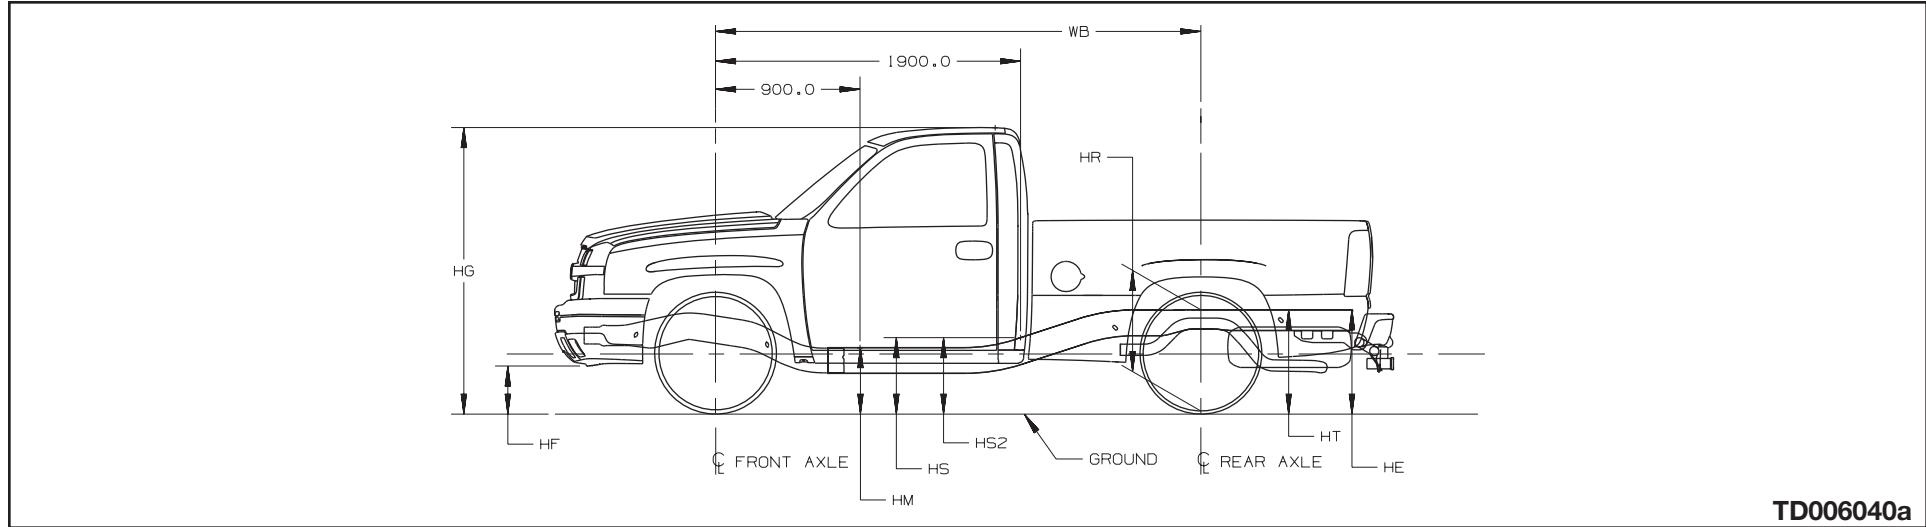

Heights (To Ground)


- HE Top of Frame at End
- HF Bottom of Front Air Deflector or Bumper
- HG Roof height to ground
- HM Normal Top of Frame
- HP Top of Tailgate
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 46

Classic C/K Fullsize Chassis-Cabs

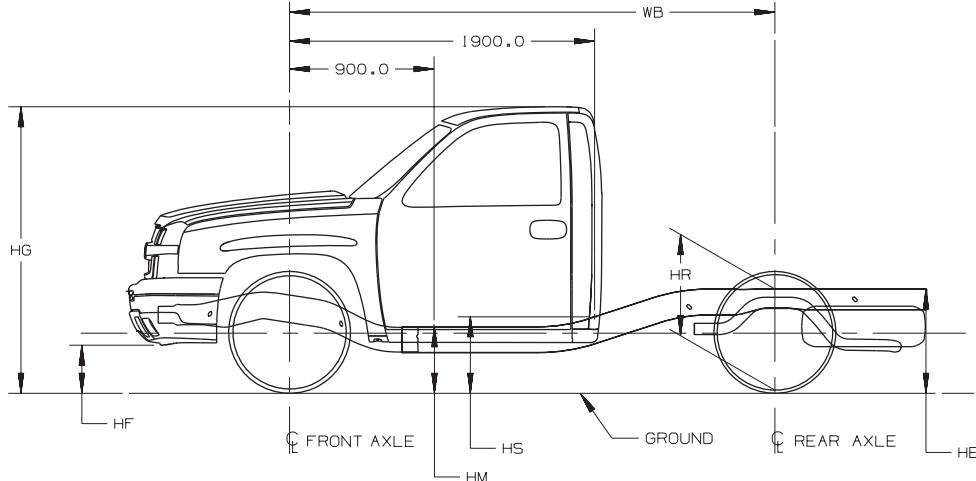

TD006040b

Heights (To Ground)

HE	Top of Frame at End
HF	Bottom of Front Air Deflector or Bumper
HG	Roof height to ground
HM	Normal Top of Frame
HP	Top of Tailgate
HR	Top of Frame at Centerline of Rear Axle
HS	Step H-Point-Front
HS2	Step H-Point-Second
HT	Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 47

C 15703			119.0" Wheelbase		Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 6100 P245/70R17	2457	1704	4161	3150	3686	30.3	10.3	72.0	17.1	—	29.1	20.4	—	33.0	23.9	9.0	69.2	14.8	—	24.2	18.1	—	26.3

C 15903			133.0" Wheelbase		Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 6400 P245/70R17	2536	1779	4315	3150	3686	30.3	10.4	71.8	17.0	—	29.1	20.3	—	33.0	24.4	9.4	69.1	14.9	—	24.5	18.2	—	26.8

C 15753			143.5" Wheelbase		Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 6200 P235/75R16	2689	1859	4548	3600	3686	29.3	10.1	71.5	16.4	—	28.3	19.7	20.7	31.9	23.6	8.0	69.4	14.3	—	24.0	17.6	18.5	26.1
²⁾ 6200 P245/70R17	2689	1859	4548	3600	3686	29.6	10.4	71.9	16.8	—	28.7	20.1	21.1	32.3	24.0	8.4	69.7	14.6	—	24.3	18.0	18.9	30.0

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 48

C 15953			157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 6400 P245/70R17	2886	1915	4801	3600	3686	29.5	10.6	71.6	16.7	—	28.6	20.0	20.8	32.0	24.0	9.2	69.5	14.9	—	24.3	18.2	18.8	26.5

C 15543			143.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 6800 P245/70R17	2881	2102	4984	3650	4000	27.3	10.9	71.3	16.6	—	29.1	19.7	20.3	30.1	22.5	9.2	68.2	14.6	—	23.4	17.8	18.2	25.3

C 15743			153.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 8600 LT245/75R16	3111	2330	5442	4410	6000	34.0	13.3	77.2	20.2	—	33.2	24.9	25.6	36.5	28.5	11.3	75.0	18.0	—	28.9	22.7	23.2	31.0

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 49

K 15703			119.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 6400 P265/70R17	2678	1753	4431	3925	3750	32.7	12.7	74.4	19.5	—	31.5	22.8	—	35.3	26.3	9.5	71.9	16.8	—	26.7	20.1	—	28.8

K 15903			133.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 6400 P265/70R17	2764	1818	4582	3925	3750	32.5	12.8	74.1	19.3	—	31.3	22.6	—	35.1	26.3	9.8	71.7	16.7	—	26.7	20.1	—	28.7

K 15753			143.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 6400 P245/75R16	3054	1924	4979	3650	3600	31.1	12.8	73.5	18.4	—	30.2	21.7	22.7	33.7	25.8	11.0	71.7	16.7	—	26.2	20.1	20.7	28.3
²⁾ 6400 P265/70R17	3054	1924	4979	3650	3600	31.7	12.8	74.1	19.1	—	30.8	22.4	23.3	34.3	26.5	11.6	72.3	17.4	—	26.8	20.7	21.3	28.9
²⁾ 6400 P275/55R20	3159	2076	5236	3650	3600	31.5	13.2	74.1	19.2	—	30.7	22.5	23.3	34.0	26.8	12.4	72.5	18.0	—	27.1	21.3	21.8	29.2
¹⁾ 6900 P245/75R16	3023	2302	5326	3925	4000	30.8	12.3	73.3	18.4	—	30.0	21.7	22.5	33.4	25.6	10.1	71.4	16.2	—	26.0	19.6	20.4	28.1
²⁾ 6900 P265/70R17	3023	2302	5326	3925	4000	30.6	12.7	73.9	18.9	—	30.6	22.2	23.1	34.0	26.3	10.5	72.0	16.7	—	26.6	20.0	21.0	28.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 50

K 15953			157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 6400 P265/70R17	3118	1992	5111	3925	3750	32.2	12.8	74.2	19.1	—	31.2	22.4	23.3	34.8	26.5	11.1	72.6	17.5	—	26.9	20.8	21.8	28.9

K 15543			153.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 7000 P265/70R17	3137	2170	5308	3925	4000	29.8	13.2	73.8	19.0	—	29.7	22.1	22.7	32.7	25.0	11.7	71.8	17.2	—	25.9	20.4	20.7	27.8
²⁾ 7000 P265/70R17	3137	2170	5308	3925	4000	29.8	13.1	73.7	18.9	—	29.6	22.0	22.6	32.6	24.8	11.6	71.7	17.1	—	25.8	20.3	20.5	27.7
²⁾ 7000 P275/55R20	3137	2170	5308	3925	4000	30.1	13.5	74.1	19.3	—	30.0	22.4	23.0	33.0	25.3	12.1	72.1	17.5	—	26.2	20.7	21.0	28.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 51

C 25903			133.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 9200 AF LT245/75R16	3395	1942	5338	4410	6084	35.6	12.9	74.7	20.5	—	34.2	23.4	—	36.1	28.6	11.8	72.2	18.3	—	29.0	20.9	—	29.0
¹⁾ 8500 LT245/75R16	2990	2610	5601	4100	6000	33.4	13.3	73.9	20.2	—	32.6	22.9	—	33.9	28.4	11.7	72.3	18.3	—	28.9	20.9	—	28.8
²⁾ 8500 & ZW9 LT245/75R16	3011	2329	5341	4100	6000	34.2	13.2	74.2	20.3	—	33.1	23.1	—	—	28.4	11.7	72.3	18.3	—	28.9	21.0	—	—
¹⁾ 9200 LT245/75R16	2866	2177	5044	4410	6084	34.6	13.2	76.4	20.4	—	33.4	25.2	—	37.1	28.6	11.0	73.8	17.7	—	28.9	22.4	—	31.1
²⁾ 9200 & ZW9 LT245/75R16	2870	1813	4683	4410	6084	35.5	13.0	76.8	20.6	—	34.1	25.4	—	—	28.6	11.0	73.8	17.7	—	28.9	22.4	—	—

C 25753			143.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 9200 LT245/75R16	3033	2187	5221	4410	6084	34.5	13.2	76.8	20.4	—	33.6	25.1	25.7	37.1	28.7	11.3	74.0	17.9	—	28.9	22.5	22.9	31.2

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE **52**

C 25953			157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
²⁾ 8500 LT245/75R16	3226	2806	6033	4500	6084	33.0	13.4	75.9	20.0	—	32.4	24.6	25.0	35.5	28.3	11.3	74.9	18.1	—	28.9	22.7	23.2	30.8
¹⁾ 9200 LT245/75R16	3119	2247	5367	4500	6084	33.5	13.2	76.5	20.2	—	33.5	24.9	25.5	36.9	28.7	11.2	74.1	17.8	—	28.9	22.4	22.8	31.1
²⁾ 9200 AF LT245/75R16	3687	2336	6024	4500	6084	34.4	13.0	76.4	20.1	—	33.4	24.8	25.4	36.9	28.5	12.1	74.6	18.4	—	29.0	23.0	23.3	31.0

C 25743			143.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 9200 LT245/75R16	3068	2304	5373	4410	6084	34.2	13.2	77.4	20.3	—	33.4	25.0	25.7	36.7	28.7	11.4	74.5	17.9	—	28.9	22.5	23.0	31.2

C 25943			157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 9200 LT245/75R16	3172	2368	5541	4670	6084	34.1	13.2	77.1	20.1	—	33.2	24.8	25.5	—	28.7	11.0	74.4	17.7	—	28.9	22.3	22.8	—
²⁾ 9200 & ZW9 LT245/75R16	3184	1999	5184	4670	6084	35.0	13.1	77.5	20.3	—	34.0	25.0	25.8	—	28.7	11.0	74.4	17.7	—	28.9	22.3	22.8	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 53

K 25903			133.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
²⁾ 8500 AF LT245/75R16	3293	2704	5998	4500	6084	33.3	13.2	75.6	20.1	—	32.5	24.8	—	35.8	28.1	11.3	74.8	18.2	—	28.8	22.9	—	30.5
¹⁾ 9200 & ZW9 LT245/75R16	3133	1802	4936	4500	6084	35.6	12.9	76.3	20.6	—	34.2	25.4	—	—	28.5	11.2	74.0	17.9	—	28.8	22.6	—	—
²⁾ 9200 & E63 LT245/75R16	3184	2163	5348	4500	6084	34.7	13.0	76.0	20.4	—	33.5	25.1	—	37.2	28.5	11.3	74.1	18.0	—	28.8	22.6	—	31.0
²⁾ 9200 & VYU LT245/75R16	3192	2163	5356	4800	6084	34.7	13.1	76.0	20.4	—	33.5	25.2	—	37.2	28.5	10.8	74.1	17.7	—	28.8	22.4	—	30.9

K 25753			143.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 9200 LT245/75R16	3337	2249	5587	4800	6084	34.3	13.1	76.7	20.3	—	33.4	25.0	25.6	36.8	28.5	10.9	74.2	17.8	—	28.8	22.4	22.9	31.0
²⁾ 9200 & VYU LT245/75R16	3386	2353	5740	4800	6084	33.9	13.2	76.5	20.2	—	33.0	24.9	25.4	36.4	28.4	11.1	74.3	17.9	—	28.8	22.5	22.9	30.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 54

K 25953			157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
²⁾ 8500 AF LT245/75R16	3472	2811	6284	4500	6084	33.0	13.3	75.9	19.9	—	32.3	24.5	24.9	35.5	28.1	11.7	75.1	18.3	—	28.8	22.9	23.3	30.6
¹⁾ 9200 LT245/75R16	3374	2258	5633	4670	6084	34.3	13.1	76.5	20.2	—	33.4	24.9	25.4	36.8	28.5	11.3	74.3	17.9	—	28.9	22.5	22.9	31.0
²⁾ 9200 & VYU LT245/75R16	3383	2258	5642	4800	6084	34.3	13.2	76.5	20.2	—	33.4	24.9	25.4	36.8	28.5	11.2	74.3	17.8	—	28.9	22.5	22.9	30.9

K 25743			153.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 8600 LT245/75R16	3414	2404	5819	4410	6000	33.8	13.3	77.1	20.1	—	33.0	24.8	25.5	36.3	28.3	11.7	75.1	18.3	—	28.9	22.9	23.4	30.8
¹⁾ 9200 LT245/75R16	3340	2446	5787	4670	6084	33.9	13.2	77.1	20.1	—	33.1	24.8	25.5	36.4	28.6	11.2	74.7	17.9	—	28.9	23.8	23.0	31.0
²⁾ 9200 & VYU LT245/75R16	3419	2532	5952	4800	6084	33.6	13.2	77.1	20.1	—	32.9	24.8	25.4	36.1	28.5	11.2	74.8	17.9	—	28.9	22.5	23.1	31.0

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 55

K 25943			167.0" Wheelbase			Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 9200 LT245/75R16	3451	2577	6029	4800	6084	33.6	13.3	76.8	20.0	—	32.8	24.7	25.3	36.1	28.5	11.3	74.9	17.9	—	28.9	22.5	23.0	31.0
²⁾ 9200 & ZW9 LT245/75R16	3463	2208	5672	4800	6084	34.5	13.2	77.2	20.2	—	33.5	24.9	25.6	37.0	28.5	11.3	74.9	17.9	—	28.9	22.5	23.0	31.0

C 35953			157.5" Wheelbase			Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 11400 LT215/85R16	3156	2767	5924	4670	8550	35.7	13.1	76.8	20.3	—	34.0	25.1	25.7	37.6	28.6	11.1	74.4	17.6	—	28.9	22.2	22.6	31.0

C 35943			167.0" Wheelbase			Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 11400 LT215/85R16	3244	2760	6005	4670	8550	35.0	13.1	77.5	20.3	—	34.0	25.0	25.8	37.5	28.5	11.3	75.0	17.7	—	28.9	22.3	22.7	31.0
²⁾ 11400 & ZW9 LT215/85R16	3260	2347	5608	4670	8550	35.9	13.0	77.9	20.5	—	34.7	25.3	26.2	—	28.5	11.4	75.0	17.7	—	28.9	22.3	22.7	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE **56**

GVW/Tire	133.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 9900 & VYU LT265/75R16	3141	2014	5156	4800	6500	37.2	13.4	77.3	21.4	—	35.5	26.3	—	39.7	30.1	11.3	74.7	18.3	—	30.1	23.0	—	32.6
¹⁾ 9900 & VYU LT265/75R16	3139	2332	5472	4800	6500	36.4	13.5	77.0	21.2	—	34.9	26.1	—	—	30.1	11.3	74.7	18.3	—	30.1	23.0	—	—
¹⁾ 11400 LT215/85R18	3137	2565	5703	4500	8550	35.7	13.0	76.4	20.7	—	34.3	25.5	—	38.2	28.5	11.4	74.3	17.9	—	28.9	22.5	—	30.9
²⁾ 11400 & ZW9 LT215/85R16	3143	2238	5382	4500	8550	36.5	12.8	76.7	20.8	—	34.9	25.7	—	—	28.4	11.4	74.3	17.9	—	28.9	22.5	—	—
²⁾ 11400 & VYU LT215/85R16	3146	2565	5712	4800	8550	35.7	12.9	76.4	20.6	—	34.3	25.5	—	38.2	28.5	10.8	74.3	17.6	—	28.9	22.3	—	30.9
²⁾ 11400 & VYU LT215/85R16	3151	2238	5390	4800	8550	36.5	12.8	76.7	20.8	—	34.9	25.7	—	—	28.4	10.9	74.3	17.6	—	28.9	22.3	—	—

GVW/Tire	157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 9900 & SRW LT265/75R16	3372	2463	5836	4800	6500	35.2	13.8	77.2	20.9	—	34.2	25.6	26.1	37.7	29.1	11.8	74.6	18.3	—	29.4	23.0	23.3	31.6
²⁾ 11400 LT215/85R16	3388	2712	6101	4800	8550	35.0	13.1	76.8	20.3	—	33.9	25.1	25.7	37.5	27.5	11.4	74.4	17.6	—	28.2	22.2	22.4	30.0

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 57

K 35943			167.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 9900 LT265/75R16	3478	2788	6267	4800	6500	35.3	13.8	77.9	20.8	—	34.3	25.5	26.3	37.8	30.0	12.0	75.7	18.5	—	30.1	23.2	23.7	32.5
²⁾ 9900 & ZW9 LT265/75R16	3492	2373	5866	4800	6500	36.3	13.6	78.4	21.0	—	35.1	25.7	26.7	—	30.0	12.0	75.7	18.5	—	30.1	23.2	23.7	—
¹⁾ 11400 LT215/85R16	3499	2888	6388	4800	8550	34.7	13.2	77.4	20.2	—	33.7	25.0	25.7	37.2	28.4	11.5	75.1	17.8	—	28.9	22.4	22.8	30.9
²⁾ 11400 & ZW9 LT215/85R16	3513	2472	5986	4800	8550	35.7	13.0	77.8	20.4	—	34.5	25.2	26.1	—	28.4	11.5	75.2	17.9	—	28.9	22.5	22.8	—

C 36003			137.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 11400 LT215/85R16	2990	2275	5266	4500	8550	33.5	13.0	76.2	20.6	—	32.0	25.3	—	—	26.8	11.0	74.4	17.8	—	27.1	22.4	—	—

C 36053			161.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 11400 LT215/85R16	3232	2497	5730	4670	8550	33.0	13.1	76.7	20.4	—	31.7	25.0	25.6	—	26.8	11.2	74.6	17.8	—	27.1	22.4	22.8	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 58

C 36403			161.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 11400 LT215/85R16	3120	2229	5350	4670	8550	33.4	13.1	76.0	20.5	—	32.0	25.1	—	—	26.8	11.0	74.5	17.7	—	27.1	22.3	—	—

K 36003			137.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 12000 LT215/85R16	3249	2300	5550	4670	8600	33.2	13.0	76.1	20.5	—	31.7	25.2	—	—	25.8	11.3	72.5	17.7	—	26.3	22.2	—	—
²⁾ 12000 & VYU LT215/85R16	3249	2300	5550	4800	8600	33.3	13.0	76.2	20.6	—	31.8	25.3	—	—	25.9	11.1	73.8	17.6	—	26.4	22.2	—	—

K 36053			161.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 12000 LT215/85R16	3537	2510	6048	4800	8600	32.7	13.1	76.6	20.3	—	31.5	25.0	25.5	—	25.9	11.6	74.1	17.9	—	26.4	22.4	22.6	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 59

K 36403		161.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 12000 LT215/85R16	3401	2273	5675	4800	8600	33.2	13.1	75.9	20.4	—	31.8	25.1	—	—	25.9	11.4	74.0	17.7	—	26.4	22.2	—	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required


2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 60

G/H Van - Full Body

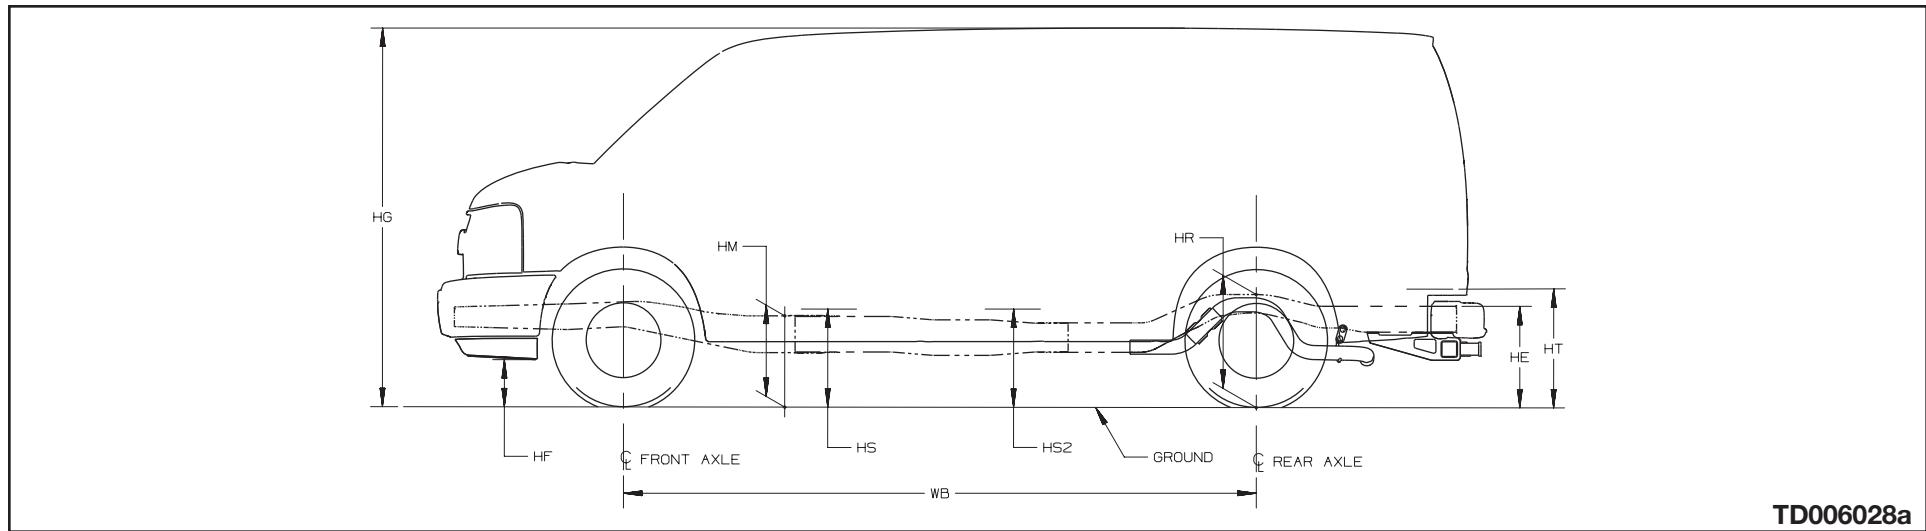

Heights (To Ground)

- HE Top of Frame at End
- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Normal Top of Frame
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 61

G 13405			135.0" Wheelbase			Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
²⁾ 7200 LT225/75R16	2656	2030	4686	3600	4000	—	15.1	81.8	17.7	—	25.3	18.0	18.9	27.0	—	13.4	79.2	15.7	—	22.1	15.9	16.5	23.2

G 13406			135.0" Wheelbase			Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 7200 P245/75R16	2772	2465	5237	3600	4000	—	15.5	81.4	17.8	—	24.8	18.1	18.7	26.3	—	14.0	79.5	16.1	—	22.2	16.3	16.7	23.2
¹⁾ 7200 LT225/75R16	2772	2465	5237	3600	4000	—	15.2	81.1	17.5	—	24.5	17.7	18.4	26.0	—	13.7	79.3	15.9	—	22.1	16.1	16.6	23.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 62

H 13405			135.0" Wheelbase			Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 7200 LT225/75R16	2904	2026	4930	3600	4000	—	14.9	81.8	17.7	—	25.3	17.9	18.9	27.1	—	14.0	79.4	16.0	—	22.1	16.2	16.6	23.1
¹⁾ 7200 P245/75R16	2904	2026	4930	3600	4000	—	15.2	82.2	18.0	—	25.7	18.2	19.2	27.4	—	14.2	79.6	16.2	—	22.3	16.4	16.8	23.2

H 13406			135.0" Wheelbase			Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 7200 LT225/75R16	3004	2442	5446	3600	4000	—	15.0	81.1	17.4	—	24.6	17.7	18.4	26.1	—	14.1	79.4	16.1	—	22.1	16.3	16.7	23.0
¹⁾ 7200 P245/75R16	3004	2442	5446	3600	4000	—	15.3	81.4	17.7	—	24.9	18.0	18.7	26.4	—	14.4	79.6	16.3	—	22.2	16.5	16.9	23.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 63

G 23405			135.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 7300 LT245/75R16	2638	2188	4826	3600	4380	—	15.5	83.2	18.6	—	26.6	18.8	19.9	28.5	—	13.9	80.3	16.5	—	23.0	16.7	17.4	23.9
²⁾ 8500 LT245/75R16	2806	2790	5596	4100	5360	—	16.8	83.1	19.3	—	26.6	19.5	20.3	28.2	—	14.4	81.6	17.3	—	24.4	17.5	18.5	25.4
²⁾ 8600 LT225/75R16	2909	2260	5169	4100	5360	—	16.5	83.4	19.3	—	26.9	19.5	20.4	28.6	—	14.5	80.9	17.1	—	23.8	17.3	18.1	24.7

G 23406			135.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 8500 KL6 LT245/75R16	3006	3118	6124	4100	5360	—	17.2	82.8	19.4	—	26.2	19.6	20.1	27.5	—	15.1	81.6	17.7	—	24.4	17.9	18.8	25.3
²⁾ 8600 LT225/75R16	3116	2597	5713	4100	5360	—	16.5	82.8	19.0	—	26.3	19.2	20.0	27.9	—	14.8	81.0	17.3	—	23.8	17.5	18.2	24.7
²⁾ 8600 & LLY LT225/75R16	3640	2631	6271	4100	5360	—	16.4	82.7	18.9	—	26.3	19.1	19.9	27.8	—	16.0	81.2	18.0	—	23.8	18.2	18.6	24.5
²⁾ 8600 & LLY LT245/75R16	3640	2631	6271	4100	5360	—	16.8	83.3	19.4	—	26.8	19.7	20.5	28.4	—	16.5	81.8	18.5	—	24.4	18.7	19.1	25.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 64

GVW/Tire	155.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 7300 LT245/75R16	3154	2280	5434	3600	4380	—	15.4	82.9	18.2	—	26.4	18.5	19.5	28.2	—	14.9	80.5	17.0	—	22.9	17.3	17.7	23.7
²⁾ 8500 LT245/75R16	2973	2776	5749	4300	5360	—	17.2	83.2	19.5	—	26.6	19.7	20.3	28.0	—	14.8	81.7	17.4	—	24.3	17.7	18.6	25.3
²⁾ 8600 LT225/75R16	3074	2230	5304	4300	5360	—	16.5	83.4	19.2	—	26.9	19.4	20.3	28.6	—	14.5	81.0	17.0	—	23.8	17.3	18.1	24.7
²⁾ 8600 LT245/75R16	3074	2230	5304	4300	5360	—	17.0	83.9	19.7	—	27.5	19.9	20.8	29.2	—	15.0	81.6	17.6	—	24.3	17.8	18.6	25.3

GVW/Tire	135.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 7300 LT245/75R16	2938	2196	5134	3600	4380	—	15.4	83.2	18.5	—	26.6	18.7	19.9	28.5	—	14.6	80.4	16.9	—	23.0	17.1	17.6	23.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 65

G 33405			135.0" Wheelbase		Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 9600 LT245/75R16	2935	2270	5205	4300	6084	—	17.0	84.1	19.7	—	27.6	20.1	21.1	29.4	—	14.9	81.3	17.4	—	24.3	17.7	18.5	25.3

G 33406			135.0" Wheelbase		Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 9600 LT245/75R16	3065	2528	5593	4300	6084	—	17.0	83.9	19.7	—	27.5	19.9	20.8	29.1	—	15.0	81.4	17.5	—	24.2	17.7	18.5	25.3

G 33705			155.0" Wheelbase		Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 9600 LT245/75R16	3042	2376	5418	4300	6084	—	17.0	83.6	19.6	—	27.2	19.9	20.8	28.8	—	15.1	81.3	17.4	—	24.3	17.7	18.4	25.3

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 66

G 33706		155.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 9600 LT245/75R16	3258	2605	5863	4300	6084	—	17.0	83.6	19.7	—	27.2	19.8	20.6	28.8	—	15.4	81.4	17.8	—	24.3	17.9	18.6	25.3

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required


2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 67

G/H Van - Fullsize Cutaway

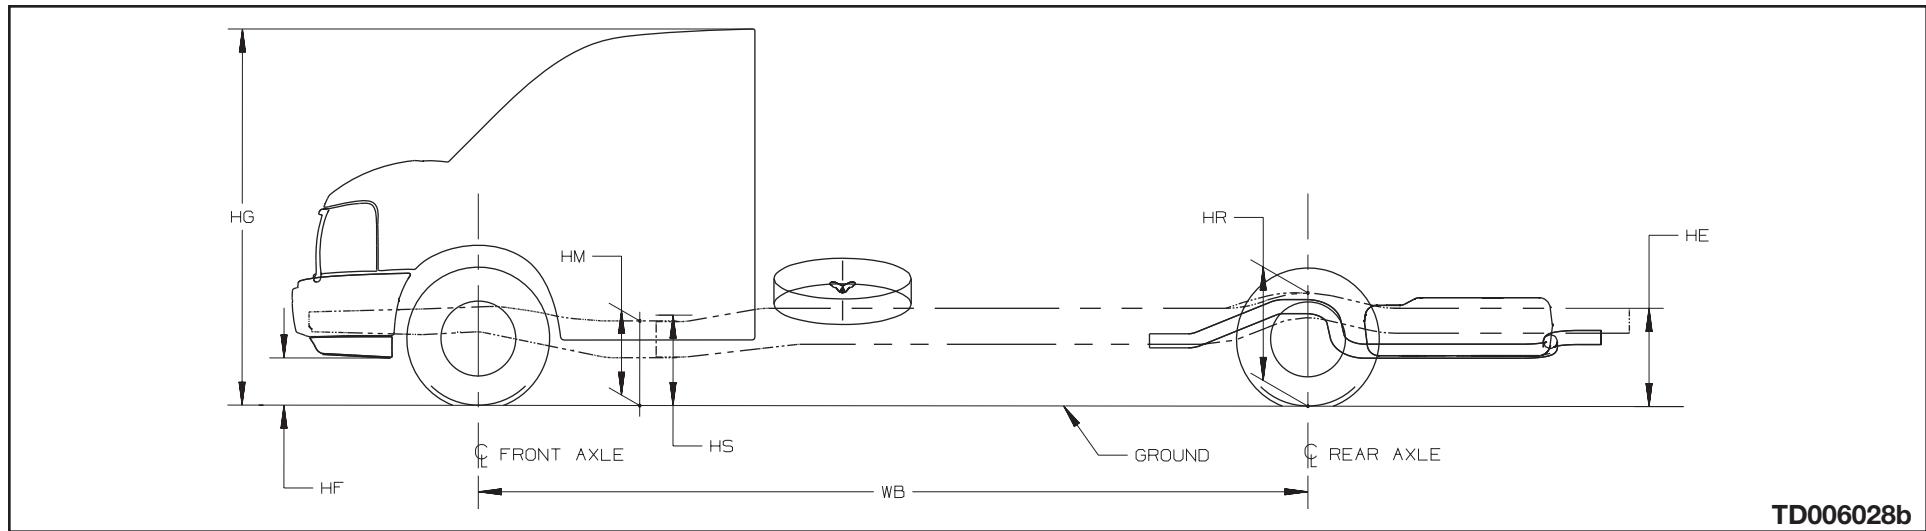

Heights (To Ground)

HE	Top of Frame at End
HF	Bottom of Front Air Deflector or Bumper
HG	Roof Height
HM	Normal Top of Frame
HR	Top of Frame at Centerline of Rear Axle
HS	Step H-Point-Front
HS2	Step H-Point-Second
HT	Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

PAGE **68**

GVW/Tire	139.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 8600 LT225/75R16	2915	1550	4465	4100	5360	25.0	16.5	82.1	22.9	—	27.2	19.5	—	—	21.4	14.5	80.7	20.9	—	24.6	17.5	—	—
²⁾ 9600 LT245/75R16	2915	1550	4465	4100	6084	28.9	16.5	83.6	24.8	—	30.0	20.7	—	—	25.1	14.6	81.7	22.5	—	27.0	18.5	—	—
²⁾ 10,000 LT225/75R16	2956	1827	4783	4100	7500	28.1	16.0	83.0	24.2	—	29.3	20.1	—	—	21.9	14.1	81.8	21.7	—	25.3	17.9	—	—
²⁾ 12,000 LT225/75R16	2956	1831	4787	4300	8600	28.2	16.0	83.0	24.2	—	29.3	20.2	—	—	22.5	14.1	80.9	21.2	—	25.2	17.5	—	—
²⁾ 12,300 LT225/75R16	3005	1919	4924	4300	8600	28.4	16.0	83.0	24.3	—	29.4	20.2	—	—	22.7	14.2	80.6	21.1	—	25.3	17.5	—	—

GVW/Tire	159.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 9600 LT245/75R16	3012	1625	4637	4100	6084	28.6	16.6	83.3	24.5	—	30.0	20.6	—	—	24.9	14.8	81.7	22.2	—	27.1	18.5	—	—
²⁾ 10,000 LT225/75R16	3012	1625	4637	4100	7500	27.9	16.1	82.8	23.9	—	29.3	20.0	—	—	21.7	14.4	81.9	21.4	—	25.3	17.8	—	—
²⁾ 12,000 LT225/75R16	3012	1625	4637	4300	8600	28.0	16.3	82.9	24.0	—	29.4	20.2	—	—	22.2	14.5	81.0	21.1	—	25.2	17.6	—	—
²⁾ 12,300 & YF1 LT225/75R16	3064	1714	4778	4300	8600	28.1	16.2	82.9	24.0	—	29.5	20.1	—	—	22.4	14.5	80.7	21.0	—	25.2	17.6	—	—
²⁾ 14,050 LT225/75R16	3062	1723	4785	4600	9450	28.0	16.9	83.3	24.3	—	29.6	20.5	—	—	22.3	15.2	80.3	20.9	—	25.0	17.8	—	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 69

GVW/Tire	177.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 12,000 LT225/75R16	2998	1695	4693	4300	8600	27.9	16.6	83.0	24.0	—	29.6	20.2	—	—	23.3	14.8	81.4	21.4	—	26.0	17.9	—	—
²⁾ 12,300 & YF1 LT225/75R16	3051	1774	4825	4300	8600	28.2	16.5	83.0	24.0	—	29.7	20.2	—	—	23.5	14.8	81.1	21.4	—	26.1	17.9	—	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.

Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required


2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 70

U/X Crossover Sport Van

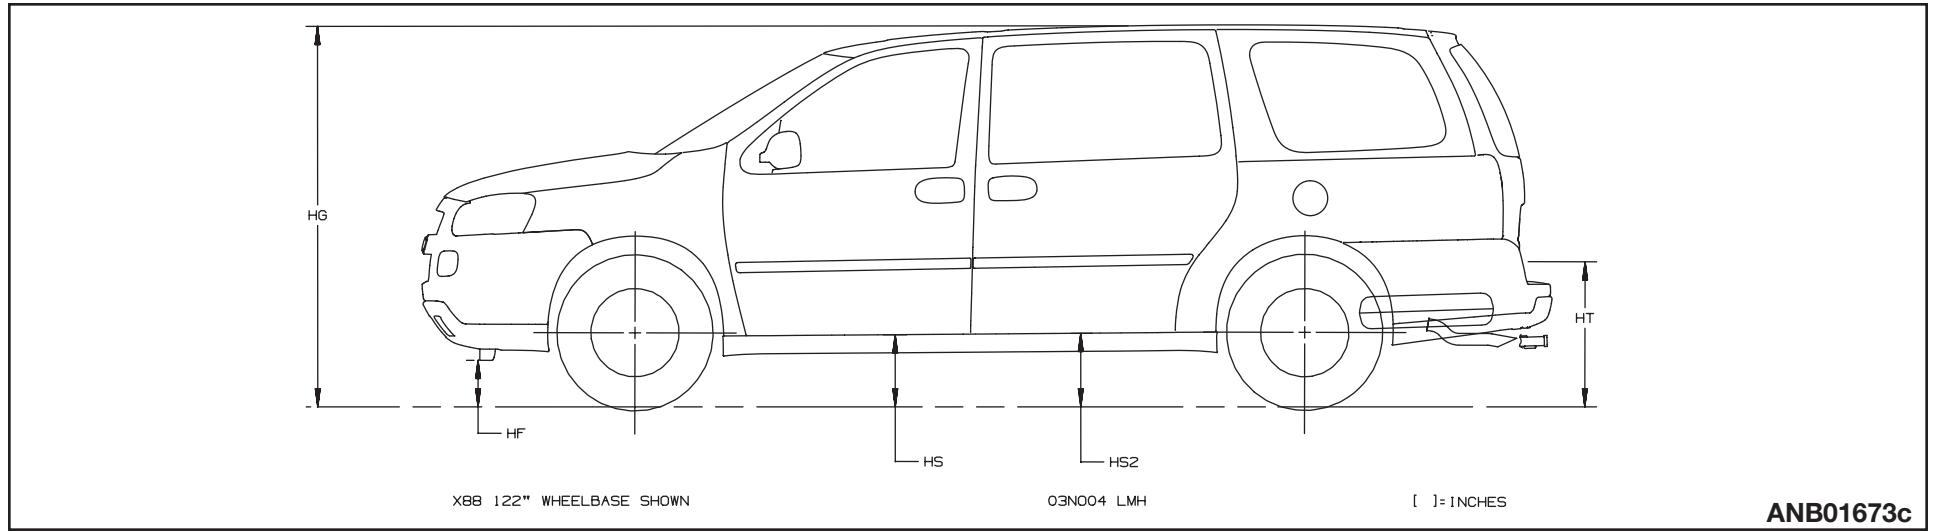

Heights (To Ground)

- HE Top of Frame at End
HF Bottom of Front Air Deflector or Bumper
HG Roof Height
HM Normal Top of Frame
HR Top of Frame at Centerline of Rear Axle
HS Step H-Point-Front
HS2 Step H-Point-Second
HT Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

PAGE 71

U 11416			113.0" Wheelbase			Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
5622 P225/60R17	2359	1823	4183	2866	2756	—	7.2	68.1	—	—	—	16.6	19.3	24.7	—	7.1	65.2	—	—	—	15.0	16.7	20.7
5622 & G67 P225/60R17	2359	1823	4183	2866	2756	—	7.2	68.1	—	—	—	16.6	19.3	24.7	—	6.6	66.9	—	—	—	15.7	18.1	23.1

U 12216			121.0" Wheelbase			Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 5622 P225/60R17	2318	1854	4172	2866	2756	—	7.4	68.2	—	—	—	16.7	19.4	25.2	—	4.8	65.7	—	—	—	14.1	15.9	19.3
¹⁾ 5622 & G67 P225/60R17	2318	1854	4172	2866	2756	—	7.4	68.2	—	—	—	16.7	19.4	25.2	—	4.4	67.0	—	—	—	14.7	18.0	23.8
²⁾ 5622 & FE1 & Y3G/Y3H/Z10 P225/60R17	2318	1854	4172	2866	2756	—	7.3	68.5	—	—	—	16.8	19.6	25.5	—	4.7	66.0	—	—	—	14.2	16.1	19.7
²⁾ 5622 & FE3 & Y3G/Y3H/Z10 P225/60R17	2318	1854	4172	2866	2756	—	7.3	68.5	—	—	—	16.8	19.7	25.6	—	4.7	66.0	—	—	—	14.3	16.1	19.7
²⁾ 5622 & G67 & FE3 & Y3G/Y3H/Z10 P225/60R17	2318	1854	4172	2866	2756	—	7.3	68.5	—	—	—	16.8	19.7	25.6	—	4.5	67.0	—	—	—	14.6	17.9	23.7
²⁾ 5842 & W49 & G67 P225/60R17	2318	1854	4172	2866	3006	—	7.3	68.3	—	—	—	16.7	19.5	25.4	—	4.2	66.9	—	—	—	14.5	17.8	23.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model