

VEHICLE AND FRAME HEIGHT CHARTS

S/T MIDSIZE TRUCK

S/T 15403 Midsize Regular Cab Pickup.....	1
Heights (To Ground).....	1
111.0" Wheelbase – S 15403	2
111.0" Wheelbase – T 15403.....	2
S/T 15653 Midsize Extended Cab Pickup.....	3
Heights (To Ground).....	3
126.0" Wheelbase – S 15653	4
126.0" Wheelbase – T 15653.....	4
S/T 15643 Midsize Crew Cab Pickup	5
Heights (To Ground).....	5
126.0" Wheelbase – S 15643	6
126.0" Wheelbase – T 15643.....	6
S/T 15603 Midsize Chassis Cab.....	7
Heights (To Ground).....	7
126.0" Wheelbase – S 15603	8

C/K FULLSIZE TRUCK

C/K 10000/20000 Light Duty Fullsize Utility.....	9
Heights (To Ground).....	9
116.0" Wheelbase – C 10706	10
130.0" Wheelbase – C 10906	11
116.0" Wheelbase – K 10706	12
130.0" Wheelbase – K 10906	13
130.0" Wheelbase – C 20906	13
130.0" Wheelbase – K 20906	14

VEHICLE AND FRAME HEIGHT CHARTS

C/K FULLSIZE TRUCK – (Continued)

C/K 10000/20000 Light Duty Fullsize Pickups.....	15
Heights (To Ground).....	15
119.0" Wheelbase – C 10703	16
133.0" Wheelbase – C 10903	16
133.9" Wheelbase – C 10553	16
143.5" Wheelbase – C 10753	17
157.5" Wheelbase – C 10953	17
143.5" Wheelbase – C 10543	17
119.0" Wheelbase – K 10703	18
133.0" Wheelbase – K 10903	18
133.9" Wheelbase – K 10553	18
143.5" Wheelbase – K 10753	19
157.5" Wheelbase – K 10953	19
143.5" Wheelbase – K 10543	19
C/K 20000 Fullsize Pickups & Chassis-Cabs	20
Heights (To Ground).....	20
133.0" Wheelbase – C 20903	21
143.5" Wheelbase – C 20753	22
157.5" Wheelbase – C 20953	23
153.0" Wheelbase – C 20743	24
167.0" Wheelbase – C 20943	25
133.0" Wheelbase – K 20903	26
143.5" Wheelbase – K 20753	27
157.5" Wheelbase – K 20953	28

VEHICLE AND FRAME HEIGHT CHARTS

C/K FULLSIZE TRUCK – C/K 20000 Fullsize Pickups & Chassis-Cabs – (Continued)

153.0" Wheelbase – K 20743	29
167.0" Wheelbase – K 20943	30

C/K 30000 Fullsize Pickups & Chassis-Cabs

Heights (To Ground).....	31
133.0" Wheelbase – C 30903	32
157.5" Wheelbase – C 30953	33
167.0" Wheelbase – C 30943	34
133.0" Wheelbase – K 30903	35
157.5" Wheelbase – K 30953	36
167.0" Wheelbase – K 30943	37

C/K 31000 Fullsize Chassis-Cabs.....

Heights (To Ground).....	38
137.0" Wheelbase – C 31003	39
161.5" Wheelbase – C 31053	40
161.5" Wheelbase – C 31403	41
137.0" Wheelbase – K 31003	42
161.5" Wheelbase – K 31053	43
161.5" Wheelbase – K 31403	44

G/H FULLSIZE VAN

G/H Full Body Van

Heights (To Ground).....	45
135.0" Wheelbase – G 13405	46
135.0" Wheelbase – G 13406	46
135.0" Wheelbase – H 13405	47

VEHICLE AND FRAME HEIGHT CHARTS

G/H FULLSIZE VAN – G/H Full Body Van – (Continued)

135.0" Wheelbase – H 13406	47
135.0" Wheelbase – G 23405	48
135.0" Wheelbase – G 23406	48
155.0" Wheelbase – G 23705	49
135.0" Wheelbase – H 23405	49
135.0" Wheelbase – G 33405	50
135.0" Wheelbase – G 33406	50
155.0" Wheelbase – G 33705	50
155.0" Wheelbase – G 33706	51

G/H Fullsize Cutaway Van	52
---------------------------------------	-----------


Heights (To Ground)	52
139.0" Wheelbase – G 33503	53
159.0" Wheelbase – G 33803	53
177.0" Wheelbase – G 33903	54

U/X CROSSOVER SPORT VAN

U/X Crossover Sport Van	55
Heights (To Ground).....	55
113.0" Wheelbase – U 11416	56
121.0" Wheelbase – U 12216	56

VEHICLE AND FRAME HEIGHT CHARTS

S/T 15403 Midsize Regular Cab Pickup

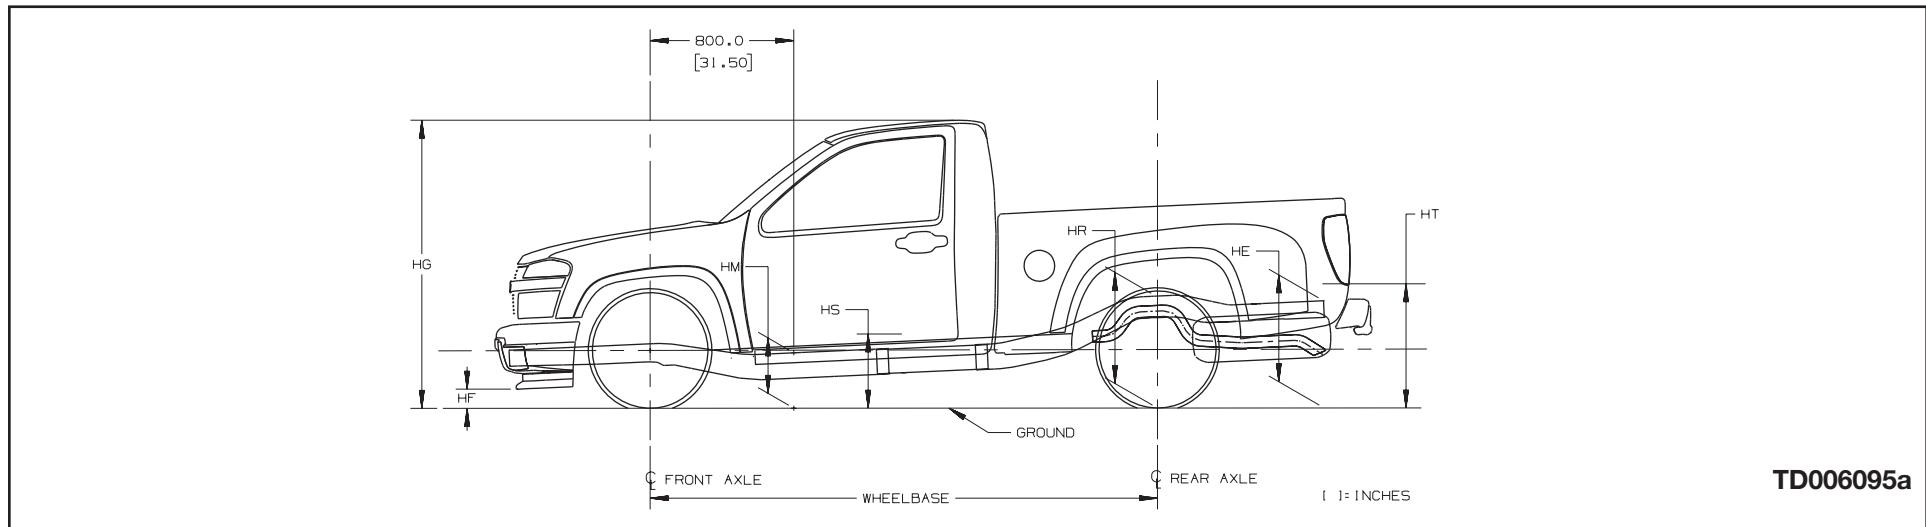

Heights (To Ground)

HF	Bottom of Front Air Deflector or Bumper
HG	Roof Height
HM	Normal Top of Frame
HP	Top of Tailgate (Down)
HR	Top of Frame at Centerline of Rear Axle
HS	Step H-Point-Front
HS2	Step H-Point-Second
HT.....	Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

S 15403	111.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 4400 & ZQ8 P235/50R18	1896	1461	3357	2533	2447	—	10.0	63.8	13.9	—	24.3	17.6	—	26.5	—	7.9	62.1	12.1	—	21.7	15.8	—	22.6
²⁾ 4850 & Z85 P225/75R15	1823	1448	3271	2533	2896	—	11.4	65.5	15.5	—	26.1	19.2	—	28.5	—	9.2	63.0	13.1	—	22.4	16.8	—	23.1
²⁾ 4850 & Z85 P205/75R15	1823	1448	3271	2533	2896	—	10.9	65.0	15.0	—	25.7	18.7	—	28.0	—	8.7	62.5	12.6	—	21.9	16.3	—	22.5
²⁾ 5150 & Z71 P265/75R15	1832	1517	3349	2753	2896	—	14.7	69.0	18.9	—	29.8	22.7	—	32.2	—	11.9	66.5	16.3	—	26.3	20.2	—	27.8

T 15403	111.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 5150 & Z85 P235/75R15	2049	1610	3659	2753	2896	—	13.9	68.2	18.1	—	28.9	21.9	—	31.3	—	11.8	66.1	16.0	—	25.7	19.8	—	26.9
²⁾ 5150 & Z71 P265/75R15	2074	1640	3714	2753	2896	—	14.6	68.9	18.8	—	29.7	22.6	—	32.1	—	12.6	66.9	16.8	—	26.5	20.6	—	27.7


NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

S/T 15653 Midsize Extended Cab Pickup

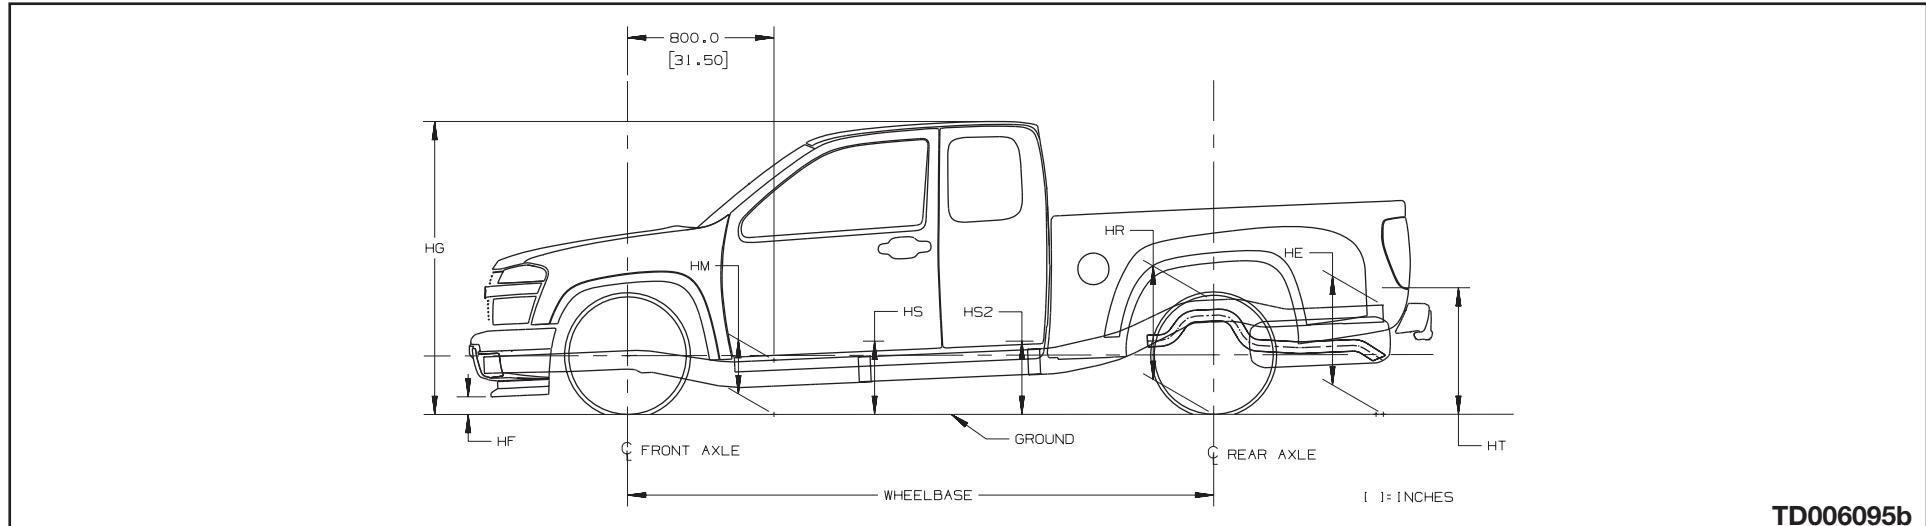

Heights (To Ground)

HF	Bottom of Front Air Deflector or Bumper
HG	Roof Height
HM	Normal Top of Frame
HP	Top of Tailgate (Down)
HR	Top of Frame at Centerline of Rear Axle
HS	Step H-Point-Front
HS2	Step H-Point-Second
HT	Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

S 15653	126.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 4600 & ZQ8 P235/50R18	1945	1602	3547	2533	2447	—	10.1	64.0	13.8	—	24.3	17.4	17.7	26.0	—	8.2	62.3	12.1	—	21.9	15.7	16.0	23.1
²⁾ 5000 & Z85 P225/75R15	1871	1593	3464	2533	2896	—	11.5	65.6	15.4	—	26.1	19.0	19.4	27.9	—	9.5	63.3	13.2	—	22.6	16.7	17.0	23.6
²⁾ 5000 & Z85 P205/75R15	1871	1593	3464	2533	2896	—	11.1	65.1	14.9	—	25.6	18.6	18.9	27.4	—	9.0	62.8	12.7	—	22.1	16.2	16.5	23.1
²⁾ 5300 & Z71 P265/75R15	1889	1673	3562	2753	2896	—	15.0	68.8	18.7	—	29.1	22.2	22.5	30.8	—	12.4	66.0	16.0	—	25.5	19.5	19.7	26.7

T 15653	126.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 5300 & Z85 P235/75R15	2200	1649	3849	2753	2896	—	14.1	67.8	17.8	—	28.1	21.3	21.6	29.7	—	12.7	65.5	15.8	—	24.6	19.1	19.2	25.4
¹⁾ 5300 & Z71 P265/75R15	2224	1679	3903	2753	2896	—	14.9	68.5	18.5	—	28.7	22.0	22.2	30.4	—	13.5	66.3	16.6	—	25.3	19.9	20.0	26.1


NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

S/T 15643 Midsize Crew Cab Pickup

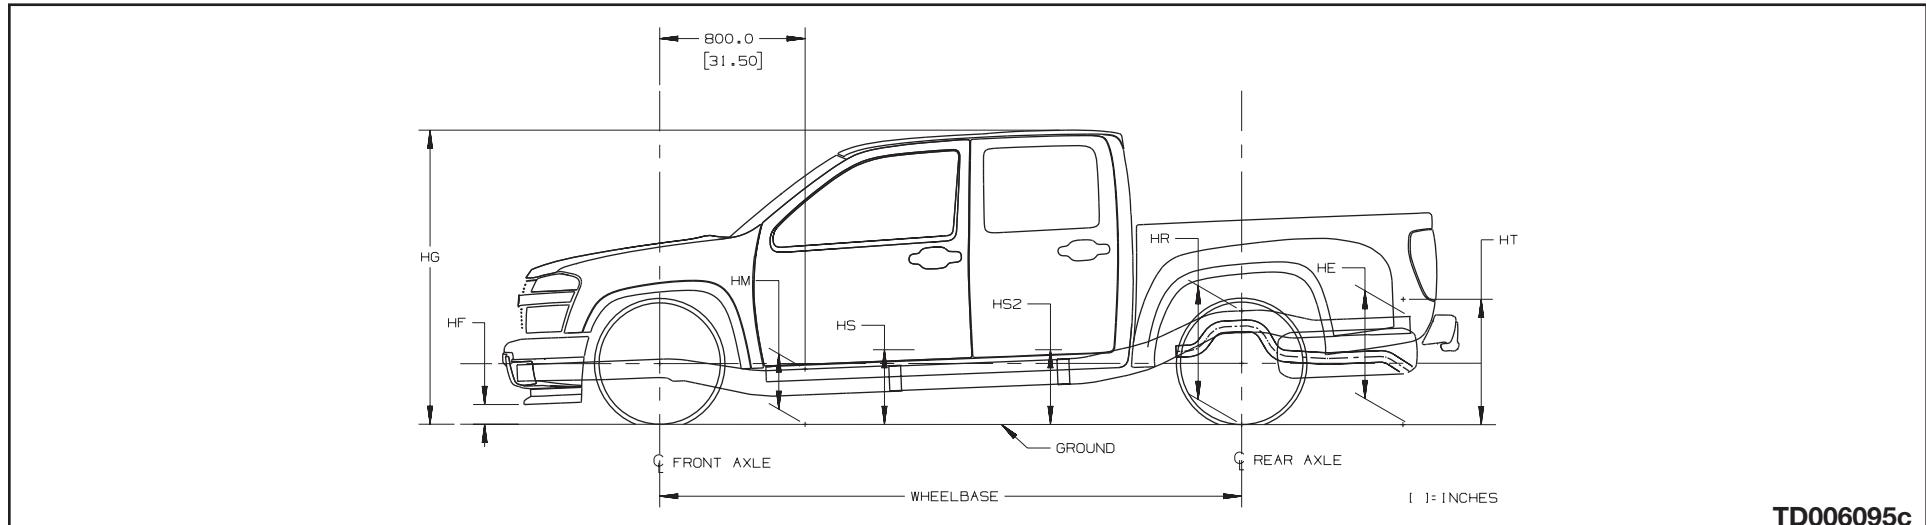

Heights (To Ground)

HF	Bottom of Front Air Deflector or Bumper
HG	Roof Height
HM	Normal Top of Frame
HP	Top of Tailgate (Down)
HR	Top of Frame at Centerline of Rear Axle
HS	Step H-Point-Front
HS2	Step H-Point-Second
HT.....	Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

S 15643	126.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 4900 & ZQ8 P235/50R18	2056	1684	3740	2533	2447	—	10.1	64.3	13.8	—	24.3	17.4	17.9	26.0	—	8.7	62.4	12.2	—	22.0	15.6	16.0	23.4
²⁾ 5000 & Z85 P225/75R15	1974	1661	3635	2533	2896	—	11.5	66.0	15.4	—	26.0	19.0	19.6	27.8	—	9.8	63.8	13.4	—	22.7	16.9	17.2	23.7
²⁾ 5300 & Z71 P265/75R15	2010	1759	3769	2753	2896	—	14.9	69.1	18.6	—	29.1	22.2	22.7	30.8	—	12.7	66.6	16.3	—	25.7	19.8	20.0	26.8

T 15643	126.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 5300 & Z85 P235/75R15	2097	1844	3941	2753	2896	—	14.2	68.1	17.8	—	28.0	21.3	21.7	29.6	—	12.3	65.9	15.7	—	24.9	19.2	19.3	25.9
¹⁾ 5300 & Z71 P265/75R15	2172	1882	4054	2753	2896	—	14.9	68.8	18.5	—	28.7	22.0	22.4	30.3	—	13.3	66.7	16.6	—	25.7	20.0	20.1	26.7

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.


Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

S/T 15603 Midsize Chassis Cab

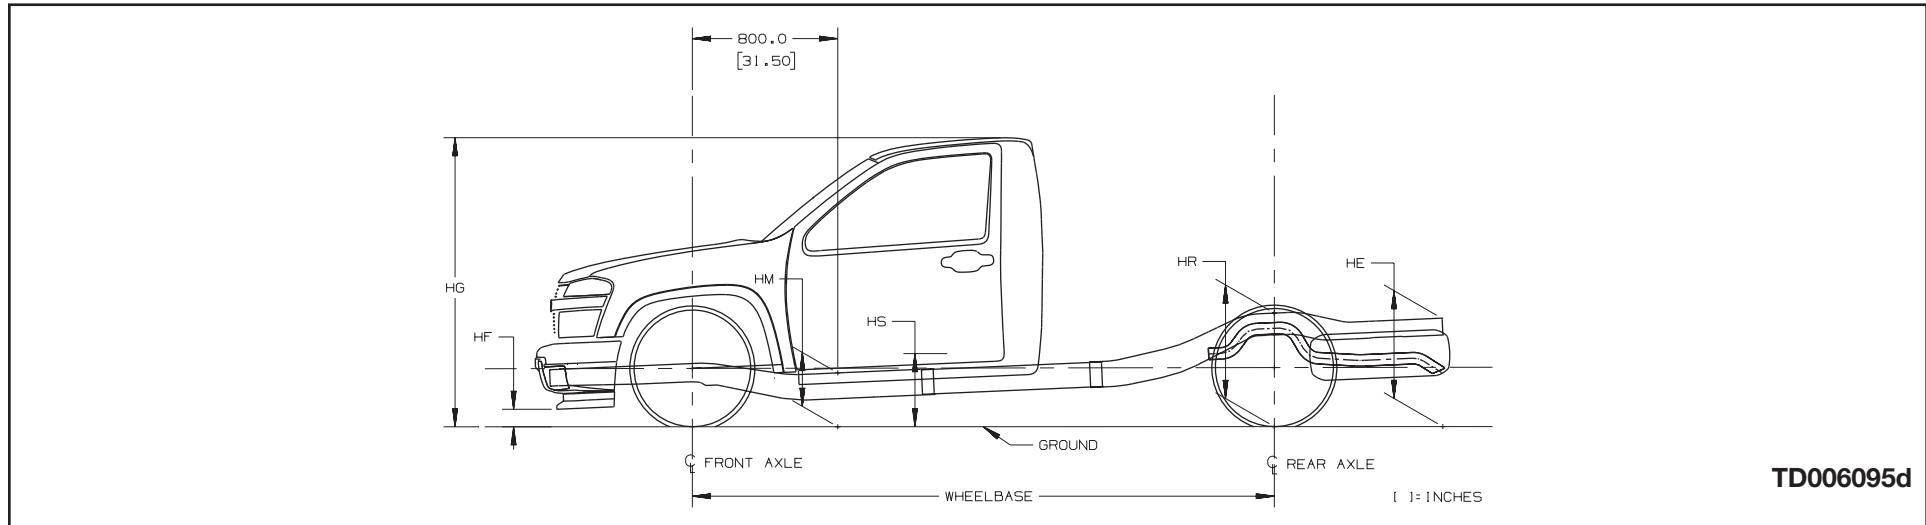

Heights (To Ground)

- HF Bottom of Front Air Deflector or Bumper
HG Roof Height
HM Normal Top of Frame
HP Top of Tailgate (Down)
HR Top of Frame at Centerline of Rear Axle
HS Step H-Point-Front
HS2 Step H-Point-Second
HT Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

S 15603		126.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 5300 & Z71 P265/75R15	1967	1171	3138	2753	2896	-	14.7	68.8	18.8	-	29.5	22.6	-	-	-	12.6	65.9	16.2	-	25.8	19.7	-	-	23.1	30.4	22.0	-	25.3	-	-	-	-
¹⁾ 5300 & Z71 P235/75R15	1967	1171	3138	2753	2896	-	14.1	68.2	18.2	-	28.9	21.9	-	-	-	11.9	65.3	15.5	-	25.2	19.0	-	-	21.5	28.2	20.4	-	23.6	-	-	-	-


NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

C/K 10000/20000 Light Duty Fullsize Utility

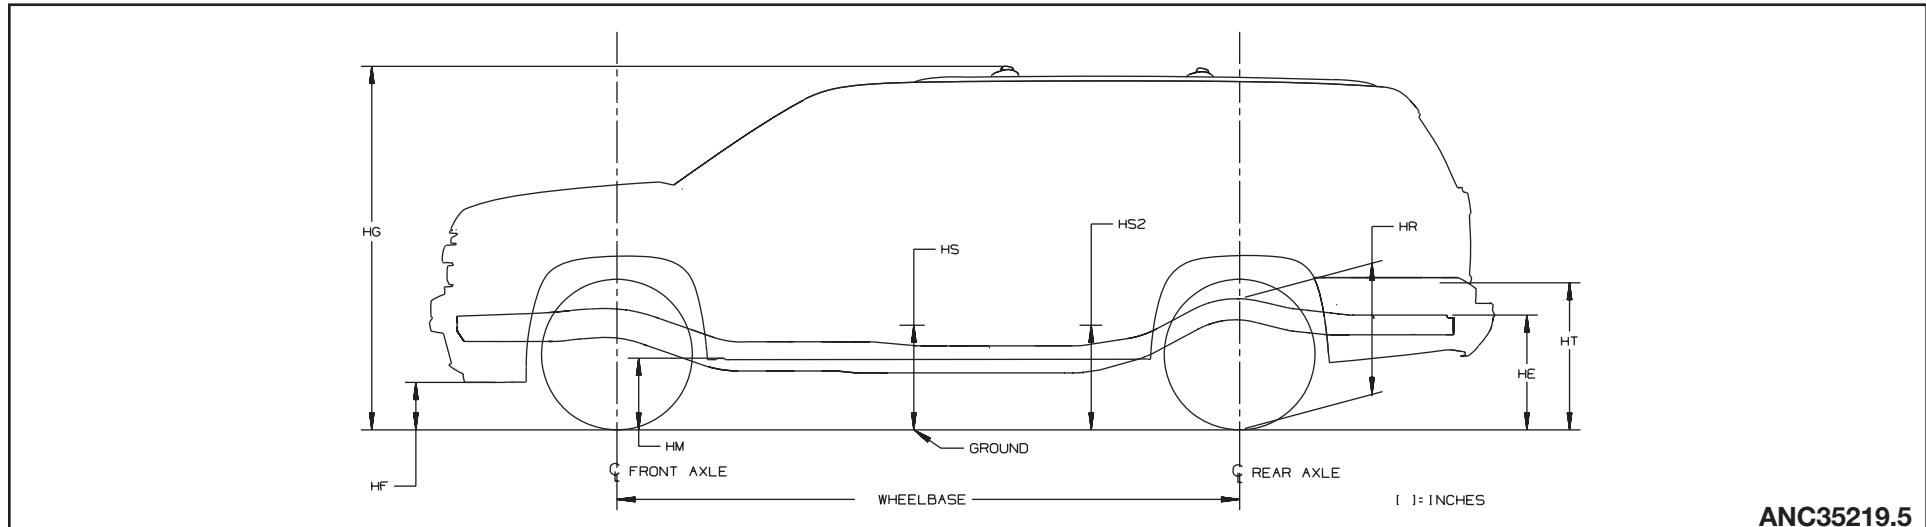

ANC35219.5

Heights (To Ground)

HF	Bottom of Front Facia or Air Deflector
HG	Roof Rack
HM	Chassis Datum Hole
HR	Top of Frame at Centerline of Rear Axle
HS	Step H-Point-Front
HS2	Step H-Point-Second
HT.....	Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

C 10706	116.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 7100 P265/65R18	2873	2688	5561	3200	4200	25.7	8.4	75.4	14.8	35.0	28.5	22.0	22.4	15.2	22.5	7.7	75.3	13.6	34.0	26.1	20.5	20.7	12.8
²⁾ 7200 & Z55 P265/65R18	2974	2861	5835	3250	4200	25.0	8.4	75.0	14.6	34.3	28.0	21.7	22.0	14.5	23.7	7.7	75.0	13.8	33.5	27.0	20.9	21.1	13.5
²⁾ 6700 & PPV P255/60R17	2756	2493	5249	3200	3600	23.7	7.0	73.6	13.2	33.0	26.7	20.4	20.7	13.2	21.6	6.2	72.9	12.1	32.0	24.9	19.0	19.2	11.3
²⁾ 7100 & Z55 & AS3 P275/55R20	2590	2610	5200	3200	4100	25.3	8.8	75.3	15.0	34.6	28.4	22.1	22.4	14.9	24.5	7.0	74.2	13.5	32.9	27.5	20.8	21.2	13.7
²⁾ 7100 & Z55 & AS3 P265/70R17	2590	2610	5200	3200	4100	25.0	8.5	75.0	14.7	34.3	28.1	21.8	22.1	14.6	24.2	6.7	73.9	13.2	32.7	27.1	20.5	20.9	13.4
²⁾ 7000 & Z55 P265/65R18	2687	2626	5313	3250	4100	25.1	8.5	75.0	14.6	34.4	28.1	21.8	22.1	14.6	24.3	7.0	74.4	13.3	32.9	27.1	20.6	21.0	13.7
²⁾ 7000 & Z55 P265/65R18	2687	2626	5313	3250	4100	25.4	8.9	75.4	15.0	34.7	28.4	22.2	22.5	15.0	24.4	7.4	74.8	13.7	33.3	27.5	21.0	21.4	14.2
²⁾ 7100 & ZW7 & AS3 P265/70R17	2590	2610	5200	3200	4100	25.6	8.4	75.3	14.7	34.9	28.5	22.0	22.4	15.1	22.6	7.0	74.2	13.0	33.3	25.9	20.0	20.3	12.6
²⁾ 7100 & ZW7 & AS3 P275/55R20	2590	2610	5200	3200	4100	25.9	8.7	75.6	15.0	35.2	28.7	22.3	22.7	15.4	22.9	7.3	74.5	13.4	33.7	26.3	20.4	20.6	12.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

C 10906	130.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 7200 & Z55 P265/70R17	2660	2527	5187	3300	4200	25.7	8.5	75.5	14.7	34.7	28.5	22.0	22.4	15.2	24.4	6.7	74.5	13.2	33.1	27.3	20.5	21.2	14.2
¹⁾ 7200 & Z55 P275/55R20	2660	2527	5187	3300	4200	25.9	8.7	75.8	15.0	35.0	28.8	22.2	22.7	15.4	24.8	7.0	74.5	13.5	33.3	27.7	20.8	21.5	14.5
¹⁾ 7200 & ZW7 P265/70R17	2736	2669	5405	3300	4200	25.6	8.4	75.4	14.7	34.7	28.6	21.9	22.4	15.1	21.6	6.8	74.7	12.8	32.9	25.3	19.7	20.0	12.2
¹⁾ 7200 & ZW7 P275/55R20	2736	2669	5405	3300	4200	25.9	8.7	75.7	14.9	34.9	28.7	22.2	22.6	15.4	22.0	7.1	75.0	13.1	33.2	25.6	20.0	20.3	12.6

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

K 10706	116.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 7300 & ZW7 P265/65R18	3063	2736	5799	3600	4200	26.1	8.3	75.5	14.8	35.5	28.8	22.1	22.6	15.6	22.9	7.0	75.5	13.4	34.2	26.4	20.5	20.9	13.6
²⁾ 7400 & Z55 P265/65R18	3124	2910	6034	3600	4200	25.4	8.3	75.2	14.6	34.8	28.3	21.9	22.2	14.9	24.2	7.0	75.0	13.5	33.5	27.3	20.8	21.3	14.2
²⁾ 7300 & Z55 & AS3 P265/70R17	2811	2635	5446	3600	4100	24.9	9.3	75.1	14.9	34.2	28.1	22.0	22.2	14.5	24.1	7.1	74.0	13.2	32.2	27.1	20.6	21.1	13.4
²⁾ 7300 & Z55 & AS3 P275/55R20	2811	2635	5446	3600	4100	25.2	9.7	75.4	15.2	34.5	28.4	22.3	22.5	14.8	24.4	7.4	74.3	13.5	32.5	27.5	20.9	21.4	13.7
²⁾ 7100 & Z55 P265/65R18	2844	2778	5622	3550	4100	24.9	9.4	75.1	14.9	34.1	28.0	21.9	22.1	14.4	23.7	7.3	74.7	13.3	32.3	27.0	20.6	21.1	13.9
²⁾ 7100 & Z55 P275/55R20	2844	2778	5622	3550	4100	25.2	9.6	75.4	15.2	34.4	28.3	22.2	22.4	14.7	20.4	7.6	74.9	13.6	32.6	27.3	20.9	21.4	14.2
²⁾ 7100 & Z55 P285/45R22	2841	2778	5619	3550	4100	25.3	9.7	75.5	15.3	34.5	28.4	22.3	22.5	14.8	24.1	7.7	75.0	13.7	32.7	27.4	21.0	21.5	14.3
²⁾ 7300 & ZW7 & AS3 P265/70R17	2809	2641	5450	3600	4100	26.0	9.2	75.7	15.1	35.3	28.8	22.3	22.7	15.5	23.1	7.1	74.6	13.1	33.3	26.4	20.4	20.8	13.6
²⁾ 7300 & ZW7 & AS3 P275/55R20	2809	2641	5450	3600	4100	26.3	9.5	76.0	15.4	35.6	29.1	22.6	23.0	15.8	23.4	7.5	74.9	13.4	33.6	26.7	20.7	21.1	13.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

K 10906	130.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 7400 & Z55 P265/70R17	2802	2597	5399	3600	4200	26.0	9.2	75.8	15.0	35.1	28.8	22.3	22.8	15.5	24.9	7.0	74.5	13.2	33.0	27.7	20.6	21.4	14.4
¹⁾ 7400 & Z55 P275/55R20	2802	2597	5399	3600	4200	26.3	9.5	76.1	15.3	35.4	29.1	22.6	23.1	15.8	25.2	7.3	75.0	13.5	33.3	28.1	21.0	21.8	14.7
¹⁾ 7400 & Z55 P265/65R18	2977	2875	5852	3600	4200	25.1	9.3	75.3	14.9	34.2	28.2	21.9	22.2	14.6	24.0	7.5	74.7	13.4	32.5	27.1	20.7	21.2	14.0
¹⁾ 7400 & Z55 P275/55R20	2977	2875	5852	3600	4200	25.4	9.6	75.6	15.2	34.5	28.5	22.2	22.5	14.9	24.3	7.8	75.0	13.7	32.8	27.5	21.0	21.5	14.3
¹⁾ 7400 & Z55 P285/45R22	2895	2672	5567	3600	4200	25.6	9.7	75.8	15.3	34.6	28.6	22.4	22.7	15.1	24.5	7.7	74.9	13.7	32.9	27.6	21.0	21.5	14.2
²⁾ 7400 & ZW7 P265/70R17	2878	2700	5578	3600	4200	26.0	9.2	75.8	15.0	35.1	28.8	22.2	22.8	15.5	22.1	7.1	74.9	12.9	32.9	25.7	20.0	20.4	13.1
²⁾ 7400 & ZW7 P275/55R20	2878	2700	5578	3600	4200	26.3	9.5	76.1	15.3	35.3	29.1	22.5	23.0	15.8	22.5	7.4	75.2	13.2	33.2	26.0	20.3	20.7	13.4

C 20906	130.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 8400 & Z55 LT245/75R16E																							
¹⁾ 8400 & Z85 LT245/75R16E																							
²⁾ 8400 & Z85 LT265/70R17E																							

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

DATA NOT AVAILABLE
AT TIME OF PUBLICATION

VEHICLE AND FRAME HEIGHT CHARTS

K 20906	130.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 8600 & Z55 LT245/75R16E	2745	2665	5410	4180	5500	27.5	9.4	76.5	15.5	36.1	28.6	22.8	23.4	16.6	24.1	7.0	76.0	13.3	33.7	25.9	20.6	21.3	14.7
¹⁾ 8600 & Z85 LT245/75R16E	2977	2747	5724	4180	5500	27.3	9.3	76.3	15.4	35.8	28.4	22.6	23.3	16.3	24.1	7.3	76.2	13.6	33.9	26.0	20.8	21.5	14.7
²⁾ 8600 & Z85 LT265/70R17E	2745	2665	5410	4180	5500	28.1	10.0	77.1	16.1	36.6	29.1	23.4	24.0	17.1	24.6	7.7	76.6	13.9	34.3	26.4	21.2	21.9	15.2


NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

C/K 10000/20000 Light Duty Fullsize Pickups

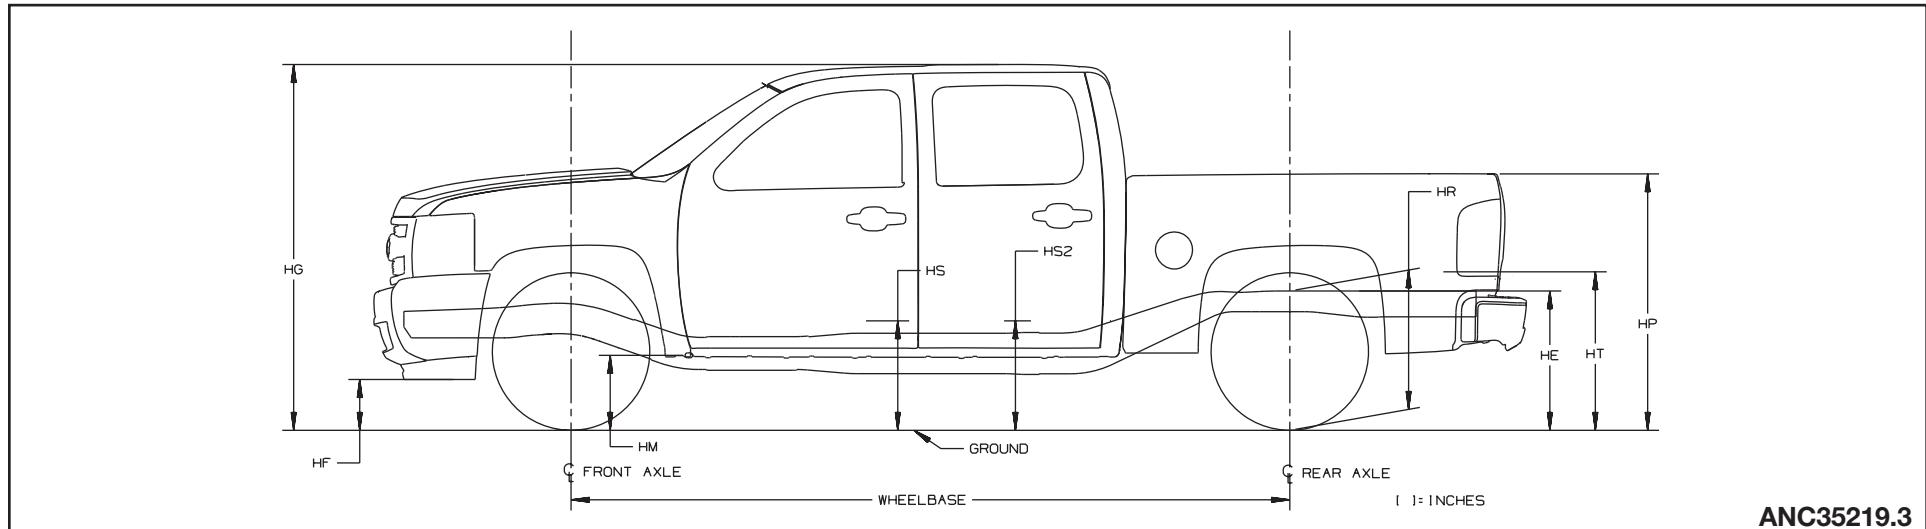

Heights (To Ground)

- HE Top of Frame Rail at End
- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Chassis Datum Hole
- HP Top of Tailgate
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

C 10703		119.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire		Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
		Frt	Rr	Ttl	Frt	Rr																		
6400 & Z83 P265/70R17		2456	1704	4160	3200	3750	32.2	9.0	74.1	15.3	55.7	31.1	23.2	—	36.3	26.5	7.4	71.3	13.1	49.9	26.6	20.5	—	30.3

C 10903		133.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire		Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
		Frt	Rr	Ttl	Frt	Rr																		
6400 & Z83 P265/70R17		2535	1779	4314	3300	3750	32.0	9.0	73.7	15.1	55.4	30.9	22.9	—	36.1	26.4	7.3	71.2	13.0	49.8	26.6	20.4	—	30.2

C 10553		133.9" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire		Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
		Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 6600 P265/70R17		2676	1944	4620	3600	3950	31.3	9.0	73.8	15.0	54.7	30.4	22.6	23.2	35.3	26.0	6.8	71.4	12.7	49.3	26.3	20.2	20.7	29.7

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

C 10753	143.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	GVW/Tire	Frt	Rr	Ttl	Frt	Rr																	
6800 & -NHT P265/70R17	2689	1858	4547	3600	3950	31.7	9.0	73.9	15.0	55.1	30.8	22.7	23.3	35.7	26.3	7.1	71.3	12.8	49.6	26.4	20.2	20.6	30.1
7000 & NHT P265/70R17	2826	1900	4726	3600	4200	31.8	8.9	73.8	15.0	55.3	30.8	22.7	23.3	35.9	26.3	7.3	71.3	12.9	49.7	26.5	20.2	20.7	30.1

C 10953	157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	GVW/Tire	Frt	Rr	Ttl	Frt	Rr																	
6900 & Z83 P265/70R17	2917	1931	4848	3700	3950	31.3	9.0	73.5	14.9	54.8	30.5	22.4	22.9	35.3	26.0	7.3	71.2	12.9	49.4	26.3	20.2	20.5	29.8

C 10543	143.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	GVW/Tire	Frt	Rr	Ttl	Frt	Rr																	
6800 & Z83 P265/70R17	2880	2101	4981	3650	3950	30.7	9.0	74.1	14.9	54.1	30.0	22.3	23.0	34.7	26.0	7.3	71.9	13.0	49.4	26.3	20.3	20.7	29.8
7100 & NHT P265/70R17	2881	2123	5004	3650	4200	31.1	8.9	74.3	14.9	54.6	30.3	22.4	23.2	35.2	26.4	7.3	71.9	12.9	49.7	26.5	20.2	20.8	30.2

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

K 10703		119.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
6400 & Z83 P265/70R17	2678	1753	4431	3950	3750	31.9	9.3	74.1	15.5	55.4	30.9	23.3	—	36.0	26.2	6.3	71.8	12.8	49.6	26.6	20.9	—	29.9

K 10903		133.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
6800 & Z83 P265/70R17	2764	1819	4583	3950	3950	31.9	8.9	73.6	15.1	55.3	30.8	22.8	—	35.9	26.0	6.3	71.0	12.4	49.4	26.3	20.1	—	29.8

K 10553		133.9" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 6800 P265/70R17	2881	2035	4916	3950	3950	30.9	9.4	73.8	15.2	54.3	30.2	22.7	23.2	34.9	25.9	6.9	71.5	12.9	49.2	26.3	20.4	20.9	29.6

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

K 10753		143.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire		Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
		Frt	Rr	Ttl	Frt	Rr																		
7000 & -NHT P265/70R17		3058	1923	4981	3950	3950	31.2	9.3	73.9	15.2	54.7	30.5	22.7	23.3	35.3	25.9	7.5	71.5	13.2	49.3	26.3	20.4	20.8	29.7
7200 & NHT P265/70R17		3058	1940	4998	3950	4200	31.6	9.2	74.0	15.2	55.0	30.7	22.8	23.4	35.6	26.2	7.3	71.4	13.1	49.6	26.5	20.4	20.8	30.0

K 10953		157.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire		Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
		Frt	Rr	Ttl	Frt	Rr																		
7000 & Z83 P265/70R17		3146	2007	5153	3950	3950	31.0	9.4	73.6	15.1	54.4	30.2	22.5	23.0	35.0	25.9	7.6	71.5	13.2	49.2	26.3	20.4	20.8	29.6

K 10543		143.5" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire		Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
		Frt	Rr	Ttl	Frt	Rr																		
7000 & -NHT P265/70R17		2961	2081	5042	3950	3950	30.7	9.4	74.3	15.2	54.1	30.0	22.6	23.2	34.7	26.0	7.3	71.9	13.0	49.3	26.3	20.3	20.7	29.7
7300 & NHT P265/70R17		3137	2169	5306	3950	4200	30.6	9.3	74.2	15.1	54.0	30.0	22.5	23.1	34.6	26.1	7.6	72.0	13.2	49.5	26.4	20.4	20.9	29.9


NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

C/K 20000 Fullsize Pickups & Chassis-Cabs

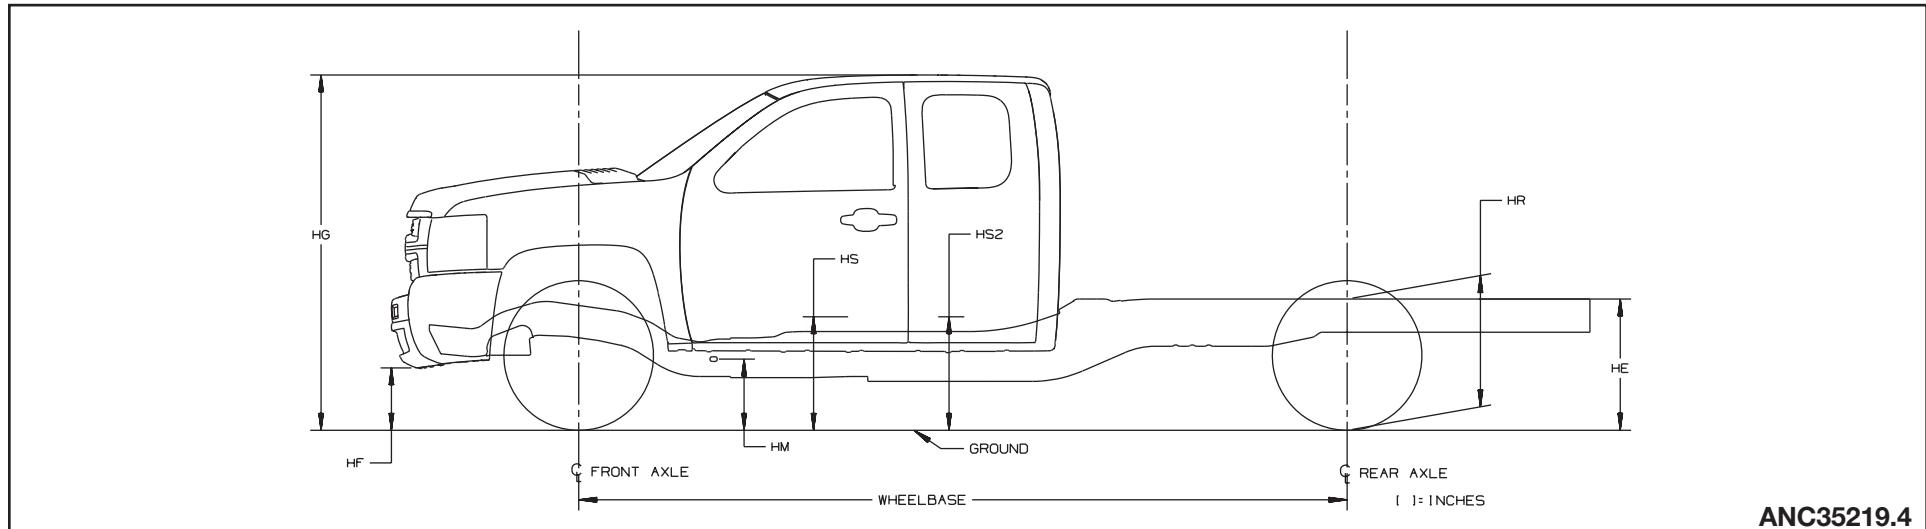

ANC35219.4

Heights (To Ground)

- HE Top of Frame Rail at End
- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Chassis Datum Hole
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

GVW/Tire	C 20903 133.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. LY6 & X88 LT265/70R17	3025	2111	5136	4411	6084	37.7	14.7	79.1	18.4	61.2	36.4	28.2	—	41.8	32.3	12.8	76.5	16.2	55.8	32.3	25.7	—	36.2
9200 lb. LY6 & Z88 LT265/70R17 at 50 PSI Rear	3025	2111	5136	4411	6084	37.7	14.3	79.1	18.4	61.2	36.4	28.2	—	41.8	32.3	12.4	76.5	16.2	55.8	32.3	25.7	—	36.2
9200 lb. LMM & X88 LT265/70R17	3560	2182	5742	4411	6084	37.6	14.5	79.0	18.3	61.1	36.3	28.1	—	41.7	32.1	13.7	76.8	16.7	55.5	32.3	26.0	—	36.0
9200 lb. LMM & Z88 LT265/70R17 at 50 PSI Rear	3560	2182	5742	4411	6084	37.6	14.1	79.0	18.3	61.1	36.3	28.1	—	41.7	32.1	13.3	76.8	16.7	55.5	32.3	26.0	—	36.0

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

C 20753	143.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. LY6 & X88 LT265/70R17	3135	2289	5424	4411	6084	37.2	14.8	79.2	18.3	60.7	36.2	28.0	28.7	41.3	32.3	13.1	76.8	16.2	55.7	32.3	25.7	26.1	36.2
9200 lb. LY6 & X88 LT265/70R17 at 50 PSI Rear	3135	2289	5424	4411	6084	37.2	14.4	79.2	18.3	60.7	36.2	28.0	28.7	41.3	32.3	12.6	76.8	16.2	55.7	32.3	25.7	26.1	36.2
9200 lb. LMM & Z88 LT265/70R17	3786	2360	6146	4411	6084	37.1	14.6	79.0	18.2	60.6	36.1	27.8	28.6	41.2	32.1	14.1	77.2	16.9	55.5	32.3	26.1	26.3	35.9
9200 lb. LMM & Z88 LT265/70R17 at 50 PSI Rear	3786	2360	6146	4411	6084	37.1	14.1	79.0	18.2	60.6	36.1	27.8	28.6	41.2	32.1	13.7	77.2	16.9	55.5	32.3	26.1	26.3	35.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

C 20953	157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. LY6 & X88 LT265/70R17	3210	2305	5515	4500	6084	37.2	14.8	79.0	18.2	60.7	36.2	27.8	28.5	41.4	32.3	13.1	76.6	16.2	55.7	32.3	25.3	26.0	36.1
9200 lb. LY6 & Z88 LT265/70R17 at 50 PSI Rear	3210	2305	5515	4500	6084	37.2	14.4	79.0	18.2	60.7	36.2	27.8	28.5	41.4	32.3	12.6	76.6	16.2	55.7	32.3	25.3	26.0	36.1
9200 lb. LMM & X88 LT265/70R17	3849	2389	6238	4500	6084	37.1	14.6	78.8	18.1	60.6	36.1	27.7	28.4	41.2	32.1	14.0	77.1	16.8	55.5	32.3	26.1	26.4	35.9
9200 lb. LMM & Z88 LT265/70R17 at 50 PSI Rear	3849	2389	6238	4500	6084	37.1	14.2	78.8	18.1	60.6	36.1	27.7	28.4	41.2	32.1	13.6	77.1	16.8	55.5	32.3	26.1	26.4	35.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

C 20743	153.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. LY6 & X88 LT225/75R17	3148	2374	5522	4670	6084	37.0	14.9	79.7	18.2	60.5	36.1	27.8	28.8	41.1	32.3	12.6	77.2	15.9	55.7	32.3	25.4	26.2	36.2
9200 lb. LY6 & Z88 LT225/75R17 at 65 PSI Rear	3148	2374	5522	4670	6084	37.0	14.4	79.7	18.2	6035	36.1	27.8	28.8	41.0	32.3	12.2	77.2	15.9	55.7	32.3	25.4	26.2	35.9
9200 lb. LMM & X88 LT265/70R17	3777	2446	6223	4670	6084	36.9	14.7	79.6	18.1	60.4	36.0	27.7	28.7	41.0	32.1	13.5	77.6	16.6	55.5	32.3	25.9	26.5	35.9
9200 lb. LMM & Z88 LT265/70R17 at 50 PSI Rear	3777	2446	6223	4670	6084	36.9	14.2	79.6	18.1	60.4	36.0	27.7	28.7	41.0	32.1	13.1	77.6	16.6	55.5	32.3	25.9	26.5	35.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

C 20943	167.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	GVW/Tire	Frt	Rr	Ttl	Frt	Rr																	
9200 lb. LY6 & X88 LT265/70R17	3230	2387	5617	4800	6084	37.0	14.9	79.5	18.2	60.5	36.1	27.7	28.6	41.1	32.3	12.5	77.1	15.8	55.7	32.3	25.3	26.1	36.1
9200 lb. LY6 & Z88 LT265/70R17 at 50 PSI Rear	3230	2387	5617	4800	6084	37.0	14.5	79.5	18.2	60.5	36.1	27.7	28.6	41.1	32.3	12.1	77.1	15.8	55.7	32.3	25.3	26.1	36.1
9200 lb. LMM & X88 LT265/70R17	3841	2456	6297	4800	6084	36.9	14.7	79.4	18.0	60.4	36.0	27.6	28.5	41.0	32.1	13.4	77.5	16.4	55.5	32.3	25.8	26.4	35.9
9200 lb. LMM & Z88 LT265/70R17 at 50 PSI Rear	3841	2456	6297	4800	6084	36.9	14.3	79.4	18.0	60.4	36.0	27.6	28.5	41.0	32.1	13.0	77.5	16.4	55.5	32.3	25.8	26.4	35.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

K 20903	133.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. LY6 & X88 LT265/70R17 at 50 PSI Rear	3173	2124	5297	4500	6084	37.7	14.7	79.0	18.4	61.2	36.4	28.2	—	41.8	32.3	12.9	76.5	16.2	55.7	32.3	25.7	—	36.1
9200 lb. LY6 & Z88 LT265/70R17 at 50 PSI Rear	3173	2124	5297	4500	6084	37.7	14.2	79.0	18.4	61.2	36.4	28.2	—	41.7	32.3	12.5	76.5	16.2	55.7	32.3	25.7	—	35.8
9200 lb. LMM & X88 LT265/70R17 at 50 PSI Rear	3772	2197	5969	4500	6084	37.6	14.5	78.9	18.3	61.1	36.3	28.0	—	41.7	32.0	13.8	76.9	16.8	55.4	32.3	26.1	—	35.8
9200 lb. LMM & Z88 LT265/70R17 at 50 PSI Rear	3772	2197	5969	4500	6084	37.6	14.0	78.9	18.3	61.1	36.3	28.0	—	41.7	32.0	13.4	76.9	16.8	55.4	32.3	26.1	—	35.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

K 20753	143.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. LY6 & X88 LT265/70R17 at 50 PSI Rear	3421	2252	5673	4500	6084	37.2	14.7	79.1	18.3	60.7	36.2	27.9	28.7	41.4	32.2	13.3	76.9	16.4	55.6	32.3	25.8	26.2	36.1
9200 lb. LY6 & Z88 LT265/70R17 at 50 PSI Rear	3421	2252	5673	4500	6084	37.2	14.3	79.1	18.3	60.7	36.2	27.9	28.7	41.4	32.2	12.9	76.9	16.4	55.6	32.3	25.8	26.2	36.1
9200 lb. LMM & X88 LT265/70R17 at 50 PSI Rear	4083	2327	6410	4500	6084	37.2	14.4	79.0	18.1	60.7	36.1	27.8	28.6	41.3	32.0	14.3	77.3	17.1	55.4	32.3	26.3	26.4	35.8
9200 lb. LMM & Z88 LT265/70R17 at 50 PSI Rear	4083	2327	6410	4500	6084	37.2	14.0	79.0	18.1	60.7	36.1	27.8	28.6	41.3	32.0	13.9	77.3	17.1	55.4	32.3	26.3	26.4	35.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

K 20953	157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. LY6 & X88 LT265/70R17 at 50 PSI Rear	3464	2319	5783	4670	6084	37.2	14.8	78.9	18.2	60.7	36.1	27.8	28.5	41.3	32.2	13.1	76.7	16.2	55.6	32.3	25.6	26.1	36.0
9200 lb. LY6 & Z88 LT265/70R17 at 50 PSI Rear	3464	2319	5783	4670	6084	37.2	14.3	78.9	18.2	60.7	36.1	27.8	28.5	41.3	32.2	12.7	76.7	16.2	55.6	32.3	25.6	26.1	36.0
9200 lb. LMM & X88 LT265/70R17 at 50 PSI Rear	4113	2395	6508	4670	6084	37.1	14.5	78.8	18.0	60.6	36.0	27.6	28.4	41.2	32.0	14.1	77.2	16.9	55.4	32.3	26.1	26.3	35.8
9200 lb. LMM & Z88 LT265/70R17 at 50 PSI Rear	4113	2395	6508	4670	6084	37.1	14.1	78.8	18.0	60.6	36.0	27.6	28.4	41.2	32.0	13.7	77.2	16.9	55.4	32.3	26.1	26.3	35.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

GVW/Tire	153.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. LY6 & X88 LT265/70R17 at 50 PSI Rear	3384	2371	5755	4670	6084	37.0	14.8	79.7	18.2	60.5	36.1	27.8	28.8	41.1	32.2	12.9	77.4	16.2	55.6	32.3	25.6	26.3	36.1
9200 lb. LY6 & Z88 LT265/70R17 at 50 PSI Rear	3384	2371	5755	4670	6084	37.0	14.4	79.7	18.2	60.5	36.1	27.8	28.8	41.1	32.2	12.5	77.4	16.2	55.6	32.3	25.6	26.3	36.1
9200 lb. LMM & X88 LT265/70R17 at 50 PSI Rear	4015	2440	6455	4670	6084	36.9	14.6	79.6	18.1	60.4	36.0	27.7	28.7	41.0	32.0	13.9	77.7	16.8	55.4	32.3	26.1	26.6	35.8
9200 lb. LMM & Z88 LT265/70R17 at 50 PSI Rear	4015	2440	6455	4670	6084	36.9	14.1	79.6	18.1	60.4	36.0	27.7	28.7	41.0	32.0	13.5	77.7	16.8	55.4	32.3	26.1	26.6	35.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

GVW/Tire	167.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9200 lb. LY6 & X88 LT265/70R17 at 50 PSI Rear	3463	2427	5890	4800	6084	37.0	14.8	79.5	18.1	60.4	36.0	27.6	28.6	41.0	32.2	12.9	77.2	16.1	55.6	32.3	25.2	26.2	36.1
9200 lb. LY6 & Z88 LT265/70R17 at 50 PSI Rear	3463	2427	5890	4800	6084	37.0	14.4	79.5	18.1	60.4	36.0	27.6	28.6	41.0	32.2	12.4	77.2	16.1	55.6	32.3	25.2	26.2	36.1
9200 lb. LMM & X88 LT265/70R17 at 50 PSI Rear	4090	2496	6586	4800	6084	36.9	14.6	79.3	18.0	60.4	35.9	27.5	28.4	40.9	32.0	13.8	77.6	16.7	55.4	32.3	26.0	26.5	35.8
9200 lb. LMM & Z88 LT265/70R17 at 50 PSI Rear	4090	2496	6586	4800	6084	36.9	14.2	79.3	18.0	60.4	35.9	27.5	28.4	40.9	32.0	13.4	77.6	16.7	55.4	32.3	26.0	26.5	35.8


NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

C/K 30000 Fullsize Pickups & Chassis-Cabs

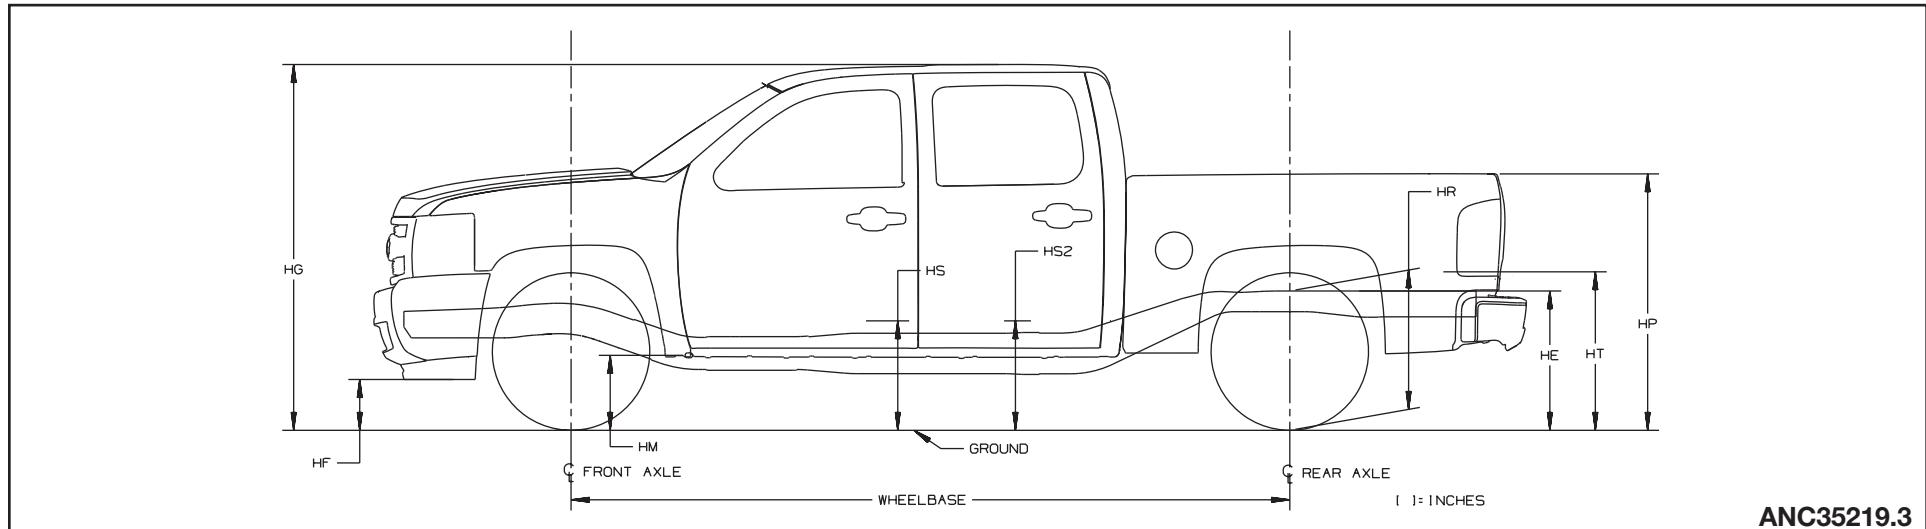

Heights (To Ground)

- HE Top of Frame Rail at End
- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Chassis Datum Hole
- HP Top of Tailgate
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

C 30903	133.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	GVW/Tire	Frt	Rr	Ttl	Frt	Rr																	
9700 lb. LY6 & X88 LT265/70R17	3067	2410	5477	4200	6500	37.4	14.9	79.0	18.5	60.9	36.2	28.2	29.0	41.5	31.3	13.8	76.3	16.4	54.7	31.6	25.6	25.8	35.1
9700 lb. LY6 & Z88 LT265/70R17 at 60 PSI Rear	3067	2410	5477	4200	6500	37.4	14.4	79.0	18.5	60.9	36.2	28.2	29.0	41.5	31.3	13.3	76.3	16.4	54.7	31.6	25.6	25.8	35.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

C 30953	157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9900 lb. LY6 & X88 LT265/70R17 at 60 PSI Rear	3190	2610	5800	4800	6500	36.9	15.0	78.9	18.3	60.3	35.9	27.8	28.4	40.9	31.4	12.8	76.2	15.8	54.8	31.6	25.1	25.5	35.2
9900 lb. LY6 & Z88 LT265/70R17 at 60 PSI Rear	3190	2610	5800	4800	6500	36.9	14.6	78.9	18.3	60.3	35.9	27.8	28.4	40.9	31.4	12.4	76.2	15.8	54.8	31.6	25.1	25.5	35.2
11400 lb. LY6 & X88 LT225/75R17 at 65 PSI Rear	3252	2781	6033	4800	8200	36.8	14.2	78.4	17.7	60.3	35.7	27.3	28.0	40.9	30.3	12.4	75.2	15.0	53.7	30.7	24.2	24.4	34.1
11400 lb. LY6 & Z88 LT225/75R17 at 65 PSI Rear	3252	2781	6033	4800	8200	36.8	13.8	78.4	17.7	60.3	35.7	27.3	28.0	40.9	30.3	12.0	75.2	15.0	53.7	30.7	24.2	24.4	34.1
11400 lb. LMM & X88 LT225/75R17 at 65 PSI Rear	3840	2850	6690	4800	8200	36.7	14.0	78.3	17.5	60.2	35.6	27.2	27.9	40.8	30.1	13.3	75.6	15.6	53.5	30.7	24.6	24.8	33.9
11400 lb. LMM & Z88 LT225/75R17 at 65 PSI Rear	3840	2850	6690	4800	8200	36.7	13.6	78.3	17.5	60.2	35.6	27.2	27.9	40.8	30.1	12.9	75.6	15.6	53.5	30.7	24.6	24.8	33.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

C 30943	167.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9900 lb. LY6 & X88 LT265/70R17 at 60 PSI Rear	3224	2638	5862	4800	6500	36.8	15.1	79.5	18.2	60.2	35.9	27.7	28.5	40.8	31.4	12.9	76.7	15.8	54.8	31.6	25.1	25.7	35.2
9900 lb. LY6 & Z88 LT265/70R17 at 60 PSI Rear	3224	2638	5862	4800	6500	36.8	14.6	79.5	18.2	60.2	35.9	27.7	28.5	40.8	31.4	12.4	76.7	15.8	54.8	31.6	25.1	25.7	35.2
11400 lb. LY6 & X88 LT225/75R17 at 65 PSI Rear	3293	2862	6155	4800	8200	36.6	14.3	79.0	17.6	60.1	35.6	27.1	28.1	40.7	30.3	12.5	75.6	15.1	53.7	30.7	24.2	24.5	34.1
11400 lb. LY6 & Z88 LT225/75R17 at 65 PSI Rear	3293	2862	6155	4800	8200	36.6	13.8	79.0	17.6	60.1	35.6	27.1	28.1	40.7	30.3	12.0	75.6	15.1	53.7	30.7	24.2	24.5	34.1
11400 lb. LMM & X88 LT225/75R17 at 65 PSI Rear	3853	2919	6772	4800	8200	36.5	14.1	78.9	17.5	60.0	35.5	27.0	28.0	40.6	30.2	13.3	76.0	15.6	53.5	30.7	24.6	24.9	33.9
11400 lb. LMM & Z88 LT225/75R17 at 65 PSI Rear	3853	2919	6772	4800	8200	36.5	13.7	78.9	17.5	60.0	35.5	27.0	28.0	40.6	30.2	12.9	76.0	15.6	53.5	30.7	24.6	24.9	33.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

GVW/Tire	133.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9900 lb. LY6 & X88 LT265/70R17 at 60 PSI Rear	3165	2368	5533	4800	6500	37.5	14.8	79.0	18.4	60.9	36.2	28.2	29.0	41.6	31.4	12.6	76.1	15.9	54.8	31.6	25.3	25.8	35.2
9900 lb. LY6 & Z88 LT265/70R17 at 60 PSI Rear	3165	2368	5533	4800	6500	37.5	14.4	79.0	18.4	60.9	36.2	28.2	29.0	41.6	31.4	12.2	76.1	15.9	54.8	31.6	25.3	25.8	35.2
9900 lb. LMM & X88 LT265/70R17 at 60 PSI Rear	3752	2429	6181	4800	6500	37.4	14.6	78.9	18.3	60.9	36.2	28.0	28.9	41.5	31.1	13.5	76.5	16.4	54.5	31.6	25.7	26.1	34.9
9900 lb. LMM & Z88 LT265/70R17 at 60 PSI Rear	3752	2429	6181	4800	6500	37.4	14.2	78.9	18.3	60.9	36.2	28.0	28.9	41.5	31.1	13.1	76.5	16.4	54.5	31.6	25.7	26.1	34.9
11400 lb. LY6 & X88 LT225/75R17 at 65 PSI Rear	3259	2634	5893	4800	8200	37.2	14.0	78.5	17.8	60.7	35.9	27.6	—	41.4	30.3	12.3	75.1	15.1	53.7	30.7	24.3	—	34.1
11400 lb. LY6 & Z88 LT225/75R17 at 65 PSI Rear	3259	2634	5893	4800	8200	37.2	13.6	78.5	17.8	60.7	35.9	27.6	—	41.4	30.3	11.9	75.1	15.1	53.7	30.7	24.3	—	34.1
11400 lb. LMM & X88 LT225/75R17 at 65 PSI Rear	3846	2695	6541	4800	8200	37.2	13.8	78.4	17.7	60.7	35.8	27.5	—	41.3	30.0	13.3	75.4	15.7	53.4	30.7	24.7	—	33.8
11400 lb. LMM & Z88 LT225/75R17 at 65 PSI Rear	3846	2695	6541	4800	8200	37.2	13.4	78.4	17.7	60.7	35.8	27.5	—	41.3	30.0	12.8	75.4	15.7	53.4	30.7	24.7	—	33.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

GVW/Tire	157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9900 lb. LY6 & X88 LT265/70R17 at 60 PSI Rear	3402	2535	5937	4800	6500	37.0	14.9	78.9	18.2	60.5	36.0	27.8	28.5	41.1	31.3	13.1	76.3	16.0	54.7	31.6	25.3	25.7	35.1
9900 lb. LY6 & Z88 LT265/70R17 at 60 PSI Rear	3402	2535	5937	4800	6500	37.0	14.5	78.9	18.2	60.5	36.0	27.8	28.5	41.1	31.3	12.7	76.3	16.0	54.7	31.6	25.3	25.7	35.1
9900 lb. LMM & X88 LT265/70R17 at 60 PSI Rear	4001	2601	6602	4800	6500	36.9	14.7	78.8	18.1	60.4	35.9	27.7	28.4	41.0	31.1	14.0	76.7	16.6	54.5	31.6	25.8	26.0	34.9
9900 lb. LMM & Z88 LT265/75R17 at 60 PSI Rear	4001	2601	6602	4800	6500	36.9	14.3	78.8	18.1	60.4	35.9	27.7	28.4	41.0	31.1	13.6	76.7	16.6	54.5	31.6	25.8	26.0	34.9
11400 lb. LMM & X88 LT225/75R17 at 65 PSI Rear	4094	2868	6962	4800	8200	36.7	14.0	78.3	17.5	60.2	35.6	27.1	27.9	40.8	30.1	13.7	75.7	15.9	53.4	30.7	24.8	25.0	33.8
11400 lb. LMM & Z88 LT225/75R17 at 65 PSI Rear	4094	2868	6962	4800	8200	36.7	13.5	78.3	17.5	60.2	35.6	27.1	27.9	40.8	30.1	13.2	75.7	15.9	53.4	30.7	24.8	25.0	33.8

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

GVW/Tire	167.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
9900 lb. LY6 & X88 LT265/70R17 at 60 PSI Rear	3474	2621	6095	4800	6500	36.8	15.0	79.4	18.2	60.3	35.9	27.7	28.5	40.9	31.3	13.2	76.9	16.1	54.7	31.6	25.3	25.8	35.1
9900 lb. LY6 & Z88 LT265/70R17 at 60 PSI Rear	3474	2621	6095	4800	6500	36.8	14.5	79.4	18.2	60.3	35.9	27.7	28.5	40.9	31.3	12.8	76.9	16.1	54.7	31.6	25.3	25.8	35.1
11400 lb. LY6 & X88 LT225/75R17 at 65 PSI Rear	3564	2892	6456	4800	8200	36.6	14.2	78.9	17.5	60.0	35.6	27.1	28.0	40.6	30.3	12.9	75.8	15.3	53.7	30.7	24.4	24.7	33.8
11400 lb. LY6 & Z88 LT225/75R17 at 65 PSI Rear	3564	2892	6456	4800	8200	36.6	13.8	78.9	17.5	60.0	35.6	27.1	28.0	40.6	30.3	12.5	75.8	15.3	53.7	30.7	24.4	24.7	33.8
11400 lb. LMM LT225/75R17	4150	2956	7106	4800	8200	36.5	14.0	13.6	78.8	17.4	60.0	35.5	27.0	27.9	30.1	13.7	13.3	76.2	15.9	53.4	30.7	24.9	25.0


NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

C/K 31000 Fullsize Chassis-Cabs

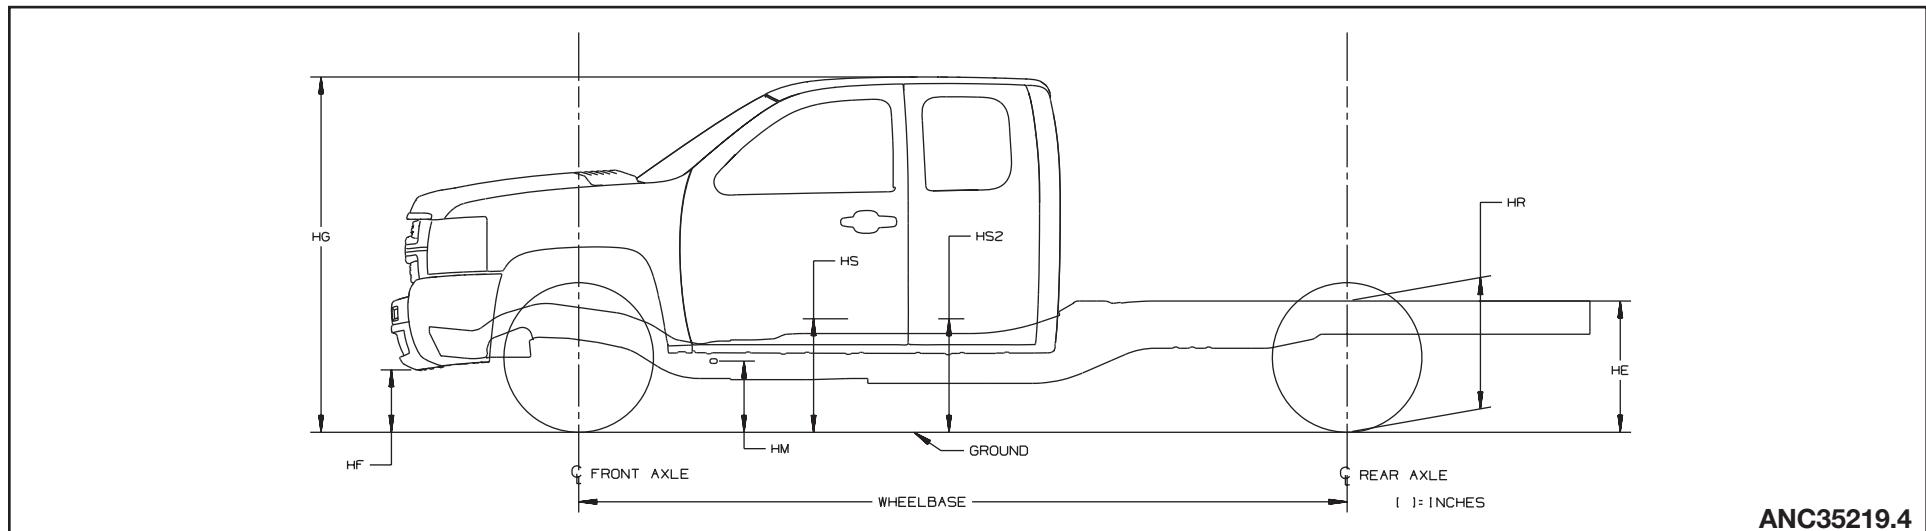

ANC35219.4

Heights (To Ground)

- HE Top of Frame Rail at End
- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Chassis Datum Hole
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

C 31003	137.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
11400 lb. LY6 & X88 LT215/85R16 at 65 PSI Rear	3156	2323	5479	4500	8600	35.5	14.0	78.5	17.9	—	33.9	27.7	—	—	28.6	12.4	75.5	15.4	—	29.0	24.7	—	—
11400 lb. LY6 & Z88 LT215/85R16 at 65 PSI Rear	3156	2323	5479	4500	8600	35.5	13.6	78.5	17.9	—	33.9	27.7	—	—	28.6	12.0	75.5	15.4	—	29.0	24.7	—	—
11400 lb. LMM & X88 LT215/85R16 at 65 PSI Rear	3655	2376	6031	4500	8600	35.4	13.9	78.4	17.8	—	33.8	27.6	—	—	28.3	13.2	75.8	15.9	—	29.0	25.1	—	—
11400 lb. LMM & Z88 LT215/85R16 at 65 PSI Rear	3655	2376	6031	4500	8600	35.4	13.5	78.4	17.8	—	33.8	27.6	—	—	28.3	12.8	75.8	15.9	—	29.0	25.1	—	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

C 31053	161.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
11400 lb. LY6 & X88 LT215/85R16 at 70 PSI Rear	3377	2589	5966	4800	8600	34.6	14.3	78.4	17.7	—	33.4	27.2	28.0	—	27.5	12.5	75.1	15.1	—	28.2	24.2	24.4	—
11400 lb. LY6 & Z88 LT215/85R16 at 70 PSI Rear	3377	2589	5966	4800	8600	34.6	13.9	78.4	17.7	—	33.4	27.2	28.0	—	27.5	12.0	75.1	15.1	—	28.2	24.2	24.4	—
11400 lb. LMM & X88 LT215/85R16 at 70 PSI Rear	3965	2655	6620	4800	8600	34.5	14.1	78.2	17.5	—	33.3	27.1	27.9	—	27.2	13.4	75.6	15.7	—	28.2	24.7	24.8	—
11400 lb. LMM & Z88 LT215/85R16 at 70 PSI Rear	3965	2655	6620	4800	8600	34.5	13.7	78.2	17.5	—	33.3	27.1	27.9	—	27.2	13.0	75.6	15.7	—	28.2	24.7	24.8	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

C 31403	161.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
11400 lb. LY6 & X88 LT215/85R16 at 70 PSI Rear	3269	2300	5569	4800	8600	35.3	14.2	78.3	17.8	—	33.9	27.4	—	—	27.5	12.3	74.8	15.0	—	28.2	24.1	—	—
11400 lb. LY6 & Z88 LT215/85R16 at 70 PSI Rear	3269	2300	5569	4800	8600	35.3	13.8	78.3	17.8	—	33.9	27.4	—	—	27.5	11.8	74.8	15.0	—	28.2	24.1	—	—
11400 lb. LMM & X88 LT215/85R16 at 70 PSI Rear	3764	2357	6121	4800	8600	35.2	14.1	78.2	17.7	—	33.8	27.3	—	—	27.3	13.1	75.3	15.5	—	28.2	24.5	—	—
11400 lb. LMM & Z88 LT215/85R16 at 70 PSI Rear	3764	2357	6121	4800	8600	35.2	13.6	78.2	17.7	—	33.8	27.3	—	—	27.3	12.7	75.3	15.5	—	28.2	24.5	—	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

GVW/Tire	137.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
12000 lb. LY6 & X88 LT215/85R16 at 70 PSI Rear	3403	2375	5778	4800	8600	35.4	14.0	78.5	17.9	—	33.8	27.6	—	—	28.8	12.3	75.3	15.3	—	29.0	24.6	—	—
12000 lb. LY6 & Z88 LT215/85R16 at 70 PSI Rear	3403	2375	5778	4800	8600	35.4	13.6	78.5	17.9	—	33.8	27.6	—	—	28.8	11.9	75.3	15.3	—	29.0	24.6	—	—
12000 lb. LMM & X88 LT215/85R16 at 70 PSI Rear	3996	2439	6435	4800	8600	35.3	13.9	78.4	17.7	—	33.7	27.5	—	—	28.5	13.3	75.8	15.9	—	29.0	25.0	—	—
12000 lb. LMM & Z88 LT215/85R16 at 70 PSI Rear	3996	2439	6435	4800	8600	35.3	13.4	78.4	17.7	—	33.7	27.5	—	—	28.5	12.9	75.8	15.9	—	29.0	25.0	—	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

GVW/Tire	161.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
12000 lb. LY6 & X88 LT215/85R16 at 70 PSI Rear	3695	2610	6305	4800	8600	34.6	14.2	78.3	17.6	—	33.4	27.2	27.9	—	27.6	13.0	75.3	15.4	—	28.2	24.4	24.5	—
12000 lb. LY6 & Z88 LT215/85R16 at 70 PSI Rear	3695	2610	6305	4800	8600	34.6	13.8	78.3	17.6	—	33.4	27.2	27.9	—	27.6	12.6	75.3	15.4	—	28.2	24.4	24.5	—
12000 lb. LMM & X88 LT215/85R16 at 70 PSI Rear	4293	2676	6969	4800	8600	34.5	14.0	78.2	17.5	—	33.3	27.0	27.8	—	27.4	14.0	75.7	16.0	—	28.2	24.9	24.9	—
12000 lb. LMM & Z88 LT215/85R16 at 70 PSI Rear	4293	2676	6969	4800	8600	34.5	13.6	78.2	17.5	—	33.3	27.0	27.8	—	27.4	13.6	75.7	16.0	—	28.2	24.9	24.9	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

C 31403	161.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
12000 lb. LY6 & X88 LT215/85R16 at 70 PSI Rear	3467	2419	5886	4800	8600	35.0	14.2	78.2	17.7	—	33.7	27.3	—	—	27.7	12.7	74.9	15.1	—	28.2	24.2	—	—
12000 lb. LY6 & Z88 LT215/85R16 at 70 PSI Rear	3467	2419	5886	4800	8600	35.0	13.8	78.2	17.7	—	33.7	27.3	—	—	27.7	12.2	74.9	15.1	—	28.2	24.2	—	—
12000 lb. LMM & X88 LT215/85R16 at 70 PSI Rear	4057	2487	6544	4800	8600	34.9	14.0	78.0	17.6	—	33.6	27.2	—	—	27.5	13.6	75.4	15.8	—	28.2	24.7	—	—
12000 lb. LMM & Z88 LT215/85R16 at 70 PSI Rear	4057	2487	6544	4800	8600	34.9	13.6	78.0	17.6	—	33.6	27.2	—	—	27.5	13.2	75.4	15.8	—	28.2	24.7	—	—


NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

G/H Van - Full Body

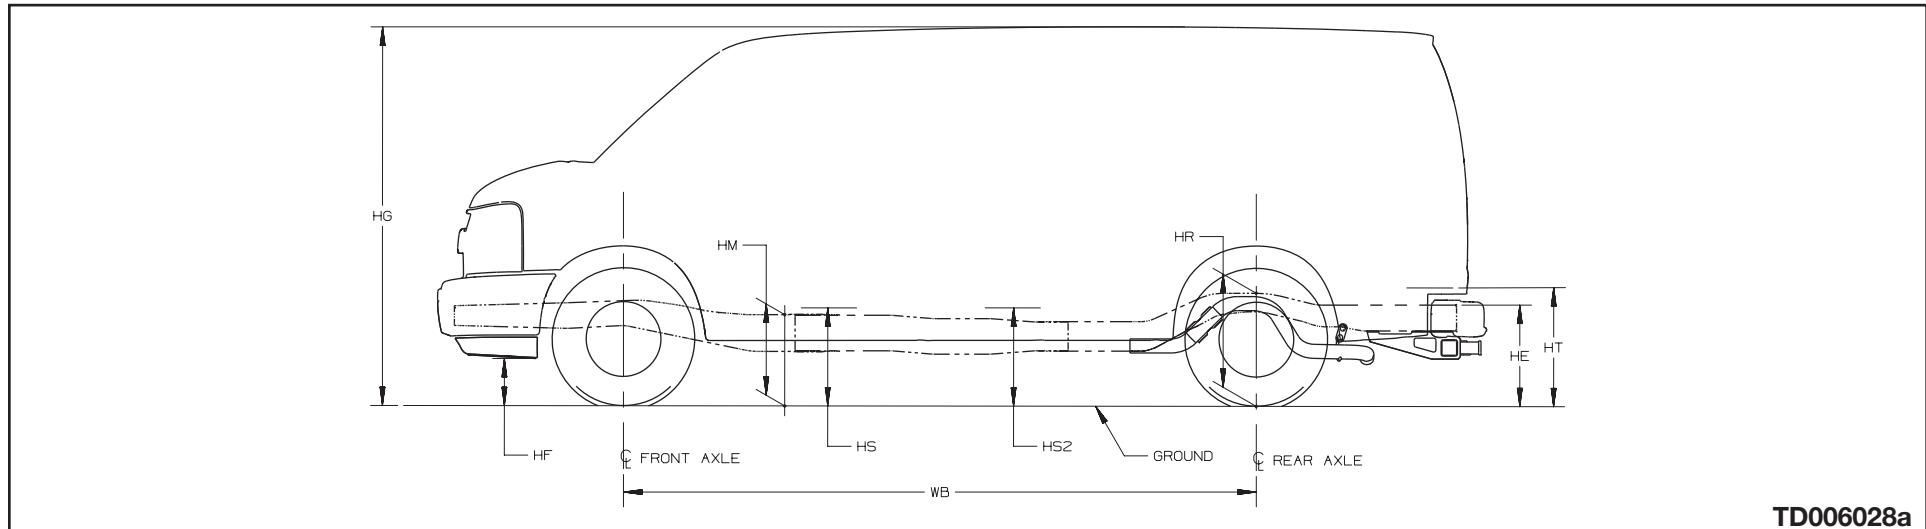

Heights (To Ground)

- HE Top of Frame at End
- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Normal Top of Frame
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

GVW/Tire	135.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
²⁾ 7200 P245/75R16	2669	2147	4817	3600	4000	—	15.7	81.5	17.9	—	24.9	18.2	18.8	26.4	—	14.1	79.6	16.2	—	23.3	16.4	16.8	23.3
²⁾ 7200 LT245/75R16	2669	2147	4817	3600	4000	—	15.7	81.5	17.9	—	24.9	18.2	18.8	26.4	—	14.1	79.6	16.2	—	23.3	16.4	16.8	23.3

GVW/Tire	135.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 7200 P245/75R16	2772	2465	5237	3600	4000	—	15.5	81.4	17.8	—	24.8	18.1	18.7	26.3	—	14.0	79.5	16.1	—	22.2	16.3	16.7	23.2
¹⁾ 7200 LT245/75R16	2772	2465	5237	3600	4000	—	15.5	81.4	17.8	—	24.8	18.1	18.7	26.3	—	14.0	79.5	16.1	—	22.2	16.3	16.7	23.2

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

H 13405		135.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire		Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
		Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 7300 P245/75R16		2904	2026	4930	3600	4000	—	15.2	82.2	18.0	—	25.7	18.2	19.2	27.4	—	14.2	79.6	16.2	—	22.3	16.4	16.8	23.2
¹⁾ 7300 LT245/75R16		2904	2026	4930	3600	4000	—	15.2	82.2	18.0	—	25.7	18.2	19.2	27.4	—	14.2	79.6	16.2	—	22.3	16.4	16.8	23.2

H 13406		135.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire		Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
		Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 7300 P245/75R16		3004	2442	5446	3600	4000	—	15.3	81.4	17.7	—	24.9	18.0	18.7	26.4	—	14.4	79.6	16.3	—	22.2	16.5	16.9	23.1
¹⁾ 7300 LT245/75R16		3004	2442	5446	3600	4000	—	15.3	81.4	17.7	—	24.9	18.0	18.7	26.4	—	14.4	79.6	16.3	—	22.2	16.5	16.9	23.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.

Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

GVW/Tire	135.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
²⁾ 8600 LT245/75R16	2806	2790	5596	4100	5360	—	16.8	83.1	19.3	—	26.6	19.5	20.3	28.2	—	14.4	81.6	17.3	—	24.4	17.5	18.5	25.4
²⁾ 8600 LT225/75R16	2909	2260	5169	4100	5360	—	16.5	83.4	19.3	—	26.9	19.5	20.4	28.6	—	14.5	80.9	17.1	—	23.8	17.3	18.1	24.7

GVW/Tire	135.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 8600 KL6 LT245/75R16	3006	3118	6124	4100	5360	—	17.2	82.8	19.4	—	26.2	19.6	20.1	27.5	—	15.1	81.6	17.7	—	24.4	17.9	18.8	25.3
²⁾ 8600 LT225/75R16	3116	2597	5713	4100	5360	—	16.5	82.8	19.0	—	26.3	19.2	20.0	27.9	—	14.8	81.0	17.3	—	23.8	17.5	18.2	24.7
²⁾ 8600 & LLY LT225/75R16	3640	2631	6271	4100	5360	—	16.4	82.7	18.9	—	26.3	19.1	19.9	27.8	—	16.0	81.2	18.0	—	23.8	18.2	18.6	24.5
²⁾ 8600 & LLY LT245/75R16	3640	2631	6271	4100	5360	—	16.8	83.3	19.4	—	26.8	19.7	20.5	28.4	—	16.5	81.8	18.5	—	24.4	18.7	19.1	25.1

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

G 23705		155.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
²⁾ 8600 LT245/75R16	3074	2230	5304	4300	5360	—	17.0	83.9	19.7	—	27.5	19.9	20.8	29.2	—	15.0	81.6	17.6	—	24.3	17.8	18.6	25.3

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

G 33405		135.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 9600 LT245/75R16	2935	2270	5205	4300	6084	—	17.0	84.1	19.7	—	27.6	20.1	21.1	29.4	—	14.9	81.3	17.4	—	24.3	17.7	18.5	25.3

G 33406		135.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 9600 LT245/75R16	3065	2528	5593	4300	6084	—	17.0	83.9	19.7	—	27.5	19.9	20.8	29.1	—	15.0	81.4	17.5	—	24.2	17.7	18.5	25.3

G 33705		155.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear								
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 9600 LT245/75R16	3042	2376	5418	4300	6084	—	17.0	83.6	19.6	—	27.2	19.9	20.8	28.8	—	15.1	81.3	17.4	—	24.3	17.7	18.4	25.3

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

G 33706		155.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
¹⁾ 9600 LT245/75R16	3258	2605	5863	4300	6084	—	17.0	83.6	19.7	—	27.2	19.8	20.6	28.8	—	15.4	81.4	17.8	—	24.3	17.9	18.6	25.3


NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

G/H Van - Fullsize Cutaway

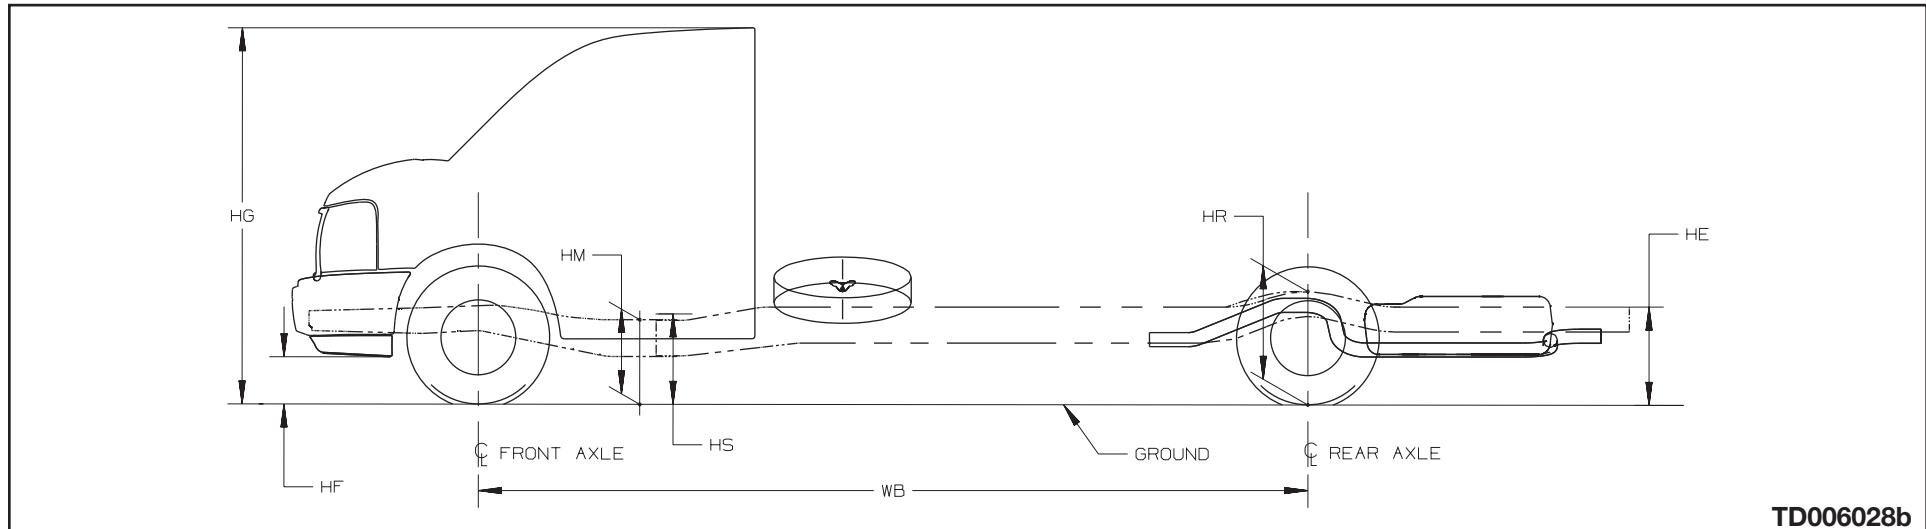

TD006028b

Heights (To Ground)

- HE Top of Frame at End
- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Normal Top of Frame
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

G 33503			139.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
²⁾ 9600 LT245/75R16	2915	1550	4465	4100	6084	28.9	16.5	83.6	24.8	—	30.0	20.7	—	—	25.1	14.6	81.7	22.5	—	27.0	18.5	—	—
²⁾ 12,300 LT225/75R16	3005	1919	4924	4300	8600	28.4	16.0	83.0	24.3	—	29.4	20.2	—	—	22.7	14.2	80.6	21.1	—	25.3	17.5	—	—

G 33803			159.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear							
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
²⁾ 12,300 & YF1 LT225/75R16	3064	1714	4778	4300	8600	28.1	16.2	82.9	24.0	—	29.5	20.1	—	—	22.4	14.5	80.7	21.0	—	25.2	17.6	—	—
²⁾ 14,050 LT225/75R16	3062	1723	4785	4600	9450	28.0	16.9	83.3	24.3	—	29.6	20.5	—	—	22.3	15.2	80.3	20.9	—	25.0	17.8	—	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

G 33903		177.0" Wheelbase				Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	Frt	Rr	Ttl	Frt	Rr																		
²⁾ 12,300 & YF1 LT225/75R16	3051	1774	4825	4300	8600	28.2	16.5	83.0	24.0	—	29.7	20.2	—	—	23.5	14.8	81.1	21.4	—	26.1	17.9	—	—


NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

VEHICLE AND FRAME HEIGHT CHARTS

U/X Crossover Sport Van

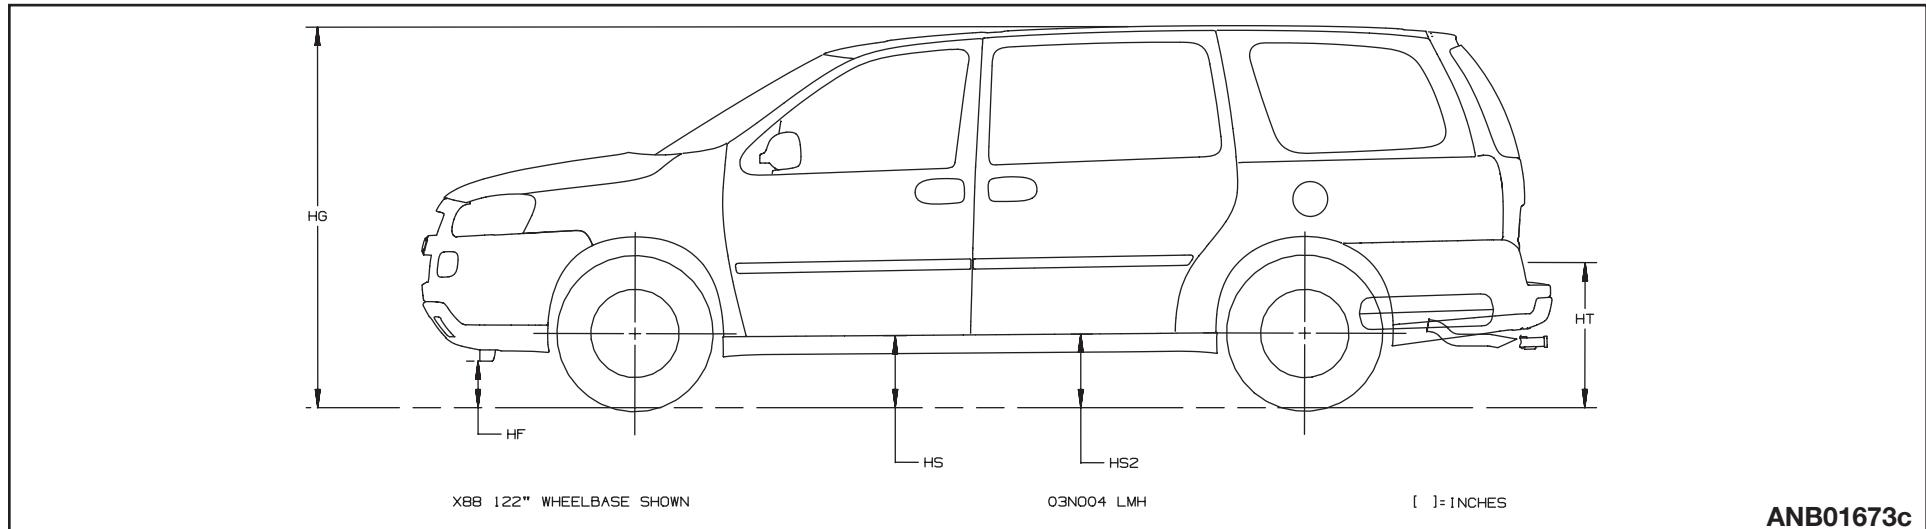

Heights (To Ground)

- HE Top of Frame at End
- HF Bottom of Front Air Deflector or Bumper
- HG Roof Height
- HM Normal Top of Frame
- HR Top of Frame at Centerline of Rear Axle
- HS Step H-Point-Front
- HS2 Step H-Point-Second
- HT Rear Cargo Load Height

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

VEHICLE AND FRAME HEIGHT CHARTS

U 11416	113.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	GVW/Tire	Frt	Rr	Ttl	Frt	Rr																	
5622 P225/60R17	2359	1823	4183	2866	2756	—	7.2	68.1	—	—	—	16.6	19.3	24.7	—	7.1	65.2	—	—	—	15.0	16.7	20.7
5622 & G67 P225/60R17	2359	1823	4183	2866	2756	—	7.2	68.1	—	—	—	16.6	19.3	24.7	—	6.6	66.9	—	—	—	15.7	18.1	23.1

U 12216	121.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear									
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT
	GVW/Tire	Frt	Rr	Ttl	Frt	Rr																	
¹⁾ 5622 P225/60R17	2318	1854	4172	2866	2756	—	7.4	68.2	—	—	—	16.7	19.4	25.2	—	4.8	65.7	—	—	—	14.1	15.9	19.3
¹⁾ 5622 & G67 P225/60R17	2318	1854	4172	2866	2756	—	7.4	68.2	—	—	—	16.7	19.4	25.2	—	4.4	67.0	—	—	—	14.7	18.0	23.8
²⁾ 5622 & FE1 & Y3G/Y3H/Z10 P225/60R17	2318	1854	4172	2866	2756	—	7.3	68.5	—	—	—	16.8	19.6	25.5	—	4.7	66.0	—	—	—	14.2	16.1	19.7
²⁾ 5622 & FE3 & Y3G/Y3H/Z10 P225/60R17	2318	1854	4172	2866	2756	—	7.3	68.5	—	—	—	16.8	19.7	25.6	—	4.7	66.0	—	—	—	14.3	16.1	19.7
²⁾ 5622 & G67 & FE3 & Y3G/Y3H/Z10 P225/60R17	2318	1854	4172	2866	2756	—	7.3	68.5	—	—	—	16.8	19.7	25.6	—	4.5	67.0	—	—	—	14.6	17.9	23.7
²⁾ 5842 & W49 & G67 P225/60R17	2318	1854	4172	2866	3006	—	7.3	68.3	—	—	—	16.7	19.5	25.4	—	4.2	66.9	—	—	—	14.5	17.8	23.9

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required