



2017

EXPRESS VAN CARGO



Shown with aftermarket equipment



About This Publication

This catalog is not updated during the model year and should not be used for ordering purposes. It is intended as a source of basic information. All illustrations and specifications in this literature are based on the latest product information available at the time of publication. General Motors reserves the right to make changes at any time without notice. For further details, consult your local dealer.

Care must be taken during customer installation of equipment and wiring to ensure that all holes drilled in the body are corrosion protected, properly sealed and that vehicle wiring harnesses, piping or other components have not been displaced or damaged. Aftermarket equipment installers must be mindful of applicable Federal Motor Vehicle Safety Standards. This information can be obtained directly from the National Highway Traffic Safety Administration.

Adding non-dealer accessories or making modifications to the vehicle can affect vehicle performance, aerodynamics, and overall top speed.

These vehicles are equipped with an air bag system. The air bag system in your police vehicle includes frontal driver and passenger air bags, front seat back side impact air bags, front knee air bags or knee bolsters and side curtain air bags. Customer installed equipment such as security barriers behind the front seats should not be mounted so that the barrier ends are within the side air bag deployment zones. The sensors and other components for the air bag system must not be relocated to accommodate the installation of customer furnished equipment; please refer to the service manual for sensor and other component locations. For information concerning instrument panel top pad mounted equipment and air bag system deployment zones, see the air bag information section in this catalog and the vehicle owners manual.

A note about vehicle alterations by independent suppliers: This catalog shows pictures of vehicles that have been altered or upfitted with equipment or components supplied to Chevrolet or its dealers by independent suppliers. Chevrolet is not responsible for the safety or quality of design features, materials or workmanship of any alterations by a supplier.

INDEX

- **UPDATES FOR 2017 EXPRESS CARGO VAN**
- **STANDARD 1WT FEATURES**
- **COLORS & INTERIOR TRIM**
- **OPTIONAL EQUIPMENT**
- **POWERTRAIN / TRANSMISSION RATINGS /
GCWR RATINGS / EMISSIONS**
- **SPECIFICATIONS**
- **AIRBAG DIMENSIONS**
- **AIRBAGS & STABILITRAK**
- **WARRANTY**

EXPRESS VAN



UPDATES FOR 2017

NEW AVAILABLE FEATURES

- (GPA) Graphite Metallic
- (CGN) Cargo liner, spray-in
- (KG4) Alternator, 150 amps
- (Z82) Optional Heavy Duty Trailering Equipment
- (LWN) Duramax 2.8L Turbo Diesel (late availability)



DELETIONS

- (LGH) Duramax 6.6L V8 Turbo Diesel
- (FHZ) Dedicated Compressed Natural Gas (CNG) system and LPG
- (UFM) Fuel tank, 3-tank configuration
- (UFP) Fuel tank, 4-tank configuration
- (KG3) Alternator, 145 amps
- (GHO) Rear axle, 3.54 ratio

NOTE: This vehicle is not designed nor intended for use in high speed emergency vehicle operations.
 Model G2500 Regular Wheelbase RWD (CG23405), Model G2500 Extended Wheelbase RWD (CG23705)
 Model G3500 Regular Wheelbase RWD (CG33405), Model G3500 Extended Wheelbase RWD (CG33705)

STANDARD INTERIOR FEATURES ON EXPRESS PRISONER VAN-1WT

AIR CONDITIONING	Single-zone, manual
ASSIST HANDLE	Driver and front passenger
CARGO TIE DOWNS	6 D-ring attachments on cargo floor
CONSOLE	Engine cover with open storage bin
CONVENIENCE PACKAGE	Includes power windows and (AU3) power door locks. NOTE: Does not include (ATG) Remote Keyless Entry. Remote Keyless Entry (ATG) must be ordered separately.
CUP HOLDERS	Three on engine console cover
DEFOGGER	Front and side windows
DRIVE INFO. CENTER	Includes fuel range, average speed, oil life, tire pressure monitoring, fuel used, ice warning, engine hours, average fuel economy, tachometer, and maintenance reminders. Compass and outside temperature available if equipped. When (FHZ) Dedicated Compressed Natural Gas (CNG) system is ordered, includes average speed, oil life, tire pressure monitoring, ice warning, engine hours, tachometer and maintenance reminders. Compass and outside temperature available if equipped.
FLOOR COVERING	Full-length Black rubberized-vinyl
HEADLINER	Cloth over driver and passenger
LIGHTING	Interior with 4 dome lights, 1 overhead and 3 LED's on cross members in cargo area, includes defeat switch and door handle-activated switches.
MIRROR	Inside rearview manual day/night
POWER OUTLETS	Two auxiliary on engine console with cover 12-volt and 120-volt power outlet
AUDIO SYSTEM	Audio system, AM/FM stereo with MP3 player, seek-and-scan, digital clock, TheftLock, random select, auxiliary jack and 2 front door speakers
RESTRAINT SYSTEM¹	Airbags, frontal, driver and right front passenger, side curtain, seat-mounted thorax and knee bolsters, driver and right front passenger. Includes passenger-side airbag deactivation switch. Not available with (ZX1) driver only high-back bucket seat.
SEATS, FRONT	Seating arrangement, vinyl driver and front passenger high-back buckets, with head restraints.
SPEEDOMETER/CLUSTER	Analog with speedometer, odometer, trip odometer, fuel level, volt meter, engine temperature and oil pressure
THEFT DETERRENT	Vehicle theft PASS-Key® III
VISORS	Driver and front passenger, Cloth, Padded
WARNING TONES	Headlamp on and key-in-ignition

1. Always use safety belts and the correct child restraint for your child's age and size, even in vehicles equipped with airbags. Even in vehicles equipped with Passenger Sensing System, children are safer when properly secured in a rear seat in an appropriate infant, child or booster seat. Never place a rear-facing infant restraint in the front seat of any vehicle equipped with an active frontal airbag. See your vehicle Owner Manual and child safety seat instructions for more information.

STANDARD EXTERIOR FEATURES ON EXPRESS PRISONER VAN-1WT

BUMPER, FRONT	Painted, Black. Deleted when (V37) front and rear chrome bumpers is ordered.
BUMPER, REAR	Painted, Black with step pad. Deleted when (V37) front and rear chrome bumpers is ordered.
DEFOGGER	Side windows
DOOR	Swing-out passenger-side, 60-40 split
DOOR LOCKS	Power
GLASS	Solar-Ray light-tinted, all windows.
GRILLE	Black composite with single rectangular halogen headlamps
HEADLAMPS	Single halogen. Includes Day time running lamps. Altering headlamp assembly is not recommended, General Motors is not responsible for the effects of any modifications.
LICENSE PLATE KIT	Front
MIRRORS	Outside, rearview, manual, Black
TIRES	LT245/75R16E all-seasonal, blackwall, with full size spare tire (Spare tire located at rear underbody of vehicle).
TRIM PANELS	Hinged rear side doors and hinged rear doors
WINDOWS	Power
WINDSHIELD WIPERS	Intermittent wet-arm with pulse washers
WHEELS	Steel, 16 inch x 6.5 inch, includes Gray center caps and steel spare

STANDARD CHASSIS FEATURES ON EXPRESS PRISONER VAN-1WT




















ALTERNATOR	105 amps. (KG4) 150 amp is standard when (C69) rear air conditioning is ordered.
AXLE	3.42 Axle ratio
BATTERY	600 cold-cranking amps, maintenance-free with rundown protection and retained accessory power. (Dual battery option available see Chassis options)
BRAKES	4-wheel antilock, 4-wheel disc
ENGINE	Vortec V8, 4.8L with SFI. Includes external engine oil cooler. For engine availability and engine specifications see powertrain
EXHAUST	Aluminized stainless-steel muffler and tailpipe
FUEL TANK CAPACITY	31 gallon (117.3 liters)
MONITOR	Oil life
TRANS. OIL COOLER	External, included and only available with (L20) Vortec 4.8L V8 SFI engine or (L96) Vortec 6.0L V8 SFI FlexFuel engine.
STABILITRAK	Traction assistance and vehicle stability enhancement system
STEERING	Power
SUSPENSION, FRONT	Independent with coil spring and stabilizer bar
SUSPENSION, REAR	Hypoid drive axle with multi-leaf springs
TIRE PRESSURE MONITOR	Does not apply to spare tire
TOW/HAUL MODE	Tow/haul mode selector mounted on instrument panel
TRANSMISSION	6-speed automatic, heavy-duty, electronically controlled with overdrive and tow/haul mode and internal transmission oil cooler
WARRANTY	See warranty and maintenance section for information

AVAILABLE EXTERIOR COLORS Actual colors may vary

GAN	GPA	GBV	GWX	GBA	GAZ	G7C	86U
Silver Ice Metallic	*Graphite Metallic	Cyber Gray Metallic	Brownstone Metallic	*Black	Summit White	*Red Hot	*Wheatland Yellow

* Not available with B46 rear body-colored trim

SEO PAINT AVAILABLE Actual colors may vary

COLOR DESCRIPTION	SEO CODE	WA#	
Yellow	–	215D	
Yellow	–	259L	
Blue	–	451N	
Blue	–	5665	
Petro Blue	–	527Y	
Yellow	–	478G	
Dark Blue Metallic	–	722J	
Sheer Silver Metallic	–	726S	
Bronzemist	–	529F	
Yellow	–	5456	
Green	–	7927	
Silver Metallic	–	8867	
Woodland Green	9V5	9015	
Doeskin Tan	9V9	9403	
Yellow	–	9414	
Tangier Orange	9W4	9417	
Inca Gold	–	7952	
Dark Toreador Red	–	257C	
Silver Birch Metallic	–	926L	

NOTE:

- SEO paint orders that contain less than five vehicles will be delayed until five unit minimum is received for batch production
- Exterior SEO solid paints are not available with (B46) Trim, rear body-colored halo.
- All extraneous body components formerly color-keyed to body color, will be flat Black.

SEATS

	FRONT SEAT TYPE	SEAT CODE	SEAT TRIM	COLOR	COLOR CODE
Standard	Front bucket with vinyl trim and outboard head restraints, includes inboard armrests.	AR7	Vinyl	Medium Pewter	93W
				Neutral	52W

NOTE: For optional front seat and rear seat availability see Interior optional equipment pages.

OPTIONAL EQUIPMENT & FEATURES

INTERIOR

AJ3	AIRBAG - frontal, driver-side only (deletes passenger-side). Included and only available with (ZX1) driver-only high-back bucket seat. Not available with (ZX2) driver and front passenger high-back bucket seats. NOTE: Passenger seat is removed when ordered. See the Owner's Manual for more information.
C69	AIR CONDITIONING, REAR - Includes (C36) rear heater and (KG4) 150-amp alternator. Included with (ZP6) Express Crew Van Package when ordered with CG23705 or CG33705 models.
R6G	AIR CONDITIONING DELETE - Not available with (YF2) Ambulance Package or (DE5) outside heated, power-adjustable Black mirrors.
UI8	AUDIO SYSTEM - Chevrolet MyLink radio with Navigation, 6.5" diagonal color touch-screen display, AM/FM stereo with CD player, includes Bluetooth streaming audio for music and select phones; Hands-Free smartphone integration with Pandora and Stitcher; voice-activated technology for radio and phone. Not available with (U2K) SiriusXM Satellite Radio. Requires (ZQ3) Convenience Package, (NP5) leather-wrapped steering wheel and (W1Y) steering wheel controls
US8	AUDIO SYSTEM - AM/FM stereo with CD/MP3 player, Seek-and-scan, digital clock, auto-tone control, Radio Data System (RDS), TheftLock, random select, auxiliary jack, 2 front door speakers.
U0H	AUDIO SYSTEM - AM/FM stereo with MP3 player and USB port, includes seek-and-scan, digital clock, TheftLock, random select, auxiliary jack and 2 front door speakers. Not available with (NP5) leather wrapped steering wheel.
UXZ	AUDIO SYSTEM - Radio provisions only. Includes alarm warning chimes, radio wiring harness, radio antenna and 2 front door speakers
K5Z	AUXILIARY BATTERY TRAY - Requires (L20) Vortec 4.8L V8 SFI FlexFuel ² engine or (L96) Vortec 6.0L V8 SFI FlexFuel engine.
UPF	BLUETOOTH FOR PHONE¹ - Requires (NP5) leather-wrapped steering wheel, (W1Y) steering wheel controls and (ZQ3) Convenience Package. Included with (UI8) Chevrolet MyLink radio with Navigation. With (U0F) AM/FM stereo with MP3 player, (U0H) AM/FM stereo with MP3 player and USB port or (US8) AM/FM stereo with MP3 compatible CD player requires (UE1) OnStar hardware (subscription to OnStar services not required for operation).
VLW	BULKHEAD DIVIDER , With door. Not available with (VLP) Bulkhead divider (R7T/R7Q) commercial customer bin, GM Business Choice Upfit, (ZP6) Express Crew Van Package
CGN	CARGO LINER - Spray-in
U80	COMPASS - 8-point digital located in the Driver Information Center, included and only available with (TR9) Auxiliary Lighting.
BA3	CONSOLE - Deluxe with swing-out storage bin. Included with (AS5) front bucket seats with custom cloth.
ZQ3	CONVENIENCE PACKAGE - Tilt-wheel and cruise control
K34	CRUISE CONTROL - Included and only available with ZQ3 Convenience Package, tilt-wheel and cruise control.
PNC	DOOR TRIM PANEL PACKAGE - Included with (ZP6) Express Crew Van 5-passenger seating arrangement or (5BV) Electrical Provisions, Upfitter. Requires (A19) swing-out rear cargo door window glass. Not available with (52G) or (52W) Neutral interior, (PPC) door trim panel package.
B31	FLOOR COVERING - Black rubberized-vinyl, front only (deletes rear covering behind front seat) Required with (5BV) Upfitter electrical provisions. Included with (RFM) Rear floor covering delete
RFM	FLOOR COVERING DELETE - Rear Floor covering.
C36	HEATER, REAR AUXILIARY - Included with (C69) rear air conditioning.
5A1	HVAC PROVISIONS - Rear A/C Control Head Kit with rear air conditioning control head, retainer and bezel. Designed for installation after upfit is completed. Shipped loose. Requires RPO (C69) rear air conditioning and RPO (C36) rear auxiliary heater. Not Available with RPO (PCH) Hotel Shuttle Package, (5BV) upfitter electrical provisions.
TR9	LIGHTING - Auxiliary with reading and underhood lights. Required with (5BV) Upfitter electrical. Includes (U80) 8-point digital compass. Included with (PCR) Express Access Plus Package and (ZP6) Express Crew Van Package.
D31	MIRROR - Inside rearview manual day/night. Available with (UVC) Rear Vision Camera only when (UI8) Chevrolet MyLink radio with Navigation is ordered.
DRJ	MIRROR - Inside rearview, includes Rear Vision Camera display. Not available with (UI8) Navigation radio or (UXZ) radio provision.
MTM	MIRROR, BRACKET - Windshield mirror mounting bracket Provides the windshield rearview mirror mounting bracket only, no mirror. Not available with (D31) inside rearview manual day/night mirror or (DRJ) inside rearview mirror, includes Rear Vision Camera display. Not available with (UI8) Navigation radio or (UXZ) radio provision.
UBS	NAVTRAFFIC - Avoid congestion before you reach it by enhancing your vehicle's navigation or entertainment system with NavTraffic. With detailed information on traffic speed, accidents, construction, road closures and more, you will get to your destination faster and more easily than ever before. Included and only available with (UI8) Chevrolet MyLink radio with navigation. SiriusXM Satellite Radio and NavTraffic subscriptions are sold separately or as a package after trial period. If you decide to continue service after your trial, the subscription plan you choose will automatically renew thereafter and you will be charged according to your chosen payment method at then-current rates. Fees and taxes apply. To cancel you must call us at 1-866-635-2349. See our Customer Agreement for complete terms at www.siriusxm.com . All fees and programming subject to change. NavTraffic available only in select markets. For more information, see www.siriusxm.com/navtraffic .

1. Go to gm.com/bluetooth to find out which Bluetooth phones are compatible with the vehicle.

OPTIONAL EQUIPMENT & FEATURES

INTERIOR CONTINUED

ROV	ONSTAR - With 4G LTE for Fleet (12GB/12 months) provides a built-in Wi-Fi hotspot to connect to the internet at 4G LTE speeds, includes AT&T 12GB data plan good for 12 months. Requires (UE1) OnStar and (VV4) OnStar with 4G LTE and one of the following order types FLS, FNR, FRC, FBC, FGO or FEF. Not available with ROW. Visit www.onstar.com for vehicle availability, details and system limitations. Services and connectivity may vary by model and conditions. 4G LTE service available in select markets. 4G LTE performance based on industry averages and vehicle systems design. Some services require data plan.
ROW	ONSTAR - With 4G LTE for Fleet (24GB/24 months) provides a built-in Wi-Fi hotspot to connect to the internet at 4G LTE speeds, includes AT&T 24GB data plan good for 24 months. Requires (UE1) OnStar and (VV4) OnStar with 4G LTE and one of the following order types: FLS, FNR, FRC, FBC, FGO or FEF. Not available with ROV. Visit www.onstar.com for vehicle availability, details and system limitations. Services and connectivity may vary by model and conditions. 4G LTE service available in select markets. 4G LTE performance based on industry averages and vehicle systems design. Some services require data plan.
UE1	ONSTAR GUIDANCE ¹ - "OnStar Guidance Plan for a limited time period. Includes Automatic Crash Response, Stolen Vehicle Assistance, Roadside Assistance, Turn-by-Turn Navigation, Advanced Diagnostics and more (trial excludes Hands-Free Calling)". Visit www.onstar.com for coverage map, details and system limitations. Services vary by model. OnStar acts as a link to existing emergency service providers. Not all vehicles may transmit all crash data. Requires (UOF) AM/FM stereo with MP3 player, (UOH) AM/FM stereo with MP3 player and USB port, (US8) AM/FM stereo with CD/MP3 player or (UI8) Chevrolet MyLink radio with Navigation. Not available with (UXZ) radio provisions only. Includes: OnStar3 Basic Plan for 5 years, includes limited vehicle mobile app features, Monthly Diagnostics Report and Dealer Maintenance Notification". Includes OnStar Basic Plan2 available for 5 years from the date of vehicle delivery and is transferable. Does not include Emergency, Security or Navigation services. NOTE: Activation of an OnStar account requires the request of customer to initiate once vehicle is received
VV4	ONSTAR WITH 4G LTE ³ - "OnStar 4G LTE and built-in Wi-Fi hotspot connects to the Internet at 4G LTE speeds; includes OnStar Data Trial for 3 months or 3GB (whichever comes first)". Visit www.onstar.com for coverage map, details and system limitations. Services vary by model. OnStar acts as a link to existing service providers. Not all vehicles may transmit all crash data. Available Wi-Fi requires compatible mobile device, active OnStar service and data plan. Data plans provided by ATandT." Included and only available with (UE1)
UFA	OUTSIDE TEMPERATURE DISPLAY - Located in the Driver Information Center. Requires (ZR7) Chrome Appearance Package.
ATG	REMOTE KEYLESS ENTRY - Includes 2 transmitters and remote panic button. Required with (BTV) remote vehicle starter system. Included with (PRP) Express Access.
RG1	ROUTING GROMMET - Front of instrument panel. Provides an area for putting wires thru the front of dash. Not available with RPO (9L7) 2-30 amp wire leads.
BN2	SAFETY BELTS , Orange belts, Orange, Provides high visibility front Orange safety belts in lieu of Dark Pewter. Requires (93G) Medium Pewter Custom Cloth or (93W) Custom Vinyl. Not available with SEO (5B2) Red safety belts.
5B2	SAFETY BELTS - Red belts, Provides high visibility front Red seat belts in lieu of Dark Pewter. Requires Medium Pewter RPO (93G) Custom Cloth or (93W) Custom Vinyl trim code. Not available with SEO (8N2) Orange safety belts.
AG1	SEAT ADJUSTER - Driver 6-way power. Requires (ASS) front bucket with Custom Cloth trim.
AG2	SEAT ADJUSTER, FRONT PASSENGER - 6-way power, available on CG23405 and CG23705 1WT. Requires (ASS) front bucket seats with Custom Cloth trim, (5BV) Upfitter electrical provisions and (AG1) 6-way power driver seat adjuster.
ASS	SEATS - Front bucket with Custom Cloth trim, head restraints and inboard armrests. Requires (52G) Neutral or (93G) Medium Pewter interior trim. Includes (BA3) console with swing-out storage bin.
ZP6	SEATING ARRANGEMENT - 5-passenger, Express Crew Van Package, Includes (ASF) Air Bags, driver and right-front passenger, seat-mounted side-impact and head curtain side-impact, (B38) full-length Black rubberized-vinyl floor covering, (ZW6) fixed full-body window package glass, and (93W/93G) Medium Pewter interior. Includes (C69) rear air conditioning and (TR9) auxiliary lighting when ordered with CG23705 or CG33705 models. Not available with (RFM) rear floor covering delete, (5L3) side and rear cargo door panel trim sides, (VLP) Bulkhead divider, LPO, (VLW) Bulkhead divider with door, LPO or (5C6) cargo tie-downs.
ZX1	SEATING ARRANGEMENT - Driver-only high-back bucket, adjustable, includes head restraint and vinyl or cloth trim. Deletes passenger-side airbag, seat and safety belt. Components cannot be added back later. Includes (AJ3) driver-side only frontal airbag. Deletes passenger-side airbag, seat and safety belt. Components cannot be added back later. Includes (AJ3) driver-side only frontal airbag.
U2K	SIRIUS XM SATELLITE RADIO - Enjoy a 3-month All Access trial subscription with over 150 channels including commercial-free music, plus sports, news and entertainment. Plus you can listen to SiriusXM Internet Radio everywhere on your computer, smartphone or tablet. Welcome to the world of SiriusXM. Included and only available with the combination of (UE1) OnStar and (US8) AM/FM stereo with MP3 compatible CD player. If you decide to continue listening after your trial, the subscription plan you choose will automatically renew and you will be charged according to your chosen payment method at then-current rates. Fees and taxes apply. To cancel you must call us at 1-866-635-2349. See our Customer Agreement for complete terms at www.siriusxm.com . All fees and programming subject to change.
PR6	SIRIUS XM RADIO - Additional 9 months of the SiriusXM All Access Package. Includes 150 channels of commercial-free music plus every major sport and the biggest names in entertainment, news and comedy in vehicle plus 9 months of listening on the SiriusXM app or online in addition to the 3 months of All Access trial service that is included in the price of the vehicle. Total service duration is 12 months. Non-Transferrable. Non-Refundable. Requires (U2K) SiriusXM Satellite Radio and a Fleet order type. Not available with FDR order types, PR7 or PR8. Not available in AK, HI, PR and VI.
PR7	SIRIUS XM SATELLITE RADIO - Radio Additional 21 months of the SiriusXM All Access Package. Includes 150 channels of commercial-free music plus every major sport and the biggest names in entertainment, news and comedy in vehicle plus 21 months of listening on the SiriusXM app or online in addition to the 3 months of All Access trial service that is included in the price of the vehicle. Total service duration is 24 months. Non-Transferrable. Non-Refundable. Requires (U2K) SiriusXM Satellite Radio and a Fleet order type. Not available with FDR order types, PR6 or PR8. Not available in AK, HI, PR and VI.

1. Visit onstar.com for coverage map, details and system limitations

2. Does not include emergency or security services. Visit onstar.com for coverage map, details and system limitations

3. 4G LTE service available in select markets. Visit onstar.com for coverage map, details and system limitations.

OPTIONAL EQUIPMENT & FEATURES

INTERIOR CONTINUED

PR8	SIRIUS XM SATLLITE RADIO - Additional 33 months of the SiriusXM All Access Package. Includes 150 channels of commercial-free music plus every major sport and the biggest names in entertainment, news and comedy in vehicle plus 33 months of listening on the SiriusXM app or online in addition to the 3 months of All Access trial service that is included in the price of the vehicle. Total service duration is 36 months. Non-Transferrable. Non-Refundable. Requires (U2K) SiriusXM Satellite Radio and a Fleet order type. Not available with FDR order types, PR6 or PR7. Not available in AK, HI, PR and VI.
DT4	SMOKER'S PACKAGE - Includes ash tray and lighter
SJ6	STEERING COLUMN - Tilt Steering column without cruise control. Not available with RPO (ZQ3) Convenience Package, RPO (K34) cruise control, RPO (UF3) high idle switch.
NP5	STEERING WHEEL - Leather-wrapped, Requires (ZQ3) Convenience Package and (U0F) AM/FM stereo with MP3 player, (U0H) AM/FM stereo with MP3 player and USB port, (U58) AM/FM stereo with CD/MP3 player or (UI8) Chevrolet MyLink radio with Navigation.
5A2	SUNSHADE - Vanity inside mirrors with passenger side mirror illumination Provides passenger illuminated vanity mirror with driver non-illuminated mirror. Requires (AK5) air bags, frontal driver and right-front passenger, (TR9) Auxiliary lighting and (E24) swing-out passenger-side door. Not available with (UE1) OnStar, Guidance plan for 6 months, (ASF) head/side-curtain air bags, (C69) rear air conditioning, (DAA) driver and front passenger vinyl visors, (ZX1) seating arrangement, driver-only high-back bucket, adjustable, includes head restraint and vinyl or cloth trim, (ZP6) seating arrangement, 5-passenger.
5P9	TRIM PANEL - Side and rear cargo doors. Base level passenger van interior trim panels for the side and rear cargo doors of a 2500 and 3500 cargo van. Trim panels are shipped loose for installation later. Requires (93G) Medium Pewter Custom Cloth or (93W) Custom Vinyl, RPO (E24) swing-out, passenger-side door, RPO (A19) swing-out rear cargo door window glass and RPO (ZW3) rear doors and side cargo doors fixed glass. Not available with RPO (YA2) sliding passenger-side door, RPO (R6S) rear side and rear doors trim panel delete, RPO (PNC) door trim panel package, RPO (PPC) door trim panel package, (5BV) upfitter electrical provisions.
R6S	TRIM PANEL DELETE - Rear side and rear doors
DAA	VISORS - Driver and front passenger, vinyl in lieu of standard cloth
R8J	WINDOWS - Power, delete. Deletes power windows from the (ZQ2) Convenience Package. (AU3) Power door locks remain. Not available with (DE5) outside heated power-adjustable, Black mirrors.

EXTERIOR

G7K	ANTENNA EQUIPMENT - Includes additional antenna, cable and ground plate. Provides additional ability to relocate standard OnStar antenna, cable length 25 ft. Ships loose. Requires (UE1) OnStar.
V37	BUMPERS - Front and rear chrome with step pad (included with ZR7 Chrome Appearance Package)
VLW	BULKHEAD DIVIDER WITH DOOR - Not available with (VLP) Bulkhead divider, LPO, (R7T/R7Q) commercial customer bin GM Business Choice Upfit, (ZP6) Express Crew Van Package.
VLP	BULKHEAD DIVIDER - Not available with (VLW) Bulkhead divider with door, LPO, (R7T/R7Q) commercial customer bin GM Business Choice Upfit, (ZP6) Express Crew Van Package.
ZR7	CHROME APPEARANCE PACKAGE - Includes V37 front and rear chrome bumpers with step-pad and V22 chrome grille with dual composite halogen headlamps
C49	DEFOGGER - Rear-window electric. Requires (A18) rear cargo door windows swing-out glass and (AJ1) Solar-Ray deep-tinted glass. Not available with (R6G) air conditioning delete.
YA2	DOOR - Sliding passenger, side (includes trim panel standard on sliding door only)
ZW1	GLASS - Fixed right side cargo door. Requires (E24) swing-out passenger-side door or (YA2) sliding passenger-side door. You may upgrade fixed glass to (A19) swing-out glass. Not available with (A12) fixed rear doors window glass, (A18) swing-out rear cargo door windows glass.
ZW6	GLASS, FIXED FULL-BODY WINDOW PACKAGE - May upgrade fixed glass to swing-out glass, see (A18) rear cargo door windows swing-out glass. Upgrade requires (A19) rear side door and rear door window swing-out glass. Included with (ZP6) 5-passenger Express Crew Van Package.
ZW3	GLASS, FIXED REAR DOORS AND SIDE CARGO DOORS - May upgrade fixed glass to swing-out glass, see (A18) rear cargo door windows swing-out glass. Upgrade requires (A19) rear side door and rear door window swing-out glass. Included with (PCH) Hotel Shuttle Package.
ZW4	GLASS, FIXED REAR DOORS, SIDE CARGO DOOR AND REAR PASSENGER-SIDE QUARTER - May upgrade fixed glass to swing-out glass, see (A18) rear cargo door windows swing-out glass. Upgrade requires (A19) rear side door and rear door window swing-out glass. Not available with (PCH) Hotel Shuttle Package.
ZW2	GLASS, FIXED REAR DOORS - May upgrade fixed glass to swing-out glass, see (A18) rear cargo door windows swing-out glass. Not available with (PCH) Hotel Shuttle Package.
AJ1	GLASS, SOLAR-RAY DEEP-TINTED - All windows except light-tinted glass on windshield and driver- and front passenger-side glass. Requires (A19) rear side door and rear door window swing-out glass or (A18) rear cargo door windows swing-out glass. Included with (PCH) Hotel Shuttle Package. Requires (A19) rear side door and rear door window swing-out glass or (A18) rear cargo door windows swing-out glass.
A18	GLASS, SWING-OUT REAR CARGO DOOR WINDOWS - Requires (ZW2) rear doors fixed glass. Requires (A19) swing-out rear side door window glass when ordered with (ZW3) rear doors and side cargo doors fixed glass, (ZW4) rear doors, side cargo door and rear passenger side quarter fixed glass or (ZW6) full body window package fixed glass.

OPTIONAL EQUIPMENT & FEATURES

EXTERIOR CONTINUED

A19	GLASS, SWING-OUT REAR SIDE DOOR AND REAR WINDOW. - Requires (A18) rear cargo door windows, swing-out glass when ordered with (ZW3) rear doors and side cargo door fixed glass, (ZW4) rear doors, side cargo door and rear passenger-side quarter fixed glass or (ZW6) full body window package fixed.
U05	HORN - Dual-note high and low
5Z5	HUBCAP DELETE - Deletes gray center caps from standard wheels 1 - Not available with RPO (P03) wheel trim chrome center cap.
5X8	KEY - unique side cargo and rear door Unique key for side and rear cargo doors, separate from driver ignition and door key. 1 - Not available with RPO (5H1) key equipment.
5H1	KEY EQUIPMENT - Two additional keys for single key system. Provides two additional spare keys for a total of (4). (Keys will be cut but not programmed). NOTE: programming of keys is at customer's expense. Programming keys is not a warranty expense. Not available with SEO (5X8) side cargo and rear door key.
8X1	LABEL - fasten safety belts "Fasten Safety Belts" reminder label on front driver and passenger door window glass
TR9	LIGHTING - Auxiliary with reading and underhood lights. Required with (5BV) Upfitter electrical. Includes (U80) 8-point digital compass. Included with (PCR) Express Access Plus Package and (ZP6) Express Crew Van Package.
DEB	MIRRORS - Outside heated power-adjustable, Black, manual-folding with single pane glass. Not available with (R6G) air conditioning delete or (R8J) power window delete.
DE5	MIRRORS - Outside heated power-adjustable, Black, manual-folding Included with (PCR) Express Access Plus Package. Not available with (R6G) air conditioning delete or (R8J) power window delete.
VXW	MOLDED ASSIST STEPS - Dealer Installed
5H3	ORNAMENTATION - Exterior Delete Deletes all exterior ornamentation on rear doors
UFA	OUTSIDE TEMPERATURE DISPLAY , Located in the Driver Information Center. Requires (ZR7) Chrome Appearance Package.Code Description.
TGK	PAINT, SPECIAL - Solid, one color All normally body colored non-sheet metal parts will be flat Black. Required with any SEO paint selection. Not available with RPO (B46) rear body-colored halo trim. May require extra lead time and GM will require 5 orders before sending to the plant.
9V9	PAINTS, SOLID, DOESKIN TAN - All extraneous body components formerly color-keyed to body color, will be flat Black with SEO paint. Not available to order until January 2017. Requires SEO (TGK) solid special paint. Not available with RPO (B46) rear body-colored halo trim. May require extra lead time and GM will require 5 orders before sending to the plant.
9W4	PAINTS, SOLID, TANGIER ORANGE - All extraneous body components formerly color-keyed to body color, will be flat Black with SEO paint. Not available to order until January 2017. Requires SEO (TGK) solid special paint. Not available with RPO (B46) rear body-colored halo trim. May require extra lead time and GM will require 5 orders before sending to the plant.
9V5	PAINTS, SOLID, WOODLAND GREEN - All extraneous body components formerly color-keyed to body color, will be flat Black with SEO paint Not available to order until January 2017. Requires SEO (TGK) solid special paint. Not available with RPO (B46) rear body-colored halo trim. May require extra lead time and GM will require 5 orders before sending to the plant.
8S3	REAR BACKUP ALARM - Rear frame mounted, 97 decibels. Not available with RPO (ZR7) Chrome Appearance Package, RPO (UJ1) brake warning indicator or SEO (5BV) upfitter electrical provisions.
UD7	REAR PARK ASSIST - Not available with (UXZ) radio provisions only.
UVC	REAR VISION CAMERA - Display integrated into rearview mirror. Display included with (DRJ) inside rearview mirror. Display integrated into navigation screen when (UI8) Chevrolet MyLink radio with Navigation is ordered.
VLL	REMOVABLE ROOF RACK - Not available with (VLV) Swing out ladder rack LPO.
VLV	REMOVABLE SWING OUT LADDER RACK - Not available with (VLL) Removable roof rack LPO.
BTV	REMOTE VEHICLE STARTER SYSTEM - Includes remote keyless entry, 2 transmitters. Requires (ATG) remote keyless entry
5H6	SAFETY REFLECTOR TRIANGLE KIT - Provides a break-down warning kit consisting of 3 reflective triangles, Item shipped loose for later placement and securing in after-market installation
VLU	SECURITY SCREEN PACKAGE, WITHOUT REAR WINDOW POP-OUT - Requires a (ZW*) fixed glass. Not available with (A18) rear cargo door windows swing-out glass
ZX9	TIRE, SPARE DELETE - Jack is not included.
Q8C	TIRE VALVE STEM CAPS - Air thru Air through valve caps on the tire air valves
B46	TRIM - Rear body-colored halo (replaces standard Black panel located above rear cargo doors). Not available with (GBA) Black or (G7C) Red Hot, (GPA) Graphite Metallic, (86U) Wheatland Yellow or (TGK) SEO solid paint. These colors will receive a Black halo.
40P	WHEEL FINISH, PAINTED WHITE - White-painted wheels in lieu of standard Gray-painted wheels (includes spare wheel) Not available with option 5G0
5G0	WHEEL FINISH, PAINTED BLACK - Painted Black in lieu of standard Gray painted wheels. Not available with (P03) wheel trim chrome center cap or with option 40P
P03	WHEEL TRIM - Chrome center cap

OPTIONAL EQUIPMENT & FEATURES

ELECTRICAL

- 5BV UPFITTER ELECTRICAL PROVISIONS**, 30 amp circuit at C-pillar. Requires CG23405 or CG23705 model, RPO (AS5) seat front bucket deluxe, RPO (B31) floor covering, RPO (C69) air conditioning rear, RPO (DH6) visor LH/RH pass illumination sunshade, RPO (KG3) alternator 145 amp, RPO (PNC) door trim panels, RPO (TR9) auxiliary lighting, RPO (U80) compass, RPO (ZX2) Seating, Driver and Passenger, High-Back Bucket, RPO (ZQ3) tilt wheel & cruise control package, RPO (V37) chrome grille with dual composite halogen headlamps, RPO (V37) front and rear chrome bumpers with step-pad and SEO (8E1) Fuel, additional 3-gallons not available with (YA2) Door passenger side sliding, (U0F) am/fm radio stereo w/mp3 player, SEO (5L3) side and rear cargo door panel trim, SEO (9J6) tilt-steering column, SEO (5A1) provisions for rear A/C control head, SEO (9D7) 75MPD road speed governor, SEO (5A2) sunshade, SEO (8S3) back up alarm or SEO (5P9) side and rear cargo door panel trim
- 9L7 WIRING JUNCTION BLOCK**, Equipment accessory, includes 2-30 amp circuits. Requires (KG4) alternator 150 amp or (KW5) alternator 220 amp and (TP2) dual 600 and 770 isolated batteries. (Not available with (RGI) front instrument panel routing grommet)

CHASSIS

- KG4 ALTERNATOR**, 150-amps - Requires C69 rear air conditioning.
- KW5 ALTERNATOR**, 220 amps
- UA1 BATTERY** - Heavy-duty 770 cold-cranking amps, maintenance-free with rundown protection and retained accessory power. Not available (TP2) 600 cold-cranking amps primary battery
- TP2 BATTERY** - 600 cold-cranking amps primary, isolated 2nd heavy-duty 770-cold-cranking maps, allows 2nd battery to be used when the vehicle is not running without affecting ability to start the vehicle.
- UJ1 BRAKE WARNING INDICATOR**, Monitors brake system pressure, with loss of pressure an audible alarm (chime) and cluster telltale is lit.
- V10 COLD CLIMATE PACKAGE** - Includes (K05) engine block heater.
- G80 DIFFERENTIAL** - Heavy-duty locking rear
- L96 ENGINE** - Vortec 6.0L V8 SFI FlexFuel² (342 hp @ 5400 rpm, 373 lb-ft of torque @ 4400 rpm, Includes external engine oil cooler.
- K05 ENGINE BLOCK HEATER** - Included and only available with (V10) Cold Climate Package
- 5H5 FIRE EXTINGUISHER**, 2.5 lb. Dry chemical BC rated. Item shipped loose for later placement and securing in after-market installation
- R9Y FLEET FREE MAINTENANCE CREDIT** - This option code provides a credit in lieu of the free oil changes, tire rotations and inspections (2 maximum), during the first 24 months and 24,000 miles period for this ordered vehicle. The invoice will detail the applicable credit. The Customer will be responsible for all oil changes, tire rotations and inspections cost for this vehicle. NOTE: Dealer is unable to credit customer on vehicles not originally ordered with (R9Y) option.
- 8E1 FUEL, ADDITIONAL 3-GALLONS** - 3 gallons of fuel in addition to normal assembly plant fill
- 7T6 FUEL FITTING**, For fuel line take-off. A fuel tank with a fuel take-off fitting that a body builder may utilize to attach an auxiliary engine fueling device. Requires (L20) Vortec 4.8L V8 SFI engine or (L96) Vortec 6.0L V8 SFI FlexFuel engine.
- 9C2 GOVERNOR** - Electronic speed sensor set to 65 MPH Electronic software to facilitate 65-MPH maximum road speed with gasoline engine Requires a Fleet order. Not available with (K34) cruise control.
- 9B9 GOVERNOR**, Electronic speed sensor set to 70 MPH. Provides electronic software to limit maximum road speed to 70-MPH. Cruise control limited to 65 MPH. Requires a Fleet order type.
- 9D7 GOVERNOR**, Electronic speed sensor set to 75 MPH. Provides electronic software to limit maximum road speed to 75-MPH. Cruise control limited to 70 MPH. Requires a Fleet order type. Not available with SEO (5BV) upfitter electrical provisions.
- RT7 GM BUSINESS CHOICE UPFIT** - Commercial customer bin. Requires (TBM) Ship-thru. Options will have an invoice note "Adrian Steel Upfit". Not available with (PRP) Express Access, Bid Assistance or Competitive Assistance Programs.
- UF3 HIGH IDLE SWITCH** - Requires (L96) Vortec 6.0L V8 SFI FlexFuel engine and (ZQ3) Convenience Package.
- 5C4 SPRINGS, FRONT**- High Rate Upgrade, Upfitter option. Provides computer selected high rate front springs based on the front weight of the vehicle. Intended for a upfit that requires higher center of gravity loads that are located at or near the front axle. Provides increased front spring capacity but will not change the front GVWR rating. (Replaces standard computer selected suspension). Requires models *G33405 or *G33705 and a shipment to an upfitter or body builder.
- V14 TRANSMISSION OIL COOLER** - External. Included and only available with (L20) Vortec 4.8L V8 SFI engine or (L96) Vortec 6.0L V8 SFI FlexFuel engine.
- Z82 TRAILERING EQUIPMENT** - Heavy-duty, 4-pin/7-pin sealed connector. Includes (UY7) trailering provisions, trailering wire harness only.
- UY7 TRAILERING WIRING PROVISIONS** - Trailering wire harness only. Included with (Z82) heavy-duty trailering equipment.

POWERTRAIN

ENGINE					TRANSMISSION		AXLE	
MODEL	CODE	TYPE	DISPLACEMENT LITERS/CU. IN.	FUEL SYSTEM	STANDARD	TYPE	OPTION CODE	RATIO
1LS/1LT Standard	L20 Vortec	V8	4.8/293	SFI	Automatic MX0/MYD	Automatic HD 6-speed	GU6	3.42
1LS/1LT Optional	L96 Vortec	V8	6.0/366	SFI FlexFuel	Automatic MX0/MYD	Automatic HD 6-speed	GU6	3.42
1LS/1LT Optional	LWN Duramax	I4	2.8/170	DI	Automatic MSU	Automatic 8-speed	GU6	3.42

AUTOMATIC TRANSMISSION RATINGS

MODEL	(L20) Vortec 4.8L V8 SFI		(L96) Vortec 6.0L V8 FlexFuel	
	AXLE RATIO	Maximum Trailer Towing lbs. (kg)	AXLE RATIO	Maximum Trailer Towing lbs. (kg)
CG23405	3.42	8900(4307)	3.42	10000 (4536)
CG23705	3.42	8200(3720)	3.42	10000 (4536)
CG33405	3.42	8900(4307)	3.42	10000 (4536)
CG33705	3.42	8700(3946)	3.42	10000 (4536)

The wiring system is designed to operate with maximum performance and reliability. Adding electrical accessories to the vehicle for which it was not designed, would cause abnormalities in the electrical system.

The electrical system was designed to handle one additional stop/turn light bulb per tail light circuit (one added stop/turn light bulb to the right and left side). It is not recommended to add more than one bulb per circuit as it will result in damage to the electrical system (without optional trailer Towing Wiring). It is highly recommended to order the van with the optional (UY7) trailering wire harness only, trailering provisions for towing.

GCWR For Engine/Rear Axle Ratio Combination

(GCWR) Gross Combination Weight Ratings lbs. (kg)			
	13000 (5897)	14600 (6623)	16000 (7258)
(L20) Vortec 4.8L V8 SFI		3.42	
(L96) Vortec 6.0L V8 FlexFuel			3.42
(LWN) Duramax 2.8L I4 Diesel	3.42		

EMISSIONS - MUST BE SPECIFIED

FE9 EMISSIONS, Federal requirements

NE1 EMISSIONS, CONNECTICUT, Connecticut, Delaware, Maine, Maryland, Massachusetts, New Jersey, New York, Oregon, Pennsylvania, Rhode Island, Vermont and Washington state requirements


NB8 EMISSIONS OVERRIDE, California (allows a dealer in states that require California emissions - California, Connecticut, Delaware, Maryland, Massachusetts, New Jersey, New York, Oregon, Pennsylvania, Rhode Island or Washington - to order Federal emissions for a vehicle that will be registered in a state that has Federal emission requirements). Do not use for vehicles that will be registered in California, Connecticut, Delaware, Maryland, Massachusetts, New Jersey, New York, Oregon, Pennsylvania, Rhode Island or Washington. **Requires (FE9) Federal emissions requirements. Not available in Maine or Vermont.**

NB9 EMISSIONS OVERRIDE, State-specific (for dealers ordering vehicles in (YF5) or (NE1) emission states - California, Connecticut, Delaware, Maine, Maryland, Massachusetts, New Jersey, New York, Oregon, Pennsylvania, Rhode Island, Vermont and Washington) **Allows a California dealer (YF5 emissions) to order (NE1) emissions with (NB9) emissions override code for registration in (NE1) states; or, a Connecticut, Delaware, Maine, Maryland, Massachusetts, New Jersey, New York, Oregon, Pennsylvania, Rhode Island, Vermont and Washington dealer (NE1 emissions) to order (YF5) emissions with (NB9) emissions override code for registration in California.**

NC7 EMISSIONS OVERRIDE, Federal (for vehicles ordered by dealers in Federal emission states with (YF5) or (NE1) emissions - Not required for vehicles being shipped to California, Connecticut, Delaware, Maine, Maryland, Massachusetts, New Jersey, New York, Oregon, Pennsylvania, Rhode Island, Vermont or Washington) **Requires (YF5) California state emissions requirements or (NE1) Connecticut, Delaware, Maine, Maryland, Massachusetts, New Jersey, New York, Oregon, Pennsylvania, Rhode Island, Vermont or Washington state emissions requirements.**

YF5 EMISSIONS, California state requirements

DIMENSIONS

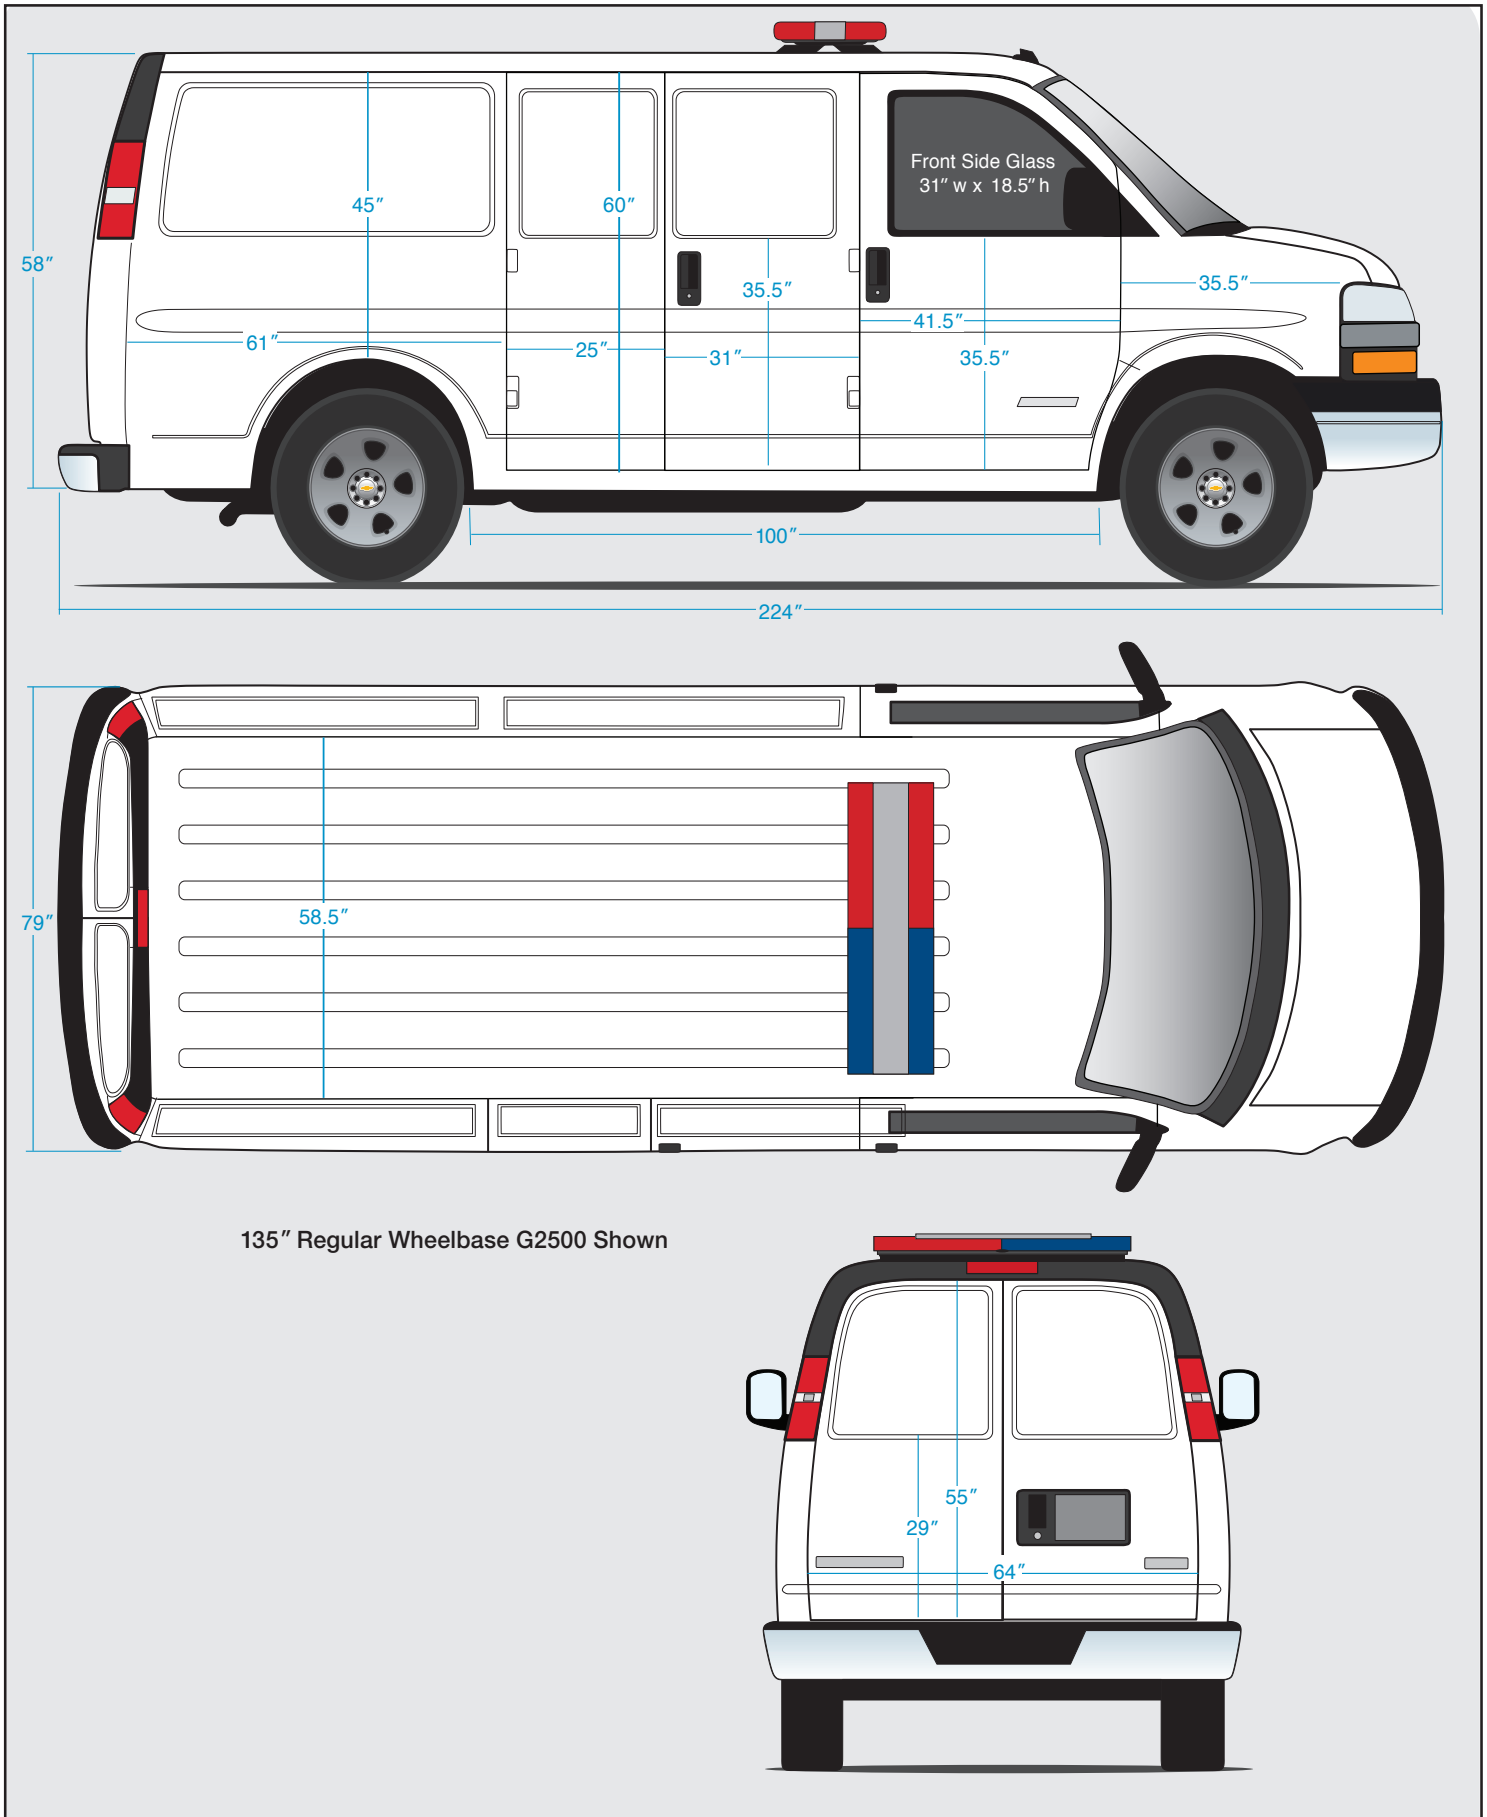

SPECIFICATIONS - GAS ENGINE

GENERAL

Model G2500 Regular Wheelbase RWD (CG23405)

Model G2500 Extended Wheelbase RWD (CG23705)

Model G3500 Regular Wheelbase RWD (CG33405)

Model G3500 Extended Wheelbase RWD (CG33705)

Projected top speed on all Express Cargo Van models is 98 mph

ENGINE	CG23405 G2500 Regular Wheelbase RWD 1WT	CG23705 G2500 Extended Wheelbase RWD 1WT	CG33405 G3500 Regular Wheelbase RWD 1WT	CG33705 G3500 Extended Wheelbase RWD 1WT
Type	Vortec V8 (L20)	Vortec V8 (L20)	Vortec V8 (L20)	Vortec V8 (L20)
Fuel	GAS	GAS	GAS	GAS
Displacement: liters/cu. in.	4.8/293	4.8/293	4.8/293	4.8/293
Horsepower/rpm	285@5400	285@5400	285@5400	285@5400
Torque lb.-ft./rpm	295@4600	295@4600	295@4600	295@4600
Fuel system	SFI	SFI	SFI	SFI
Compression ratio	8.8:1	8.8:1	8.8:1	8.8:1
Exhaust	Single	Single	Single	Single
Minimum recommended fuel octane	87	87	87	87
Fuel tank capacity (gallons/liters)	31/117.3	31/117.3	31/117.3	31/117.3

TRANSMISSION

Automatic heavy-duty	6-speed	6-speed	6-speed	6-speed
----------------------	---------	---------	---------	---------

AXLE

Ratio	3.42	3.42	3.42	3.42
-------	------	------	------	------

CHASSIS

Frame	Full length boxed frame	Full length boxed frame	Full length boxed frame	Full length boxed frame
Front suspension	Independent with coil spring and stabilizer bar	Independent with coil spring and stabilizer bar	Independent with coil spring and stabilizer bar	Independent with coil spring and stabilizer bar
Rear suspension	Hypoid driver axle w/multi-leaf springs	Hypoid driver axle w/multi-leaf springs	Hypoid driver axle w/multi-leaf springs	Hypoid driver axle w/multi-leaf springs
Steering type	Speed sensitive (evo), variable ratio, integral power	Speed sensitive (evo), variable ratio, integral power	Speed sensitive (evo), variable ratio, integral power	Speed sensitive (evo), variable ratio, integral power
Steering ratio (center/stop)	17.2:1	17.2:1	17.2:1	17.2:1

BRAKES

ABS hydra-boost	Disc/Disc	Disc/Disc	Disc/Disc	Disc/Disc
Front size	12.8 x 1.50	12.8 x 1.50	12.8 x 1.50	12.8 x 1.50
Rear size	13.0 x 1.14	13.0 x 1.14	13.0 x 1.14	13.0 x 1.14

TIRES

Type	All-season	All-season	All-season	All-season
Size	LT245/75R16	LT245/75R16	LT245/75R16	LT245/75R16

WHEELS

Type	Steel	Steel	Steel	Steel
Size	16" x 6.5"	16" x 6.5"	16" x 6.5"	16" x 6.5"

BATTERY

Type	Maintenance free	Maintenance free	Maintenance free	Maintenance free
BCI group size	78	78	78	78
Volts	12	12	12	12
Amp hour rating	69	69	69	69
Cold cranking-amps @ 0°F (-18°C)	600	600	600	600
Reserve capacity @ 80°F (27°C)	115	115	115	115

ALTERNATOR

Amps	105	105	105	105
------	-----	-----	-----	-----

1. Adding non dealer accessories or making modifications to the vehicle can affect vehicle performance, aerodynamics, and overall top speed.

SPECIFICATIONS - GAS ENGINE

	CG23405 G2500 Regular Wheelbase RWD	CG23705 G2500 Extended Wheelbase RWD	CG33405 G3500 Regular Wheelbase RWD	CG33705 G3500 Extended Wheelbase RWD
EXTERIOR (in./mm)				
Wheelbase	135.00 / 3429	155.00 / 3937	135.00 / 3429	155.00 / 3937
Overall length	224.10 / 5692	244.10 / 6200	224.10 / 5692	244.10 / 6200
Body width	79.20 / 2012	79.20 / 2012	79.20 / 2012	79.20 / 2012
Overall height, at roof*	84.60 / 2149	84.30 / 2141	84.50 / 2146	84.10 / 2136
Front bumper to axle	39.70 / 1008	39.70 / 1008	39.70 / 1008	39.70 / 1008
Opening height, side door*	47.90 / 1217	47.90 / 1217	47.90 / 1217	47.90 / 1217
Opening height, rear door*	49.40 / 1255	49.40 / 1255	49.40 / 1255	49.40 / 1255
Opening width, sliding side door	44.10 / 1120	44.10 / 1120	44.10 / 1120	44.10 / 1120
Opening width, rear door, at beltline	57.00 / 1448	57.00 / 1448	57.00 / 1448	57.00 / 1448
Step up height, front door*	20.30 / 516	20.30 / 516	20.30 / 516	20.30 / 516
Step up height, side door*	20.80 / 528	20.80 / 528	20.80 / 528	20.80 / 528
Ground to top of rear load floor*	27.80 / 706	27.80 / 706	27.80 / 706	27.80 / 706
Ground clearance, front*	11.00 / 279	11.00 / 279	8.80 / 224	8.80 / 224
Ground clearance, rear*	7.10 / 180	7.10 / 180	7.70 / 196	7.70 / 196
Sign panel area, side panel width	116.50 / 2959	136.50 / 3467	116.50 / 2959	136.50 / 3467
Sign panel area, side panel height	56.70 / 1440	56.70 / 1440	56.70 / 1440	56.70 / 1440
Front stabilizer bar diameter, in./mm	1.38 / 35	1.38 / 35	1.38 / 35	1.38 / 35
Overhang, front	39.70 / 1008	39.70 / 1008	39.70 / 1008	39.70 / 1008
Turning circle/curb to curb	49.2 / 15	54.5 / 16.6	49.2 / 15	54.5 / 16.6

INTERIOR (in./mm)

Head room, front	39.80 / 1011	39.80 / 1011	39.80 / 1011	39.80 / 1011
Shoulder room, front	68.80 / 1748	68.80 / 1748	68.80 / 1748	68.80 / 1748
Hip room, front	65.50 / 1664	65.50 / 1664	65.50 / 1664	65.50 / 1664
Leg room, front	41.30 / 1049	41.30 / 1049	41.30 / 1049	41.30 / 1049
Load floor length, to front seat, at floor	124.60 / 3165	146.20 / 3713	124.60 / 3165	146.20 / 3713
Load floor length, to engine cover, at floor	153.60 / 3901	173.60 / 4409	153.60 / 3901	173.60 / 4409
Inside width, between wheelhousing	52.70 / 1339	52.70 / 1339	52.70 / 1339	52.70 / 1339
Cargo area height	52.90 / 1344	53.40 / 1356	52.90 / 1344	53.40 / 1356

CAPACITY

Seating capacity (front)	2	2	2	2
Optional seating capacity (front/rear)	2/3	2/3	2/3	2/3
Base curb weight ⁴ , lbs. (kg)	5345 / 2424	5578 / 2530	5386 / 2443	5627 / 2552
Payload ⁵ , lbs./kg	3234 / 1467	3000 / 1361	4192 / 1901	3951 / 1792
Cargo vol., reg, w/seats ¹ , cu. ft./liters	239.7 / 6788.3	284.4 / 8054.2	239.7 / 6788.3	284.4 / 8054.2
Cargo vol., reg, w/seats removed ¹ , cu. ft./liters	270.4 / 7657.7	313.9 / 8889.6	270.4 / 7657.7	313.9 / 8889.6
Gross Vehicle Weight Rating ³ /GVWR, lbs./kg	8600 / 3901	8600 / 3901	9600 / 4355	9600 / 4355
Fuel capacity, approximate, U.S., gallon/liters	31 / 117	31 / 117	31 / 117	31 / 117

1. Cargo and load capacity limited by weight and distribution.

2. EPA-estimated MPG.

3. Gross Vehicle Weight Rating (GVWR). When properly equipped, includes vehicle, passengers, cargo and equipment.

4. Base curb weight in operational status with 100% fuel, fluids and standard base equipment (excludes optional content)

5. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's door jamb.

*Published dimensions indicated are at Base Curb Weight.

SPECIFICATIONS - DIESEL ENGINE

GENERAL

Model G2500 Regular Wheelbase RWD (CG23405)

Model G2500 Extended Wheelbase RWD (CG23705)

Model G3500 Regular Wheelbase RWD (CG33405)

Model G3500 Extended Wheelbase RWD (CG33705)

Projected top speed¹ on all Express Cargo Van models is 98 mph

ENGINE	CG23405 G2500 Regular Wheelbase RWD 1WT	CG23705 G2500 Extended Wheelbase RWD 1WT	CG33405 G3500 Regular Wheelbase RWD 1WT	CG33705 G3500 Extended Wheelbase RWD 1WT
Type	Duramax Turbo I-4	Duramax Turbo I-4	Duramax Turbo I-4	Duramax Turbo I-4
Fuel	Diesel	Diesel	Diesel	Diesel
Displacement: liters/cu. in.	2.8/170	2.8/170	2.8/170	2.8/170
Horsepower/rpm	TBD	TBD	TBD	TBD
Torque lb.-ft./rpm	TBD	TBD	TBD	TBD
Fuel system	Turbo Diesel	Turbo Diesel	Turbo Diesel	Turbo Diesel
Compression ratio	TBD	TBD	TBD	TBD
Exhaust	Single	Single	Single	Single
Fuel tank capacity (gallons/liters)	31/117.3	31/117.3	31/117.3	31/117.3

TRANSMISSION

Automatic heavy-duty	8-speed	8-speed	8-speed	8-speed
----------------------	---------	---------	---------	---------

AXLE

Ratio	3.42	3.42	3.42	3.42
-------	------	------	------	------

CHASSIS

Frame	Full length boxed frame	Full length boxed frame	Full length boxed frame	Full length boxed frame
Front suspension	Independent with coil spring and stabilizer bar	Independent with coil spring and stabilizer bar	Independent with coil spring and stabilizer bar	Independent with coil spring and stabilizer bar
Rear suspension	Hypoid driver axle w/multi-leaf springs	Hypoid driver axle w/multi-leaf springs	Hypoid driver axle w/multi-leaf springs	Hypoid driver axle w/multi-leaf springs
Steering type	Speed sensitive (evo), variable ratio, integral power	Speed sensitive (evo), variable ratio, integral power	Speed sensitive (evo), variable ratio, integral power	Speed sensitive (evo), variable ratio, integral power
Steering ratio (center/stop)	17.2:1	17.2:1	17.2:1	17.2:1

BRAKES

ABS hydra-boost	Disc/Disc	Disc/Disc	Disc/Disc	Disc/Disc
Front size	12.8 x 1.50	12.8 x 1.50	12.8 x 1.50	12.8 x 1.50
Rear size	13.0 x 1.14	13.0 x 1.14	13.0 x 1.14	13.0 x 1.14

TIRES

Type	All-season	All-season	All-season	All-season
Size	LT245/75R16	LT245/75R16	LT245/75R16	LT245/75R16

WHEELS

Type	Steel	Steel	Steel	Steel
Size	16" x 6.5"	16" x 6.5"	16" x 6.5"	16" x 6.5"

BATTERY

Type	Maintenance free	Maintenance free	Maintenance free	Maintenance free
BCI group size	78	78	78	78
Volts	12	12	12	12
Amp hour rating	69	69	69	69
Cold cranking-amps @ 0°F (-18°C)	600	600	600	600
Reserve capacity @ 80°F (27°C)	115	115	115	115

ALTERNATOR

Amps	105	105	105	105
------	-----	-----	-----	-----

1. Adding non dealer accessories or making modifications to the vehicle can affect vehicle performance, aerodynamics, and overall top speed.

SPECIFICATIONS - DIESEL ENGINE

	CG23405 G2500 Regular Wheelbase RWD	CG23705 G2500 Extended Wheelbase RWD	CG33405 G3500 Regular Wheelbase RWD	CG33705 G3500 Extended Wheelbase RWD
EXTERIOR (in./mm)				
Wheelbase	135.00 / 3429	155.00 / 3937	135.00 / 3429	155.00 / 3937
Overall length	224.10 / 5692	244.10 / 6200	224.10 / 5692	244.10 / 6200
Body width	79.20 / 2012	79.20 / 2012	79.20 / 2012	79.20 / 2012
Overall height, at roof*	84.60 / 2149	84.30 / 2141	84.50 / 2146	84.10 / 2136
Front bumper to axle	39.70 / 1008	39.70 / 1008	39.70 / 1008	39.70 / 1008
Opening height, side door*	47.90 / 1217	47.90 / 1217	47.90 / 1217	47.90 / 1217
Opening height, rear door*	49.40 / 1255	49.40 / 1255	49.40 / 1255	49.40 / 1255
Opening width, sliding side door	44.10 / 1120	44.10 / 1120	44.10 / 1120	44.10 / 1120
Opening width, rear door, at beltline	57.00 / 1448	57.00 / 1448	57.00 / 1448	57.00 / 1448
Step up height, front door*	20.30 / 516	20.30 / 516	20.30 / 516	20.30 / 516
Step up height, side door*	20.80 / 528	20.80 / 528	20.80 / 528	20.80 / 528
Ground to top of rear load floor*	27.80 / 706	27.80 / 706	27.80 / 706	27.80 / 706
Ground clearance, front*	11.00 / 279	11.00 / 279	8.80 / 224	8.80 / 224
Ground clearance, rear*	7.10 / 180	7.10 / 180	7.70 / 196	7.70 / 196
Sign panel area, side panel width	116.50 / 2959	136.50 / 3467	116.50 / 2959	136.50 / 3467
Sign panel area, side panel height	56.70 / 1440	56.70 / 1440	56.70 / 1440	56.70 / 1440
Front stabilizer bar diameter, in./mm	1.38 / 35	1.38 / 35	1.38 / 35	1.38 / 35
Overhang, front	39.70 / 1008	39.70 / 1008	39.70 / 1008	39.70 / 1008
Turning circle/curb to curb	49.2 / 15	54.5 / 16.6	49.2 / 15	54.5 / 16.6

INTERIOR (in./mm)

Head room, front	39.80 / 1011	39.80 / 1011	39.80 / 1011	39.80 / 1011
Shoulder room, front	68.80 / 1748	68.80 / 1748	68.80 / 1748	68.80 / 1748
Hip room, front	65.50 / 1664	65.50 / 1664	65.50 / 1664	65.50 / 1664
Leg room, front	41.30 / 1049	41.30 / 1049	41.30 / 1049	41.30 / 1049
Load floor length, to front seat, at floor	124.60 / 3165	146.20 / 3713	124.60 / 3165	146.20 / 3713
Load floor length, to engine cover, at floor	153.60 / 3901	173.60 / 4409	153.60 / 3901	173.60 / 4409
Inside width, between wheelhousing	52.70 / 1339	52.70 / 1339	52.70 / 1339	52.70 / 1339
Cargo area height	52.90 / 1344	53.40 / 1356	52.90 / 1344	53.40 / 1356

CAPACITY

Seating capacity /front	2	2	2	2
Optional seating capacity /front/rear	2 / 5	2 / 5	2 / 5	2 / 5
Base curb weight ⁴ , lbs. (kg)	5411 / 2454	6449 / 2925	6256 / 2838	6489 / 2943
Cargo vol., reg, w/seats ¹ , cu. ft. (liters)	239.7 / 6788.3	284.4 / 8054.2	239.7 / 6788.3	284.4 / 8054.2
Cargo vol., reg, w/seats removed ¹ , cu. ft. (liters)	270.4 / 7657.7	313.9 / 8889.6	270.4 / 7657.7	313.9 / 8889.6
Payload ⁵ , lbs. (kg)	3167 / 1436	2129 / 966	3322 / 1507	3389 / 1537
Gross Vehicle Weight Rating ³ (GVWR), lbs. (kg)	8600 / 3901	8600 / 3901	9600 / 4355	9900 / 4490
Fuel capacity, approximate, U.S., gallon (liters)	31 / 117	31 / 117	31 / 117	31 / 117
Conventional Trailer Rating, lbs. (kg)	7100 / 3220	6100 / 2767	6200 / 2812	6000 / 2722

1. Cargo and load capacity limited by weight and distribution.


3. Gross Vehicle Weight Rating (GVWR). When properly equipped, includes vehicle, passengers, cargo and equipment.

4. Base curb weight in operational status with 100% fuel, fluids and standard base equipment (excludes optional content).

5. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's door jamb.


*Published dimensions indicated are at Base Curb Weight.

TOP VIEW OF INSTRUMENT PANEL AND APPROXIMATE DEPLOYMENT AREA OF THE AIRBAG ZONE

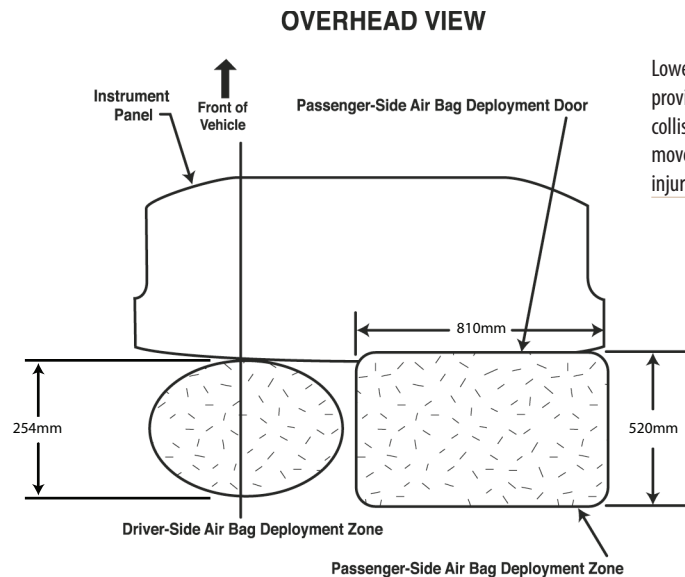


Lower instrument panel bolsters are provided to absorb energy during frontal collisions and are designed to limit leg movement to decrease the chance of injury to the driver and front passenger.


REAR VIEW OF INSTRUMENT PANEL AND APPROXIMATE DEPLOYMENT AREA OF THE AIRBAG ZONE

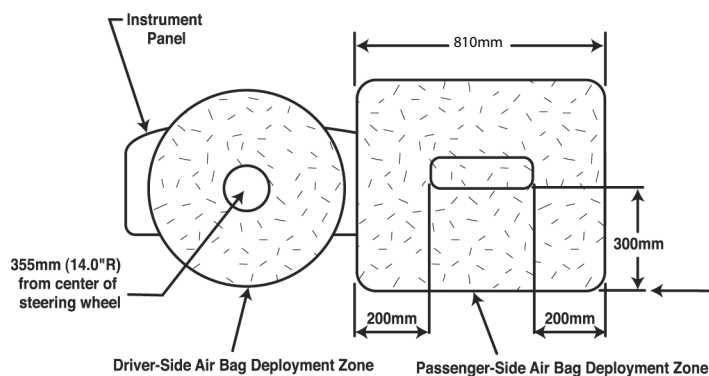

RIGHT SIDE VIEW OF INSTRUMENT PANEL AND APPROXIMATE DEPLOYMENT AREA OF THE AIRBAG ZONE

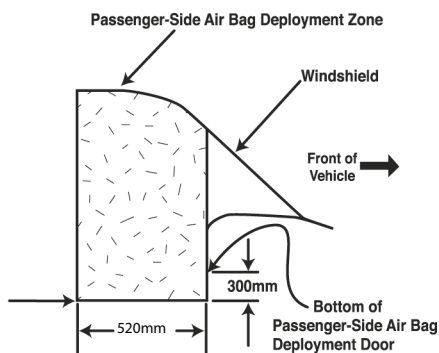


ROOF-RAIL SIDE IMPACT AIRBAG DEPLOYMENT ZONES - PASSENGER SIDE SHOWN, DRIVER SIDE SIMILAR

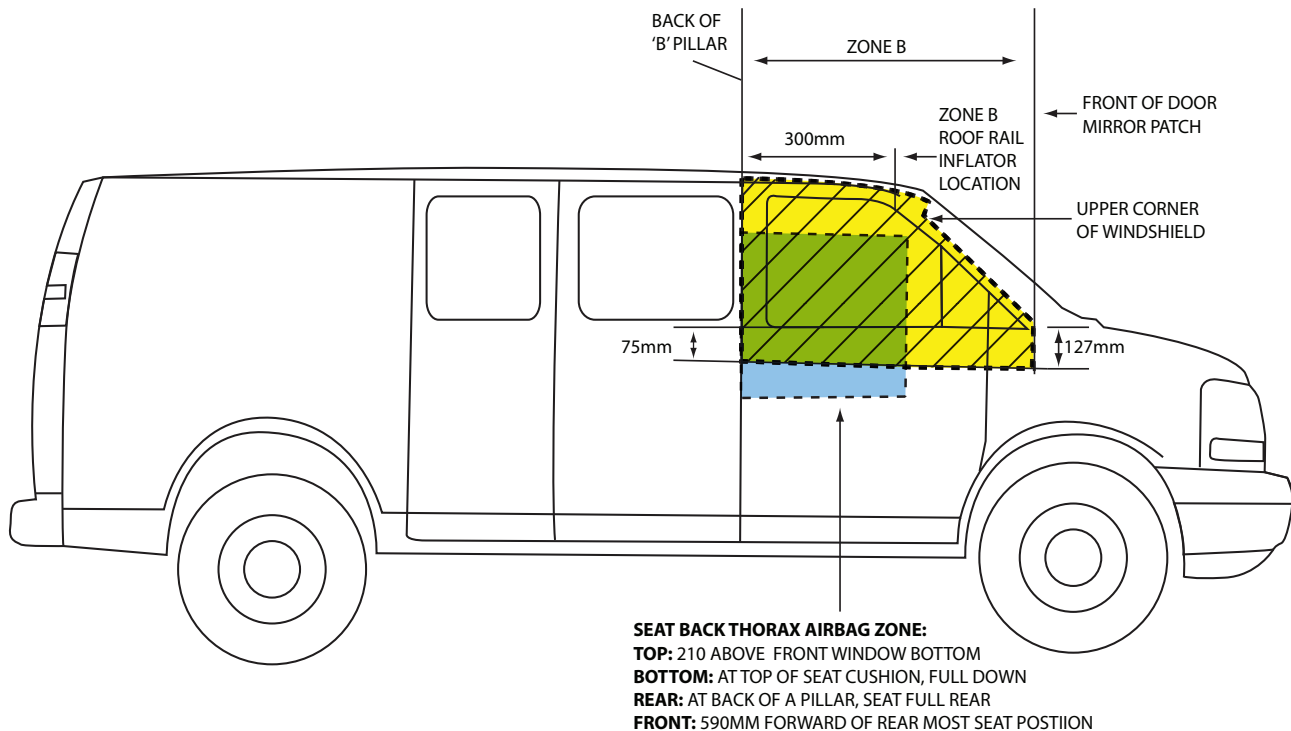

AIR BAG ZONE	LONG W.B. SHOWN, SHORT W.B. SIMILAR	USAGE	VEHICLE DESCRIPTION
B		LH/RH	CARGO/WORK VAN (DRIVER/Front PASSENGER ONLY)

ROOF-RAIL SIDE IMPACT AIRBAG DRIVER AND PASSENGER DEPLOYMENT ZONES - VIEW FROM REAR CARGO AREA

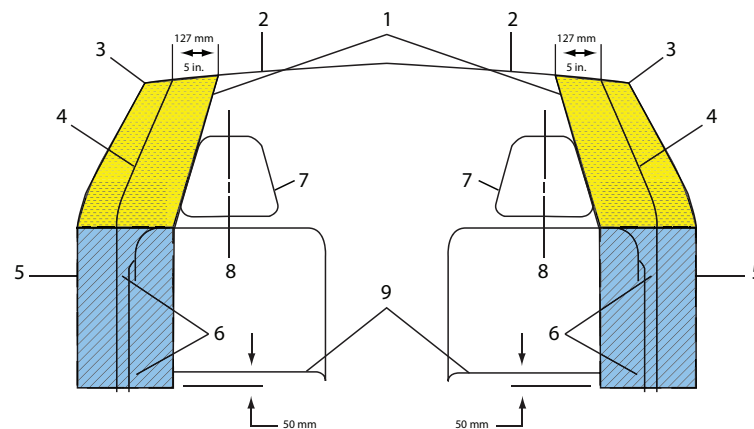

1. Roof-rail Airbag Deployment Zone
2. Underside of Headliner
3. Edge of Headliner
4. Inner Pillar Trim
5. Inner Front Door Trim

6. Front Seatback Side Deployment Zone
H: 520 mm Above Seat Cushion
W: 180 mm From Door Trim
7. Front Seat Back
8. Seat Centerline
9. Top of Seat Cushion

The driver and passenger seat-mounted side impact airbag deployment zones move up, down, fore, aft, as the seat is adjusted by the occupant. The deployment zones also move as the seatback is reclined and raised.

AIRBAGS & STABILITRAK

AIRBAG FAQ

Can specialty vehicle equipment (e.g. radar devices, video cameras, computers, meters, radio trees, shotguns, etc.) still be mounted in cars with passenger side airbags?

Yes, but care must be taken to mount the equipment outside of the deployment zone. Airbags inflate with great force and will interact with any object in the deployment zone. Therefore, to reduce the risk of injury to vehicle occupants, GM recommends that the air deployment zone be kept free of any equipment. If a piece of equipment were to become dislodged it could strike an occupant in the vehicle and result in injury. The likelihood of an object becoming dislodged is influenced by many factors, including the proximity of the object to the inflatable restraint, the size and shape of the object, and the means by which the object is secured to the vehicle. In addition to these factors, the trajectory and velocity of a dislodged object can be influenced by the type and severity of vehicle crash.

Objects that are in the deployment zone, but do not become dislodged by an inflating airbag can still affect the performance of the airbag. For example, such objects could tear the fabric or affect the shape of the airbag, thus reducing the ability of the bag to provide restraint.

Is it possible to shield equipment that is installed in the passenger side frontal airbag deployment zone in a manner that will allow full and safe airbag deployment?

Due to the complexity of influencing variables, GM is unable to evaluate the potential for shielding expected equipment configurations in all accident scenarios in order to assure that the airbag performance would be unaffected. While shielding may protect certain equipment from being damaged or dislodged, it may also negatively affect the inflation characteristics of the airbag. The airbag's shape, inflation angle, fold pattern, and inflation rate and pressure are developed to maximize the protection capability of the inflatable restraint system. Therefore, GM cannot recommend the placement of any equipment in the deployment zone, even if it is shielded to protect it from damage.

Front airbag systems and instrument panel mounted equipment.

Passenger airbags in GM vehicles deploy in different ways depending upon the type of vehicle and the particular instrument panel design.

In some vehicles, the passenger airbag deploys through a discrete door located on the top surface of the instrument panel (top-mount airbag systems). In other vehicles, the passenger airbag deploys through a discrete door mounted on the vertical rearward surface of the instrument panel, above the glove box door (mid-mount airbag system). With these types of top mount and mid-mount passenger airbag systems, the top pad of the instrument panel remains in place during deployment.

Some GM passenger airbag systems deploy from beneath the instrument panel top pad. These are considered 3/4-mount airbag systems with a "deployable top pad." The entire instrument panel top pad is the "deployment door" from under which the inflating airbag emerges. When an airbag deployment is commanded, the forces from the inflating passenger airbag push up on the instrument panel top pad, releasing special fasteners across the rearward edge of the top pad. This allows the top pad to rotate upward so that the passenger airbag may emerge. The top pad rotates upward to open widest at the right hand side, and is usually forced upward into contact with the windshield on the right hand side of the vehicle during a deployment.

Instrument panel top mounted special equipment, such as a radar antenna and control unit or video camera must be positioned to the left of the vehicle center line. This equipment must be mounted as low as possible and securely fastened to the top pad to avoid being dislodged in the event of a crash and possible

airbag deployment. In the process of securely fastening special equipment to the top, DO NOT fasten down the top pad itself to any other vehicle component such as the cluster trim plate. As described above, the top pad rotates upward during a deployment. In order to enable the proper deployment of the passenger airbag, specialty equipment installation MUST NOT PREVENT the top pad from rotating upward during deployment. Location and attachment of special equipment should minimize added resistance or interference to upward rotation of the top pad during deployment.

On the right half of the top pad closest to the passenger airbag module, GM recommends that no equipment be mounted. When mounting equipment on the driver side of the top pad, GM recommends that the total mass of the top pad mounted special equipment not exceed 8 pounds (3.6 kilograms), since some top pads tend to rotate about the left end.

Fasteners used to secure special equipment to the instrument panel top pad, the windshield glass, or to the windshield upper frame (header), should be selected to ensure that these devices will remain attached during a vehicle crash and possible airbag deployment.

Side-Impact Airbags for crashes to the vehicle sides.

The airbag system in your police vehicle includes roof rail mounted Head Curtain side airbags. The vehicle is also equipped with seat back mounted upper body airbags located on the outboard side of the driver and front passenger seat backs. Together the Head Curtain and seat-mounted side airbags are intended to protect the head and upper body in the event of a side crash. The Head Curtain and seat-mounted side airbags also may be commanded to deploy in the event that the vehicle sensing system detects an impending or underway rollover of the vehicle. Some vehicles may also be equipped with an optional airbag, mounted on the inboard side of the driver seat back.

Can Specialty Vehicle Security Barriers be mounted within the side airbag deployment zones?

No. The side airbags inflate extremely fast because of the nature of side crashes to the vehicle. Mounting a security barrier behind the front seats with the ends placed within the side airbag deployment zones will result in unintended interaction between the barrier and the inflating side airbags. To reduce the risk of injury to the vehicle occupants, GM recommends that the side airbag zones be kept free of any customer installed equipment.

Customer furnished equipment installed to the vehicle roof.

The roof system may also include side airbag head curtain components. Inflation devices and cushion components may be mounted on the vehicle roof side from the base of the windshield along the roof rail above the door openings to the base of the rear window pillar. Care must be taken to avoid damage to these components or interference with their operation when installing roof mounted equipment such as emergency lamps and communication antennas.

AIRBAG FAQ

Can the installation of push bumpers on the front end of the vehicle affect the deployment of the airbag?

General Motors is not aware of adverse effects during crash events from the many push bumpers that have been installed on GM police vehicles. Because there are many styles of push bumpers available with varying crash characteristics, installation of push bumpers may or may not affect deployment timing of the airbags. Push bumpers should be mounted to avoid modifying the vehicle structure and interfering with the front airbag sensors mounted on the upper radiator support cross member.

Two front impact sensors are installed in General Motors vehicles. Do not relocate or disconnect the front sensors. The location and orientation of the front sensors are critical for correct operation of the airbag system. Avoid mounting components on or near the sensors. Push bumper styles with vertical pushing members that are in foreaft alignment with the front airbag sensors are not recommended.

When should an airbag inflate?

The driver's and right-front passenger's frontal airbags are designed to inflate in moderate to severe frontal or near-frontal crashes. But they are designed to inflate only if the impact speed is above the system's designed "threshold level."

In addition, your vehicle has "dual stage" frontal airbags which tailor the amount of restraint according to crash severity. For moderate frontal impacts, the airbags inflate at a level less than full deployment. For more severe frontal impacts, "dual stage" frontal airbags deploy at full levels.

If the front of your vehicle goes straight into a wall that doesn't move or deform, the threshold level of the reduced deployment is about 12 to 16mph (19 to 15 km/h), and the threshold level for a full deployment is about 18 to 24 mph (29 to 28.5 km/h). The threshold level can vary, however, with specific vehicle design, so that it can be somewhat above or below this range.

If your vehicle strikes something that will move or deform such as a parked car, the threshold level will be higher. The driver's and right-front passenger's frontal airbags are not designed to inflate in rollover, side impacts, or rear impacts, because inflation would not help the occupant.

Seat mounted side impact airbags are designed to inflate in moderate to severe side crashes. The side impact airbags will inflate if the crash severity is above the designed "threshold level." The threshold level can vary with specific vehicles design. The side impact airbags are not designed to inflate on frontal or near-frontal impacts or rear impacts, because inflation would not help the occupant.

Roof rail mounted head-curtain airbags are designed to inflate in moderate to severe side crashes. In addition, certain vehicles have head-curtain airbags which are also designed to inflate in situations where an impending rollover condition is identified by the vehicle's rollover sensing system and/or frontal or near-frontal impacts if the crash severity is above the designed "threshold level."

Safety belt pretensioners at the driver and front passenger seat positions are designed to deploy in frontal, near-frontal, side, and rear crashes that exceed the "threshold level" of crash severity to help reduce slack in the safety belt. Safety belt pretensioners will also deploy in impending rollover situations.

How long will the airbag remain inflated?

It takes approximately 1/20th of a second to fully inflate the frontal airbags. This is faster than the blink of an eye. The airbags begin to deflate immediately, helping to stop the occupants more gradually. Unlike frontal airbags, head curtain side airbags can remain inflated for more than 5 seconds before they start to deflate.

I've heard that a deployed airbag produces what appears to be smoke, is the airbag hot?

After the bag has deployed in a crash, the airbag itself will not be hot to touch. Some components within the airbag module will be hot for a short time. A small amount of smoke coming from a deployed airbag module is normal and should not be cause for concern.

Also, when the nitrogen gas is vented out of the airbag, small particles from inside the bag are also vented into passenger compartment. These airborne particles look like smoke and some particles are deposited as residue on and around the airbag.

I've heard that the dusts that are released into the passenger compartment from the airbag are harmful, is this true?

For most people, the only effect the dusts will produce is some irritation of the throat and eyes, and that is only if the occupant remains in the vehicle for many minutes after the airbag deployment with no ventilation and windows closed. However, some people with asthma may develop an asthmatic attack from inhaling the dusts. If this happens, they should first treat themselves the same way their doctor has advised them to treat any other asthma attack, and then immediately seek medical treatment.

Can the airbag system be re-used?

No. The airbags are designed to inflate only once. After inflation, some new parts will be required. These will include the airbag module and possibly other parts. (A competent service technician with access to the vehicle's service manual and the required tools should replace the required components after a deployment crash.)

If my vehicle has airbags, why should I have to wear my safety belt?

Yes, safety belts are the primary safety restraint in the vehicle. Airbags are in many vehicles today and will be in most of them in the future. But they are supplemental systems only; so they work with safety belts, not instead of them. Every airbag system ever offered for sale has required the use of safety belts. Even if you're in a vehicle that has airbags, you still have to buckle up to get the most protection. That's true not only in frontal collisions but especially in side and other collisions.

ELECTRONIC STABILITY CONTROL SYSTEMS (STABILITRAK)

StabiliTrak systems help drivers maintain control of their vehicles, especially during emergency lane changes or avoidance maneuvers. StabiliTrak uses various sensors, such as steering wheel angle, wheel speed, yaw velocity, etc., to detect any difference between the path requested by the steering wheel position and vehicle's actual path. When appropriate, the system selectively controls brakes, engine power, and even suspension settings to enhance control of the vehicle's direction and help keep it on course.

Independent studies conducted by the National Highway Traffic Safety Administration, the Insurance Institute for Highway Safety, and others have found StabiliTrak to be highly effective in reducing vehicle crashes. General Motors offers StabiliTrak systems on many of its passenger car and light truck models.

See your owner's manual for additional information about the operation of StabiliTrak.

Q. How do I use StabiliTrak?

A. StabiliTrak operates independently of the driver. You should continue to drive your StabiliTrak equipped vehicle with caution and care. GM's StabiliTrak system, StabiliTrak is designed to be as seamless as possible in operation, and part of the overall vehicle response to make a good vehicle better

Q. How does StabiliTrak work?

A. StabiliTrak has the ability to apply control forces to the vehicle independent of the driver. StabiliTrak uses sensors to continuously compare the path indicated by the steering wheel position to the vehicle's actual path. If a discrepancy is detected, StabiliTrak selectively controls vehicle brakes and engine torque to create a yaw moment that helps restore the vehicle's actual path to the path indicated by the steering wheel position. StabiliTrak has the ability to help correct both understeer (where the vehicle is not turning as much as the steering wheel position indicates) and oversteer (where the vehicle is turning more than the steering wheel position indicates).

Q. Will a tire change affect StabiliTrak?

A. Use of tires other than original equipment may affect StabiliTrak performance. StabiliTrak is designed to make the best use of available traction. The performance characteristics of the original equipment tires are part of the overall system effectiveness. When you replace tires check the recommendations in your owner's manual. On GM vehicles, the original equipment tires have a "TPC" (Tire Performance Criteria) code on the sidewall. Replacing the tires with the same "TPC" code will help assure proper StabiliTrak performance.

DRIVER OPERATED STABILITRAK BUTTON

An advanced computer controlled stability enhancement system assists the driver with directional control of the vehicle in difficult driving conditions. Each time the vehicle is started, the StabiliTrak system is fully on. StabiliTrak can be controlled by a button located on the left side of instrument panel. The condition system is displayed by a StabiliTrak indicator light and Driver Information Center (DIC) Message. Push once to disable Traction Control. Push and hold to disable both Traction Control and StabiliTrak. In this condition, StabiliTrak will automatically turn ON when the vehicle speed exceeds 35 mph (56km/hr) while the Traction Control remains OFF. Push again to enable Traction Control and StabiliTrak.

MAINTENANCE / WARRANTY

MAINTENANCE	<p>2-Year Scheduled Maintenance includes only the following:</p> <p>2-year/24,000-mile Scheduled Maintenance (whichever comes first; up to a total of two service events):</p> <p>ACDelco dexos1®Oil and ACDelco Oil Filter Change (excludes Spark EV)</p> <p>4-wheel Tire Rotation (excludes dual rear wheel vehicles, all Corvette models and select Camaro models - ZL1 model and 1LE package cars – due to their unidirectional tires; see Owner's Manual for details)</p> <p>27-Point Vehicle Inspection (MPVI)</p>
WARRANTY	<p>BUMPER-TO-BUMPER (INCLUDING TIRES) Coverage is for the first 3 years or 36,000 miles, whichever comes first.</p>
POWERTRAIN	<p>In addition to the 3-year/36,000 mile protection, many of your powertrain components are protected even further with coverage extending to 5 years or 60,000 miles, whichever comes first. Coverage for 2500 and 3500 Series Heavy Duty (HD) Pickups equipped with a 6.6L Duramax, and qualifying fleet vehicles is for 5 years or 100,000 miles, whichever comes first.details.</p>
ENGINE	<p>Engine coverage includes all internally lubricated parts, engine oil cooling hoses, and lines. Also included are all actuators and electrical components internal to the engine (e.g., Active Fuel Management valve, lifter and oil manifold) cylinder head, block, timing gears, timing chain, timing cover, oil pump/oil pump housing, OHC carriers, valve covers, oil pan, seals, gaskets, manifolds, flywheel, water pump, harmonic balancer, engine mount, turbocharger, and supercharger. Timing belts are covered until the first scheduled maintenance interval. Exclusions: Excluded from the powertrain coverage are sensors, wiring, connectors, engine radiator, coolant hoses, coolant, and heater core. Coverage on the engine cooling system begins at the inlet to the water pump and ends with the thermostat housing and/or outlet that attaches to the return hose. Also excluded is the starter motor, entire pressurized fuel system (in-tank fuel pump, pressure lines, fuel rail(s), regulator, injectors, and return line), as well as the Engine/ Powertrain Control Module and/or module programming.</p>
DIESEL ENGINE/ COMPONENTS	<p>Cylinder block and heads and all internal parts, intake and exhaust manifolds, timing gears, timing gear chain or belt and cover, flywheel, harmonic balancer, valve covers, oil pan, oil pump, water pump, fuel pump, engine mounts, seals, and gaskets. Parts of the Emissions Reduction System such as the emissions reduction fluid tank, injectors, sensors including NOx and exhaust, and the Exhaust Particulate Filter. Glow Plug Control System: Control/glow plug assembly, glow plugs, cold advance relay, and engine control module The fuel injection control module, integral oil cooler, transmission adapter plate, common fuel rails, fuel filter assembly, fuel temperature sensor, and function block.</p>
TRANSMISSION/ TRANSAXLE	<p>Transmission and transaxle coverage includes all internally lubricated parts, case, torque converter, mounts, seals and gaskets, as well as any electrical components internal to the transmission/transaxle. Also covered are any actuators directly connected to the transmission (slave cylinder, etc.). Exclusions: Exclusions from the powertrain coverage include cooling lines, hoses, radiator, sensors, wiring, and electrical connectors. Also excluded are the clutch and pressure plate, as well as any Transmission Control Module and/or module programming.</p>
TRANSFER CASE	<p>Transfer case coverage includes all internally lubricated parts, case, mounts, seals and gaskets, as well as any electrical components internal to the transfer case. Also covered are any actuators directly connected to the transfer case, as well as the encoder motor. Exclusions: Excluded from the powertrain coverage are transfer case cooling lines, hoses, radiator, sensors, wiring, and electrical connectors, as well as the transfer case control module and/or module programming.</p>
DRIVE SYSTEMS	<p>Drive system coverage includes all internally lubricated parts, final drive housings, axle shafts and bearings, constant velocity joints, propeller shafts and universal joints. All mounts, supports, seals, and gaskets, as well as any electrical components internal to the drive axle. Also covered are any actuators directly connected to the drive axle (e.g., front differential actuator). Exclusions: Excluded from the powertrain coverage are all wheel bearings, drive wheel front and rear hub bearings, locking hubs, drive system cooling, lines, hoses, radiator, sensors, wiring, and electrical connectors related to drive systems, as well as any drive system control module and or module programming.</p>
SHEET METAL	<p>GM vehicles are designed and built to resist corrosion. All body and sheet metal components are warranted against corrosion for 3 years or 36,000 miles, whichever comes first. Plus you're protected even further from rust-through corrosion for a minimum of 6 years/100,000 miles (whichever comes first). Application of additional rust-inhibiting materials is not required under the corrosion coverage and none is recommended. See your GM dealer for terms of this limited warranty.</p>

MAINTENANCE / WARRANTY

EMISSION CONTROL SYSTEMS	<p>Defects and performance for car and light-duty truck emission control systems are covered for the first 2 years or 24,000 miles, whichever comes first. From the first 2 years or 24,000 miles to 3 years or 36,000 miles defects in material or workmanship continue to be covered under the New Vehicle Limited Bumper-to-Bumper Warranty coverage. Specified major components are covered for the first 8 years or 80,000 miles, whichever comes first. Defects and performance for heavy duty truck emission control systems including those found in 6.6L Duramax® Diesel Engines are covered for the first 5 years or 50,000 miles, whichever comes first.</p> <p>- Refer to your Warranty and Owner Assistance Information booklet for California emission control system warranty details.</p>
TIRES	<p>The tires supplied with your vehicle are covered by General Motors against defects in material or workmanship under the Bumper-to-Bumper Limited Warranty coverage. Wear-out is not considered a defect, and it may occur before the vehicle warranty expires. In this case, the owner is responsible for purchasing replacement tires, or seeking coverage solely from the tire manufacturer. For vehicles within the Bumper-to-Bumper Limited Warranty coverage, defective tires will be replaced on a prorated adjustment basis according to the mileage-based schedule in your Warranty and Owner Assistance Information booklet. After your New-Vehicle Limited Warranty expires, you may still have prorated warranty coverage on your original equipment tires by the tire manufacturer.</p>
TOWING	<p>Towing is covered to the nearest Chevrolet dealer if your vehicle cannot be driven because of a warranted defect.</p>
COURTESY TRANSPORTATION	<p>If your vehicle requires warranty repairs during the Limited Powertrain Warranty coverage period (8 years/100,000 miles for repairs warrantable under the Hybrid/Electric Propulsion Limited Warranty), alternate transportation and/or reimbursement of certain transportation expenses may be available under the Courtesy Transportation Program. Several transportation options are available. Consult your dealer or refer to the Owner's Manual for details. Courtesy Transportation is not part of or included in the coverage provided by the New-Vehicle Limited Warranty. General Motors reserves the right to make any changes or discontinue the Courtesy Transportation program at any time without notification.</p>
ROADSIDE ASSISTANCE	<p>Chevrolet is proud to offer the response, security and convenience of the 24-Hour Roadside Assistance Program. Roadside Assistance is provided with all purchased or leased GM vehicles that are within the Powertrain Limited Warranty.</p> <p>Emergency Towing (from a public road or highway to nearest Chevrolet dealer) Lockout Service (keys locked inside vehicle) Flat Tire Changes (service to change a flat tire with the spare tire (if equipped)) Fuel Delivery (enough fuel for vehicle to get to the nearest service station) Jump-Starts (service to jumpstart a dead battery)</p> <p>During the 8 year or 100,000 miles Electric Propulsion warranty period, towing is covered to the nearest Chevrolet servicing dealer if your vehicle cannot be driven because of a warranted Electric Propulsion specific defect.</p> <p>Refer to your Owner's Manual for details, including reservation of rights, or consult your dealer/retailer. --For specific terms and conditions, please contact your Chevrolet Roadside Assistance Program advisor at 1-800-243-8872.</p>
WHAT IS NOT COVERED	<p>All the above items are not covered for damage due to accident, misuse, alteration, insufficient or improper maintenance, contaminated or poor-quality fuel or environmental and chemical exposure. For complete details, refer to your Warranty and Owner Assistance Information booklet.</p> <p>This is a supplement to the express conditions and warranties described in the Warranty and Owner Assistance Information booklet. Other coverages are not extended or altered due to this supplement.</p> <p>Passenger car, light-duty truck, crossover and van owners requiring a more comprehensive coverage than what is provided with the New-Vehicle Limited Warranty are encouraged to consider a Chevrolet Protection Plan. This plan is available through Chevrolet dealerships. For more information, see the Extended Protection section on www.chevrolet.com/owners/warranty.html.</p>
ALTERATIONS AND WARRANTIES	<p>AN IMPORTANT NOTE ABOUT ALTERATIONS AND WARRANTIES. The Chevrolet New Vehicle Limited Warranty does not cover any damage or failure resulting from modifications, installations, or alterations to the original equipment as manufactured or assembled by General Motors. The special body company, assembler, equipment installer or upfitter is solely responsible for warranties on the body or equipment and any alterations (or any effect of the alterations) to any of the parts, components, systems or assemblies installed by GM. General Motors is not responsible for the safety or quality of design features, materials or workmanship of any alterations by such suppliers.</p>



GM reserves the right to make changes at any time, without notice, in prices, colors, materials, equipment, specifications, models, and availability. Specifications, dimensions, measurements, ratings, and other numbers in this catalog and other printed materials provided at the dealership or affixed to vehicles are approximates based upon design and engineering drawings and prototypes and laboratory tests. Your vehicle may differ due to variations in manufacture and equipment. Since some information may have been updated since the time of printing, please check with your GM dealer for complete details. Some of the equipment shown or described throughout this publication may be available at extra cost, and/or is supplied by an independent supplier.

Copyright 2017 General Motors. All rights reserved. All text, images, graphics, and other materials in this publication are subject to the copyright and other intellectual property rights of General Motors. These materials may not be reproduced, distributed, or modified without the express written permission of General Motors. The marks appearing in this publication including, but not limited to: GM and the GM logo; Chevrolet and their respective logos, emblems, slogans, and vehicle model names and body designs; and other marks such as GM Fleet and Commercial are trademarks and/or service marks of General Motors, its subsidiaries, affiliates, or licensors.

For more detailed information, contact your District Sales Manager or see the online order guide at gmfleet.com.



For more information, visit gmfleet.com/police

GENERAL MOTORS FLEET

