



## UI BULLETIN # 90b

**SUBJECT:** Chassis Cab Fuel Filler Assembly `Service Body`  
Installation Guide

**MODELS AFFECTED:** Chevrolet Silverado, GMC Sierra ALL  
With RPO ZW9 or Pick Up Box Removal

**MODEL YEAR(S):** 2011 and Beyond

**DATE:** February 20,2011

**REVISION DATE:** May 3, 2018

### ADVISORY:

This bulletin provides a detailed instructional guide to installing GM Service Part (performed) Fuel Filler Hose Elbows specific to some Chassis Cab `Service Body` Type Installations. The RPO ZW9 (Box delete) service sub-components (RPO BJA) will need to be ordered for both front and rear tank applications:

**Diesel Version:**


- Replace lower fill hose with (20788860) (see page 2)
- Replace upper fill hose with (20813414) (see page 2)
- Trim as necessary
- Maintain clamp torque (4 +/- .5 Nm)

**Gas Version:**

- Replace lower fill hose with (15113989) (see page 3)
- Replace upper fill hose and clamps with (15169367-fill hose and 11610236-clamp) (see page 3)
- Trim as necessary
- Maintain clamp torque (4 +/- .5 Nm)

\*see GM Upfitter BBM `SPECIAL APPLICATIONS – C/K Pickup Box Removal Program` Section for Fuel Filler Installation Guidelines

## Diesel Chassis Cab up-fit recommendation

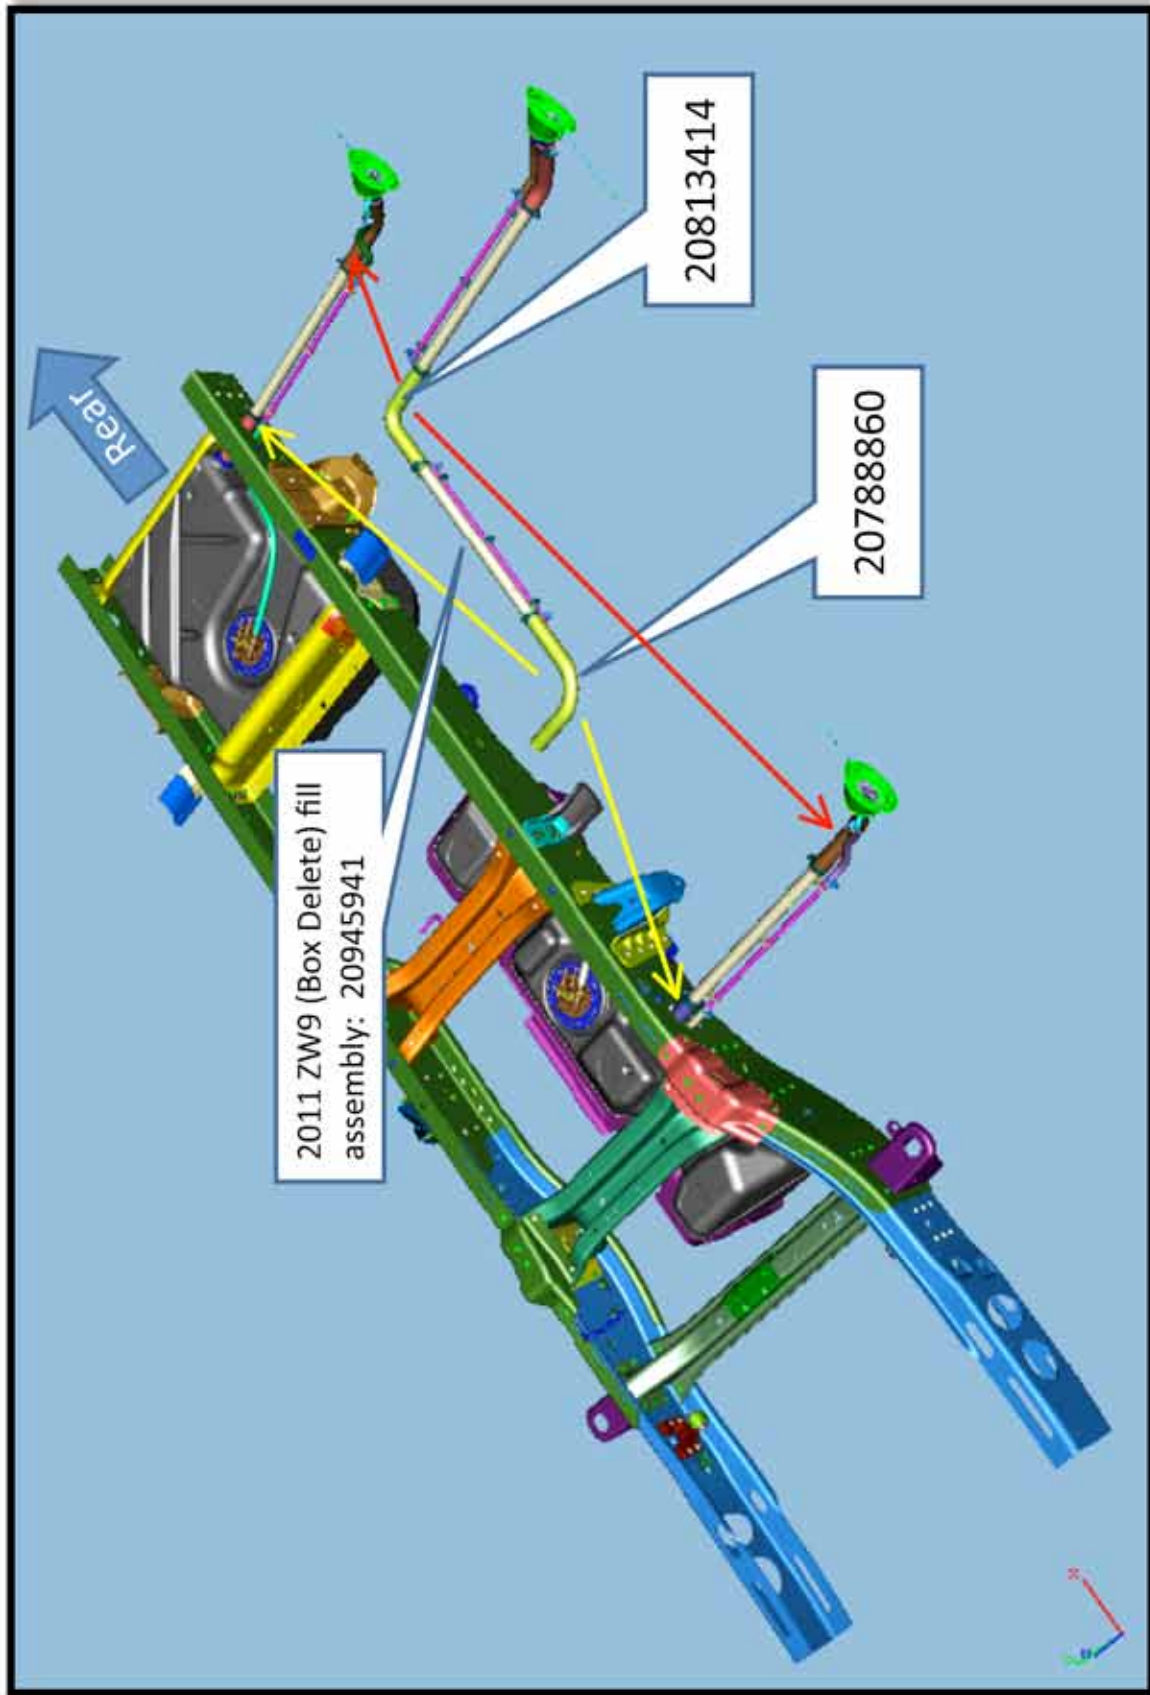

## Gas Chassis Cab up-fit recommendation

