

FRAME HEIGHT AND RAMP ANGLE DATA

S/T TRUCK

S/T 10003 Pickup	1
Heights (To Ground)	1
Angle	2
Approach Angle(s) (Bottom of)	2
Departure Angle(s) (Bottom of)	2
108.0" Wheelbase – S 10603	3
108.0" Wheelbase – S 10803	3
123.0" Wheelbase – S 10653	4
122.9" Wheelbase – T 10643	5
123.0" Wheelbase – T 10653	5
S/T 10506, S/T 15506, S/T 15806 4-Door Utility	6
Heights (To Ground)	6
Angle	7
Approach Angle(s) (Bottom of)	7
Departure Angle(s) (Bottom of)	7
107.0" Wheelbase – S 10506 Current	8
107.0" Wheelbase – T 10506 Current	8
113.0" Wheelbase – S 15506 New 2 Row/5 Passenger	9
113.0" Wheelbase – T 15506 New 2 Row/5 Passenger	9
129.0" Wheelbase – S 15806 New 3 Row/7 Passenger	10
129.0" Wheelbase – T 15806 New 3 Row/7 Passenger	10
S/T 10516 2-Door Utility	11
Heights (To Ground)	11
Angle	12
Approach Angle(s) (Bottom of)	12

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE ii

S/T TRUCK – (Continued)

Departure Angle(s) (Bottom of)	12
100.5" Wheelbase – S 10516	13
100.5" Wheelbase – T 10516	13

C/K TRUCK (CURRENT)

C/K Truck (Current)	14
Heights (To Ground)	14
Angle	15
Approach Angle(s) (Bottom of)	15
Departure Angles(s) (Bottom of)	15
135.5" Wheelbase – C 31003	16
159.5" Wheelbase – C 31403	16
183.5" Wheelbase – C 31803	16

C/K TRUCK (NEW)

C/K Truck (New)	17
Heights (To Ground)	17
Angle	17
Approach Angle(s) (Bottom of)	18
Departure Angles(s) (Bottom of)	18
119.0" Wheelbase – C 15703	19
116.0" Wheelbase – C 15706	19
143.5" Wheelbase – C 15743	20
143.5" Wheelbase – C 15753	20
133.0" Wheelbase – C 15903	21
130.0" Wheelbase – C 15906	21
130.0" Wheelbase – C 15936	22

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE **iii**

C/K TRUCK (NEW) – *Continued*

157.5" Wheelbase – C 15953	22
119.0" Wheelbase – K 15703	23
133.0" Wheelbase – K 15706	24
153.0" Wheelbase – K 15743	25
143.5" Wheelbase – K 15753	25
133.0" Wheelbase – K 15903	26
130.0" Wheelbase – K 15906	26
130.0" Wheelbase – K 15936	27
157.5" Wheelbase – K 15953	27
143.5" Wheelbase – C 25743	28
143.5" Wheelbase – C 25753	28
133.0" Wheelbase – C 25903	29
130.0" Wheelbase – C 25906	29
130.0" Wheelbase – C 25936	30
157.5" Wheelbase – C 25943	30
157.5" Wheelbase – C 25953	30
153.0" Wheelbase – K 25743	31
143.5" Wheelbase – K 25753	31
133.0" Wheelbase – K 25903	32
130.0" Wheelbase – K 25906	32
130.0" Wheelbase – K 25936	33
167.0" Wheelbase – K 25943	33
157.5" Wheelbase – K 25953	34
133.0" Wheelbase – C 35903	34
167.0" Wheelbase – C 35943	35

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE **iv**

C/K TRUCK (NEW) – *Continued*

157.5" Wheelbase – C 35953	35
137.0" Wheelbase – C 36003	35
161.5" Wheelbase – C 36053	36
161.5" Wheelbase – C 36403	36
185.5" Wheelbase – C 36453	36
133.0" Wheelbase – K 35903	37
167.0" Wheelbase – K 35943	37
157.5" Wheelbase – K 35953	38
137.0" Wheelbase – K 36003	38
161.5" Wheelbase – K 36053	38
161.5" Wheelbase – K 36403	39
185.5" Wheelbase – K 36453	39

L/M VAN

L/M 110(05, 06)	40
Heights (To Ground)	40
Angle	40
Approach Angle(s) (Bottom of)	40
Departure Angle(s) (Bottom of)	41
111.2" Wheelbase – L 11005	42
111.2" Wheelbase – L 11006	42
111.2" Wheelbase – M 11005	43
111.2" Wheelbase – M 11006	43

G VAN (GMT 600)

G Van (GMT 600)	44
Heights (To Ground)	44

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE V


G VAN (GMT 600) – *Continued*

Angle	44
Approach Angle(s) (Bottom of)	45
Departure Angle(s) (Bottom of)	45
135.0" Wheelbase – G 11405	46
135.0" Wheelbase – G 11406	46
135.0" Wheelbase – G 21405	47
135.0" Wheelbase – G 21406	47
155.0" Wheelbase – G 21705	48
155.0" Wheelbase – G 21706	48
135.0" Wheelbase – G 31405	48
135.0" Wheelbase – G 31406	49
139.0" Wheelbase – G 31503	49
139.0" Wheelbase – G 31532	50
155.0" Wheelbase – G 31705	50
155.0" Wheelbase – G 31706	50
159.0" Wheelbase – G 31803	51
159.0" Wheelbase – G 31832	51
177.0" Wheelbase – G 31903	52
177.0" Wheelbase – G 31932	52

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 1

S/T 10003 Pickup

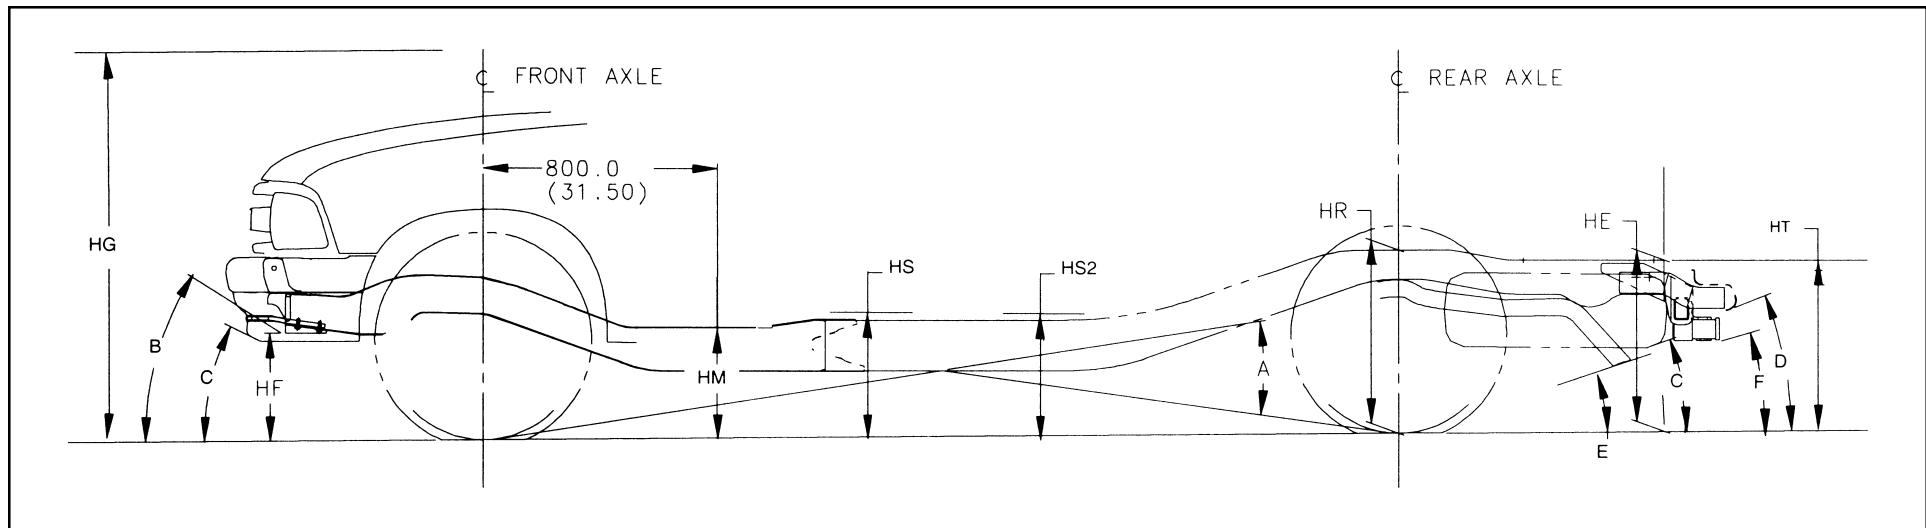


Heights (To Ground)

HE	Top of Frame at End
HF	Bottom of Front Air Deflector or Bumper
HG	Roof Height
HM	Normal Top of Frame
HR	Top of Frame at Centerline of Rear Axle
HS	Step H-Point-Front
HS2	Step H-Point-Second
HT	Rear Cargo Load Height

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE

2

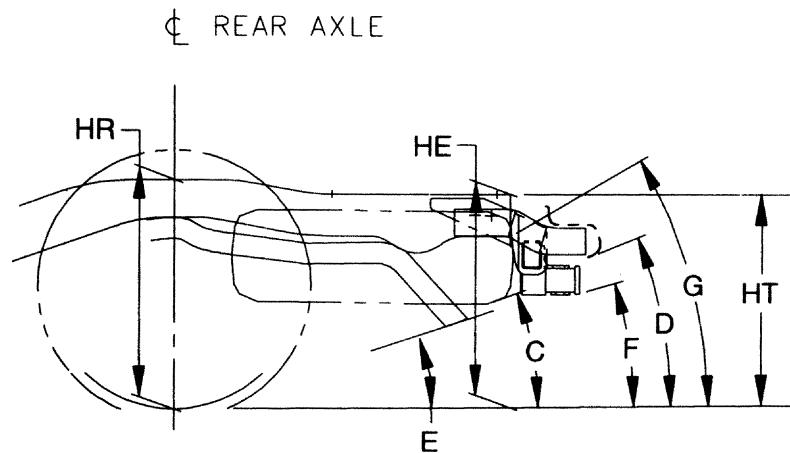

Angle

A Ramp Breakover

Approach Angle(s) (Bottom of)

B Front Air Deflector

Departure Angle(s) (Bottom of)

C Spare Tire

D Rear Bumper

E Tail pipe

F Platform Hitch

G Frame at End

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 3

S 10603	108.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 4200 & Z83 P205/75R15	1722	1292	3014	2500	2300	-	12.5	62.5	14.6	25.2	17.8	-	26.4	-	9.7	60.7	12.4	22.4	15.9	-	22.8	20	21	17	15	17	-	-
²⁾ 4200 & ZQ8 P235/55R16	1745	1323	3068	2500	2300	-	11.0	61.5	13.5	24.6	16.8	-	26.0	-	7.7	59.7	11.0	21.8	14.6	-	22.4	17	17	16	15	16	-	-
²⁾ 4600 & Z85 P205/75R15	1729	1311	3040	2500	2700	-	12.0	63.4	15.1	27.0	18.6	-	28.8	-	9.5	60.9	12.6	22.7	16.1	-	23.3	20	21	18	16	18	-	-

S 10803	118.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 4600 & Z85 P205/75R15	1791	1354	3145	2500	2700	21.4	12.3	63.4	15.2	26.9	18.6	-	28.6	15.9	10.4	61.2	13.0	22.7	16.4	-	23.1	19	23	16	14	15	-	24
²⁾ 4900 & Z85 P205/75R15	1791	1354	3145	2500	2700	21.4	12.3	63.4	15.2	26.9	18.6	-	28.6	16.2	10.6	60.7	12.8	22.7	16.0	-	23.4	19	23	16	15	16	-	24

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 4

S 10653	123.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 4400 & Z83 P205/75R15	1826	1366	3192	2500	2300	-	12.7	62.4	14.6	24.9	17.7	18.9	26.0	-	10.7	60.6	12.7	22.3	15.9	17.1	22.8	18	23	17	15	17	-	-
²⁾ 4400 & ZQ8 P235/55R16	1849	1397	3246	2500	2300	-	10.6	61.1	13.0	24.2	16.3	17.7	25.6	-	7.9	59.4	10.8	21.7	14.2	15.9	22.7	14	17	17	15	16	-	-
²⁾ 4600 & Z85 P205/75R15	1830	1385	3215	2500	2700	-	12.3	63.2	15.0	26.7	18.5	19.9	28.3	-	10.4	61.2	13.0	22.7	16.4	17.5	23.2	19	23	18	16	18	-	-

T 10643	122.9" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 5150 & Z85 P235/70R15	2393	1649	4042	2800	2700	26.8	14.0	65.0	16.5	27.8	19.9	21.3	29.3	22.7	13.2	63.2	15.1	24.6	18.3	19.3	25.2	19	28	22	19	24	-	31
²⁾ 5150 & Z85 P235/75R15	2393	1649	4042	2800	2700	27.3	14.5	65.5	17.0	28.4	20.4	21.8	29.8	23.2	13.7	63.8	15.7	25.2	18.8	19.8	25.7	20	29	23	19	25	-	32

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 5

T 10653	123.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 4900 & ZR2 31 X 10.5 R15	2418	1613	4031	2800	2700	-	17.2	67.8	19.7	31.0	23.0	24.4	32.4	-	16.5	66.4	18.5	27.3	21.7	22.5	27.4	26	35	26	21	25	-	-
²⁾ 5150 & Z85 P235/70R15	2298	1433	3731	2800	2700	-	13.9	65.0	16.7	28.5	20.2	21.7	30.2	-	12.9	62.9	15.0	24.7	18.1	19.2	25.3	19	28	22	19	24	-	-
²⁾ 5150 & Z85 P235/75R15	2298	1433	3731	2800	2700	-	14.4	65.5	17.3	29.1	20.7	22.2	30.7	-	13.4	63.4	15.5	25.2	18.7	19.8	25.8	20	29	23	19	26	-	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required


2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 6

S/T 10506 4-Door Utility

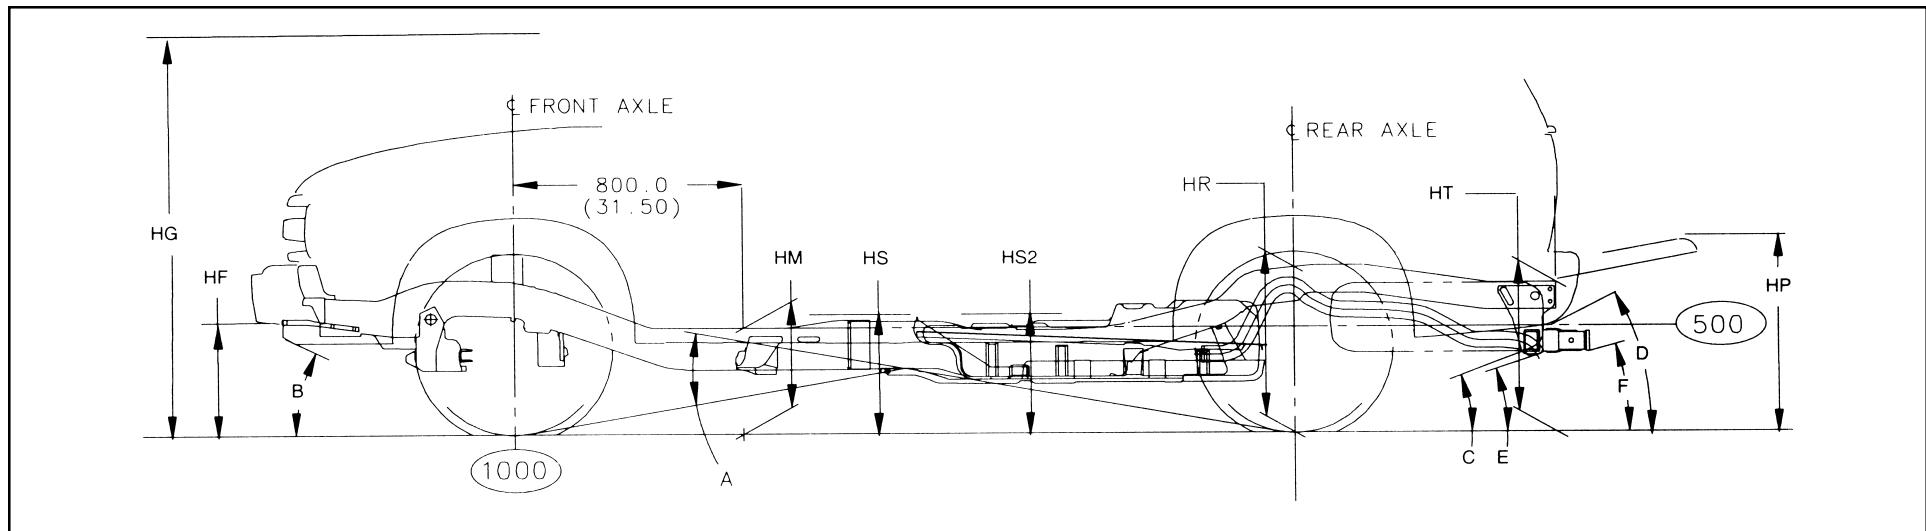

Heights (To Ground)

HF	Bottom of Front Air Deflector or Bumper
HG	Roof Height
HM	Normal Top of Frame
HP	Top of Tailgate (Down)
HR	Top of Frame at Centerline of Rear Axle
HS	Step H-Point-Front
HS2	Step H-Point-Second
HT	Rear Cargo Load Height

FRAME HEIGHT AND RAMP ANGLE DATA

Angle

A Ramp Breakover

Approach Angle(s) (Bottom of)

B Front Air Deflector

Departure Angle(s) (Bottom of)

C Spare Tire

D Rear Bumper

E Tail pipe

F Platform Hitch

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 8

S 10506	107.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear													
GVW/Tire	Minimum Curb Weight			GAWR		HF	HG	HM	HP	HR	HS	HS2	HT	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F
	Frt	Rr	Ttl	Frt	Rr																						
¹⁾ 5000 & ZW7 P235/70R15	2137	1824	3961	2500	2700	14.1	64.9	16.3	31.6	24.8	19.6	19.4	30.1	13.3	63.3	15.1	28.3	22.4	18.2	17.6	27.1	21	29	22	22	20	17
²⁾ 5000 & Z85 P205/75R15	2137	1825	3962	2500	2800	14.1	64.6	16.2	31.1	24.5	19.4	19.2	29.6	13.6	63.1	15.1	27.5	22.0	18.1	17.3	26.5	21	29	21	21	19	16

T 10506	107.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear													
GVW/Tire	Minimum Curb Weight			GAWR		HF	HG	HM	HP	HR	HS	HS2	HT	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F
	Frt	Rr	Ttl	Frt	Rr																						
¹⁾ 5350 & ZW7 P235/70R15	2336	1879	4215	2800	2700	14.2	64.8	16.3	31.4	24.6	19.5	19.3	29.8	12.9	63.1	14.8	28.5	22.5	17.9	17.4	27.3	21	28	22	23	20	17
²⁾ 5350 & Z85 P235/75R15	2336	1880	4216	2800	2900	14.2	64.9	16.4	31.5	24.7	19.6	19.4	30.0	12.8	63.2	14.8	27.8	22.2	18.0	17.4	26.7	21	28	21	22	20	17
²⁾ 5350 & Z85 P235/70R15	2336	1880	4216	2800	2900	13.8	64.4	16.0	31.1	24.3	19.2	19.0	29.5	12.4	62.8	14.4	27.4	21.8	17.6	17.0	26.3	20	27	20	21	19	16
²⁾ 5350 & Z85 P235/75R15	2336	1880	4216	2800	2900	14.7	65.4	16.9	32.0	25.2	20.1	19.9	30.5	13.3	63.7	15.4	28.4	22.8	18.5	17.9	27.3	22	29	22	23	20	17

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 9

S 15506	113.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 5550 P245/65R17	2344	1891	4235	2950	3200	-	10.0	70.6	15.8	28.0	17.8	18.3	32.1	-	8.1	68.1	13.6	24.2	15.6	15.6	27.2	16	22	16	22	16	18	-
²⁾ 5550 P245/70R16	2344	1891	4235	2950	3200	-	9.8	70.4	15.6	27.8	17.6	18.1	31.9	-	7.8	67.9	13.3	23.9	15.3	15.3	26.9	16	22	16	22	16	18	-

T 15506	113.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 5750 P245/65R17	2593	2443	5037	3600	3968	-	9.6	70.7	15.7	28.2	17.7	18.4	32.4	-	8.6	68.0	13.7	24.3	15.7	15.6	27.5	16	23	17	23	17	18	-
²⁾ 5750 P245/70R16	2593	2443	5037	3600	3968	-	9.4	70.3	15.3	27.7	17.4	18.0	31.9	-	8.4	67.6	13.4	23.9	15.4	15.2	27.0	16	23	16	23	17	18	-
²⁾ 5750 P255/60R17	2593	2443	5037	3600	3968	-	9.7	69.6	15.1	26.9	17.1	17.4	30.8	-	8.5	68.9	14.0	26.0	16.0	16.8	29.6	17	23	20	26	21	21	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 10

S 15806	129.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 6200 P245/65R17	2527	2280	4807	3100	3400	-	8.5	76.2	15.0	29.6	18.2	19.3	32.9	-	6.7	74.2	13.2	26.8	16.3	17.2	29.6	16	20	21	23	21	23	-

T 15806	129.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 6400 P245/65R17	2698	2295	4993	3200	3400	-	8.7	76.2	15.1	29.5	18.3	19.3	32.9	-	7.3	73.9	13.4	26.7	16.6	17.3	29.6	16	21	21	23	21	23	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required


2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 11

S/T 10516 2-Door Utility

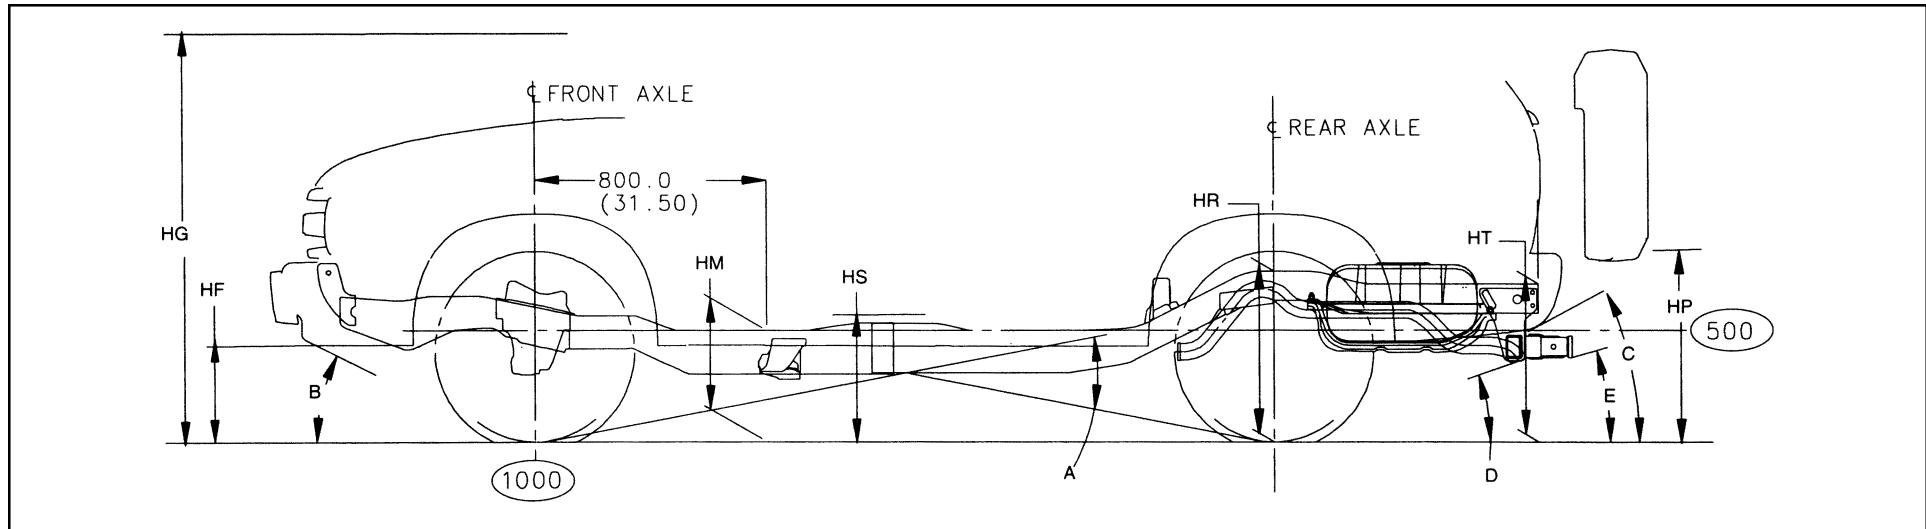

Heights (To Ground)

HF	Bottom of Front Air Deflector or Bumper
HG	Roof Height
HM	Normal Top of Frame
HP	Top of Tailgate (Down)
HR	Top of Frame at Centerline of Rear Axle
HS	Step H-Point-Front
HT	Rear Cargo Load Height

FRAME HEIGHT AND RAMP ANGLE DATA

Angle

A Ramp Breakover

Approach Angle(s) (Bottom of)

B Front Air Deflector

Departure Angle(s) (Bottom of)

C Rear Bumper

D Tail pipe

E Platform Hitch

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 13

S 10516			100.5" Wheelbase				Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire	Minimum Curb Weight			GAWR		HF	HG	HM	HP	HR	HS	HT	HF	HG	HM	HP	HR	HS	HT	A	B	C	D	E
	Frt	Rr	Ttl	Frt	Rr																			
¹⁾ 4450 & Z85 P205/75R15	1959	1686	3645	2200	2600	14.1	65.1	16.4	31.7	24.8	19.8	29.9	13.7	63.8	15.5	27.9	22.4	18.5	26.7	23	29	22	20	17
²⁾ 4450 & Z85 P235/70R15	1959	1686	3645	2200	2600	14.5	65.5	16.8	32.1	25.3	20.1	30.4	14.1	64.2	15.9	28.4	22.9	18.9	27.1	24	30	22	20	17

T 10516			100.5" Wheelbase				Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire	Minimum Curb Weight			GAWR		HF	HG	HM	HP	HR	HS	HT	HF	HG	HM	HP	HR	HS	HT	A	B	C	D	E
	Frt	Rr	Ttl	Frt	Rr																			
¹⁾ 4850 & Z85 P205/75R15	2160	1761	3921	2500	2600	13.8	64.8	16.1	31.5	24.6	19.4	29.7	12.8	63.4	14.9	27.9	22.2	18.1	26.6	23	27	22	19	17
²⁾ 4850 & Z85 P235/70R15	2160	1761	3921	2500	2700	14.2	65.3	16.5	32.0	25.1	19.8	30.2	13.2	63.8	15.3	28.3	22.6	18.5	27.0	24	28	22	20	17
²⁾ 4850 & ZM6 P235/75R15	2152	1825	3977	2500	2700	14.7	65.6	17.0	32.2	25.4	20.2	30.5	13.7	64.4	15.8	28.8	23.2	19.0	27.6	26	29	23	21	18
²⁾ 5000 & ZR2 31 X 10.5 R15	2213	1887	4100	2500	2700	17.7	67.6	19.4	33.5	27.1	22.4	31.9	17.1	66.4	18.4	30.7	25.2	21.3	29.5	31	36	26	25	21

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required


2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 14

C/K Truck (Current)

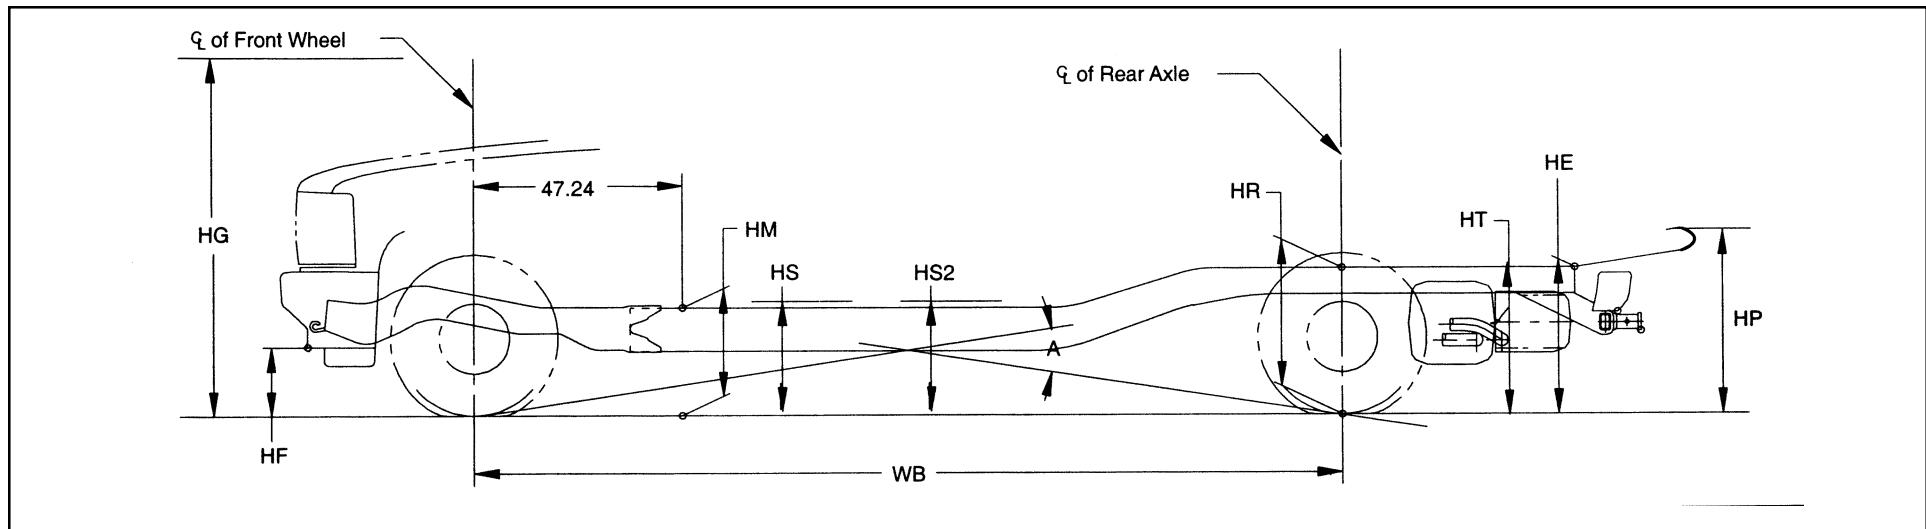


Heights (To Ground)

HE	Top of Frame at End
HF	Bottom of Front Air Deflector or Bumper
HG	Roof height to ground
HM	Normal Top of Frame
HP	Top of Tailgate
HR	Top of Frame at Centerline of Rear Axle
HS	Step H-Point-Front
HS2	Step H-Point-Second
HT	Rear Cargo Load Height

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 15

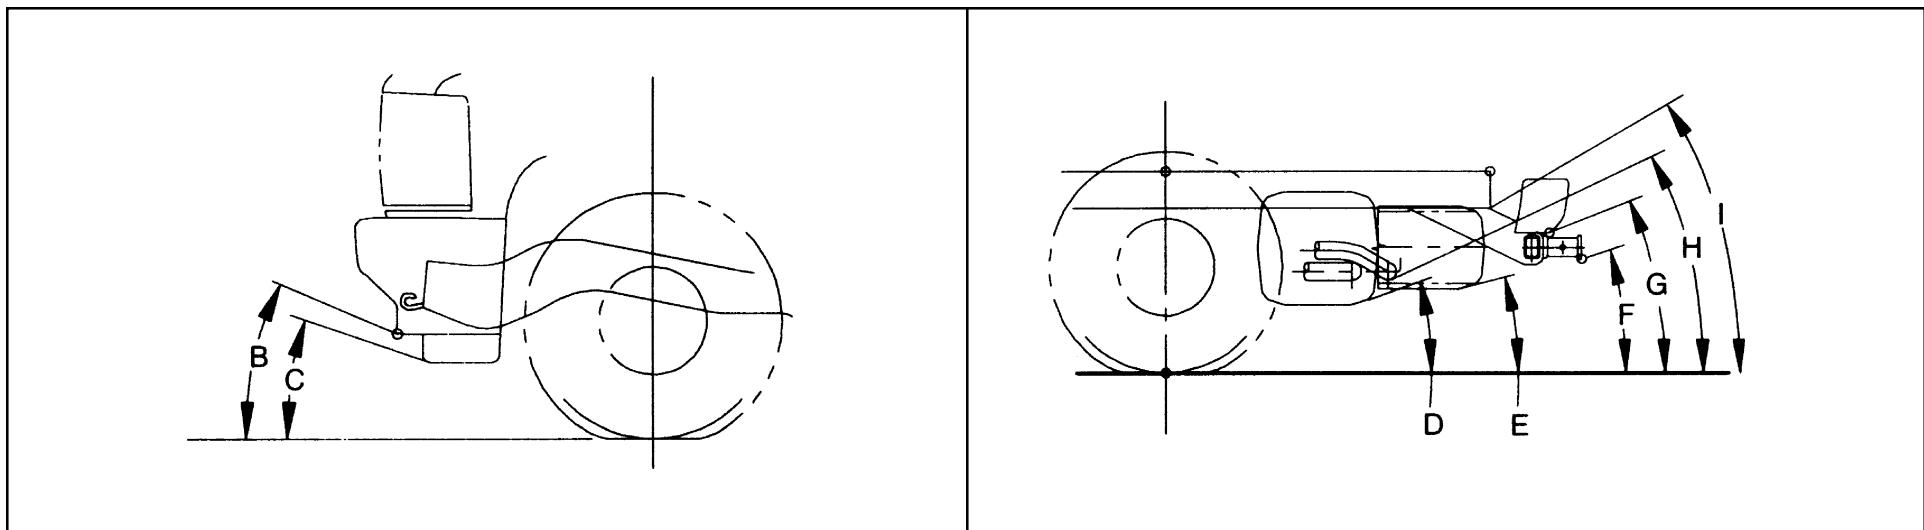

Angle

A Ramp Breakover

Approach Angle(s) (Bottom of)

B Front Bumper

C Front Air Deflector

Departure Angles(s) (Bottom of)

D Fuel Tank and Shield

E Spare Tire

F Platform Hitch

G Rear Bumper

H Exhaust

I Frame at End

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 16

GVW/Tire	C 31003 135.5" Wheelbase			Frame Heights at Minimum Curb Weight										Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 15,000 225/70R19.5	3198	2813	6011	5000	11000	32.6	18.2	77.7	25.0	-	31.7	27.4	-	-	28.3	16.6	75.7	22.8	-	28.4	25.2	-	-	21	30	-	35	-	-	39	24	

GVW/Tire	C 31403 159.5" Wheelbase			Frame Heights at Minimum Curb Weight										Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 15,000 225/70R19.5	3387	2753	6140	5000	11000	32.3	18.1	77.4	24.8	-	31.5	27.2	-	-	28.1	16.7	75.7	22.7	-	28.1	25.1	-	-	19	30	-	35	-	-	39	24	

GVW/Tire	C 31803 183.5" Wheelbase			Frame Heights at Minimum Curb Weight										Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																		
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HP	HR	HS	HS2	HT	HE	HF	HG	HM	HP	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																											
¹⁾ 15,000 225/70R19.5	3705	2741	6446	5000	11000	32.4	17.7	77.1	24.4	-	31.6	26.8	-	-	28.2	16.7	75.7	22.6	-	28.2	25.0	-	-	17	30	-	35	-	-	41	24	

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required


2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 17

C/K Truck (New)

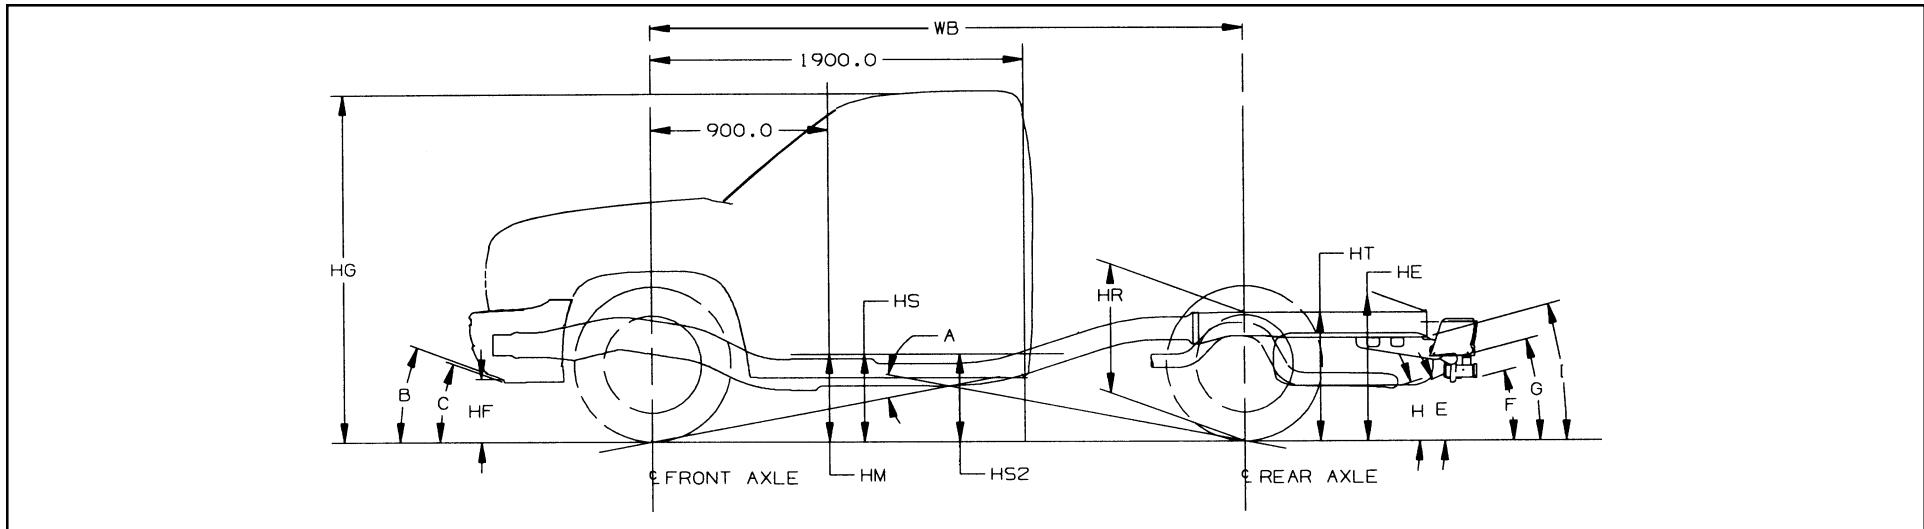


Heights (To Ground)

HE	Top of Frame at End
HF	Bottom of Front Air Deflector or Bumper
HG	Roof Height to Ground
HM	Top of Frame
HR	Top of Frame at Centerline of Rear Axle
HS	Step H-Point-Front
HS2	Step H-Point-Second
HT	Rear Cargo Load Height
Angle	Ramp Breakover
A	Ramp Breakover

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 18

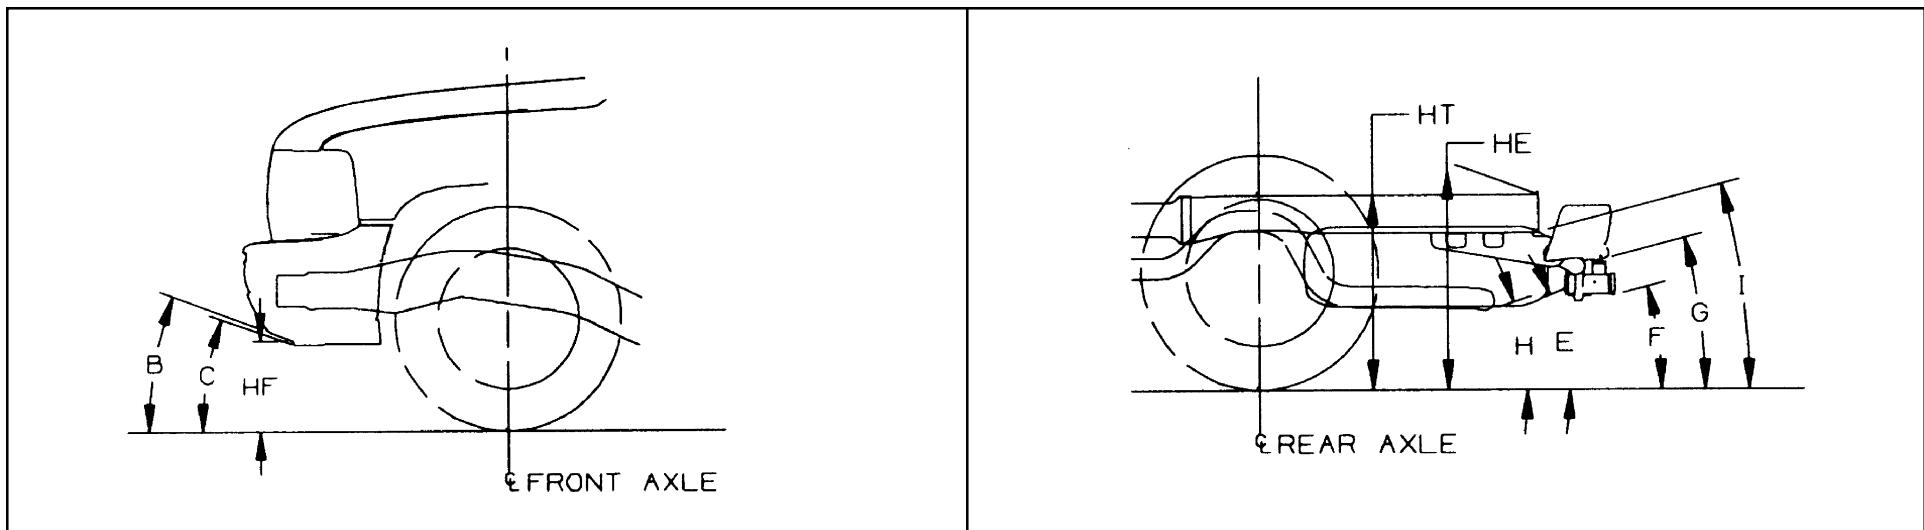

Approach Angle(s) (Bottom of)

- B Front Bumper
C Front Air Deflector

Departure Angles(s) (Bottom of)

- E Spare Tire
F Platform Hitch
G Rear Bumper
H Exhaust
I Frame at End

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 19

C 15703 119.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt																										
¹⁾ 6100 P235/75R16	2317	1629	3946	3150	3686	30.3	9.4	71.6	16.5	28.9	19.8	-	32.9	23.7	7.5	68.4	13.8	23.8	17.1	-	26.2	19	29	19	-	20	15	21	20	31
²⁾ 6100 P255/70R16	2317	1629	3946	3150	3686	30.4	9.5	71.7	16.6	29.0	19.9	-	33.1	23.8	7.7	68.6	14.0	23.9	17.3	-	26.3	19	29	19	-	20	15	21	20	32

C 15706 116.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt																										
¹⁾ 6500 P245/75R16	2502	2360	4862	3200	3750	-	12.5	77.3	18.3	29.0	22.0	22.7	31.7	-	10.4	75.2	16.2	25.8	19.9	20.2	27.8	23	41	24	-	22	17	28	27	-
²⁾ 6500 P265/70R16	2502	2360	4862	3200	3750	-	12.5	77.4	18.4	29.0	22.1	22.8	31.8	-	10.4	75.2	16.2	25.9	20.0	20.3	27.9	23	41	24	-	22	17	29	27	-
²⁾ 6800 P245/75R16	2498	2416	4914	3200	4000	-	12.7	76.7	17.9	28.2	21.7	22.1	30.7	-	10.4	74.7	15.8	25.6	19.6	20.1	27.7	22	41	24	-	22	17	28	27	-
²⁾ 6800 P265/70R16	2498	2416	4914	3200	4000	-	12.7	76.7	17.9	28.2	21.8	22.2	30.8	-	10.4	74.7	15.9	25.7	19.7	20.2	27.8	22	41	24	-	22	17	29	27	-
²⁾ 6800 & Z75 P265/70R17	2512	2458	4970	3200	4000	-	12.8	76.7	17.9	28.1	21.8	22.1	30.7	-	11.1	73.9	15.4	26.2	19.4	20.5	28.4	22	43	25	-	23	18	30	29	-

NOTE: Roof Rack is required on (06) except W/BPH. Also K15936 w/Z75.

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 20

C 15743 143.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 8600 LT245/75R16	3103	2294	5397	4410	6000	32.3	13.1	75.2	20.4	31.4	22.9	23.7	34.8	26.3	11.2	72.7	18.2	26.8	20.6	21.6	28.7	15	36	26	—	18	14	20	19	27

C 15753 143.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 6200 P235/75R16	2557	1723	4280	3600	3686	29.8	9.6	71.7	16.2	28.7	19.5	20.7	32.5	23.8	7.0	69.1	13.7	23.9	17.0	18.3	26.2	16	27	18	—	20	15	21	20	32
²⁾ 6200 P255/70R16	2557	1723	4280	3600	3686	30.0	9.6	71.8	16.3	28.8	19.6	20.8	32.6	23.9	7.0	69.2	13.7	24.1	17.0	18.4	26.4	16	28	18	—	20	15	21	20	32
²⁾ 6200 LT245/75R16	2557	1723	4280	3600	3686	30.3	10.1	72.2	16.7	29.2	20.1	21.2	32.9	24.4	7.7	69.6	14.3	24.6	17.6	18.9	26.9	16	28	19	—	20	15	22	21	32
²⁾ 6600 & NYS P255/70R16	2744	2140	4884	3600	4000	29.4	9.6	71.5	16.2	28.4	19.5	20.6	32.1	23.8	7.7	69.2	14.0	24.0	17.4	18.4	26.2	16	29	19	—	20	15	21	20	32

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 21

C 15903 133.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt																										
¹⁾ 6400 P235/75R16	2373	1729	4102	3150	3686	30.2	9.5	71.3	16.3	28.8	19.7	—	32.9	24.2	7.9	68.3	13.8	24.1	17.1	—	26.7	16	29	19	—	21	14	20	21	28
²⁾ 6400 P255/70R16	2373	1729	4102	3150	3686	30.4	9.6	71.4	16.5	29.0	19.8	—	33.0	24.4	8.0	68.4	14.0	24.2	17.3	—	26.9	17	29	19	—	20	14	20	21	29

C 15906 130.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt																										
¹⁾ 7000 P245/75R16	2608	2340	4948	3200	4000	—	12.5	76.7	18.1	28.9	21.9	22.6	31.7	—	11.2	73.7	15.8	25.4	19.7	19.9	27.4	20	42	25	—	21	14	24	26	—
²⁾ 7000 P265/70R16	2608	2340	4948	3200	4000	—	12.5	76.8	18.2	29.0	21.9	22.6	31.8	—	11.2	73.8	15.8	25.5	19.8	19.9	27.5	20	43	25	—	22	14	24	27	—

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

- 1) Base GVWR — contains minimum equipment required
2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE **22**

C 15936 130.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 6800 P265/70R16	2800	2620	5420	3400	4000	-	12.0	73.9	17.9	28.5	21.7	22.3	32.5	-	10.4	72.1	16.1	25.3	20.0	20.1	28.3	20	27	-	-	21	13	22	26	-
²⁾ 6800 P265/70R17	2800	2620	5420	3400	4000	-	12.5	73.8	18.0	28.3	21.9	22.3	32.2	-	10.5	72.8	16.7	26.8	20.4	21.3	30.2	22	28	-	-	24	16	25	31	-

C 15953 157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 6400 P235/75R16	2805	1712	4517	3600	3686	29.9	9.5	71.4	16.0	28.7	19.3	20.5	32.6	23.8	7.9	69.1	13.9	23.9	17.2	18.3	26.3	14	29	20	-	20	13	19	20	28
²⁾ 6400 P255/70R16	2805	1712	4517	3600	3686	30.1	9.6	71.5	16.2	28.9	19.5	20.6	32.7	23.9	8.0	69.2	14.0	24.1	17.3	18.4	26.4	14	29	20	-	20	13	19	20	28

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

- 1) Base GVWR — contains minimum equipment required
2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 23

K 15703		119.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear															
GVW/ Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 6100 P245/75R16	2562	1687	4249	3925	3750	32.2	12.1	73.9	19.0	31.0	22.3	-	34.9	25.5	8.3	71.6	16.2	26.0	19.5	-	27.9	24	31	21	-	23	17	23	34	
²⁾ 6100 LT245/75R16	2562	1687	4249	3925	3750	32.4	12.4	74.1	19.3	31.2	22.6	-	35.1	26.0	8.8	72.0	16.6	26.4	19.9	-	28.4	24	31	21	-	23	17	23	34	
²⁾ 6100 P265/75R16	2562	1687	4249	3925	3750	32.8	12.7	74.5	19.6	31.6	22.9	-	35.5	26.1	9.0	72.3	16.8	26.6	20.2	-	28.5	25	32	22	-	23	17	24	35	

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE **24**

K 15706					133.0" Wheelbase					Frame Heights at Minimum Curb Weight							Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear													
GVW/ Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 6800 P245/75R16	2706	2407	5113	3600	3750	-	12.5	76.8	17.9	28.3	21.7	22.2	30.9	-	9.6	75.0	15.8	26.3	19.5	20.5	28.6	22	39	22	-	23	18	30	29	-
²⁾ 6800 P265/70R16	2706	2407	5113	3600	3750	-	12.6	76.8	18.0	28.4	21.8	22.3	31.0	-	9.6	75.1	15.9	26.4	19.6	20.6	28.7	22	40	22	-	23	18	30	29	-
²⁾ 6800 LT245/75R16	2706	2407	5113	3600	3750	-	12.8	77.0	18.1	28.5	22.0	22.4	31.1	-	9.9	75.3	16.1	26.7	19.8	20.8	29.0	22	39	22	-	23	18	30	29	-
²⁾ 6800 P265/75R16	2706	2407	5113	3600	3750	-	13.2	77.4	18.5	29.0	22.4	22.9	31.6	-	10.2	75.6	16.5	27.0	20.1	21.2	29.3	23	41	24	-	24	18	31	30	-
²⁾ 6800 LT265/75R16	2706	2407	5113	3600	3750	-	13.6	77.9	19.0	29.4	22.8	23.3	32.1	-	10.7	76.2	17.0	27.5	20.7	21.7	29.9	23	41	24	-	25	19	31	31	-
²⁾ 6800 P265/70R17	2706	2407	5113	3350	3900	-	13.0	77.3	18.4	28.8	22.2	22.7	31.5	-	10.9	75.7	16.7	26.6	20.5	20.9	28.7	24	43	25	-	24	18	30	30	-
²⁾ 6900 P245/75R16	2703	2467	5170	3600	4000	-	12.6	76.6	17.8	28.0	21.6	22.0	30.6	-	9.6	75.0	15.8	25.9	19.5	20.3	27.9	22	39	22	-	22	17	29	27	-
²⁾ 6900 P265/70R16	2703	2467	5170	3600	4000	-	12.7	76.6	17.8	28.1	21.7	22.1	30.6	-	9.6	75.1	15.9	25.7	19.6	20.2	27.7	22	39	22	-	22	16	28	27	-
²⁾ 6900 LT265/75R16	2703	2467	5170	3600	4000	-	13.8	77.7	18.9	29.2	22.8	23.2	31.7	-	10.8	76.2	17.0	26.9	20.7	21.4	28.9	23	41	24	-	23	17	29	29	-
²⁾ 6900 P265/75R16	2703	2467	5170	3600	4000	-	13.2	77.2	18.4	28.7	22.3	22.7	31.2	-	10.2	75.7	16.5	26.7	20.1	21.1	28.8	23	41	24	-	24	18	30	29	-
²⁾ 7000 LT265/75R16	2864	2642	5506	3550	4000	-	13.3	76.9	18.2	28.3	22.1	22.4	30.7	-	11.0	75.6	16.6	26.3	20.4	20.9	28.3	24	43	25	-	23	17	29	29	-
²⁾ 7000 P265/70R17	2864	2642	5506	3550	4000	-	13.1	76.7	18.0	28.1	21.9	22.2	30.6	-	10.8	75.4	16.4	26.1	20.2	20.7	28.1	24	43	25	-	23	17	29	28	-

NOTE: Rack is required on (06) except w/BPH and K15936 & Z75.

↑ Column "A" is ramp angle 2001 model year.

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

(—) = not applicable for this model

2) Optional GVWR — contains minimum equipment required

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 25

K 15743 153.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 8600 LT245/75R16	3414	2380	5794	4410	6000	32.2	13.1	75.1	20.4	31.4	22.8	23.6	34.8	26.2	11.7	72.9	18.5	26.8	20.9	21.8	28.6	19	37	27	—	18	14	19	19	27

K 15753 143.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 6400 P245/75R16	2894	1788	4682	3925	3750	31.7	12.2	73.9	18.6	30.8	21.9	23.0	34.4	25.6	9.6	71.6	16.2	26.0	19.5	20.8	28.0	20	33	23	—	23	17	23	24	34
²⁾ 6400 LT245/75R16	2894	1788	4682	3925	3750	32.0	12.5	74.2	18.9	31.0	22.3	23.3	34.6	26.1	10.1	72.0	16.7	26.5	20.0	21.2	28.5	20	33	23	—	23	17	23	24	34
²⁾ 6400 P265/75R16	2894	1788	4682	3925	3750	32.4	12.8	74.5	19.2	31.4	22.6	23.6	35.0	26.3	10.2	72.3	16.9	26.7	20.2	21.4	28.7	21	35	25	—	23	18	24	25	35
²⁾ 6900 & NYS P245/75R16	2912	2178	5090	3925	4000	31.4	12.2	73.7	18.5	30.5	21.8	22.8	31.4	25.9	9.8	71.4	16.1	26.1	19.4	20.6	28.4	19	33	24	—	23	17	24	24	35
²⁾ 6900 & NYS LT245/75R16	2912	2178	5090	3925	4000	31.7	12.6	74.0	18.9	30.8	22.2	23.1	31.7	26.4	10.2	71.8	16.6	26.6	19.9	21.0	28.9	20	33	24	—	23	17	24	24	35
²⁾ 6900 & NYS P265/75R16	2912	2178	5090	3925	4000	32.0	12.8	74.3	19.2	31.1	22.5	23.4	32.0	26.6	10.4	72.0	16.8	26.8	20.1	21.2	29.0	21	35	25	—	24	18	25	26	36
²⁾ 7200 & NYS P265/70R17	3067	2327	5394	3925	4000	31.5	12.7	73.9	18.9	30.6	22.2	23.1	34.1	26.7	11.0	71.7	16.9	26.7	20.2	20.9	29.1	21	37	27	—	24	18	25	26	36

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE **26**

K 15903			133.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/ Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 6400 P245/75R16	2607	1804	4411	3925	3750	31.8	12.2	73.5	18.7	30.7	22.1	-	34.5	25.7	8.8	70.9	15.9	26.0	19.2	-	28.1	21	31	22	-	23	15	21	24	30
²⁾ 6400 LT245/75R16	2607	1804	4411	3925	3750	32.1	12.6	73.8	19.0	30.9	22.4	-	34.7	26.2	9.3	71.3	16.3	26.5	19.6	-	28.6	21	31	22	-	23	15	21	24	30
²⁾ 6400 P265/75R16	2607	1804	4411	3925	3750	32.5	12.9	74.1	19.4	31.3	22.7	-	35.1	26.3	9.4	71.6	16.5	26.6	19.8	-	28.8	22	33	23	-	23	16	22	25	31

K 15906			130.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/ Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 7200 P245/75R16	2829	2398	5227	3600	4000	-	12.6	75.9	17.7	28.2	21.6	22.1	30.7	-	10.5	74.3	15.4	26.5	19.3	20.6	28.8	19	41	24	-	24	16	25	29	-
²⁾ 7200 P265/70R16	2829	2398	5227	3600	4000	-	12.6	76.0	17.8	28.2	21.6	22.1	30.8	-	10.6	74.4	15.5	26.5	19.4	20.6	28.9	19	41	24	-	24	16	26	30	-
²⁾ 7200 P265/75R16	2829	2398	5227	3600	4000	-	13.2	76.5	18.3	28.8	22.2	22.7	31.4	-	11.1	75.0	16.1	27.1	20.0	21.2	29.5	20	43	25	-	25	16	26	31	-
²⁾ 7200 P265/70R17	2829	2398	5227	3600	4000	-	13.0	76.4	18.2	28.7	22.0	22.5	31.2	-	10.9	74.8	15.9	26.9	19.8	21.0	29.3	20	43	25	-	25	16	26	31	-
²⁾ 7200 P265/70R17	2829	2398	5227	3550	4000	-	13.0	76.4	18.2	28.6	22.0	22.5	31.2	-	11.1	74.8	15.9	26.9	19.9	21.0	29.2	20	43	26	-	25	16	26	31	-
²⁾ 7200 P265/70R17	2829	2398	5227	3450	4000	-	13.0	76.4	18.2	28.7	22.1	22.6	31.3	-	11.5	73.9	16.0	25.7	20.0	20.2	27.6	20	43	26	-	25	16	26	31	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 27

K 15936 130.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt																										
¹⁾ 7000 P265/70R16	3003	2670	5673	3800	4000	-	12.0	73.8	17.8	28.3	21.6	22.2	32.4	-	9.7	72.4	16.1	25.3	19.8	20.1	28.4	21	26	-	-	21	14	22	26	-
²⁾ 7000 P265/70R17	3003	2670	5673	3800	4000	-	12.3	74.2	18.2	28.8	22.0	22.6	32.9	-	10.0	72.8	16.5	25.7	20.2	20.5	28.8	21	27	-	-	22	14	23	28	-
²⁾ 7000 & Z75 P265/70R17	3089	2690	5779	3800	4000	-	12.7	75.8	17.7	27.7	21.7	21.9	31.5	-	10.4	75.1	16.3	26.8	20.1	21.3	30.2	21	23	-	-	24	16	20	31	-

NOTE: Rack is required on (06) except w/BPH and K15936 & Z75.

K 15953 157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt																										
¹⁾ 6400 P245/75R16	3013	1847	4860	3925	3750	31.4	12.2	73.4	18.4	30.4	21.7	22.6	34.0	25.4	10.4	71.7	16.5	25.9	19.9	20.9	27.8	18	35	25	-	23	15	21	23	30
¹⁾ 6400 LT245/75R16	3013	1847	4860	3925	3750	31.6	12.6	73.7	18.8	30.7	22.1	22.9	34.2	25.9	10.9	71.9	17.0	26.4	20.3	21.3	28.3	18	35	25	-	23	15	21	23	30
²⁾ 6400 P265/75R16	3013	1847	4860	3925	3750	32.0	12.9	74.1	19.1	31.0	22.4	23.2	34.6	26.1	11.0	72.3	17.2	26.5	20.5	21.5	28.5	19	36	26	-	23	16	22	25	31

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE **28**

C 25743 143.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 9200 LT245/75R16	3079	2309	5388	4410	6084	34.1	13.2	77.3	20.2	33.3	24.9	25.6	36.6	28.6	11.3	74.6	17.8	28.9	22.4	23.3	31.1	17	36	26	—	21	18	26	27	33

C 25753 143.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 9200 LT245/75R16	3036	2191	5227	4410	6084	34.5	13.1	76.8	20.3	33.6	25.1	25.7	37.0	28.7	11.2	74.0	17.8	28.9	22.5	23.4	31.1	18	36	26	—	21	18	26	21	33

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

- 1) Base GVWR — contains minimum equipment required
2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE **29**

C 25903					133.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear												
GVW/ Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																									
²⁾ 8500 AF LT245/75R16	3198	2160	5358	4100	6000	34.5	13.0	74.3	20.3	33.3	23.0	-	35.0	28.2	12.0	72.4	18.4	28.8	21.0	-	28.6	19	37	27	-	20	15	21	27	29
¹⁾ 8600 LT245/75R16	2876	1924	4800	4100	6000	35.2	13.0	74.6	20.5	33.9	23.3	-	35.7	28.4	11.4	72.1	18.1	28.9	20.7	-	28.9	19	36	26	-	20	16	21	27	29
²⁾ 8600 & ZW9 LT245/75R16	2887	1562	4449	4100	6000	36.1	12.8	75.0	20.7	34.6	23.5	-	-	28.4	11.5	72.1	18.1	28.9	20.8	-	-	19	36	26	-	-	-	-	27	29
²⁾ 9200 LT245/75R16	2861	2131	4992	4410	6084	34.9	13.0	76.5	20.4	33.7	25.2	-	37.4	28.7	10.9	73.7	17.7	28.9	22.4	-	31.2	18	35	25	-	21	16	23	27	30
²⁾ 9200 & ZW9 LT245/75R16	2872	1769	4641	4410	6084	35.8	12.9	76.8	20.6	34.4	25.5	-	-	28.7	10.9	73.8	17.7	28.9	22.4	-	-	18	35	25	-	-	-	-	27	30

C 25906					130.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear												
GVW/ Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 8600 LT245/75R16	2831	2598	5429	3800	5500	-	13.3	77.8	20.8	28.9	22.8	23.6	32.8	-	11.9	75.5	18.9	26.2	21.0	21.6	29.4	21	44	26	-	20	16	26	30	-

NOTE: Roof rack is required on (06) except w/BPH. Also K15936 w/Z75.

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE **30**

C 25936 130.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 8600 LT245/75R16	2831	2598	5429	3800	5500	-	12.9	74.7	20.3	28.2	22.5	23.1	33.3	-	11.9	72.9	18.7	25.5	21.1	21.3	29.6	21	30	26	-	18	14	23	30	-

C 25943 157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 9200 LT245/75R16	3180	2335	5515	4670	6084	34.1	13.2	77.1	20.1	33.2	24.8	25.5	36.6	28.6	11.0	74.7	17.6	28.9	22.3	23.4	31.0	16	35	26	-	21	16	23	22	29
²⁾ 9200 & ZW9 LT245/75R16	3180	1985	5165	4670	6084	34.9	13.1	77.5	20.3	33.9	25.0	25.8	-	28.6	11.0	74.7	17.6	28.9	22.3	23.4	-	16	35	26	-	-	-	-	22	29

C 25953 157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																									
²⁾ 8500 AF LT245/75R16	3397	2535	5932	4500	6084	33.7	13.2	76.2	20.1	32.9	24.7	25.2	36.2	28.2	11.6	75.0	18.2	28.9	22.9	24.3	30.7	17	36	27	-	22	15	22	27	29
¹⁾ 9200 LT245/75R16	3132	2249	5381	4500	6084	34.4	13.2	76.5	20.2	33.5	24.9	25.5	36.9	28.6	11.3	74.1	17.8	28.9	22.4	23.5	31.1	17	36	26	-	23	16	23	27	29

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE **31**

K 25743 153.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 9200 LT245/75R16	3372	2318	5690	4670	6084	34.1	13.1	77.3	20.2	33.3	24.9	25.6	36.6	28.5	11.3	74.8	17.9	28.9	22.5	23.5	31.0	17	36	26	-	21	17	25	27	33
²⁾ 9200 & VYU LT245/75R16	3376	2319	5695	4800	6084	34.1	13.2	77.3	20.2	33.3	24.9	25.6	36.6	28.5	11.1	74.8	17.8	28.9	22.5	23.5	31.0	17	35	26	-	21	17	25	27	33

K 25753 143.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 8600 LT245/75R16	3222	1993	5215	4410	6000	34.8	13.0	74.9	20.3	33.7	23.1	23.7	35.3	28.4	11.4	72.6	18.1	28.9	20.8	21.9	28.8	19	36	26	-	20	17	25	21	33
²⁾ 8600 & VYU LT245/75R16	3224	1994	5218	4500	6000	34.8	13.0	74.9	20.4	33.7	23.1	23.7	35.3	28.4	11.3	72.6	18.1	28.9	20.7	21.9	28.8	19	36	26	-	20	17	25	21	33
²⁾ 9200 LT245/75R16	3239	2165	5404	4670	6084	34.5	13.1	76.8	20.3	33.6	25.1	25.7	37.0	28.5	11.1	74.1	17.8	28.9	22.5	23.5	31.0	18	35	26	-	20	17	25	21	33
²⁾ 9200 & VYU LT245/75R16	3241	2166	5407	4800	6084	34.5	13.1	76.8	20.3	33.5	25.1	25.7	37.0	28.5	10.9	74.2	17.7	28.9	22.4	23.5	31.0	18	35	25	-	20	17	25	21	33

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE **32**

K 25903					133.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear												
GVW/ Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																									
²⁾ 8500 AF LT245/75R16	3501	2402	5903	4500	6084	34.2	13.0	75.8	20.2	33.1	25.0	-	36.7	28.0	11.7	74.9	18.4	28.9	23.1	-	30.5	19	37	27	-	20	15	22	26	29
¹⁾ 9200 LT245/75R16	3171	2181	5352	4500	6084	34.7	13.0	76.0	20.4	33.5	25.1	-	37.2	28.5	11.3	74.1	17.9	28.9	22.6	-	31.0	19	36	26	-	21	16	23	27	29
²⁾ 9200 & ZW9 LT245/75R16	3201	1750	5951	4500	6084	35.8	12.8	76.4	20.6	34.4	25.4	-	-	28.5	11.3	74.1	18.0	28.9	22.6	-	-	19	36	26	-	-	-	-	27	29
²⁾ 9200 LT245/75R16	3175	2182	5357	4800	6084	34.7	13.1	76.0	20.4	33.5	25.2	-	37.2	28.5	10.7	74.1	17.7	28.9	22.4	-	31.0	18	35	25	-	21	16	23	27	29
²⁾ 9200 & ZW9 LT245/75R16	3204	1751	4955	4800	6084	35.8	12.9	76.4	20.6	34.4	25.4	-	-	28.5	10.8	74.1	17.7	28.9	22.4	-	-	18	35	25	-	-	-	-	27	29

K 25906					130.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear												
GVW/ Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 8600 LT245/75R16	3089	2645	5734	4180	5500	-	13.2	77.8	20.7	28.9	22.8	23.5	32.8	-	11.5	75.9	18.9	26.2	21.0	21.7	29.3	21	43	26	-	20	16	25	30	-

NOTE: Rack is required on (06) except w/BPH and K15936 & Z75.

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 33

K 25936 130.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 8600 LT245/75R16	3527	3135	6662	4380	5500	-	12.7	74.6	20.1	28.0	22.4	22.9	33.2	-	11.4	73.1	18.7	25.4	21.0	21.4	29.4	21	29	-	-	18	14	23	30	-

K 25943 167.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 9200 LT245/75R16	3452	2362	5814	4800	6084	34.0	13.2	77.1	20.1	33.2	24.8	25.4	36.5	28.5	11.3	74.9	17.9	28.9	22.5	23.6	30.9	16	36	26	-	20	16	23	22	29
²⁾ 9200 & ZW9 LT245/75R16	3442	2097	5539	4800	6084	34.7	13.1	77.3	20.2	33.7	24.9	25.7	-	28.5	11.3	74.9	17.8	28.9	22.5	23.6	-	16	36	26	-	-	-	-	22	29

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE **34**

K 25953 157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
²⁾ 8500 AF LT245/75R16	3619	2525	6144	4670	6084	33.7	13.2	76.2	20.0	32.9	24.7	25.2	36.2	28.1	11.6	75.2	18.3	28.9	22.9	24.5	30.6	17	37	27	-	22	15	22	27	29
¹⁾ 9200 LT245/75R16	3352	2241	5593	4670	6084	34.4	13.1	76.5	20.2	33.4	24.9	25.4	36.9	28.5	11.3	74.3	17.9	28.9	22.5	23.6	31.0	17	36	26	-	22	16	23	27	29
²⁾ 9200 & VYU LT245/75R16	3356	2242	5598	4800	6084	34.4	13.2	76.5	20.2	33.4	24.9	25.5	36.9	28.5	11.1	74.3	17.8	28.9	22.4	23.7	31.0	17	35	26	-	22	16	23	27	29

C 35903 133.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 11400 LT215/85R16	2859	2756	5616	4500	8550	35.5	13.0	76.3	20.6	34.1	25.4	-	38.0	28.6	10.9	74.1	17.6	29.0	22.2	-	31.1	18	35	25	-	22	16	23	27	29
²⁾ 11400&ZW9 LT215/85R16	2921	2144	5066	4500	8550	37.0	12.8	76.9	20.9	35.3	25.8	-	-	28.6	11.1	74.2	17.7	29.0	22.3	-	-	18	35	25	-	-	-	-	27	29

C35903 CANCELLED FOR MY2002 EWO#LU043A

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE **35**

C 35943 167.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 11400 LT215/85R16	3209	2745	5954	4670	8550	34.9	13.1	77.5	20.3	33.9	25.0	25.8	37.5	28.5	11.2	74.9	17.6	28.9	22.2	23.6	31.0	15	36	26	-	22	16	23	22	29
²⁾ 11400 & ZW9 LT215/85R16	3213	2339	5552	4670	8550	36.2	13.0	78.0	20.5	34.9	25.3	26.3	-	28.6	11.3	75.0	17.7	29.0	22.3	23.7	-	15	36	26	-	-	-	-	22	29

C 35953 157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 11400 LT215/85R16	3052	2854	5907	4670	8550	35.1	13.1	76.8	20.4	34.0	25.1	25.7	37.6	28.5	11.0	74.4	17.5	28.9	22.2	23.7	31.0	16	35	25	-	22	16	23	27	29

C 36003 137.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 11400 LT215/85R16	2970	2351	5321	4500	8550	33.5	13.0	76.2	20.6	31.9	25.3	-	-	26.9	11.0	74.4	17.8	27.1	22.4	-	-	17	35	25	28	-	-	-	23	24

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

- 1) Base GVWR — contains minimum equipment required
2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE **36**

C 36053 161.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 11400 LT215/85R16	3194	2502	5696	4670	8550	32.9	13.1	76.7	20.4	31.7	25.0	25.6	—	26.8	11.1	74.6	17.8	27.1	22.3	24.0	—	15	35	26	28	—	—	—	23	24

C 36403 161.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 11400 LT215/85R16	2803	2601	5404	4670	8550	32.8	13.2	75.9	20.4	31.6	25.1	—	—	27.0	10.5	74.3	17.4	27.2	22.0	—	—	14	34	24	28	—	—	—	23	24

C 36453 185.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 11400 LT215/85R16	3342	2442	5784	4800	8550	32.9	13.2	76.5	20.3	31.8	24.9	25.4	—	26.8	11.2	74.8	17.8	27.1	22.3	24.2	—	13	36	26	28	—	—	—	23	24

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 37

K 35903 133.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 11400 LT215/85R16	3232	2463	5695	4500	8550	35.9	12.8	76.4	20.6	34.4	25.4	-	38.4	28.4	11.5	74.4	17.9	28.9	22.5	-	30.9	18	36	26	-	22	15	23	27	29
²⁾ 11400&ZW9 LT215/85R16	3221	2142	5363	4500	8550	36.7	12.7	76.7	20.8	35.0	25.6	-	-	28.4	11.4	74.3	17.9	28.9	22.5	-	-	18	36	26	-	-	-	-	27	29
²⁾ 11400&VYU LT215/85R16	3236	2464	5700	4800	8550	35.9	12.9	76.4	20.7	34.4	25.5	-	38.4	28.4	11.0	74.4	17.7	28.9	22.3	-	30.9	18	35	25	-	22	15	23	27	29
²⁾ 11400&ZW9 LT215/85R16	3225	2143	5368	4800	8550	36.7	12.8	76.8	20.8	35.0	25.7	-	-	28.4	11.0	74.4	17.7	28.9	22.3	-	-	18	35	25	-	-	-	-	27	29

K 35943 167.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 11400 LT215/85R16	3456	2779	6235	4800	8550	34.9	13.1	77.4	20.3	33.9	25.0	25.8	37.4	28.4	11.4	75.1	17.8	28.9	22.4	23.8	30.9	15	36	26	-	22	15	23	22	29
²⁾ 11400&ZW9 LT215/85R16	3447	2456	5903	4800	8550	35.6	13.0	77.8	20.4	34.5	25.2	26.1	-	28.4	11.4	75.1	17.8	28.9	22.4	23.8	-	15	36	26	-	-	-	-	22	29

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE **38**

K 35953 157.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 11400 LT215/85R16	3377	2631	6008	4800	8550	35.3	13.1	76.9	20.4	34.1	25.1	25.8	37.8	28.4	11.3	74.6	17.7	28.9	22.4	23.9	30.9	16	36	26	-	22	15	23	27	29

K 36003 137.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 12000 LT215/85R16	3171	2570	5741	4670	8600	33.0	13.0	76.1	20.5	31.5	25.2	-	-	27.0	11.0	74.0	17.8	27.1	22.4	-	-	17	35	25	28	-	-	-	23	24
²⁾ 12000&VYU LT215/85R16	3175	2571	5746	4800	8600	33.0	13.1	76.1	20.5	31.6	25.2	-	-	27.0	10.9	74.1	17.7	27.1	22.3	-	-	17	35	25	28	-	-	-	23	24

K 36053 161.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 12000 LT215/85R16	3432	2724	6156	4800	8600	32.4	13.2	76.5	20.3	31.3	24.9	25.5	-	26.9	11.4	74.3	17.9	27.1	22.4	23.7	-	15	36	26	28	-	-	-	23	24

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE **39**

K 36403 161.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 12000 LT215/85R16	3022	2833	5855	4800	8600	32.3	13.3	75.8	20.3	31.2	25.0	-	-	27.1	10.7	73.9	17.5	27.1	22.0	-	-	14	34	25	28	-	-	-	24	24

K 36453 185.5" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear																	
GVW/ Tire	Minimum Curb Weight			GAWR	HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G	H	I	
	Frt	Rr	Ttl	Frt	Rr																									
¹⁾ 12000 LT215/85R16	3587	2654	6241	4800	8600	32.4	13.2	76.3	20.2	31.4	24.8	25.3	-	26.9	11.7	74.5	18.0	27.1	22.5	23.9	-	13	36	27	28	-	-	-	23	24

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required


2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 40

L/M 110(05, 06)

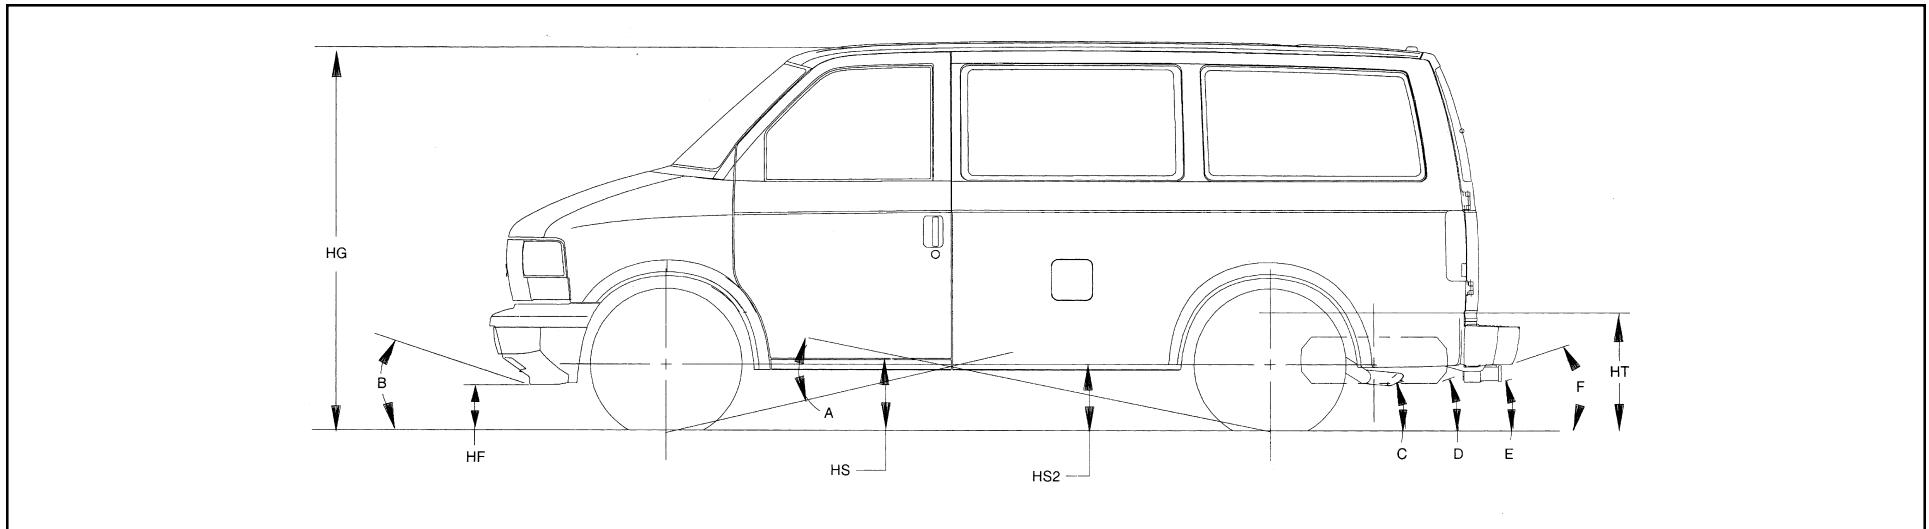

Heights (To Ground)

HF	Bottom of Front Bumper
HG	Top of Roof
HS	Step H-Point-Front
HS2	Step H-Point-Second
HT	Rear Cargo Load Height

Angle

A	Ramp Breakover
---------	----------------

Approach Angle(s) (Bottom of)

B	Air Dam
---------	---------

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 41

Departure Angle(s) (Bottom of)

C	Tail pipe
D	Spare Tire
E	Hitch
F	Rear Bumper

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 42

L 11005						Frame Heights at Minimum Curb Weight					Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire	Minimum Curb Weight			GAWR		HF	HG	HS	HS2	HT	HF	HG	HS	HS2	HT	A	B	C	D	E	F
	Frt	Rr	Ttl	Frt	Rr																
¹⁾ 5850 P215/75R15	2490	1697	4187	3050	3150	9.1	75.5	18.9	20.8	27.1	7.9	72.8	16.7	17.9	22.0	29	23	17	18	15	18
²⁾ 6100 P215/75R15	2499	1642	4142	3050	3150	9.1	75.6	18.9	20.9	27.3	8.1	72.4	16.5	17.7	22.2	28	24	18	19	15	19

L 11006						Frame Heights at Minimum Curb Weight					Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire	Minimum Curb Weight			GAWR		HF	HG	HS	HS2	HT	HF	HG	HS	HS2	HT	A	B	C	D	E	F
	Frt	Rr	Ttl	Frt	Rr																
¹⁾ 6100 P215/75R15	2535	2038	4573	3050	3150	9.3	74.8	18.5	20.1	25.8	8.2	72.4	16.6	17.7	22.2	28	24	18	19	15	19

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

- 1) Base GVWR — contains minimum equipment required
2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 43

M 11005						Frame Heights at Minimum Curb Weight					Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire	Minimum Curb Weight			GAWR		HF	HG	HS	HS2	HT	HF	HG	HS	HS2	HT	A	B	C	D	E	F
	Frt	Rr	Ttl	Frt	Rr																
¹⁾ 5600 P215/75R15	2268	1655	3924	2800	3150	9.3	75.6	19.0	20.9	27.2	8.4	73.0	17.0	18.0	21.9	29	24	17	18	14	18
²⁾ 5950 P215/75R15	2278	1600	3879	2800	3150	9.5	75.8	19.2	21.1	27.4	8.5	72.3	16.6	17.7	22.2	28	25	18	19	15	19

M 11006						Frame Heights at Minimum Curb Weight					Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear										
GVW/Tire	Minimum Curb Weight			GAWR		HF	HG	HS	HS2	HT	HF	HG	HS	HS2	HT	A	B	C	D	E	F
	Frt	Rr	Ttl	Frt	Rr																
¹⁾ 5950 P215/75R15	2323	1979	4302	2800	3150	9.4	74.9	18.6	20.2	26	8.4	72.3	16.5	17.6	22.2	28	24	18	19	15	19

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.


- 1) Base GVWR — contains minimum equipment required
2) Optional GVWR — contains minimum equipment required

(—) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 44

G Van (GMT 600)

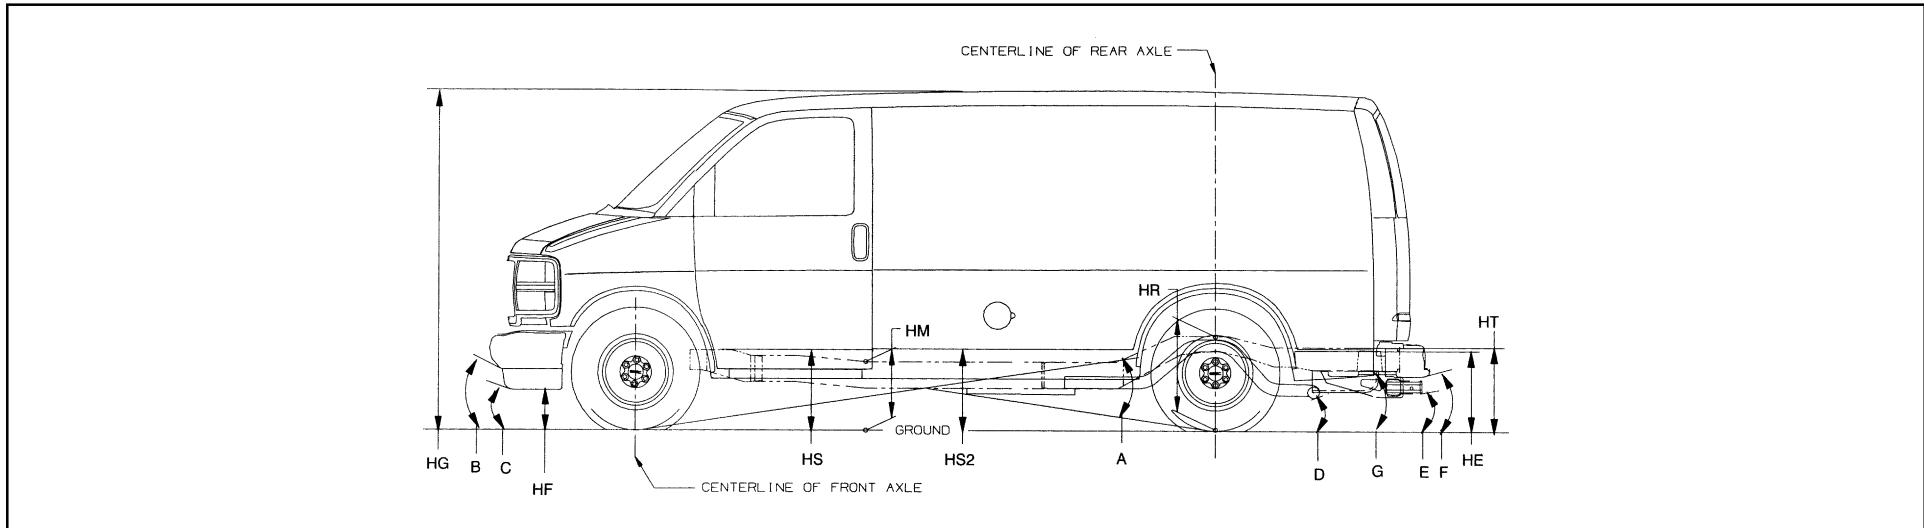

Heights (To Ground)

HE	Top of Frame at End
HF	Bottom of Front Air Deflector or Bumper
HG	Roof Height
HM	Normal Top of Frame
HR	Top of Frame at Centerline of Rear Axle
HS	Step H-Point-Front
HS2	Step H-Point-Second
HT	Rear Cargo Load Height
Angle	
A	Ramp Breakover

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 45

Approach Angle(s) (Bottom of)

B Front Air Deflector

C Air Dam

Departure Angle(s) (Bottom of)

D Tail pipe

E Platform Hitch

F Rear Bumper

G Frame at End

NOTE: All weights are in pounds, dimensions are in inches and angles are in degrees.

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 46

G 11405	135.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 6100 P215/75R15	2462	2134	4596	3168	3168	-	15.0	79.7	16.8	22.9	16.8	17.2	24.1	-	13.3	78.2	15.2	21.2	15.2	15.7	22.1	18	28	21	22	11	16	-
²⁾ 7100 P235/75R15	2474	2141	4615	3600	3968	-	15.4	81.2	17.7	24.6	17.7	18.5	26.1	-	12.7	78.7	15.2	21.4	15.1	16.0	22.4	18	27	20	23	12	17	-

G 11406	135.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 7100 P235/75R15	2635	2380	5015	3600	3968	-	15.1	80.7	17.4	24.2	17.4	18.1	25.6	-	12.8	78.7	15.2	21.4	15.2	16.0	22.4	18	27	20	23	12	17	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 47

GVW/Tire	135.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 7300 LT225/75R16	2493	2218	4711	3580	4380	-	16.8	82.5	19.1	26.0	19.1	19.9	27.4	-	14.7	79.9	16.7	22.4	16.7	17.4	23.1	20	30	23	24	12	17	-
²⁾ 8600 LT225/75R16	2612	2356	4968	3800	5360	-	16.5	83.4	19.4	26.9	19.3	20.3	28.6	-	14.1	80.8	16.9	23.8	16.8	18.0	25.0	21	29	22	28	14	19	-
²⁾ 8600 & KL6 LT245/75R16	2518	3014	5532	3800	5360	-	17.5	82.9	19.7	26.3	19.6	20.3	27.6	-	14.6	81.2	17.4	24.3	17.3	18.5	25.5	22	30	23	30	15	20	-

GVW/Tire	135.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 8600 LT225/75R16	2876	2770	5673	3800	5360	-	16.6	82.7	19.1	26.2	19.1	19.9	27.7	-	14.9	80.8	17.3	23.8	17.3	18.2	24.8	21	30	23	28	14	19	-
²⁾ 8600 & KL6 LT245/75R16	2771	3272	6043	3800	5360	-	17.5	82.7	19.6	26.0	19.5	20.1	27.3	-	15.4	81.2	17.8	24.3	17.7	18.7	25.3	22	31	25	30	15	20	-
²⁾ 8600 & L65 LT225/75R16	3168	2899	6067	4100	5360	-	16.7	82.6	19.1	26.1	19.1	19.9	27.6	-	15.0	81.1	17.5	23.9	17.5	18.5	24.7	21	30	24	28	14	19	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 48

GVW/Tire	155.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 7300 LT225/75R16	2602	2283	4885	3580	4380	-	15.4	82.5	18.2	25.9	18.2	19.1	27.6	-	13.7	79.9	16.1	22.5	16.1	17.1	23.4	17	28	21	25	12	17	-
²⁾ 8600 LT225/75R16	2723	2422	5145	4100	5360	-	16.9	83.3	19.5	26.8	19.4	20.3	28.3	-	14.2	81.1	16.9	23.8	16.9	18.3	24.8	18	29	22	28	14	19	-
²⁾ 8600 & L65 LT225/75R16	3127	2564	5691	4300	5360	-	16.7	83.2	19.3	26.7	19.3	20.1	28.3	-	14.6	81.3	17.3	23.9	17.2	18.6	24.8	19	30	23	28	14	19	-

GVW/Tire	155.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 8600 LT225/75R16	3031	2954	5985	4100	5360	-	17.0	82.4	19.2	25.9	19.1	19.8	27.2	-	15.0	81.1	17.4	23.8	17.4	18.5	24.7	19	31	24	28	14	19	-

GVW/Tire	135.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 9500 LT245/75R16	2723	2522	5245	4300	6084	-	17.4	83.9	20.1	27.3	20.1	21.0	29	-	14.3	81.4	17.3	24.2	17.2	18.6	25.4	22	30	23	30	15	20	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

- 1) Base GVWR — contains minimum equipment required
2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 49

G 31406		135.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire		Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
		Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 9500 LT245/75R16		2885	2895	5780	4300	6084	-	17.2	83.3	19.7	26.7	19.7	20.5	28.3	-	14.3	81.4	17.3	24.2	17.2	18.6	25.4	22	30	23	30	15	20	-

G 31503		139.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire		Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
		Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 9500 LT245/75R16		2573	1545	4118	4100	6084	28.8	17.2	84.0	24.0	30.1	21.1	-	-	25.2	14.2	81.8	21.2	27.1	18.3	-	-	23	29	22	29	-	-	18
²⁾ 10,000 LT225/75R16		2775	1783	4558	4100	7500	28.4	16.2	83.2	23.1	29.5	20.3	-	-	23.1	13.6	82.1	20.7	26.1	17.8	-	-	22	28	21	26	-	-	16
²⁾ 11,000 LT225/75R16		2775	1783	4558	4100	8250	28.4	16.2	83.2	23.2	29.5	20.3	-	-	23.3	13.7	81.8	20.6	26.1	17.7	-	-	22	28	21	26	-	-	16
¹⁾ 12,000 LT225/75R16		2775	1783	4558	4300	8600	28.4	16.2	83.2	23.2	29.5	20.3	-	-	23.8	13.4	81.1	20.3	26.1	17.4	-	-	22	28	20	27	-	-	16

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE **50**

GVW/Tire	139.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 9500 LT245/75R16	2817	1689	4506	4100	6084	28.9	16.6	83.7	23.6	30.0	20.8	-	-	25.2	14.2	81.8	21.2	27.1	18.3	-	-	23	29	22	29	-	-	18
²⁾ 11,500 LT225/75R16	2835	1872	4707	4300	8250	28.4	16.1	83.2	23.1	29.5	20.2	-	-	23.7	13.4	81.3	20.3	26.1	17.5	-	-	22	27	20	27	-	-	16
²⁾ 12,300 LT225/75R16	2835	1872	4707	4300	8600	28.5	16.1	83.2	23.1	29.6	20.3	-	-	24.0	13.4	80.8	20.2	26.0	17.4	-	-	22	28	21	27	-	-	17

GVW/Tire	155.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 9500 LT245/75R16	2853	2609	5462	4300	6084	-	17.2	83.8	19.8	27.2	19.8	20.6	28.8	-	14.4	81.5	17.2	24.3	17.1	18.6	25.4	19	30	23	30	15	20	-

GVW/Tire	155.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 9500 LT245/75R16	3042	3080	6122	4300	6084	-	17.6	83.2	19.8	26.6	19.7	20.4	28.0	-	15.2	81.5	17.7	24.3	17.6	18.9	25.3	19	31	24	30	15	20	-

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

- 1) Base GVWR — contains minimum equipment required
2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE 51

GVW/Tire	159.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 10,000 LT225/75R16	2776	1813	4589	4100	7500	28.1	16.3	83.0	23.0	29.5	20.2	-	-	23.1	13.8	82.1	20.5	26.1	17.7	-	-	21	28	21	26	-	-	16
²⁾ 11,000 LT225/75R16	2776	1813	4589	4100	8250	28.1	16.3	83.0	23.0	29.5	20.2	-	-	23.2	13.8	81.8	20.4	26.1	17.6	-	-	21	28	21	26	-	-	16
²⁾ 12,000 LT225/75R16	2776	1813	4589	4300	8600	28.1	16.3	83.0	23.0	29.5	20.2	-	-	23.7	13.5	81.0	20.1	26.1	17.3	-	-	21	28	21	26	-	-	16

GVW/Tire	159.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
	Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
	Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 11,500 LT225/75R16	2835	1903	4738	4300	8250	28.1	16.2	82.9	22.9	29.5	20.1	-	-	23.6	13.5	81.2	20.1	26.1	17.4	-	-	21	28	21	26	-	-	16
²⁾ 12,300 LT225/75R16	2835	1903	4738	4300	8600	28.3	16.2	83.0	23.0	29.6	20.2	-	-	24.0	13.5	80.6	20.1	26.1	17.3	-	-	21	28	21	27	-	-	17

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model

FRAME HEIGHT AND RAMP ANGLE DATA

PAGE **52**

G 31903		177.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire		Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
		Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 12,000 LT225/75R16	2801	1821	4622	4300	8600	27.8	17.0	83.2	23.2	29.5	20.5	-	-	23.4	14.4	81.3	20.5	26.1	17.7	-	-	19	29	22	26	-	-	16	

G 31932		177.0" Wheelbase					Frame Heights at Minimum Curb Weight								Frame Heights and Angular Dimensions are shown at Maximum GAWR Front/Rear														
GVW/Tire		Minimum Curb Weight			GAWR		HE	HF	HG	HM	HR	HS	HS2	HT	HE	HF	HG	HM	HR	HS	HS2	HT	A	B	C	D	E	F	G
		Frt	Rr	Ttl	Frt	Rr																							
¹⁾ 12,300 LT225/75R16	2859	1904	4763	4300	8600	28.0	16.8	83.1	23.2	29.6	20.4	-	-	23.6	14.4	81.0	20.5	26.1	17.7	-	-	19	29	22	26	-	-	16	

NOTE: Front coil springs, torsion bars and adjusters are computer selected based on model options and calculated sprung curb weight.
Actual heights may vary due to production tolerances.

1) Base GVWR — contains minimum equipment required

2) Optional GVWR — contains minimum equipment required

(-) = not applicable for this model