

GENERAL INFORMATION

| | |
|---|-----------|
| PROCEDURE FOR HANDLING CHASSIS/DEALER CLAIMS | 1 |
| General | 1 |
| Shipments Received from Truckaway or Driveaway Company | 1 |
| If Received from Railroad | 1 |
| Filing a Claim | 2 |
| Disposition of Damaged Parts | 2 |
| GOVERNMENT REGULATIONS | 2 |
| Introduction | 2 |
| Responsibility for Complete Vehicle Performance | 2 |
| Noise Emission Standards for Transportation Equipment – Medium and Heavy Trucks | 3 |
| 40 CFR Part 205 | 3 |
| Method of Certification by GM | 4 |
| Completed Vehicle | 4 |
| Certification Labels | 4 |
| Method of Certification | 4 |
| Incomplete Vehicles | 4 |
| Models | 5 |
| Vehicle Classification and GM Application | 6 |
| Federal Regulations – Tires | 7 |
| GM FLEET & COMMERCIAL OPERATIONS | 8 |
| BASE MODEL WEIGHT INFORMATION | 8 |
| PAYLOAD DETERMINATION | 9 |
| Payload Definition | 9 |
| Incomplete Vehicle Payload Determination..... | 11 |
| Payload Definition | 11 |
| Percentage Body and Payload Weight at Front Axle | 13 |

GENERAL INFORMATION

PAYLOAD DETERMINATION – *Continued*

| | |
|---|-----------|
| Reserve Capacity Determination | 15 |
| Cargo Weight Definition | 15 |
| VEHICLE CENTER OF GRAVITY | 17 |
| Determining Vehicle Center of Gravity – Hoist Method | 17 |
| Introduction | 17 |
| Recommended Procedure | 17 |
| Steps | 17 |
| Determining Vehicle Center of Gravity – Hoist Method Data Sheet | 19 |
| Calculating the Vehicle Center of Gravity Location | 20 |
| Determining Vehicle Center of Gravity – Hoist Method Illustrations | 21 |
| WEIGHTS AND MEASURES | 22 |
| Standard Weights and Measures | 22 |
| Metric Weights and Measures | 23 |
| Equivalent Weights and Measures | 23 |
| Decimal Equivalents of Parts of an Inch | 24 |
| Approximate Weight of Materials | 25 |
| METRIC/U.S. CUSTOMARY CONVERSION TABLE | 34 |
| 2001 LIGHT DUTY 10/1500 – 30/3500 SERIES MODEL IDENTIFICATION SYSTEM | 35 |

GENERAL INFORMATION

PROCEDURE FOR HANDLING CHASSIS/DEALER CLAIMS

General

All chassis tendered for delivery by the Transportation Company are to be accepted by the Body Company. If a chassis has been damaged or is short certain parts when received by the Body Company, they will repair or replace missing parts, if possible, with their own or other local facilities and promptly forward the claim to the dealer.

If the Body Company or other local facilities are not adequate for replacing missing or damaged parts, the Body Company will promptly notify the Dealer and hold damaged chassis awaiting his instructions. The Dealer must be notified promptly upon receipt of a chassis on which a claim is in order giving the "model", "engine number," and "serial number" and what the damage or shortage consisted of. This is important since Chevrolet/GMC Truck cannot accept claims from the Dealer unless filed within thirty days from date of delivery, or unless within the thirty-day period, the Dealer has advised Chevrolet/GMC Truck that a claim will be filed. Delivery to the Body Company constitutes delivery to the Dealer, since the Body Company is the Dealer's agent.

Completed vehicles that are to be driven to the Dealer or the Dealer's customer must first be serviced by the Body Company at the Body Company's location in accordance with Chevrolet/GMC Truck new vehicle conditioning procedures. Expenses incurred for this condition are the responsibility of the selling Dealer.

Shipments Received from Truckaway or Driveaway Company

The Body Company will inspect condition of chassis and call driver's attention to damage or missing parts and make a detailed notation of both copies of the Transportation Company's delivery receipt of the nature and extent of the existing damage and/or shortage and have driver sign such notation on the Dealer's copy. If chassis are received after business hours and cannot, therefore, be adequately inspected, the delivery receipt (both copies) is to carry notation "Received subject to inspection" and show the time and date. On such chassis, a detailed inspection must be made within 24 hours or on the first working day after receipt of chassis and immediately furnish to the Dealer. Any exceptions are to be noted on both copies of the delivery receipt by the Body Company.

If Received from Railroad

Freight car should be opened and contents inspected in presence of railroad representative before starting to unload, and any existing damage or shortage recorded by the railroad representative on his standard inspection report. Body Company must secure from railroad agent, a copy of his inspection report detailing nature and extent of the damage and/or shortage.

If the railroad representative does not comply with consignee's request to make an inspection, then the Body Company will immediately confirm his request (in writing) to the railroad agent, outlining the nature and extent of damage and/or shortage disclosed by consignee's inspection, prior to starting any unloading operations, sending a copy of his letter to the Dealer.

(Procedures for Dealer Claims continued on next page)

GENERAL INFORMATION

(Procedures for Dealer Claims continued from previous page)

Filing a Claim

Upon completion of repairs or replacements of missing parts, the Body Company will promptly bill the Dealer for the cost involved, supporting such debit with a detailed statement showing how the amount is arrived at end, either the original delivery receipt with notation if received from a truckaway company or the carrier's inspection report if received from a railroad.

Disposition of Damaged Parts

Damaged parts removed from chassis by the Body Company must be held for disposition orders from the Dealer.

Dealer claims will not be allowed unless above instructions are fully complied with.

GOVERNMENT REGULATIONS

Introduction

The Federal Government has established Motor Vehicle Safety Standards for various categories of motor vehicles and motor vehicle equipment under the provisions of the National Traffic and Motor Vehicle Safety Act of 1966. The Act imposes important legal responsibilities on manufacturers, dealers, body builders and others engaged in the manufacturing and marketing of motor vehicles and motor vehicle equipment.

Questions dealing with the specific application of the Act or the standards to your business should be discussed with your legal counsel. This is particularly so because the standards and other requirements or interpretations are subject to change by the government agency in charge, the National Highway Traffic Safety Administration.

New standards and amendments issued by the National Highway Traffic Safety Administration will appear in the Federal Register from time to time. You may obtain the Federal Register, through the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402, or at <http://www.NHTSA.dot.gov/cars/rules/>.

Responsibility for Complete Vehicle Performance

General Motors performs extensive testing on all trucks described in this book. Major changes to a complete vehicle or the installation of a body on an incomplete truck chassis will, however, affect vehicle performance.

(Government Regulations continued on next page)

(Government Regulations continued from previous page)

It is the responsibility of the body and equipment manufacturers to validate final completed vehicle performance. Total vehicle system performance tests may be required. The test schedule must reflect the type of vehicle system loading to which the completed vehicle will be subjected, and must also include consideration of all aspects of performance, e.g., durability, ride, handling, etc.

Noise Emission Standards for Transportation Equipment – Medium and Heavy Trucks

40 CFR PART 205

The U.S. Environmental Protection Agency (EPA) has established noise emission standards applicable to vehicles (in general vehicles in excess of 10,000 pounds GVWR capable of transportation of property on a street or highway) manufactured after January 1, 1978, under the provisions of the Noise Control Act of 1972. The standards provide that vehicles manufactured after January 1, 1978, when tested pursuant to EPA's prescribed test procedure, must conform to an 83 dBA level and vehicles manufactured after January 1, 1988 must conform to an 80 dBA level.

The Act and the standards impose legal obligations on vehicle manufacturers and subsequent manufacturers. Questions dealing with what is covered under the definition of a "vehicle" in the standards and the specific application of the Act or the standards to your business should be discussed with your legal counsel. This is particularly so in light of EPA's broad definition of a "vehicle."

The standards or interpretations of such standards are subject to change by EPA. New standards or amendments issued by the Environmental Protection Agency appear in the Federal Register from time to time. You may obtain the Federal Register through the Superintendent of Documents, U.S. Government Building Office, Washington, D.C. 20402.

NOTE: Model and option weight information is available in the GM Medium Duty Data Book. Contact your local GM dealer for assistance.

Method of Certification by GM

Completed Vehicle

A completed vehicle will have the certification label installed before shipment from the factory.



Certification Labels

Models:

C/K 1500-3500 Pickups Silverado/Sierra,
C/K 1500-2500 Tahoe/Yukon, Suburban/Yukon XL
G 10/1500-30/3500 Express/Savana
G30/3500 Cutaway

Models:

M/L Van Astro/Safari
S 10/15 Pickup, S 10/15 Blazer/Jimmy

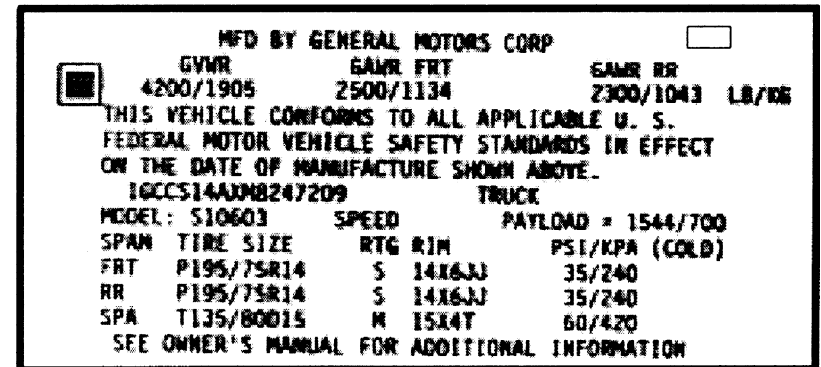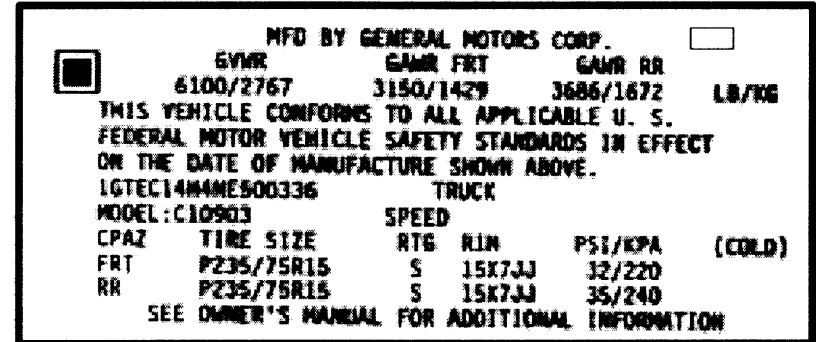

Method of Certification

Incomplete Vehicles

Will have a label affixed to the Document for Incomplete Vehicles. This is placed in a clear container and shipped with the incomplete vehicle from the factory.

(Method of Certification continued on next page)

GENERAL INFORMATION

(Method of Certification continued from previous page)

DOCUMENT FOR INCOMPLETE VEHICLE

PLACE
LABEL
HERE

This document is furnished as required by government regulation to aid intermediate and final stage manufacturers in determining conformity to applicable Federal Motor Vehicle Safety Standards. Also included are instructions which must be followed in order to assure that Environmental Protection Agency (EPA) and California emission certification requirements and NHTSA Fuel Economy Regulations are met. As a result of certifying Heavy Duty Vehicles with GVW's up to 10,000 pounds by Federal Light Duty Emission Standards, Part II of this document - U.S. EPA and California Exhaust & Evaporative Emission Requirements and NHTSA Fuel Economy Regulations - has been significantly revised and should be reviewed. This document is not a substitute for knowledge and understanding of the requirements of these standards and regulations. Intermediate and final stage manufacturers should be familiar with all Federal Motor Vehicle Safety Standards and Emission Regulations to be aware of their specific responsibilities as manufacturers.

Any manufacturer making material alterations to this incomplete vehicle during the process of manufacturing the complete vehicle should be constantly vigilant to recognize all the effects, either direct or indirect, on other components, assemblies or systems caused by each such alteration. No alteration should be made to the incomplete vehicle which either directly or indirectly results in any component, assembly or system being in nonconformance with any applicable Federal Motor Vehicle Safety Standard or Emission Regulation.

CANADA MOTOR VEHICLE SAFETY STANDARDS

The following statement, which is required by Section 6.4 (a) of the Canada Motor Vehicle Safety Regulations is applicable only to incomplete vehicles manufactured in or imported to Canada.

THIS INCOMPLETE VEHICLE CONFORMS TO THE APPLICABLE CANADA MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF ITS MANUFACTURE SHOWN ABOVE. THE STANDARDS TO WHICH THIS INCOMPLETE VEHICLE CONFORMS IN FULL ARE DESIGNATED IN THE LIST OF FEDERAL MOTOR VEHICLE SAFETY STANDARDS ON PAGE 3 BY AN ASTERISK (*) IN THE COLUMN FOR THE BASIC TYPE OF INCOMPLETE VEHICLE.



Printed in U.S.A.

Models

All incomplete vehicles; C/K 2500, 2500HD, 3500, 3500HD, Chassis-Cab; G 30/3500 Cutaway Van.

Vehicle Classification and GM Application

| Model | Application (Chevy / GMC) | Vehicle Classification | | |
|----------------------|---|------------------------|---------------------|-------------------|
| | | MPV | Truck ¹⁾ | Bus ¹⁾ |
| M/L Series | Astro/Safari-Cargo/Passenger Van | X ³⁾ | X | |
| S/T Series | S-Series/Sonoma Regular/Extended/Crew Cab Pickups | X ²⁾ | X | |
| S/T Series | Blazer/Jimmy (2/4 Door) Trailblazer/Envoy | X ³⁾ | X | |
| C/K 1500 Series | Tahoe/Yukon (4 Door) | X ³⁾ | X | |
| C/K 1500-3500 Series | C/K/Silverado/Sierra Chassis-Cabs/Regular/Extended/Crew Cab Pickups | X ²⁾ | X | |
| C/K 1500-2500 Series | Suburban/Yukon XL | X ³⁾ | X | |
| G 1500-3500 | Express Cargo Van/Savanna Cargo Van | X ²⁾ | X | X |
| G 1500-3500 | Express/Savanna Passenger Van | X ³⁾ | | |
| G 3500 Series | Commercial/RV Cutaway/Savanna Special | X ²⁾ | X | X |

1) It is assumed that Cab and Chassis only will be completed as a truck. Chassis only with RPO B3D or B3M will be completed into a school bus.

2) MPV Classification may apply only when unit is completed as a Recreation Vehicle (Camper).

3) MPV is a vehicle with 2 or 3 rows of seats.

Federal Regulations – Tires

The National Highway Traffic Safety Administration has issued regulations dealing with tire identification and record keeping which became effective May 22, 1971. Under these regulations important legal responsibilities are imposed upon tire manufacturers, brand name owners, retreaders, distributors and dealers, and motor vehicle manufacturers and dealers, to maintain and/or report certain information concerning tires. This information will be used to facilitate interest of safety. If you have any questions concerning the application of these regulations to your business, we suggest you consult with your attorney.

In order for GM to meet its responsibility under these tire regulations we have a record of the tires on each vehicle we shipped to you. If you do not change a tire on a GM vehicle, it is important that you make sure that it is reshipped with the same tires that were on it when the vehicle was received by you. This will mean that any tires which you remove from a vehicle during the course of your work should be put back on the same vehicle.

If you do change a tire on a GM vehicle, it is necessary that you furnish us with such information on vehicles which are returned to us after you have completed your work. It is important that you report to us the full tire identification number (TIN) for each tire you install and the full vehicle identification number (VIN) of the vehicle on which the tire is installed.

If you change a tire on a GM vehicle which is not returned to us, you may be responsible for maintaining records of the vehicle identification number (VIN) and the vehicle owner to allow notification, through your records, if tire problems are found.

In case you should receive a defect notification from a tire manufacturer concerning tires which you installed on a vehicle returned to us, you may forward it to us so that we can send it to the vehicle owner whose name will appear on our records.

GENERAL INFORMATION

GM FLEET & COMMERCIAL OPERATIONS

| Region | Mailing Address | | |
|---------------|---|----------------|----------------|
| | | Telephone | Fax |
| Northeast | 2500 Westchester Ave. Purchase, NY 10577 - 0890 | (914) 251-5050 | (914) 251-5229 |
| North Central | 387 Shuman Blvd, Naperville, IL 60563 - 1217 | (630) 961-6425 | (630) 961-6379 |
| Southeast | 5730 Glenridge Drive Atlanta, GA 30328 | 1 800 248-0178 | (404) 257-3595 |
| South Central | 130 E. Carpenter Fwy, Ste. #200 Irving, TX 75062 | (972) 541-5415 | (972) 541-5424 |
| Western | 515 Marin St. Thousand Oaks, CA 91360 | 1 800 510-3973 | (805) 373-8432 |

BASE MODEL WEIGHT INFORMATION

DATA NOT AVAILABLE AT TIME OF PUBLICATION

PAYLOAD DETERMINATION

Payload Definition

Maximum allowable weight of cargo to be carried in a vehicle, including occupants. Computed by subtracting curb weight from GVWR.

Light trucks are designed to offer the customer a selection of payload capacities to meet their varying needs. This section of the Data Book lists the base and max payload capacity of all truck models. It does not list payloads for vehicles with optional suspensions, axles, wheels or tires, aftermarket accessories, equipment or bodies.

The reason is that each additional piece of equipment affects payload. With the number and variety of options, bodies and accessories available, there is an almost infinite number of possible payloads.

When a customer wants to know the payload of a truck in stock or a truck being ordered, and that truck is a model with optional equipment, you must perform a simple calculation to provide the information.

Here's how to do this

| What to Do | Where to Find the Information |
|---|--------------------------------------|
| 1. Determine truck's Gross Vehicle Weight Rating (GVWR) | GVWR Selector Section |
| 2. Determine the truck's Curb Weight (Curb weight = full fuel, no occupants) | Model and Option Weights |
| 3. Determine the truck's option content and the weight of each piece of optional equipment | Model and Option Weights |
| 4. Subtract the Curb Weight and the Option Weight(s) from the truck's Gross Vehicle Weight Rating | |

NOTE: The following example is based on 2001 model and option weights contained in the 2001 Weights section.

GENERAL INFORMATION

Example

A customer asks you for the payload of a C1500 Regular Cab Pickup (C15903/C7H) with an optional 5.3L V8 engine (RPO LM7), Automatic 4-speed transmission (RPO M30) and a chromed rear step bumper. You perform the following calculation:

| | | |
|--|---|--------------------|
| 1. Gross Vehicle Weight Rating (GVWR) (C5M) | | 6400.0 lbs. |
| 2. Curb Weight (C15903) | - | 4208.0 lbs. |
| 3. 5.3L V8 Engine (LM7) w/automatic transmission (M30) | - | 144.4 lbs. |
| (VB3) Rear Step Bumper (Chromed) | - | 00.0 lbs. |
| <hr/> | | |
| Payload | = | 2047.6 lbs |

Incomplete Vehicle Payload Determination

Payload Definition

Maximum allowable weight of cargo to be carried in a vehicle, including occupants. Computed by subtracting curb weight from GVWR.

Determining the available payload for an incomplete vehicle (such as a chassis-cab) is similar to a completed vehicle, but the weight of the added body and any accessories must also be subtracted from the GVWR.

| What to Do | Where to Find the Information |
|---|--------------------------------------|
| 1. Determine truck's Gross Vehicle Weight Rating (GVWR) | GVWR Selector Section |
| 2. Determine the truck's Curb Weight (Curb weight = full fuel, no occupants) | Model and Option Weights |
| 3. Determine the truck's option content and the weight of each piece of optional equipment | Model and Option Weights |
| 4. Subtract the Curb Weight and the Option Weight(s) from the truck's Gross Vehicle Weight Rating to determine the payload capacity | |
| 5. Subtract the determined weight of body and accessories | Body Manufacturer/Distributor |

NOTE: The following example is based on 2001 model and option weights contained in the 2001 Weights section.

GENERAL INFORMATION

Example

A customer asks you for the payload of a standard C/K Chassis-Cab (C36003/C7L) with a standard Vortec 6000 V8 gas engine (RPO LQ4), a 5-speed manual transmission (RPO MW3), an aftermarket stake body, as well as factory options consisting of exterior west coast style mirrors (RPO DG5) and air conditioning (RPO C60). You perform the following calculation:

| | | |
|---|---|----------------------|
| 1. Gross Vehicle Weight Rating (GVWR) (C7L) | | 12,000.0 lbs. |
| 2. Curb Weight (C36003) | - | 5738.0 lbs. |
| 3. Air Conditioning (C60) | - | 45.0 lbs. |
| Vortec 6000 V8 Engine (LQ4) | - | 0.0 lbs. |
| 5-Speed Manual Transmission (MW3) | - | 0.0 lbs. |
| Mirrors, Exterior West Coast Style (DG5) | - | 10.6 lbs. |
| 5. Stake Body | - | 850.0 lbs. |
| <hr/> | | |
| Payload | = | 5356.4 lbs |

Percentage Body and Payload Weight at Front Axle


To determine percentage of load at rear axle, subtract percentage of load at front axle from 100.0%. Tables are calculated using the following formula:

$$\frac{100 \times (X)}{\text{Wheelbase}} = \% \text{ Body and Payload at Front Axle}$$

NOTE: Body Length is in inches for equation:

- CA = Cab to rear Axle dimension
- BC = Body Clearance between body and cab
- B = Body length
- WB = Wheel Base
- X = Center of gravity of payload to rear axle dimension

$$\frac{100 \times CA - [(BC) + B/2]}{\text{Wheelbase}} = \% \text{ Body Payload at Front Axle}$$

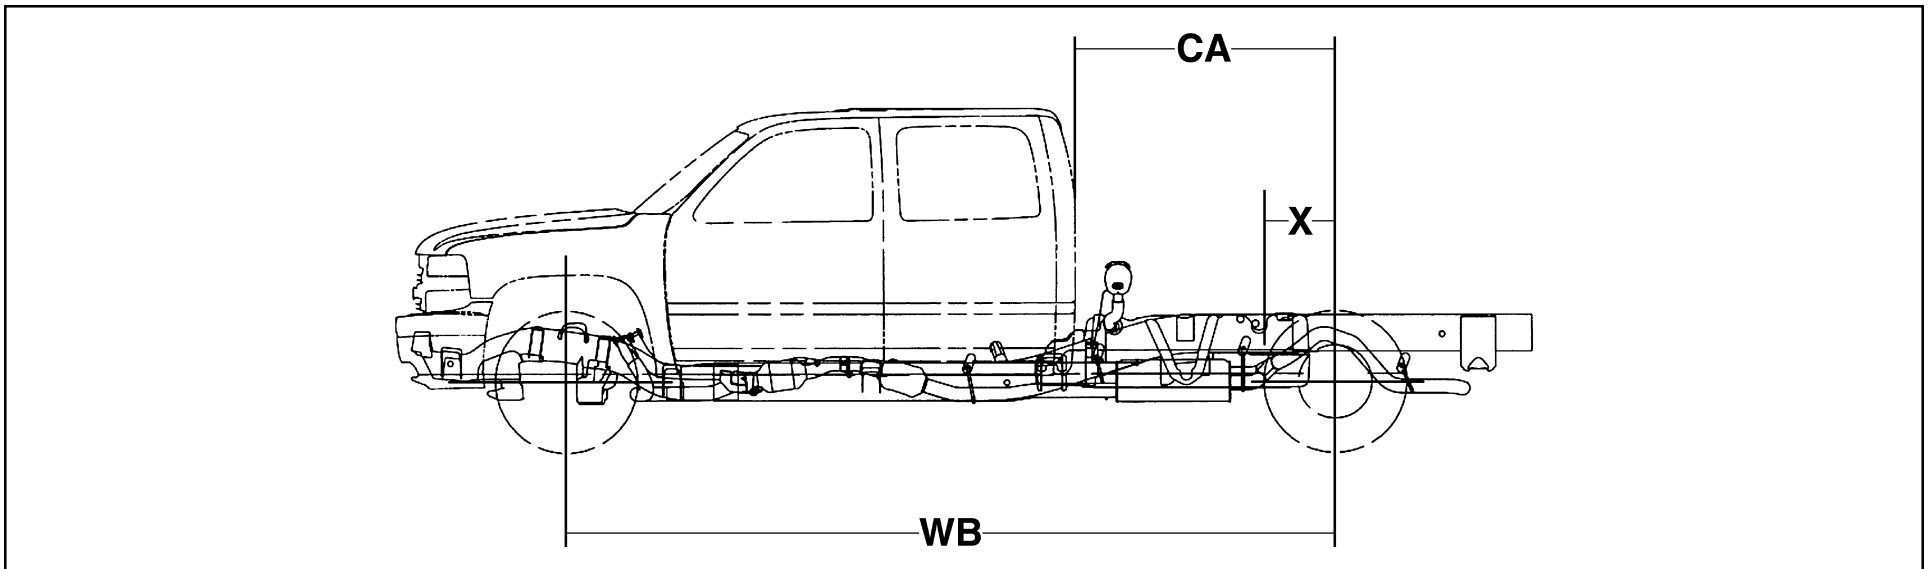

(Percentage Body and Payload Weight at Front Axle continued on next page)

(Percentage Body and Payload Weight at Front Axle continued from previous page)

Body lengths, and percentage figures are found in the Body-Payload Weight Distribution Charts located in the model weight section for pickup and C/K chassis cabs. These charts represent all lengths that are possible to use. The shortest length in each case represents the smallest body that will reach the approximate end of the chassis frame at the maximum cut off. The longest length represents the largest body which can be used without placing the center of gravity behind the rear axle.

Body lengths shown in the Body-Payload Weight Distribution Charts represent the entire outside length of the body (not necessarily nominal length) including sills or extensions of any kind. The center of gravity used is the exact center of the body length. For specific cases the exact center of gravity of body and payload should be determined. Body and payload center of gravity should always be ahead of the center line of the rear axle or bogie suspension. If the center of the load is behind the rear axle it will result in reduced steering control and may even lift the front wheels off the ground.

Weight distribution should be computed for all body applications. Some clearance must be maintained between the cab and body.

Results of a weight distribution calculation should show:

1. Weight at front as close as possible, but not exceeding, front suspension capacity
2. Weight at rear as close as possible, but not exceeding, rear axle capacity
3. Front weight at ground of the loaded vehicle must exceed the front weight at ground of the unloaded vehicle

If these conditions do not exist, recalculate the weight distribution using either different body or chassis size or using a different location of the body.

Extreme caution should be exercised in selecting the shortest or longest allowable body lengths. The shortest lengths will usually shift a major portion of the body and payload weight to the front axle of the vehicle. This will limit driver control of steering and reduce traction at the rear wheels. The longest bodies will usually restrict the weight distributed to the front axle. This will reduce the effect the steering mechanism and front wheels have on controlling the vehicle's direction of movement. In cases of special body and/or load distribution or where axle capacities are extremely over or under loaded, consult the factory for recommendations.

Reserve Capacity Determination

Cargo Weight Definition

Weight of the load carrying capability. Computed by subtracting passenger and curb weight from GVWR.

It is important to sell your customer the right truck for the right job. One way to make sure your customers are buying the right truck is to determine what they will be carrying, how much it weighs and then recommend a truck capable of carrying the load.

GMC Truck offers a variety of models in each truck line. Each model has specific capacities. It is essential to determine the weight of the payload your customers will be carrying to determine if the truck you're recommending will carry the load.

The following process will help you accomplish that task

| What to Do | Where to Find the Information |
|---|--|
| 1. Select the approximate weight of the material your prospect wishes to carry. | Weights and Measures section to find approximate weights of a variety of cargos. |
| 2. Determine which truck would best suit the customer. Use the pages at the beginning of this section to find a model with a payload in the range of the weight of the cargo the customer wishes to carry. | Payload/GVWR Calculations |
| 3. Select the percentage weight distribution of the model you have chosen. If the payload for your vehicle is not at a water level load you must calculate the percent of weight the payload will put on the front axle using the formula provided. | Consult the Percentage Weight Distribution Table in the Model and Option Weights section for pickup and chassis cab water level loading. |
| 4. Determine the percentage weight distribution of the cargo your prospect wishes to carry. Use the percentage weight distribution figures to determine the front percentage and rear percentage. | |
| 5. Determine the front and rear curb weight of the vehicle you are considering (no passenger weight). | Consult the Model and Option Weights section for the weights of the vehicle you are considering. |
| 6. Determine the front and rear weight of any optional equipment. | Consult the Model and Option Weights section for the weights of the vehicle you are considering. |

GENERAL INFORMATION


| What to Do | Where to Find the Information |
|--|---|
| <p>7. Add the total front and rear cargo weights, front and rear curb weight, and the option weights together. The result will be the amount of weight to be supported by the front axle of the vehicle you've chosen, and the amount of weight to be supported by the rear axle. This is called the Front Gross Axle Weight and the Rear Gross Axle Weight.</p> | |
| <p>8. Determine the front and rear Gross Axle Weight Rating of the vehicle you are considering. If the Gross Axle Weight Rating of the vehicle you are considering is higher than the Gross Axle Weight you've calculated, the vehicle you are considering should be right for the job. If not, you'll need to find a model with Gross Axle Weight Rating high enough to carry the load you've calculated.</p> | <p>Consult the GVWR Selector of the vehicle ordering sections.</p> |
| <p>9. One more step is necessary before recommending the model. Add the front and rear Gross Axle Weight together. This number is the Gross Vehicle Weight.</p> | |
| <p>10. Insert the Gross Vehicle Weight Rating of the model you have selected and compare it to the Gross Vehicle Weight. If the (GVW) is lower, then the model should be right for the job. If not, consult the Base Payload pages at the beginning of this section to find a vehicle with a higher GVWR.</p> | <p>Consult the Axle/Suspensions pages to find GAWRs in the range required. The models possessing these GAWRs are also listed. GVWRs are also listed.</p> |
| <p>11. Add the front Gross Axle Weight and the rear Gross Axle Weight together to determine the Gross Vehicle Weight. Subtract the Gross Vehicle Weight from the Gross Vehicle Weight Rating.</p> | |
| <p>12. Subtract the passenger weight to determine the total reserve capacity.</p> | <p>Calculated Value: (Number of passengers and driver x 150 lbs. per person)</p> |

VEHICLE CENTER OF GRAVITY

Determining Vehicle Center of Gravity – Hoist Method

Introduction

This information is being used to assist specialty vehicle manufacturers (SVMs) in determining the vehicle center of gravity of upfitted vehicles. General Motors is providing this information to upfitters in addition to the information already available in the Incomplete Vehicle document and Body Builders Book so that SVMs can determine compliance with FMVSS 105 for their completed vehicles in a more simplified and consistent manner. This has been prepared for use by knowledgeable test engineers. It is not a “how to” document for use by people without formal technical training.

 All distances are to be measured in inches to two decimal places. All weights are to be measured in whole pounds. All angles are to be measured in decimal degrees to one decimal place. Be sure the doors and hood are closed during all weighing. Use appropriate safety practices throughout the procedure.

Recommended Procedure


Steps

1. Prepare the vehicle for center of gravity testing. Start with vehicle curb weight (the weight of the completed vehicle with no passengers or payload and all fluids at maximum specified capacity) and add 400 pounds to the vehicle. Distribute the 400 pounds in the driver-passenger area of the vehicle so that the side-to-side difference is less than 50.
2. Place the vehicle on a level surface and check all tire pressures to be sure they are at the Isuzu/General Motors specified tire pressure (see the label on the vehicle door or pillar).
Measure the radius “**A**” of the left front wheel (the distance from the center point of the wheel to the ground) and record on page 23 (see Figure 1 on page 25).
Measure the radius “**B**” of the left front wheel (the distance from the center point of the wheel to the ground) and record on page 23 (see Figure 1 on page 25).
3. Measure the distance “**C**” between the rear wheel rims at their widest point (not the tires) and record on page 23 (see Figure 2 on page 25).
4. Measure the width “**D**” of one rear wheel rim at its widest point and record on page 23 (see Figure 2 on page 25).
5. Place the vehicle on four independent scales (or weight pads), with one wheel on each scale. These scales should have a minimum capacity of 2000 pounds each with a 1.0% maximum accuracy error rate.


(Vehicle Center of Gravity continued on next page)

(Vehicle Center of Gravity continued from previous page)


6. Weigh the vehicle on level ground. Record the weight at each of the wheels on page 23 (**E** = left front, **F** = right front, **G** = left rear, **H** = right rear).
7. Lock the steering wheel with the front wheels pointing straight ahead.
8. Place reference marks on all four corners of the vehicle (for example: front fenders and rear quarter panels: see Figure 1 on page 25).
Measure the height of each reference mark from the ground and record on page 23 (**J** = left front, **K** = right front, **L** = left rear, **M** = rear right).
9. Replace the shock absorbers with turnbuckles. Adjust the turnbuckles so that the heights of the reference marks on all four corners of the vehicle are at the same heights recorded in step 8.
10. Place the inclinometer (gravity protractor) on the right-hand frame rail. Observe the frame angle “ α ” as indicated by the inclinometer and record on page 23. Do not move the inclinometer.

 When the front of the vehicle is lower than the rear of the vehicle, the frame angle is *positive*.

11. Place ramps behind the front wheels and the scales behind the ramps so that when the rear of the vehicle is raised, the front wheels will roll onto the scales (see Figure 3 on page 25).

 Front wheels will roll rearward as the rear end of the vehicle is elevated. Adequate safety precautions must be taken during this procedure.

12. Set parking brake. Capture or cradle the rear axle and carefully raise the rear end of the vehicle with a hoist. Raise the rear end of the vehicle until the inclinometer reads an angle “ β ” that is *at least* 20 degrees greater than angle “ α ”. Record angle “ β ” on page 23. Be sure that the centerline of the rear axle stays parallel to the ground. Watch for unexpected interference conditions (for example: a ground effects package. See Figure 3 on page 25).

 Place jack stands under the rear axle as a safety precaution.

13. While the rear end of the vehicle is elevated, measure the inclined vehicle weight of the front wheels and record on page 23 (**P** = left front, **Q** = right front).
14. Carefully lower the rear end of the vehicle to the ground.
15. Restore the vehicle to its original condition by removing the turnbuckles and reinstalling the original shock absorbers. The user of this procedure is responsible to verify that the vehicle wheel alignment was not affected.
16. Finally, measure the wheelbase “**S**” (the distance between the centerlines of the front axle and the rear axle) and record on page 23 (see Figure 1 on page 25).

(Vehicle Center of Gravity continued on next page)

GENERAL INFORMATION

(Vehicle Center of Gravity continued from previous page)

Determining Vehicle Center of Gravity – Hoist Method Data Sheet

TEST DATE: _____ VIN: _____

WHEEL RADII (SEE FIGURE 1)

Left front wheel: **A** = _____ (inches)

Left rear wheel: **B** = _____ (inches)

VEHICLE TREADWIDTH (SEE FIGURE 2)

Distance between rear wheel rims: **C** = _____ (inches)

Width of rear wheel rim: **D** = _____ (inches)

Vehicle treadwidth: **T = C + D** = _____ (inches)

LEVEL VEHICLE WEIGHT

Left front wheel: **E** = _____ (pounds)

Right front wheel: **F** = _____ (pounds)

Left rear wheel: **G** = _____ (pounds)

Right rear wheel: **H** = _____ (pounds)

Total vehicle weight: **U = E + F + G + H**

U = _____ (pounds)

Initial front axle weight: **V = E + F** = _____ (pounds)

Initial rear axle weight: **W = G + H** = _____ (pounds)

LEVEL VEHICLE REFERENCE HEIGHTS

Left front corner: **J** = _____ (inches)

Right front corner: **K** = _____ (inches)

Left rear corner: **L** = _____ (inches)

Right rear corner: **M** = _____ (inches)

VEHICLE FRAME ANGLES (SEE FIGURE 3)

Initial frame angle: α = _____ (degrees)

Raised frame angle: β = _____ (degrees)

Inclined vehicle angle: $\theta = \beta - \alpha$ = _____ (degrees)

INCLINED VEHICLE WEIGHT

Left front wheel: **P** = _____ (pounds)

Right front wheel: **Q** = _____ (pounds)

Front axle weight: **R = P + Q** = _____ (pounds)

VEHICLE WHEELBASE (SEE FIGURE 1)

Wheelbase: **S** = _____ (inches)

(Vehicle Center of Gravity continued on next page)

(Vehicle Center of Gravity continued from previous page)

Calculating the Vehicle Center of Gravity Location

REFER TO ILLUSTRATIONS ON PAGE 25

1. Horizontal Front-To-Rear position of the vehicle center of gravity “CGx.”
The equation used is:

$$CG_x = \frac{W \times S}{U}$$

See Figure 1

2. Horizontal Inboard-Outboard position of the vehicle center of gravity “CGy.”
The equation used is:

$$CG_y = \frac{(F + H) \times T}{U}$$

See Figure 2

3. Vertical Up-And-Down position of the vehicle center of gravity “CGz.”
The equation used is:

$$CG_z = \frac{W \times (B - A)}{U} + \frac{S \times (R - V)}{U \times \tan \theta}$$

See Figure 3

$\tan \theta$ = The tangent of angle θ



In order to correlate this data to the Incomplete Vehicle Document charts, the user must add the front wheel radius “A” to the value obtained for “CGz.” As a result, the value used to chart the vertical center of gravity is:

$$CG_z + A$$

Refer to the *Incomplete Vehicle Document* to verify that the completed vehicle center of gravity is within the specified range.

The statistical accuracy of the determined vehicle center of gravity should be verified by conducting several tests and averaging the results.

(Vehicle Center of Gravity continued on next page)

GENERAL INFORMATION

(Vehicle Center of Gravity continued from previous page)

Determining Vehicle Center of Gravity – Hoist Method Illustrations

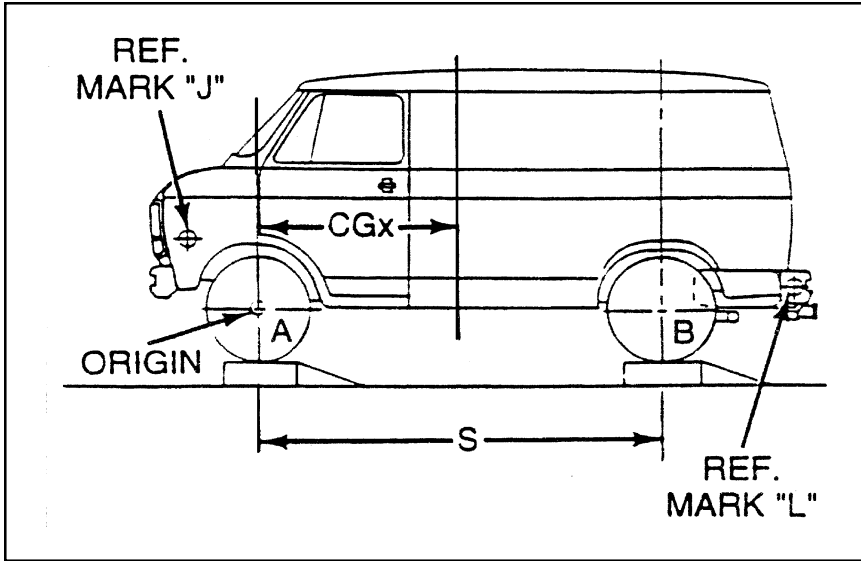


Figure 1

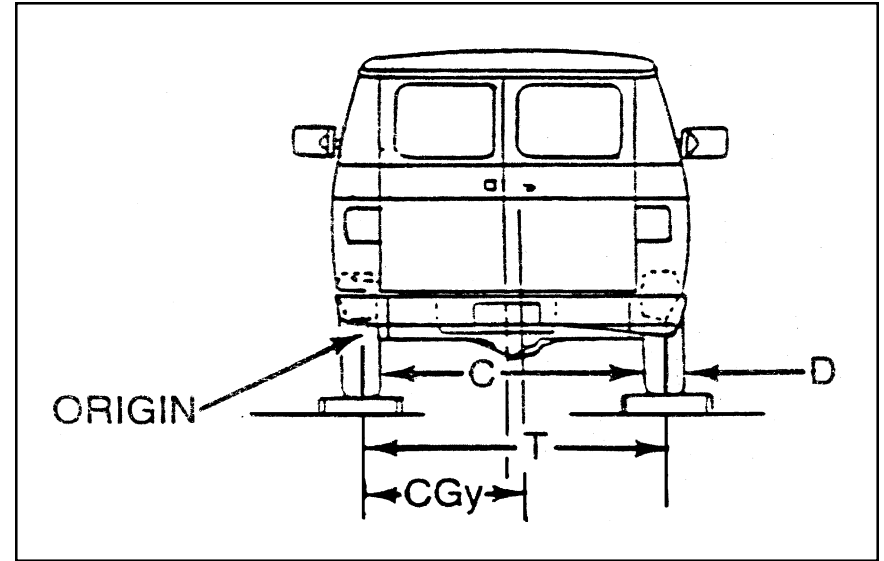


Figure 2

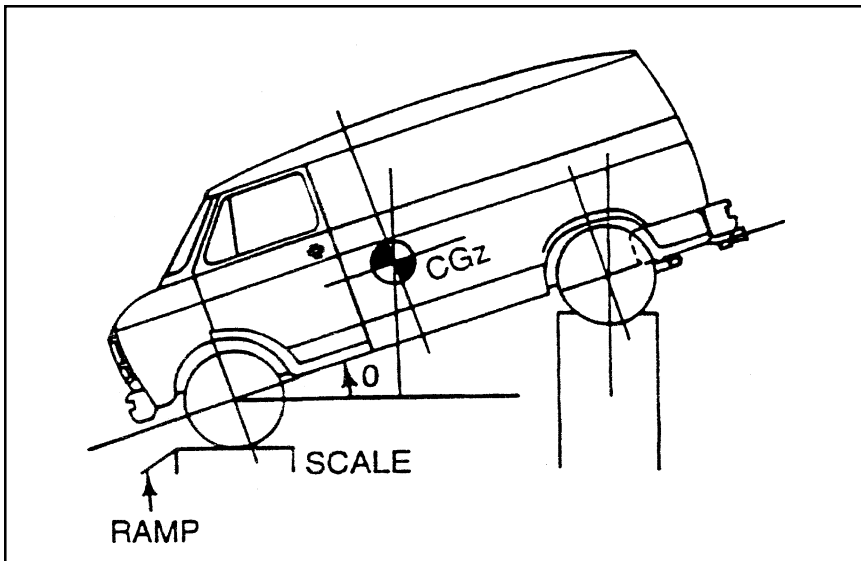


Figure 3

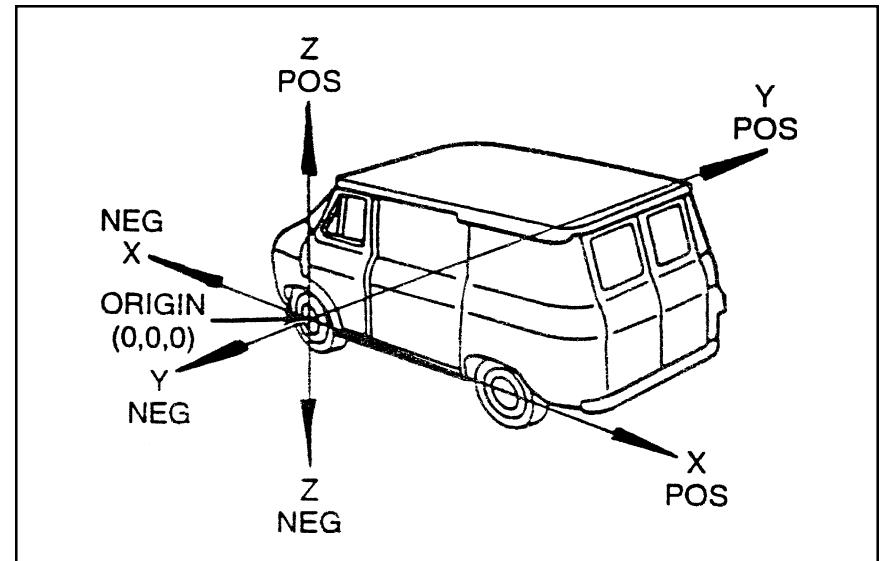


Figure 4

WEIGHTS AND MEASURES

| Standard Weights and Measures | | |
|-------------------------------|---|--|
| Length | | |
| 12 inches | = | 1 foot |
| 3 feet | = | 1 yard |
| 5 1/2 yards | = | 16 1/2 feet |
| | = | 1 rod |
| 1760 yards | = | 5820 feet |
| | = | 1 mile |
| Area | | |
| 144 square inches | = | 1 square foot |
| 9 square feet | = | 1 square yard |
| 30 1/2 sq. yards | = | 1 square rod |
| 160 sq. rods | = | 43,560 sq. feet or 1 acre |
| 640 acres | = | 27,878,400 sq. feet or 1 sq. mile |
| 1 circular inch | = | Area of circle 1 in diameter |
| 1 square inch | = | 1.2732 circular inches |
| Volume | | |
| 1728 cubic inches | = | 1 cubic foot |
| 27 cubic feet | = | 1 cubic yard |
| 1 cord wood | = | 128 cubic feet. One cord is 8 feet long, 4 feet wide and 4 feet high |
| 1 board foot | = | 144 cubic inches or volume of board 1 foot square and 1 inch thick |
| 1 cylindrical inch | = | Volume of cylinder 1 inch in diameter and 1 inch long or 0.7854 cubic inch |
| 1 cubic inch | = | 1.2732 cylindrical inches |

| Liquid or Fluid Measures | | |
|---|---|---|
| 4 gills (16 fluid ounces) | = | 1 pint |
| 2 pints | = | 1 quart |
| 4 quarts | = | 1 gallon |
| 31 11/32 gallons | = | 1 barrel (there is no standard liquid 'barrel') |
| 1 U.S. gallon | = | 231 cubic inches or 0.13373 cubic feet |
| 7.4805 gallons | = | 1 cubic foot |
| When water is at its maximum density, 1 cubic foot weighs 62.428 pounds and 1 gallon weighs 8.345 pounds. For approximations, 1 cubic foot of water equals 7 1/2 gallons. | | |
| Dry Measure | | |
| 2 pints | = | 1 quart |
| 8 quarts | = | 1 peck |
| 4 pecks | = | 1 bushel |
| 1 U.S. bushel | = | 2150.42 cubic inches |
| | = | 1.2445 cubic feet |
| 1 cubic yard | = | 21.7 U.S. bushels (approximate) |
| Measures of Angles or Arcs | | |
| 60 seconds (") | = | 1 minute (') |
| 60 minutes (') | = | 1 degree (°) |
| 90 degrees (°) | = | 1 right angle or quadrant |
| 360 degrees (°) | = | 1 circle |
| Avoirdupois Weight (U.S.) | | |
| 437.5 grains (16 drams) | = | 1 ounce |
| 16 ounces | = | 1 pound |
| 100 pounds | = | 1 hundred weight |

GENERAL INFORMATION

| | | |
|-------------|---|------------|
| 2000 pounds | = | 1 ton |
| 2240 pounds | = | 1 long ton |

| | | |
|----------------------------------|---|-------------------|
| 1000 kilograms (kg.) | = | 1 ton (metric) |
| 1000 cubic centimeters (cu. cm.) | = | 1 cubic decimeter |
| 1000 cubic decimeters (cu. dm.) | = | 1 cubic meter |

| Metric Weights and Measures | | |
|----------------------------------|---|---------------------------|
| Length | | |
| 10 millimeters (mm.) | = | 1 centimeter |
| 10 centimeters (cm.) | = | 1 decimeter |
| 10 decimeters (dm.) | = | 100 centimeters |
| | = | 1 meter |
| 1000 meters (m.) | = | 1 kilometer (km.) |
| Area | | |
| 100 square millimeters (sq. mm.) | = | 1 square centimeter |
| 100 square centimeter (sq. cm.) | = | 1 square decimeter |
| 100 square decimeters (sq. dm.) | = | 1 square meter |
| Volume | | |
| 1000 cubic millimeters (cu. mm.) | = | 1 cubic centimeter |
| 1000 cubic centimeters (cu. cm.) | = | 1 cubic decimeter |
| 1000 cubic decimeters (cu. dm.) | = | 1 cubic meter |
| Capacity | | |
| 10 milliliters (ml.) | = | 1 centiliter |
| 10 centiliters (cl.) | = | 1 deciliter |
| 10 deciliters (dl.) | = | 100 centiliter or 1 liter |
| 1000 liters (l.) | = | 1 kiloliter |
| Weight | | |
| 10 milligrams (mg.) | = | 1 centigram |
| 10 centigrams (cg.) | = | 1 decigram |
| 10 decigrams (dg.) | = | 100 centigrams or 1 gram |
| 1000 grams (g.) | = | 1 kilogram |

| Equivalent Weights and Measures | | |
|---------------------------------|---|-----------------------------|
| Length | | |
| 1 inch | = | 2.54 centimeters |
| 1 foot | = | 30.48 centimeters |
| 1 yard | = | 0.9144 meters |
| 1 mile | = | 1.609 kilometers |
| 1 centimeter | = | 0.3937 inches |
| 1 meter | = | 39.37 inches or 3.281 feet |
| 1 kilometer | = | 0.6214 mile or 1093.3 yards |
| Area | | |
| 1 square inch | = | 6.452 square centimeters |
| 1 square foot | = | 0.093 square meters |
| 1 square yard | = | 0.836 square meters |
| 1 acre | = | 4047 square meters |
| 1 square mile | = | 2.59 square kilometers |
| 1 square centimeter | = | 0.155 square inches |
| 1 square meter | = | 10.76 square feet |
| 1 square kilometer | = | 0.3861 square miles |
| Volume | | |
| 1 cubic inch | = | 16.39 cubic centimeters |
| 1 cubic foot | = | 0.0283 cubic meters |
| 1 cubic yard | = | 0.7646 cubic meters |
| 1 (U.S.) gallon | = | 3.785 liters |
| 1 cubic centimeter | = | 0.061 cubic inches |

GENERAL INFORMATION

| | | |
|---------------|---|--------------------------------------|
| 1 cubic meter | = | 35.31 cubic feet |
| 1 liter | = | 61.02 cubic inches or 0.2642 gallons |
| Weight | | |
| 1 ounce | = | 28.35 grams |
| 1 pound | = | 0.4536 kilograms |
| 1 ton | = | 907.2 kilograms |
| 1 gram | = | 15.43 grains |
| 1 kilogram | = | 2.205 pounds |
| 1 metric ton | = | 2205 pounds |

| Decimal Equivalents of Parts of an Inch | | | |
|---|----------|-------|----------|
| 1/64 | 0.015625 | 33/64 | 0.515625 |
| 1/32 | 0.03125 | 17/32 | 0.53125 |
| 3/64 | 0.046875 | 35/64 | 0.546875 |
| 1/16 | 0.0625 | 9/16 | 0.5625 |
| 5/64 | 0.078125 | 37/64 | 0.578125 |
| 3/32 | 0.09375 | 19/32 | 0.59375 |
| 7/64 | 0.109375 | 39/64 | 0.609375 |
| 1/8 | 0.125 | 5/8 | 0.625 |
| 9/64 | 0.140625 | 41/64 | 0.640625 |
| 5/32 | 0.15625 | 21/32 | 0.65626 |
| 11/64 | 0.171875 | 43/64 | 0.671875 |
| 3/16 | 0.1875 | 11/16 | 0.6875 |
| 13/64 | 0.203125 | 45/64 | 0.703125 |
| 7/32 | 0.21875 | 23/32 | 0.71875 |
| 15/64 | 0.234375 | 47/64 | 0.734375 |
| 1/4 | 0.25 | 3/4 | 0.75 |
| 17/64 | 0.265625 | 49/64 | 0.765625 |

| | | | |
|-------|----------|-------|----------|
| 9/32 | 0.28125 | 25/32 | 0.781255 |
| 19/64 | 0.296875 | 51/64 | 0.796875 |
| 5/16 | 0.3125 | 13/16 | 0.8125 |
| 21/64 | 0.328125 | 53/64 | 0.828125 |
| 11/32 | 0.34375 | 27/32 | 0.84375 |
| 23/64 | 0.359375 | 55/64 | 0.859375 |
| 3/8 | 0.375 | 7/8 | 0.875 |
| 25/64 | 0.390625 | 57/64 | 0.890625 |
| 13/32 | 0.40625 | 29/32 | 0.90625 |
| 27/64 | 0.421875 | 59/64 | 0.921875 |
| 7/16 | 0.4375 | 15/16 | 0.9375 |
| 29/64 | 0.453125 | 61/64 | 0.953125 |
| 15/32 | 0.46875 | 31/32 | 0.96875 |
| 31/64 | 0.484375 | 63/64 | 0.984375 |
| 1/2 | 0.5 | 1 | 1.0 |

GENERAL INFORMATION

| Approximate Weight of Materials | | |
|--|------------|---------|
| <p>Most materials and commodities vary in weight and containers vary in shape and size. Therefore it is impossible to list any but average weights per cubic foot or per unit of measurement and the following weights should be used only for approximation purposes. When it is necessary to figure weights accurately for recommendation of truck or tractor-trailer equipment, exact weights and dimensions should be obtained from local sources. This is particularly true of fruits and vegetables, containers for which vary widely in type, size and shape according to commodity and locality.</p> | | |
| Building Supplies, other than lumber and stone | | |
| | Pounds per | |
| | Cu. Ft. | Cu. Yd. |
| Asbestos | 153 | 4130 |
| Asphalt | | |
| Brick | 125 | 3375 |
| Lumps | 85 | 2300 |
| Paving | 100 | 2700 |
| Cinders | 50 | 1350 |
| Clay (dry lumps) | 85 | 2300 |
| Wet lumps | 110 | 2970 |
| Wet packed | 135 | 3650 |
| Fire | 125 | 3375 |
| Concrete | | |
| Cinder or slag | 120 | 3250 |
| Gravel or stone | 150 | 4050 |
| Ave. wet mix | 138 | 3730 |
| Crushed stone, ave. | 100 | 2700 |
| Earth (loam), Loose | 76 | 2050 |
| Shaken | 87 | 2350 |
| Packed | 95 | 2565 |
| Moist | 100 | 2700 |
| Wet | 125 | 3375 |
| Gravel, Dry | 95 | 2565 |
| Wet | 125 | 3375 |

| | Pounds per | |
|-------------------------------|------------|----------|
| | Cu. Ft. | Cu. Yd. |
| Motor-lime | 110 | 2970 |
| Rubble-dry | 138 | 3730 |
| Wet | 154 | 4160 |
| Pitch | 70 | 1900 |
| Plaster of Paris (gypsum) | 150 | 4050 |
| Quicklime, Solid | 95 | 2550 |
| Ground-loose | 55 | 1485 |
| Shaken | 75 | 2030 |
| Rock crushed, ave. | 100 | 2700 |
| Sand, Fine-dry | 110 | 2970 |
| Wet | 125 | 3735 |
| Course-dry | 95 | 2565 |
| Wet | 120 | 3240 |
| Tar | 65 | 1755 |
| Terra Cotta | 110 | 2970 |
| Tile, Solid | 115 | 3100 |
| Construction | 40 | 1080 |
| Brick | | Thousand |
| Soft, 2.5 x 4 x 8.25 | | 4320 |
| Common, 2.25 x 4 x 8.25 | | 5400 |
| Hard, 2.25 x 4.25 x 8.5 | | 6480 |
| Pressed, 2.375 x 4 x 8.375 | | 7500 |
| Paving, 2.5 x 4 x 8.5 | | 6750 |
| Paving block, 3.5 x 4.5 x 8.5 | | 8750 |
| Fire, 2.5 x 4.5 x 9 | | 7000 |
| Cement block | | |
| 8 x 8 x 16 | 42 | each |
| 8 x 12 x 16 | 58 | each |
| Cinder block | | |
| 8 x 8 x 16 | 35 | each |
| 8 x 12 x 16 | 45 | each |

GENERAL INFORMATION

| | Pounds per | |
|--|----------------------|----------------------------|
| | Cu. Ft. | Cu. Yd. |
| Glass Common window Plate, 1/4" thick | 162 3.3 | cu. ft. sq. ft. |
| Lime Small barrel Large barrel | 210 320 | barrel barrel |
| Farm and Dairy Products, except Fruits and Vegetables | | |
| | Pounds | Per |
| Alfalfa seed | 60 | bushel |
| Barley | 48 | bushel |
| Bran | 20 | bushel |
| Buckwheat | 49 | bushel |
| Butter, 15 dia. x 15 15 dia. x 15 10.25 x 8.75 x 10.5 (30 lb.) bricks 9 lb. pail | 25 70 32 10 | tub tub case each |
| Calf, Live (avg.) | 150 | head |
| Cheese, 15 dia. x 5.25 15 dia. x 7.5 15 dia. x 15 | 25 35 70 | box box box |
| Chickens Live broilers (20 avg.) Fowl (12 avg.) Std. crate, empty 24 x 35 x 13 | 58 78 18 | crate crate each |
| Clover seed | 60 | bushel |
| Corn, Ear Shelled Sweet corn (green) | 35 56 43 | bushel bushel bushel |

| | Pounds | Per |
|--|--------------------|----------------------------|
| Corn Meal | 44 | bushel |
| Cotton Gin bale, 20 x 48 x 54 Std. bale, 24 x 28 x 56 Comp bale, 20 x 24 x 56 | 515 515 515 | each each each |
| Cotton seed | 32 | bushel |
| Cow, Live, Feeder (avg.) Butcher (avg.) Heavy steer (avg.) | 600 800 1000 | head head head |
| Eggs, 30 doz. 12 x 12 x 26 | 55 | crate |
| Flax seed | 56 | bushel |
| Flour, 19 1/8 head, 30 stave | 215 | barrel |
| Hay, Baled 17 x 22 x 40 14 x 16 x 43 | 60 85 | bale bale |
| Hemp seed | 44 | bushel |
| Hog, Live (avg.) | 235 | head |
| Horse, Live (avg.) | 1350 | head |
| Ice Cream 2.5 gal., 9 dia. x 11 5 gal., 9 dia. x 21 | 18 35 | can can |
| Lamb, Live (avg.) | 80 | head |
| Malt, Barley Rye Brewer's grain | 28 32 40 | bushel bushel bushel |
| Millet | 50 | bushel |
| Oats | 32 | bushel |
| Popcorn, Ear Shelled | 35 56 | bushel bushel |

GENERAL INFORMATION

| | Pounds | Per |
|------------------------------|--------|------------|
| Rice, Unhulled | 43 | bushel |
| Rye | 56 | bushel |
| Sheep, Live (avg.) | 138 | each |
| Shorts | 20 | bushel |
| Soy beans | 60 | bushel |
| Straw, Baled 17 x 22 x 40 | 45 | bale |
| Tallow | 60 | cu. ft. |
| Timothy seed | 45 | bushel |
| Vetch seed | 60 | bushel |
| Wheat, Bulk | 60 | bushel |
| Bag | 90 | 1.5 bushel |
| Wool, Pressed | 82 | cu. ft. |

| Fruits, Vegetables and Nuts (in bulk, unless container specified) | | |
|--|------------------------|------------------------------------|
| | Size Container | Lbs. Per Bushel or Container |
| Apples, Fresh | bushel | 48 |
| Western box | 11.5 x 12 x 20 | 50 |
| New England box | 11.25 x 14.25 x 17.5 | 56 |
| Standard barrel | 17hc. 28.5 stone | 160 |
| Apricots, Fresh | bushel | 48 |
| Western box | 5.5 x 12 x 20 | 23 |
| Artichokes, Box | 10 x 11.5 x 22 | 44 |
| Asparagus, Pr. Crate | 11.5 high 19.375 long, | |
| Loose | 9.75 wide top, | 38 |
| Bunches | 11 bottom | 31 |
| Avocados, Box | 5.75 x 11.25 x 17.5 | 16 |

| | Size Container | Lbs. Per Bushel or Container |
|-------------------------|------------------------|------------------------------------|
| Bananas, Carton | 4.25 x 14.25 x 30 | 38 |
| Single stem | bunch | 55 |
| Beans, Dry castor | bushel | 46 |
| White | bushel | 60 |
| Lima | bushel | 56 |
| Fresh lima | bushel | 39 |
| String | bushel | 36 |
| (Hamper) string | 5 peck | 45 |
| Beets (avg.) | bushel | 55 |
| Small crate | 9.75 x 13.25 x 24 | 50 |
| Western crate | 14 x 19 x 24.5 | 95 |
| Berries, Crate 24 pt. | 9.75 x 9.75 x 20 | 25 |
| 24 qt. | 11.75 x 11.75 x 24 | 48 |
| 32 at. | 15.5 x 11.75 x 24 | 63 |
| Broccoli, Bushel Crate | 12.75 x 12.75 x 17 | 30 |
| Brussels sprouts, Crate | 7.75 x 10.75 x 21.375 | 26 |
| Cabbage, Hamper | 1.5 bushel | 58 |
| Crate | 12.75 x 18.5 x 19 | 60 |
| Western crate | 14 x 19 x 24.5 | 85 |
| Bbl. crate | 12.75 x 18.75 x 37.375 | 110 |
| Cantaloupe, Crate | | |
| Pony | 11.75 x 11.75 x 23.5 | 58 |
| Standard | 12.75 x 12.75 x 23.5 | 68 |
| Jumbo | 13.75 x 13.75 x 23.5 | 78 |
| Pony flat | 4.75 x 12.75 x 23.5 | 26 |
| Standard flat | 5.25 x 14.25 x 23.5 | 28 |
| Jumbo flat | 5.75 x 15.25 x 23.5 | 32 |
| Carrots, Topped | bushel | 55 |
| With tops | bushel | 40 |
| Crate | 11.75 x 14.125 x 24 | 60 |

GENERAL INFORMATION

| | Size Container | Lbs. Per Bushel or Container |
|--|------------------------|------------------------------|
| Cauliflower Crate | bushel | 30 |
| | 9.375 x 19 x 24 | 50 |
| Celery, Std. Crate 1/2 crate Northern crate | 11.625 x 22 x 22.625 | 70 |
| | 10.75 x 13 x 20.375 | 35 |
| | 16.5 x 21.25 x 22 | 85 |
| Cherries, Unstemmed Stemmed Lug box | bushel | 56 |
| | bushel | 64 |
| | 5.625 x 11.875 x 19.75 | 17 |
| Chestnuts | bushel | 50 |
| Cranberries 1/4 bbl. box 1/2 bbl. box | 9.5 x 11 x 14 | 28 |
| | 12.5 x 14.75 x 22 | 60 |
| Cucumbers Crate Case | bushel | 55 |
| | 9.75 x 13.75 x 24 | 75 |
| | 5 x 13.25 x 19 | 26 |
| Eggplant, Hamper Crate | bushel | 40 |
| | 14 x 11.75 x 24 | 54 |
| Endive, Basket Hamper | bushel | 25 |
| | 1.5 bushel | 36 |
| Grapefruit, Western box Southern box | 11.5 x 11.5 x 24 | 68 |
| | 12.75 x 12.75 x 27 | 90 |
| Grapes, Basket Lug box Western box Basket | bushel | 48 |
| | 5.375 x 16.375 x 17.5 | 30 |
| | 15.5 x dia. x 14 | 45 |
| | 12 quarts | 18 |
| Greens | bushel | 25 |
| Hickory nuts | bushel | 45 |
| Horseradish roots | bushel | 35 |
| Kale | bushel | 25 |

| | Size Container | Lbs. Per Bushel or Container |
|---|------------------------|------------------------------|
| Lemons, Limes, Western box Southern box | 10 x 13 x 25 | 80 |
| | 12.75 x 12.75 x 27 | 90 |
| Lentils | bushel | 60 |
| Lettuce, Hamper Hamper Basket Crate 1/2 crate | bushel | 25 |
| | 1.5 bushel | 38 |
| | 8.5 x 11.75 x 21.375 | 17 |
| | 13.75 x 17.5 x 24.5 | 75 |
| Okra, Hamper Hamper | 9.5 x 13.5 x 24.5 | 40 |
| | .5 bushel | 18 |
| Onions, Dry, Basket Bag Crate Green with tops | bushel | 55 |
| | 17 x 32 | 50 |
| | 20.5 x 11.5 x 10.5 | 58 |
| | bushel | 32 |
| Oranges, Western box Southern box Bushel box | 11.5 x 11.5 x 24 | 80 |
| | 12.75 x 12.75 x 27 | 90 |
| | 10.75 x 10.75 x 23.5 | 65 |
| Parsley, Bushel Crate | 12.75 x 12.75 x 17 | 30 |
| Parsnips | bushel | 48 |
| Peaches, Basket Basket Crate Western box | bushel | 48 |
| | .5 bushel | 25 |
| | 10.5 x 11.25 x 24 | 50 |
| | 5.5 x 11.25 x 24 | 22 |
| Peanuts, Unshelled Bag | bushel | 22 |
| | | 100 |
| Pears, Basket Western box | bushel | 50 |
| | 9.625 x 12.125 x 19.75 | 51 |
| Peas, Dry Fresh hamper Hamper | bushel | 60 |
| | bushel | 35 |
| | 40 quarts | 45 |

GENERAL INFORMATION

| | Size Container | Lbs. Per Bushel or Container |
|--------------------|------------------------|------------------------------|
| Pecans, Large bag | | 100 |
| Small bag | | 50 |
| Peppers, Basket | bushel | 25 |
| Crate | 14.125 x 11.75 x 24 | 45 |
| Pineapples, Crate | 11 x 12.5 x 36 | 85 |
| Plums, Basket | bushel | 56 |
| Western box | 5.625 x 16.375 x 17.5 | 25 |
| Potatoes, Sweet | bushel | 55 |
| White or Irish | bushel | 60 |
| Bag | 1 2/3 bushel | 102 |
| Barrel | barrel | 185 |
| Prunes, Box | 5.625 x 16.375 x 17.5 | 25 |
| Quinces | bushel | 50 |
| Radishes, Basket | bushel | 34 |
| Crate | 9.75 x 13.75 x 24 | 40 |
| Rhubarb, Box | 5.125 x 11.5 x 22 | 24 |
| Romaine, Crate | 13.875 x 18.875 x 24.5 | 64 |
| Crate | 12.25 x 13 x 15.25 | 27 |
| Rutabagas | bushel | 56 |
| Spinach | bushel | 27 |
| Squash | bushel | 46 |
| Sweet Corn, Basket | bushel | 45 |
| Crate | 13 x 13 x 24 | 60 |
| Tomatoes, Basket | bushel | 55 |
| Lug box | 7.25 x 14 x 17.5 | 35 |
| Crate | 10.5 x 11.25 x 24 | 48 |
| Basket | 8.5 x 8.75 x 20 | 18 |
| Turnips | bushel | 54 |

| | Size Container | Lbs. Per Bushel or Container |
|---------------|----------------|------------------------------|
| Walnuts, Bulk | bushel | 50 |
| Bag | | 100 |

| Liquids | | |
|---------------------|------------|--------|
| | Pounds per | |
| | Cu. Ft. | Gallon |
| Acetone | 50 | 6.6 |
| Alcohol, commercial | 51 | 6.8 |
| Asphalt, hot oil | 71 | 9.5 |
| Carbolic acid | 60 | 8.0 |
| Castor oil | 61 | 8.1 |
| Chloroform | 95 | 12.7 |
| Coconut oil | 58 | 7.8 |
| Corn oil | 58 | 7.8 |
| Corn syrup | 86 | 11.5 |
| Cotton seed oil | 58 | 7.8 |
| Cream | 64 | 8.5 |
| Creosote | 69 | 9.2 |
| Crude oil | 56 | 7.5 |
| Ether | 46 | 6.2 |
| Fuel oil-Diesel | 52 | 7.0 |
| Fuel oil-Furnace | 56 | 7.5 |
| Gasoline | 45 | 6.0 |
| Glycerine | 79 | 10.5 |
| Honey | 90 | 12.0 |
| Kerosene | 50 | 6.6 |

GENERAL INFORMATION

| | Pounds per | |
|--------------------|------------|--------|
| | Cu. Ft. | Gallon |
| Linseed oil | 59 | 7.9 |
| Lubricating | 52 | 7.0 |
| Maple syrup | 82 | 11.0 |
| Milk, bulk | 64 | 8.6 |
| Molasses | 90 | 12.0 |
| Muriatic acid, 40% | 40 | 10.0 |
| Naphtha, petroleum | 42 | 5.6 |
| Nitric acid, 91% | 94 | 12.5 |
| Olive oil | 58 | 7.7 |
| Peanut oil | 57 | 7.6 |
| Petroleum | 56 | 7.5 |
| Sorghum syrup | 86 | 11.5 |
| Soybean oil | 58 | 7.7 |
| Sugar cane syrup | 85 | 11.3 |
| Sulfuric acid, 87% | 112 | 15.0 |
| Turpentine | 54 | 7.3 |
| Vinegar | 64 | 8.5 |
| Water, fresh | 63 | 8.4 |

| | Size Container | Lbs. Per Container |
|-------------------|-------------------------|--------------------|
| Beer, Wood barrel | .25 barrel | |
| Steel barrel | .25 barrel | |
| Wood barrel | .25 barrel | |
| Steel barrel | .25 barrel | |
| Carton, 24 12oz. | | |
| Regular bottles | 17.25 x 11.5 x 9.875 | |
| Steinie bottles | 18.375 x 12.125 x 7.375 | |

| | Size Container | Lbs. Per Container |
|---|-----------------------|--------------------|
| Tin cans | 16.25 x 11 x 5.125 | |
| Wood case, 24 12oz. | | |
| Regular bottles | 21 x 13.5 x 10 | |
| Steinie bottles | 22 x 13.75 x 7.5 | |
| Note: Beer cases are of many types with variable size and weight. Cases shown are average for popular full depth type with partitions. | | |
| | Size Container | Lbs. Per Container |
| Milk, 5 gal. can | 10.25 dia. x 19 | 62 |
| 10 gal. can | 13 dia. x 23 | 115 |
| Crate, 21.5 pt. bottles | | 33 |
| 20 pt. bottles | | 54 |
| 12 qt. bottles | | 64 |
| Note: Milk bottle crates vary widely in dimensions and weights. Those shown are average weights. | | |
| | Size Container | Lbs. Per Container |
| Molasses, 50 gal. bbl. | 20.25 hd. 34 stave | 675 |
| | Size Container | Lbs. Per Container |
| Soft drinks | | |
| Half depth bottle box | | |
| 24, 6 to 8 oz. bottles | 12.25 x 18.75 x 8.5 | 39 |
| Full depth bottle box | | |
| 12, 24 to 32 oz. bottles | 13.375 x 18.5 x 12.25 | 60 |

GENERAL INFORMATION

| Lumber, Air Dried | | |
|--|------------|--------------------|
| Kiln dried lumber averages 10% to 15% lighter, and green lumber 40% to 50% heavier than air dried. | | |
| | Pounds per | |
| | Cu. Ft. | Thousand Board Ft. |
| Ash, Black or Red | 40 | 3330 |
| White | 46 | 3830 |
| Bamboo | 22 | |
| Basswood | 30 | 2500 |
| Beech | 30 | 2500 |
| Birch | 48 | 4000 |
| Butternut | 30 | 2500 |
| Cedar | 30 | 2500 |
| Cherry | 44 | 3670 |
| Chestnut | 37 | 3080 |
| Cottonwood | 37 | 3080 |
| Cypress | 30 | 2500 |
| Elm, Soft | 38 | 3170 |
| Rock | 45 | 3750 |
| Fir, Douglas | 32 | 2670 |
| Eastern | 25 | 2080 |
| Gum | 40 | 3330 |
| Hemlock | 29 | 2420 |
| Hickory | 54 | 4500 |
| Locust | 42 | 3500 |
| Mahogany | 42 | 3500 |
| Maple, Hard | 44 | 3670 |
| Soft | 34 | 2830 |

| | Pounds per | |
|---|------------|--------------------|
| | Cu. Ft. | Thousand Board Ft. |
| Oak, Black | 42 | 3500 |
| Red | 42 | 3500 |
| White | 48 | 4080 |
| Pine, Long Leaf | 44 | 3670 |
| North Carolina | 36 | 3000 |
| Oregon | 32 | 2670 |
| Red | 30 | 2500 |
| White | 26 | 2170 |
| Yellow, Northern | 34 | 2830 |
| Southern | 45 | 3750 |
| Short leaf | 38 | 3170 |
| Long leaf | 44 | 3670 |
| Poplar | 27 | 2250 |
| Redwood | 30 | 2500 |
| Spruce | 28 | 2330 |
| Sycamore | 37 | 3080 |
| Walnut | 43 | 3580 |
| Willow | 31 | 2580 |
| Lath, Standard length 29 in. Put up in bundles of 50. Avg. bundle; dia. 9 in., weight 25 lbs. | | |
| Shingles, Bundles contains the equivalent of 250 shingles, measures 24 x 20 x 10, avg. weight 50 lbs. | | |

| Metals, Minerals, Ores, Rock, Stone, Coal | | |
|---|------------|---------|
| | Pounds Per | |
| | Cu. Ft. | Cu. Yd. |
| Alabaster, gypseous | 160 | 4320 |
| Aluminum, pure | 165 | 4450 |

GENERAL INFORMATION

| | Pounds Per | |
|------------------|------------|---------|
| | Cu. Ft. | Cu. Yd. |
| Andesita stone | 180 | 4850 |
| Antimony | 420 | 11650 |
| Asbestos | 153 | 4130 |
| Babbit | 440 | 11900 |
| Barytes, mineral | 280 | 7560 |
| Basalt rock | 185 | 5000 |
| Bauxite | 160 | 4320 |
| Bluestone | 120 | 3240 |
| Borax | 110 | 2970 |
| Brass, Cast | 525 | 14175 |
| Rolled | 534 | 14420 |
| Drawn | 542 | 14635 |
| Bronze | 550 | 14850 |
| Chalk | 137 | 3700 |
| Charcoal, oak | 33 | 890 |
| pine | 23 | 620 |
| Coal, broken | | |
| Anthracite | 60 | 1600 |
| Bituminous | 45 | 1200 |
| Pocahontas | 50 | 1350 |
| Cannel | 50 | 1350 |
| Coke | 27 | 730 |
| Copper, Cast | 550 | 14850 |
| Rolled | 560 | 15120 |
| Diabase | 185 | 5000 |
| Dolomite | 181 | 4890 |
| Emery | 250 | 6750 |
| Feldspar | 160 | 4320 |

| | Pounds Per | |
|--|------------|---------|
| | Cu. Ft. | Cu. Yd. |
| Flint | 185 | 5000 |
| Gneiss, Solid | 160 | 4320 |
| Crushed | 95 | 2565 |
| Granite, Solid | 175 | 4725 |
| Crushed | 96 | 2590 |
| Graphite | 170 | 4590 |
| Greenstone, Solid | 187 | 5050 |
| Crushed | 107 | 2900 |
| Gypsum | 150 | 4050 |
| Iron, Cast | 450 | 12150 |
| Wrought | 485 | 13100 |
| Hornblende | 187 | 5050 |
| Lead, Cast | 710 | 19170 |
| Limestone, Solid | 166 | 4480 |
| Crushed | 95 | 2565 |
| Magnesite | 187 | 5050 |
| Manganese | 475 | 12825 |
| Marble, Solid | 165 | 4455 |
| Crushed | 95 | 2565 |
| Marl | 140 | 3800 |
| Mercury | 850 | |
| Mica | 185 | 5000 |
| Nickel | 537 | 14500 |
| Ore: Most ores are 15% to 20% heavier than the rock which forms the bulk of the ore. | | |
| Peat | 50 | 1350 |
| Phosphate rock | 200 | 5400 |
| Porcelain | 150 | 4050 |

GENERAL INFORMATION

| | Pounds Per | |
|----------------------|------------|----------|
| | Cu. Ft. | Cu. Yd. |
| Porphyry | 172 | 4645 |
| Pumice | 40 | 1080 |
| Pyrites | 315 | 8500 |
| Quartz | 165 | 4455 |
| Rip-rap stone | 65 | 1750 |
| Salt, Rock, Solid | 136 | 3670 |
| Very coarse | 35 | 950 |
| Coarse | 45 | 1215 |
| Fine | 50 | 1350 |
| Barrel | 280 | per bbl. |
| Salt peter | 69 | 1860 |
| Sandstone, Solid | 147 | 3970 |
| Crushed | 86 | 2325 |
| Shale, Solid | 172 | 4645 |
| Crushed | 92 | 2485 |
| Silica | 135 | 3650 |
| Slag, Solid | 175 | 4750 |
| Crushed | 75 | 2025 |
| Screenings | 100 | 2700 |
| Slate | 175 | 4725 |
| Soapstone | 169 | 4565 |
| Steel, Cast | 490 | 13250 |
| Rolled | 495 | 13365 |
| Stone, Crushed, avg. | 100 | 2700 |
| Sulphur | 125 | 3375 |
| Talc | 170 | 4600 |
| Tin | 460 | 12400 |
| Trap rock | 187 | 5050 |

| | Pounds Per | |
|----------------------|------------|---------|
| | Cu. Ft. | Cu. Yd. |
| Zinc | 440 | 11880 |
| Miscellaneous | | |
| | Pounds Per | |
| | Cu. Ft. | Cu. Yd. |
| Ashes, cool (packed) | 45 | 1215 |
| Bone | 115 | 3110 |
| Cork | 15 | 405 |
| Furniture | 6 | 160 |
| Garbage | | |
| Dry, paper wrapped | 15-30 | 400-800 |
| Wet | 50 | 1240 |
| Groceries, misc. | 30 | 810 |
| Ice | 57 | 1540 |
| Paper, Solid, avg. | 58 | 1565 |
| Rubber goods | 94 | 2540 |
| Snow, moist-packed | 50 | 1350 |
| Street sweepings | 32 | 865 |

METRIC/U.S. CUSTOMARY CONVERSION TABLE

| | Multiply | By | To Get/Multiply | By | To Get |
|--------------|--|---|--|---|--|
| Linear | inches inches feet | x 25.4 x 2.54 x 0.3048 | millimeters (mm) centimeters (cm) meters (m) | x 0.03937 x 0.3937 x 3.281 | inches inches feet |
| Area | square inches square inches square feet | x 645.16 x 6.452 x 0.0929 | square millimeters (sq. mm) square centimeters (sq. cm) square meters (sq. m) | x 0.00155 x 0.155 x 10.764 | square inches square inches square feet |
| Volume | cubic inches cubic inches cubic inches quarts gallons cubic feet cubic feet fluid oz. | x 16387.0 x 16.387 x 0.01639 x 0.94635 x 3.7854 x 28.317 x 0.02832 x 29.57 | cubic millimeters (cu. mm) cubic centimeters (cu. cm) liters (l) liters (l) liters (l) liters (l) cubic meters (cu. m) milliliters (ml) | x 0.000061 x 0.06102 x 61.024 x 1.0567 x 0.2642 x 0.03531 x 35.315 x 0.03381 | cubic inches cubic inches cubic inches quarts gallons cubic feet cubic feet fluid oz. |
| Mass | ounces (av) pounds (av) tons (2000 lb) tons (2000 lb) | x 28.35 x 0.4536 x 907.18 x 0.90718 | grams (g) kilograms (kg) kilograms (kg) tonne (t) | x 0.03527 x 2.2046 x 0.001102 x 1.1023 | ounces (av) pounds (av) tons (2000 lb) tons (2000 lb) |
| Fuel Economy | miles/gal gal/mile gal/mile | x 0.42514 x 2.3522 x 235.22 | kilometers/liters (km/l) liters/kilometer (l/km) liters/100 kilometers (l/100 km) | x 2.3522 x 0.42514 x 0.004251 | miles/gal gal/mile gal/mile |
| Power | horsepower ft.-lb./min | x 0.746 x 0.0226 | kilowatts (kW) watts (W) | x 1.34 x 44.25 | horsepower ft.-lb./min |
| Torque | pound-inches pound-feet | x 0.11298 x 1.3558 | newton-meters (N-m) newton-meters (N-m) | x 8.851 x 0.7376 | pound-inches pound-feet |
| Velocity | miles/hour kilometers/hour miles/hour | x 1.6093 x 0.27778 x 0.4470 | kilometers/hour (km/h) meters/sec (m/s) meters/sec (m/s) | x 0.6214 x 3.600 x 2.237 | miles/hour kilometers/hour miles/hour |

Common Metric Prefixes

mega (M) = 1,000,000
kilo (k) = 1,000

centi (c) = 0.01
milli (m) = 0.001

hecto (h) = 100
micro (μ) = 0.000001

U.S. Imperial Gallon Comparison


1 U.S. Gallon = 0.833 Imperial Gallon
1 Imperial Gallon = 1.201 U.S. Gallon

GENERAL INFORMATION

2001 LIGHT DUTY 10/1500 – 30/3500 SERIES MODEL IDENTIFICATION SYSTEM

The designation consists of seven characters, two letters followed by five numbers. The first letter indicates the selling division and second identifies the chassis type. The first number designates the GVWR range, the second and third identify the cab-to-axle dimension (CA) or model type, and the last two identify the cab or body style.

For example:

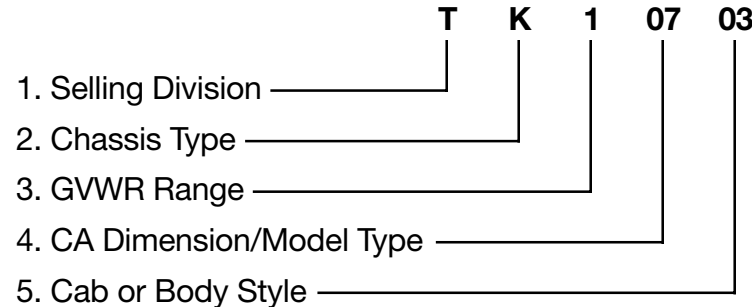

| 1. Selling Division | | 3. Series/GVWR Range | | 5. Cab or Body Type | |
|------------------------|--|------------------------------------|--|---------------------|--|
| T | – GMC Truck (Z88) | 1 | – 4200 to 8600 | 17 | – Express/Savana (G Van) |
| C | – Chevrolet Truck (X88) | 2 | – 7300 to 9200 | 18 | – Chassis Cab 108" CA (C/K) Cutaway/Savana Special 100" CA Commercial & RV |
| 2. Chassis Type | | 3 | – 9500 to 15,000 | 19 | – Cutaway/Savana Special 118" CA Commercial & RV |
| C | – Pickup, Utility 4 x 2 (Two-Wheel Drive) | 4. Model Type/CA Dimensions | | 55 | – S/T Trailblazer/Envoy/Bravada 4-Door (2002 M.Y.) |
| G | – Van, Cargo/Passenger/Cutaway, Savana/Express | 05 | – Blazer/Jimmy (S/T Utility) | 57 | – C/K New Pickup/6.5' Cargo Box Tahoe/Yukon 4-Door |
| K | – Pickup, Utility 4 x 4 (Four-Wheel Drive) | 06 | – S-10/Sonoma Pickup 39" CA (S/T 6.1' Cargo Box) | 59 | – C/K New Pickup/8.0' Cargo Box Suburban/Yukon XL/Avalanche |
| L | – Mid-Size Van (AWD) Astro/Safari | 08 | – S-10/Sonoma Pickup 47" CA (S/T 7.4' Cargo Box) | 60 | – Chassis Cab 60" CA (C/K New) |
| M | – Mid-Size Van (4 x 2) Astro/Safari | 10 | – Chassis-Cab 60" CA (C/K) Astro/Safari (M/L Van) | 64 | – Chassis Cab 64" CA (C/K New) |
| S | – 4 x 2 (Two-Wheel Drive) S10 Pickup/Sonoma Jimmy/Blazer | 14 | – Chassis Cab 84" CA (C/K) Express/Savana (G Van) | | |
| T | – 4 x 4 (Four-Wheel Drive) S10 Pickup/Sonoma Jimmy/Blazer | 15 | – Cutaway/Savana Special 80" CA Commercial & RV | | |
| | | | | | 03 – Pickup Conventional Cab (S/T, C/K) G-Cutaway Van, Commercial, Savana Special |
| | | | | | 05 – Astro/Safari/Express/Savana Special Cargo Van |
| | | | | | 06 – (4-Door) Suburban/Yukon XL, Yukon/Tahoe, Blazer/Jimmy Astro/Safari/Express/Savana Passenger Van |
| | | | | | 16 – (2-Door) Jimmy/Blazer |
| | | | | | 32 – G-Cutaway Van - RV Savana Camper Special |
| | | | | | 36 – Avalanche (2002 M.Y.) |
| | | | | | 43 – Crew Cab (S/T, C/K Models) |
| | | | | | 53 – Extended Cab (S/T, C/K Models) |