## General Motors Upfitter Integration









# **BODY BUILDER MANUAL ELECTRICAL SECTION**

**FOR THE** 

## 2017 CHEVROLET LOW CAB FORWARD **MEDIUM DUTY** 4500HD 4500XD 5500HD 5500XD

#### Note to User:

As part of our mission to provide an up-to-date website that includes detailed Body Builder Manuals, Technical Bulletins, and Best Practice Manuals, we are now using sectional excerpts directly from the General Motors Service Information publications for our Electrical Body Builder Manuals.

You will note that the section numbers are non-sequential as we have provided only those that are believed to be the most pertinent to the Upfitter community and best suited to their needs.\*

This new usage of the Service Information provides the opportunity for us to remain consistent with the changes that take place throughout the model year and to provide you updated information in a more timely fashion.

\* If you would like to have access to all of the electrical Service Information, please apply for a subscription from ACDelco at <a href="http://acdelcotechconnect.com/html/tss\_tech\_esi.jsp">http://acdelcotechconnect.com/html/tss\_tech\_esi.jsp</a>

## **Cab and Chassis Electrical**

## Cab and Chassis Electrical

### **Specifications**

### **Battery Specifications**

Application	Specification
Туре	Delkor 31–750
Cold Crank Capacity	750 amp
Reserve Capacity (25 Amperes)	160 Minutes

MARK	CONSTRUCTION	CHECKING THERE SHOULD BE CONTINUITY IN EITHER A OR B WHEN A CIRCUIT TESTER IS CONNECTED WITH DIODE TERMINAL.									
	2	TERMINAL NO.			-	2	1				
		21	CONNECTION PATTERN		A B		$\oplus$	<ul><li>⊖</li><li>⊕</li></ul>			
	3		TERMINAL NO.				<u> </u>				
₽						_	3	2	1		
	2	2	001115071011		Α			Θ	⊕ ⊕	Θ	
	1		CONNECTION PATTERN					<b>⊕</b>	$\Theta$		
					В				$\Theta$	<b>⊕</b>	
									~	1	
	4 3 2 2 0 1	TERMINAL I		NO.		7	_ ^ ^	<u>子</u>			
l lo P						4	3	2	1		
			CONNECTION PATTERN		А			<b>⊕</b>	Θ		
						$\Theta$	Θ	<del>(1)</del>			
				'  -	В			Ϊ́Θ	<b>(+)</b>	1	
							<b>+</b>	$\Theta$		1	
						•		$\Theta$		1	
							-		-	•	

LNW780LF000601


#### Maximum Rating (Temp. = 25°C {77°F})


Items	Rating	Remarks
Peak Reverse Voltage	400V	_
Transient Peak Reverse Voltage	500V	_
Average Output Current	1.5A	Temp. = 40°C (104°F)
Working Ambient Temperature	-30°C – 80°C (-22°F – 176°F)	_
Storage Temperature	-40°C – 100°C (-40°F – 212°F)	_


#### Reference Table of Fuse


Fuse No.	Capacity	Indication on Label	Main Parts(Load)	
F-1	25A	RR P/WINDOW	Rear Power Window Switch RH, Rear Power Window Switch LH	
F-2	_	_	_	
F-3	10A	ROOM LAMP,AUDIO	Audio, Data Link Connector, Dome Light, Rear Dome Light	
F-4	15A	DOOR LOCK	Door Lock Relay	
F-5	15A	TRAILER BRAKE	Trailer Stop Relay	
F-6	25A	P/WINDOW	Front Power Window RH Switch, Front Power Window LH Switch	
F-7	10A	ABS	Electronic Hydraulic Control Unit (EHCU)	
F-8	25A	WIPER	Wiper Main Relay, Wiper High Low Relay, Front Wiper Motor Front Washer Motor	
F-9	10A	H/LAMP LO (LH)	Headlight LH, DRL Control Unit	
F-10	10A	LMAPS (BATT)	DRL Relay, Headlight High Relay, Headlight Low Relay, Tail Relay	
F-11	10A	H/LAMP LO (RH)	Headlight RH, DRL Control Unit	
F-12	10A	BRAKE LAMPS	Stoplight Relay	
F-13	10A	STARTER	P/N Start Relay	
F-14	10A	H/LAMP HI (LH)	IP Cluster, Headlight LH, Headlight High Relay	
F-15	10A	H/LAMP HI (RH)	Headlight RH, Headlight High Relay	
F-16	15A	MIRROR HEATER	Blower Relay, Power Window Relay, Mirror Heater Switch	
F-17	10A	IGNITION2	Rear Window Lock Switch	
F-18	10A	IGNITION1	PTO Enable Relay, Intermittent Relay, Vacuum Pump Relay, Inhibitor Switch Keyless Entry Control Unit	
F-19	_	_	_	
F-20	10A	ECM	Engine Control Module (ECM), Cruise Main Switch, Combination Switch Stoplight Switch	
F-21	10A	METER	IP Cluster, Key On Relay, P/N Start Relay, TCM Relay Vacuum Pump Relay, Vehicle Speed Sensor, Flasher Unit Electronic Hydraulic Control Unit (EHCU), Cornering Light Relay PTO Switch	
F-22	10A	ECU (BATT)	IP Cluster, Check Miles and Check Oil Level Switch, TCM Relay Transmission Control Module (TCM), Engine Control Module (ECM)	
F-23	10A	MIRROR	Rear Body Switch, Rear Body Connector	
F-24	15A	AUDIO, ACC	Audio, Cigarette Lighter Relay, Power ACC Relay	
F-25	15A	HORN	Horn Relay	
	- 10 Data	4/00/0047		


F-26	15A	TURN, HAZARD	Flasher Unit	
F-27	10A	TAIL LAMPS	ID 1, ID 2, ID 3, Marker 1, Marker 2, Marker Light Relay Side Marker RH, Side Marker LH,	
F-28	10A	ILLUMINATIONS	Check Miles and Check Oil Level Switch, Door Lock Switch, Audio Cigarette Illumination, Cruise Main Switch, Rear Dome Light Switch1 DPF Regeneration Switch, PTO Engine Speed Control Switch Mirror Heater Switch, Illumination Control Switch, Overdrive Off Switch IP Cluster, Hazard Switch, PTO Switch 2	
F-29	10A	CORNERING LAMPS	Cornering Light Relay	
F-30	10A	AIR CONDITIONER	Blower Relay, Blower Motor, Magnetic Clutch Relay  Defroster Switch, A/C Switch	
F-31	20A	MARKER LAMP	Marker Light Relay	
F-32	20A	TAIL MAIN	Tail Relay	
F-33	10A	ECM MAIN	ECM Main Relay, Engine Control Module, Exhaust Brake Cut Relay MAF and IAT 1 Sensor, VNT Control Module	
F-33	_	_	_	
F-34	20A	SCR	Diesel Exhaust Fluid (DEF) Control Module, Heater Valve Relay, Diesel Exhaust Fluid (DEF) Sensor Relay	
F-35	15A	PM SENSOR	PM Sensor	
F-36	15A	RR DOME LIGHT	Rear Dome Light Relay, Front Manufacture Connector Rear Manufacture Connector	
F-37	20A	CONDENSER FAN	Condenser Fan Relay	
F-38	10A	AIR CONDITIONER	Magnetic Clutch Relay	
F-39 (D-1)	20A	CIGAR	Rear Heater, Cigarette Lighter	
F-40 (D-2)	15A	ACCESSORIES SOCKET	ACC Socket	
F-41 (D-3)	20A	POWER SOURCE	Power Source	

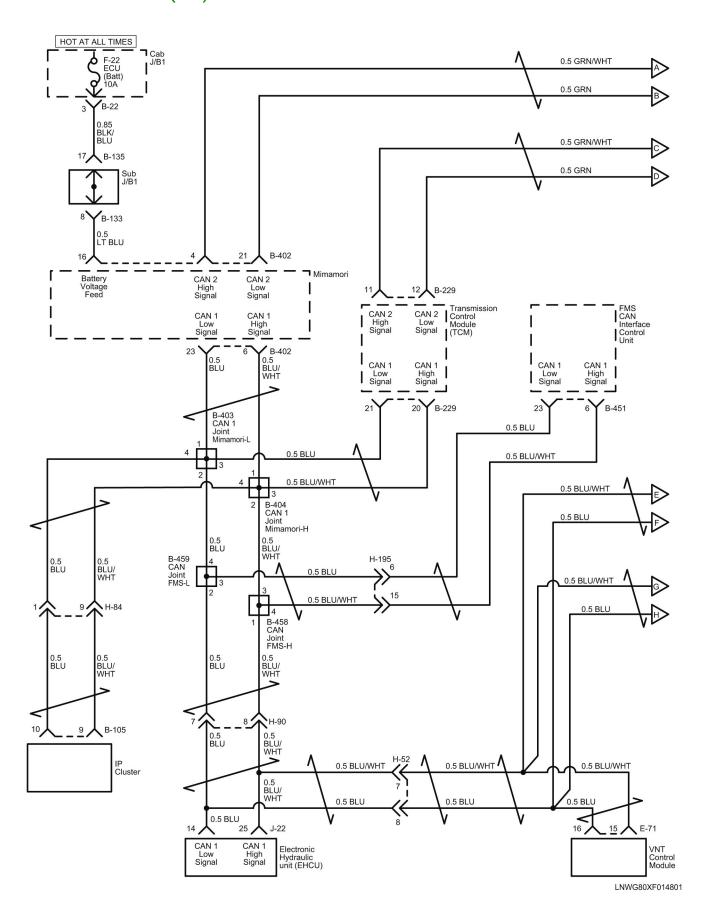


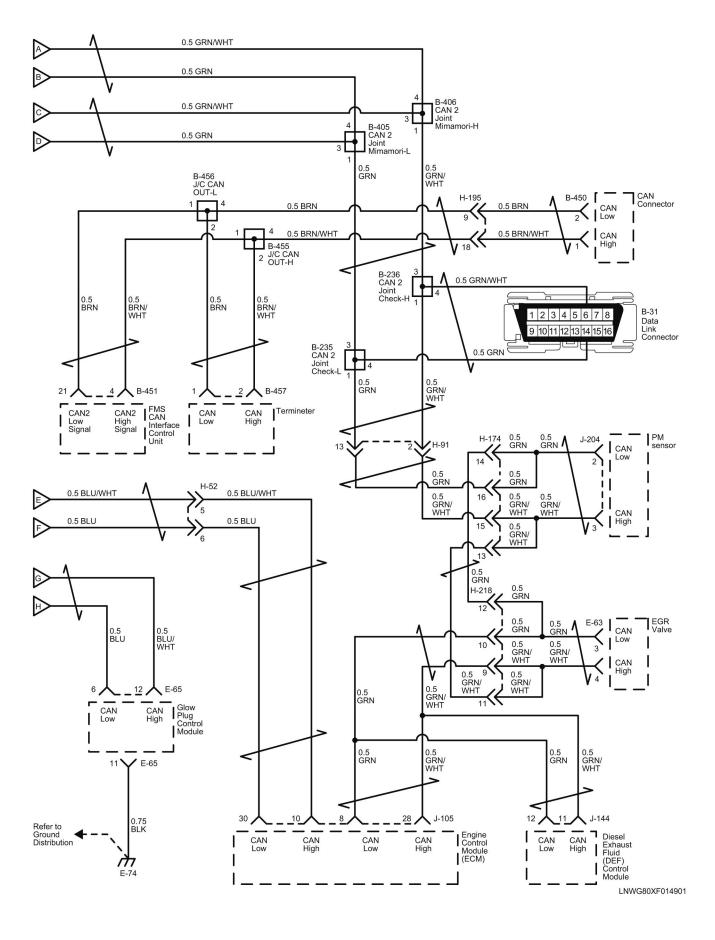


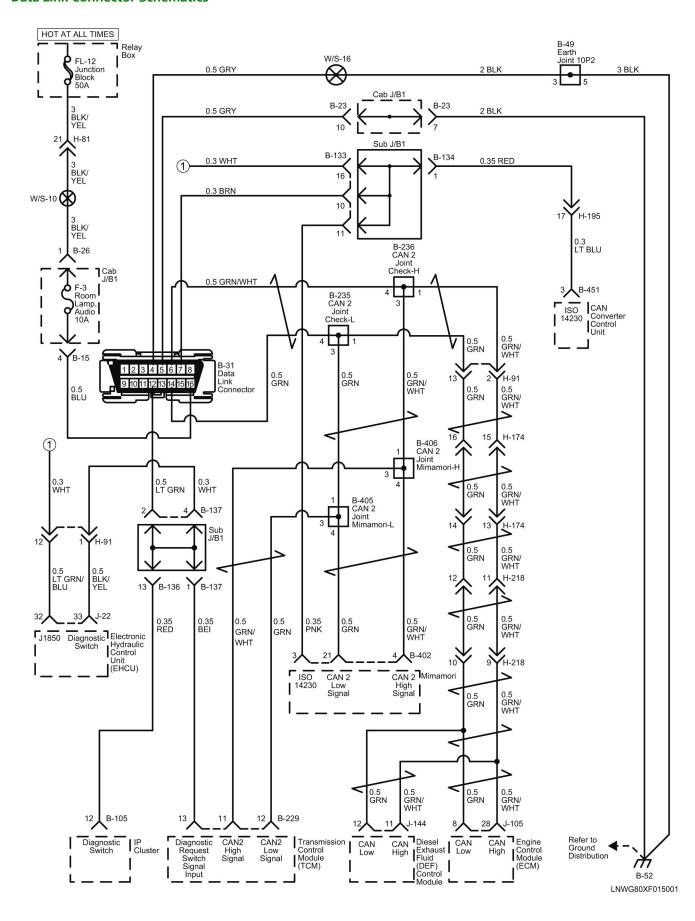


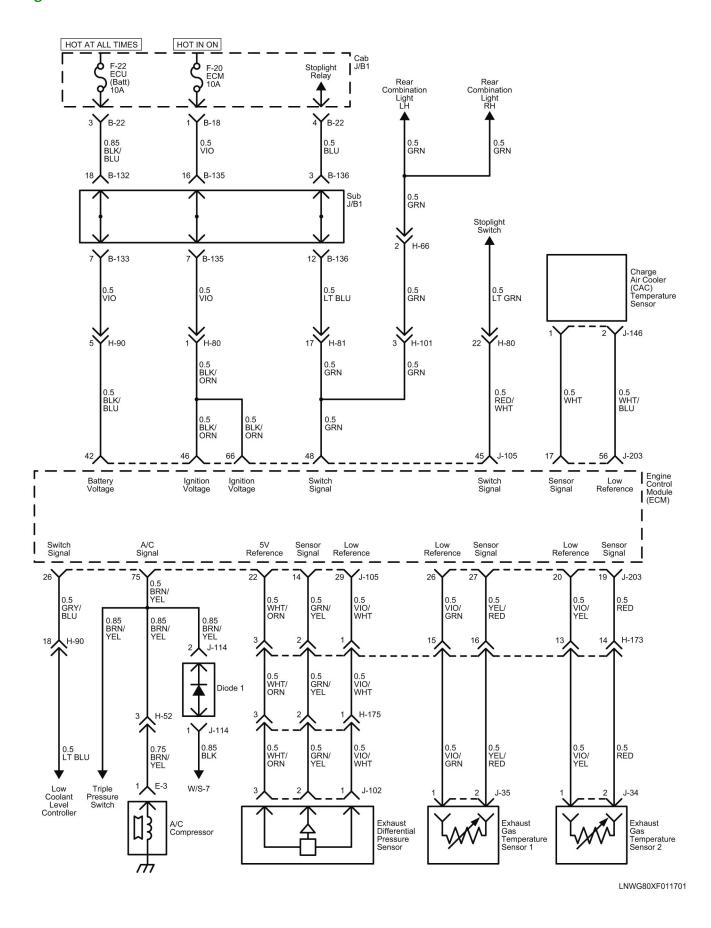


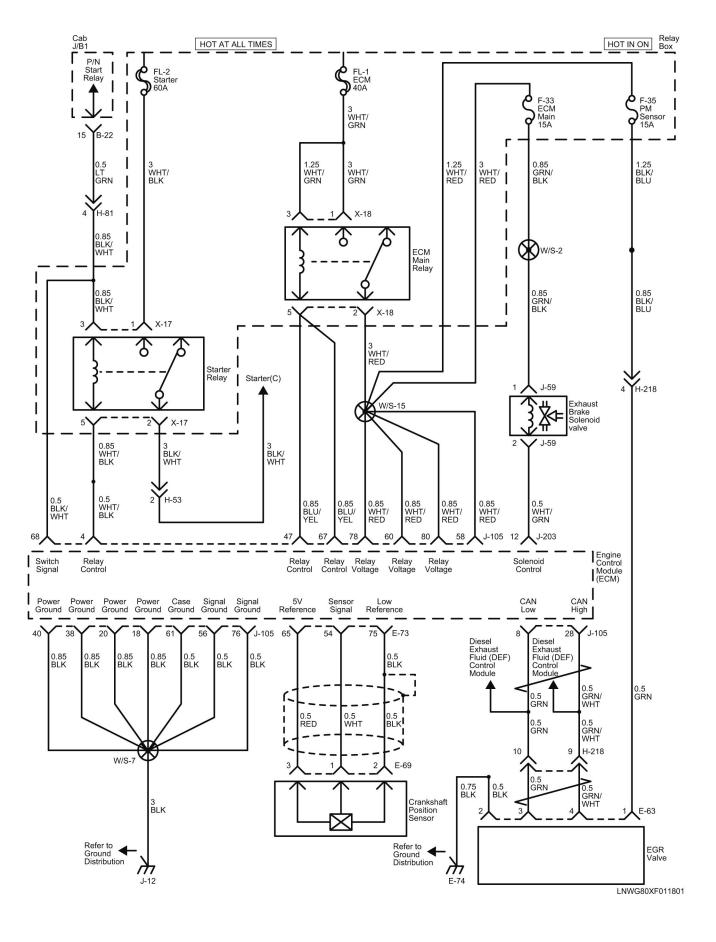


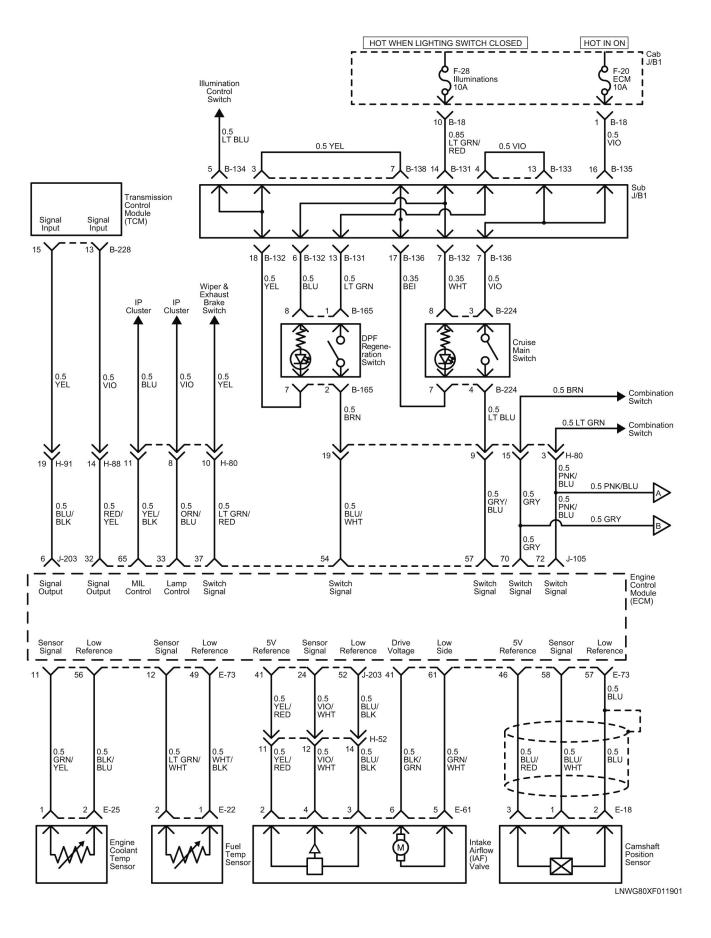

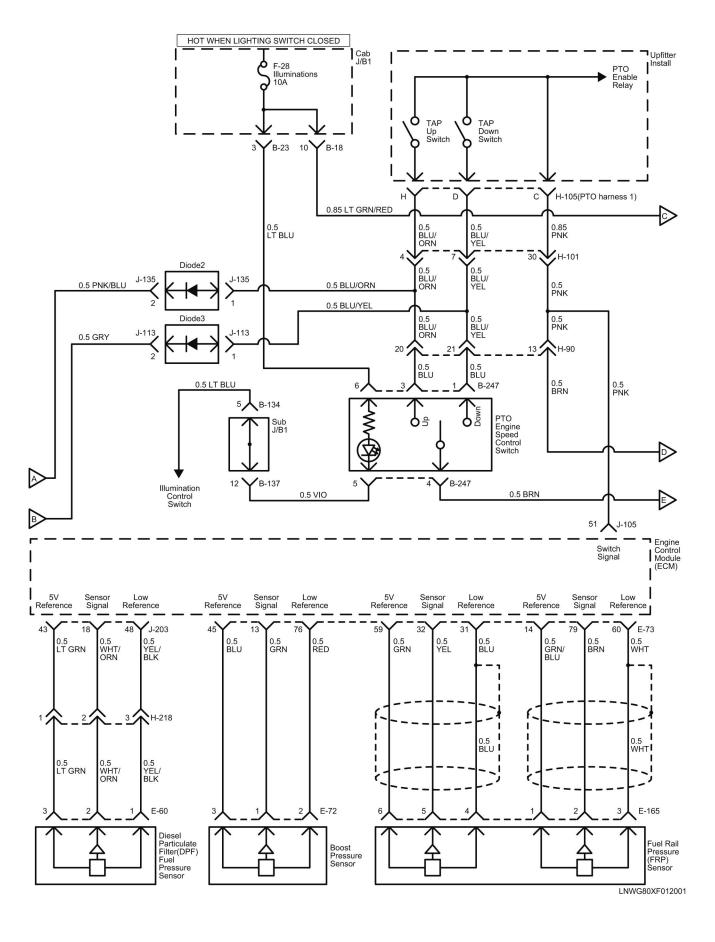


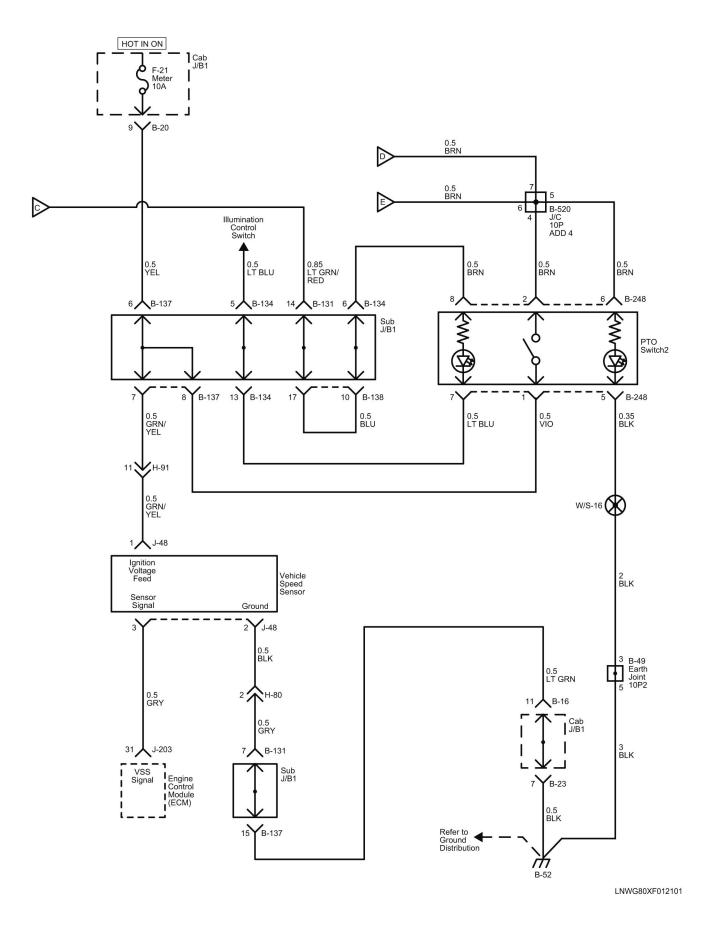


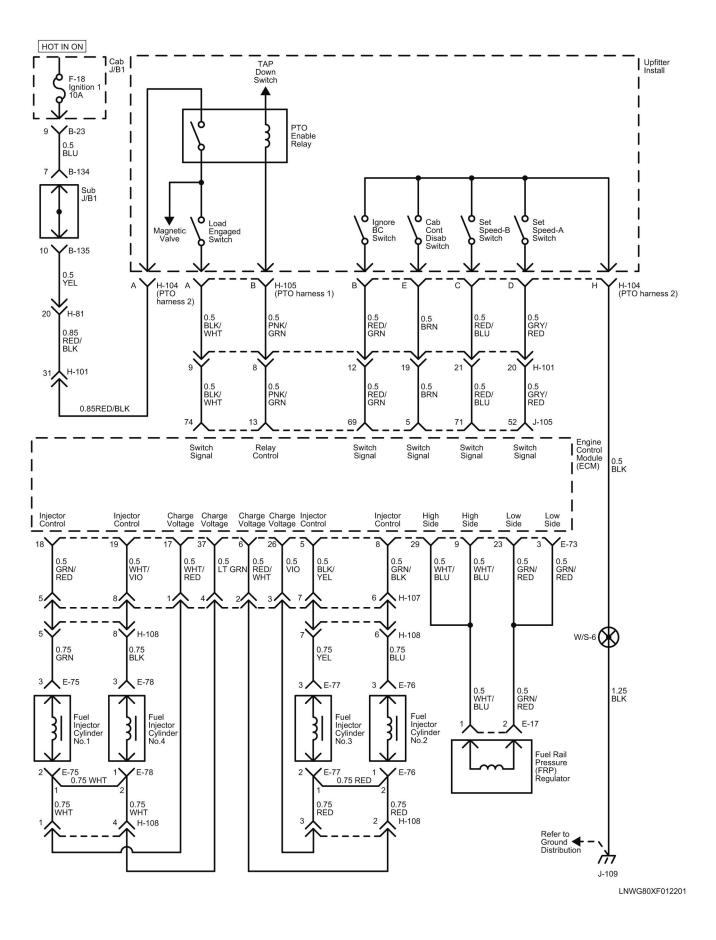


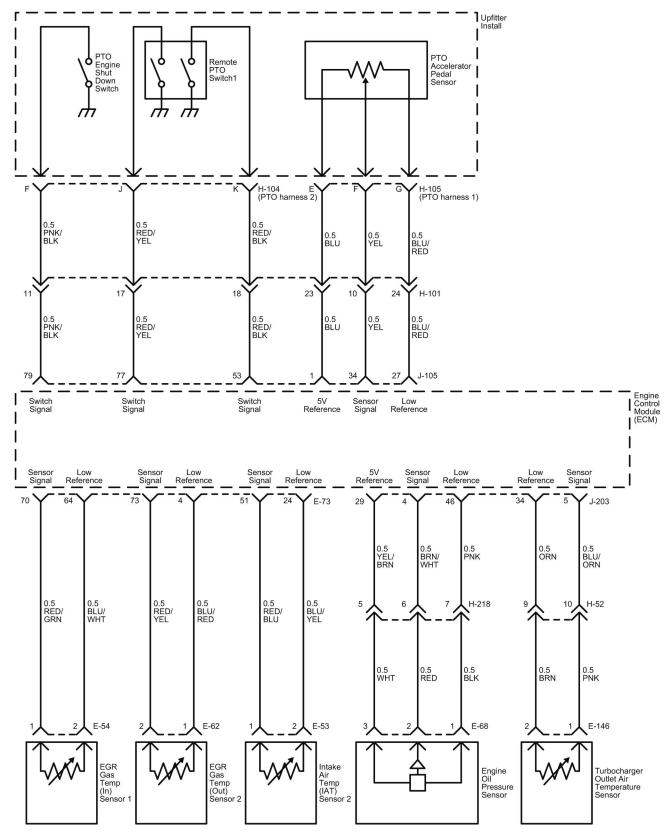



LNWF80XF036601

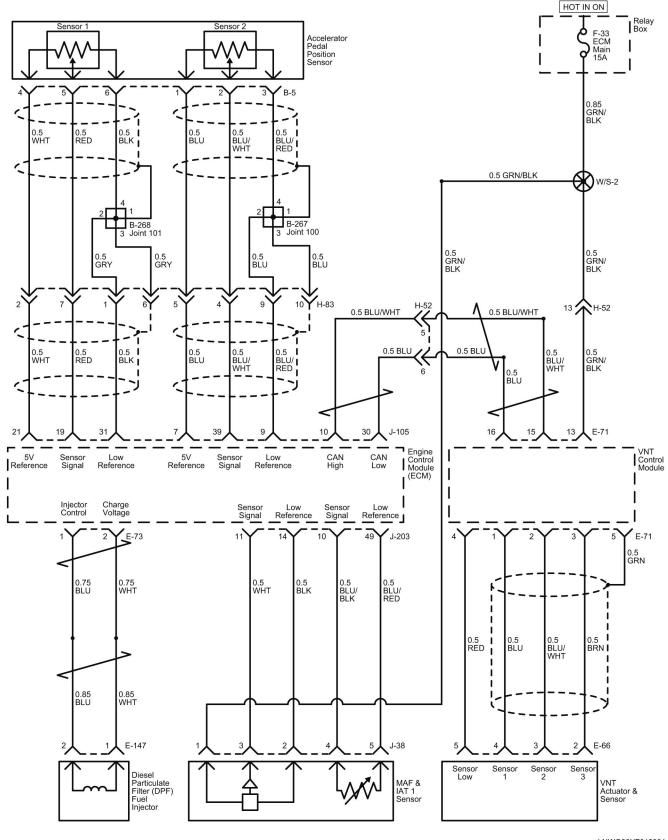


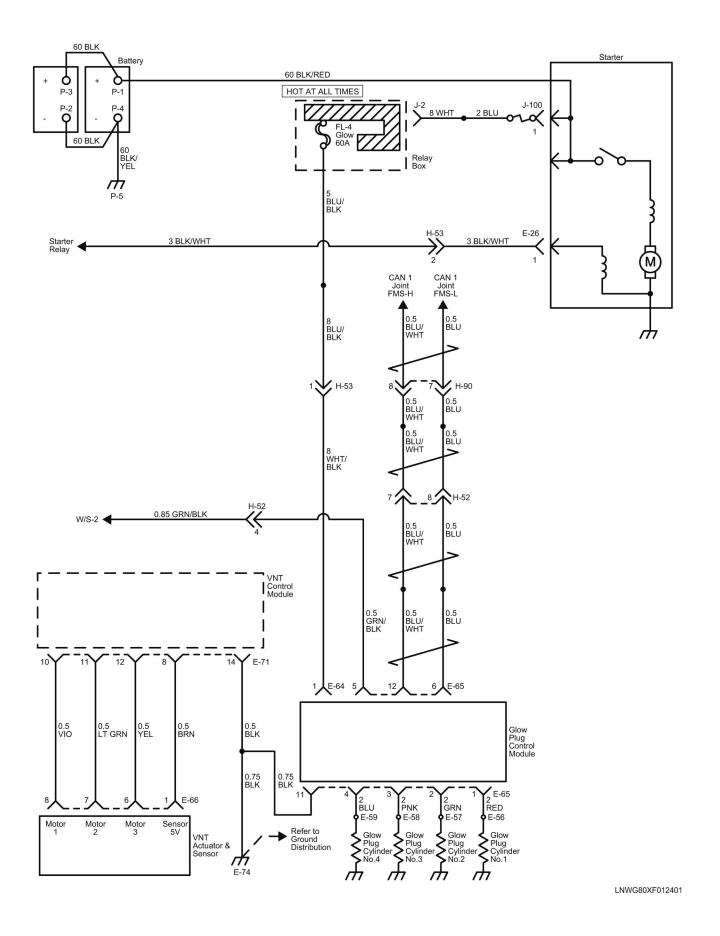


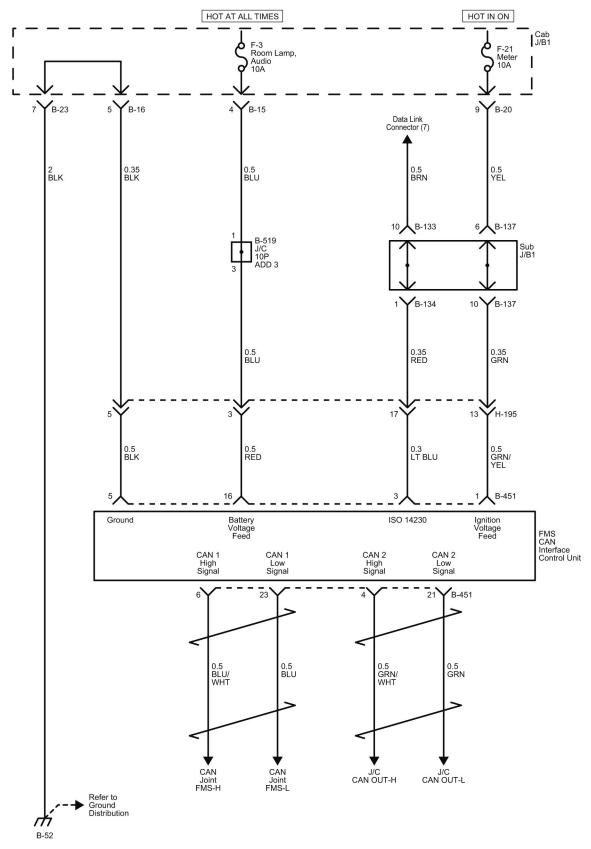


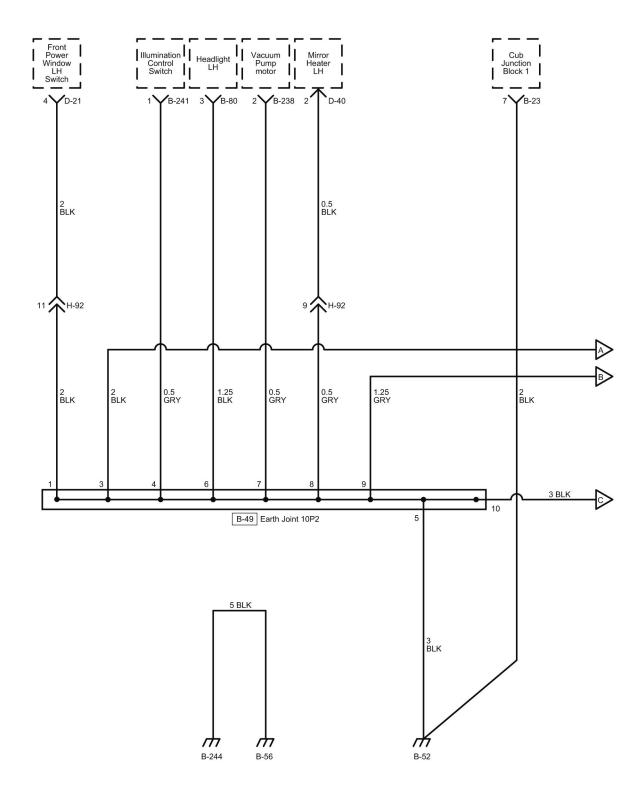


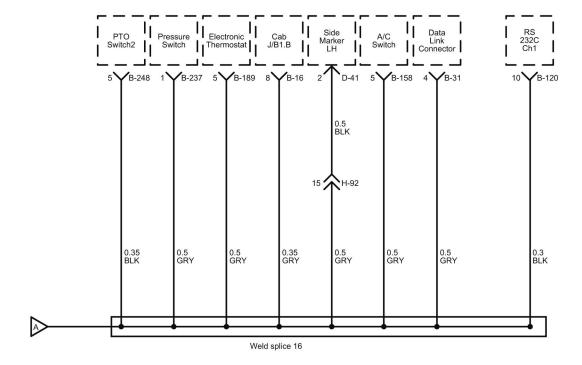


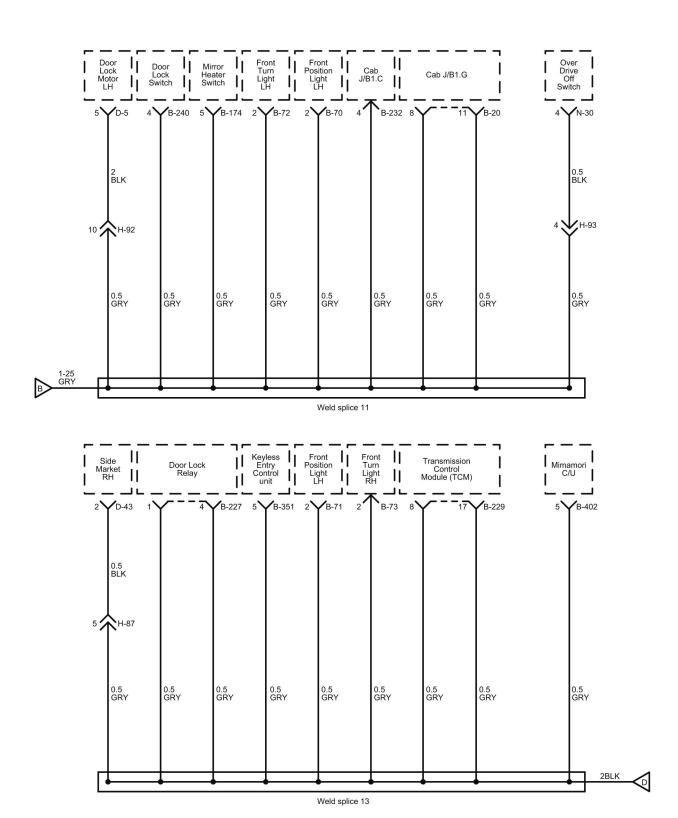

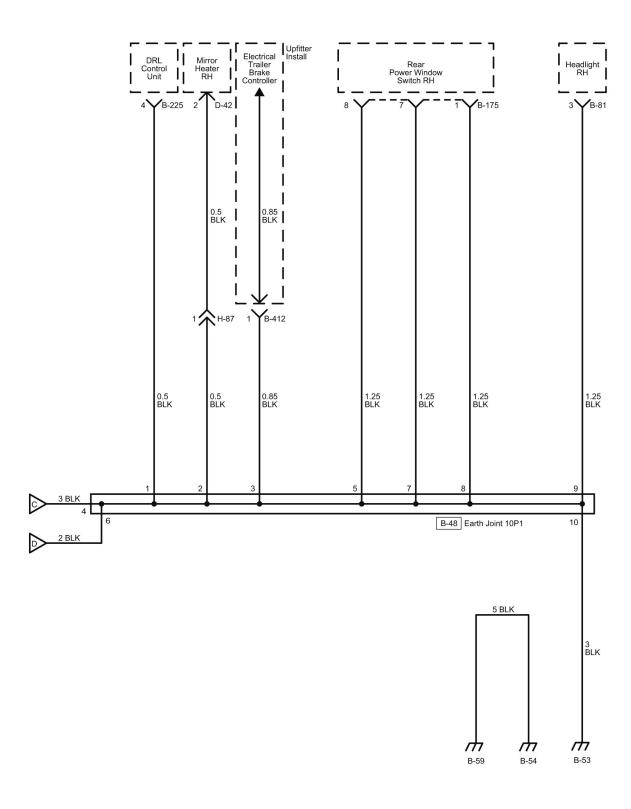


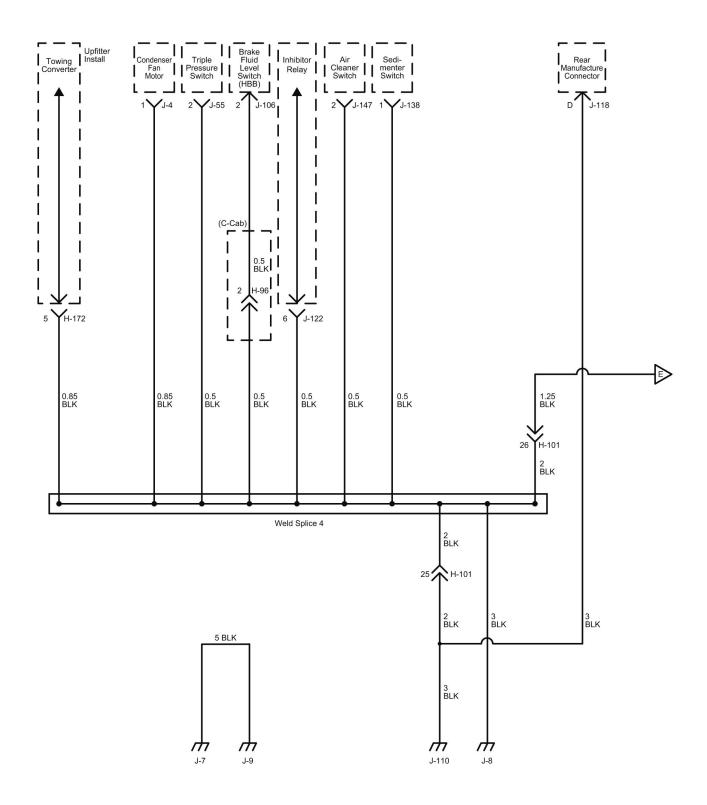





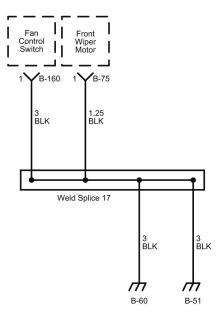





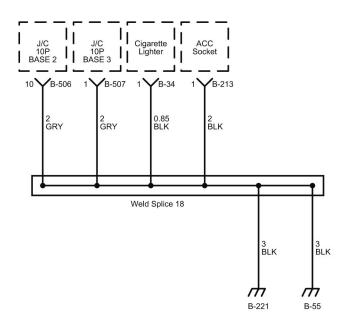


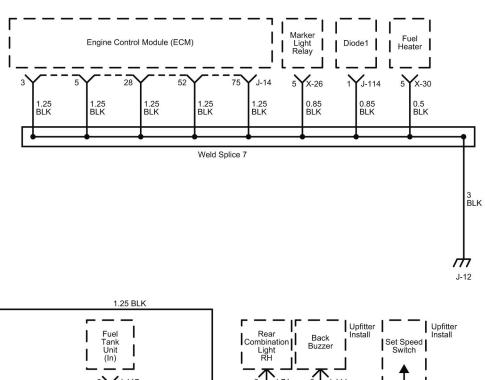


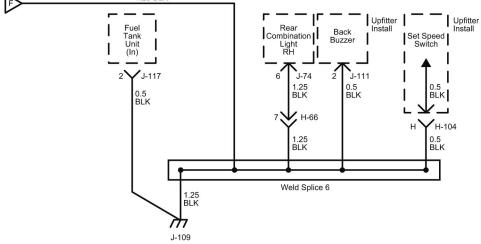


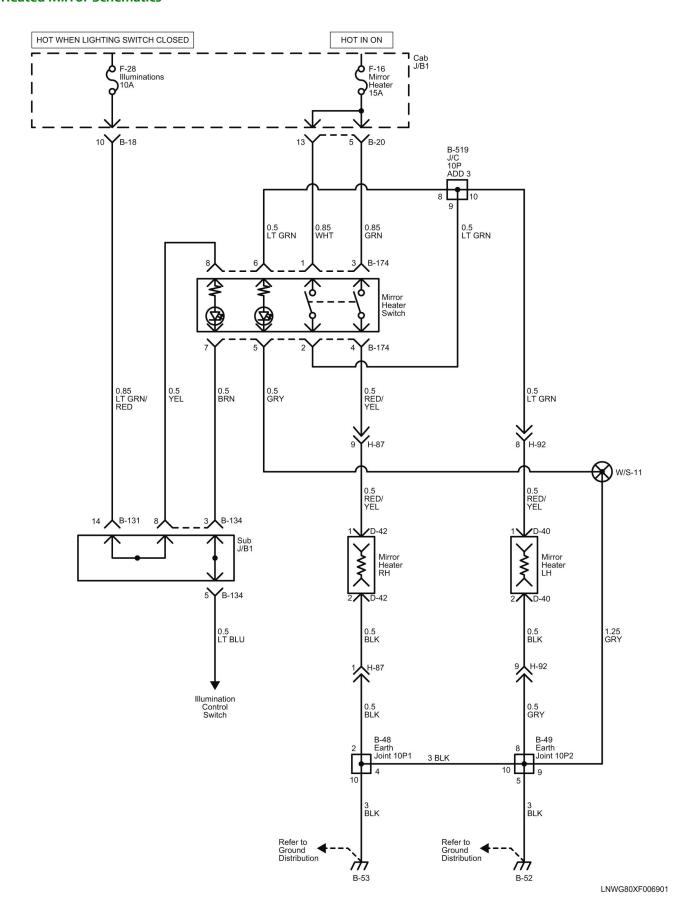


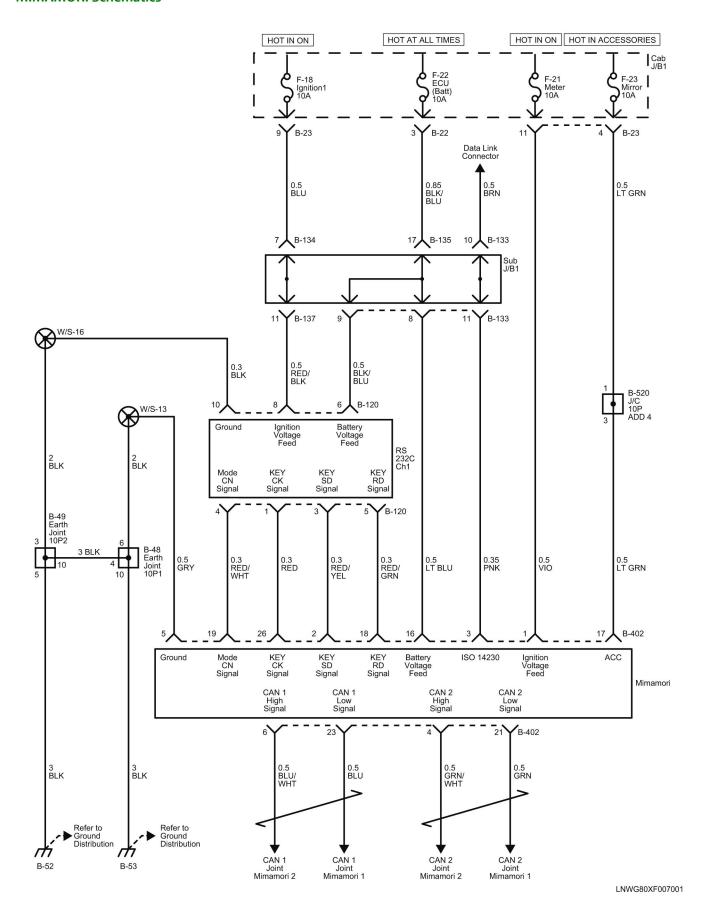


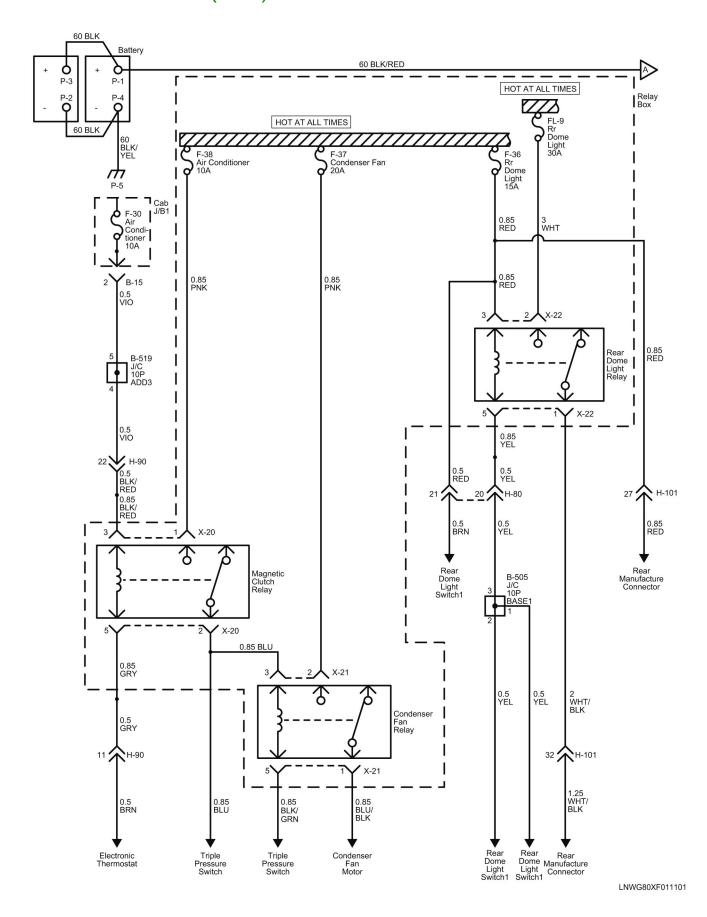


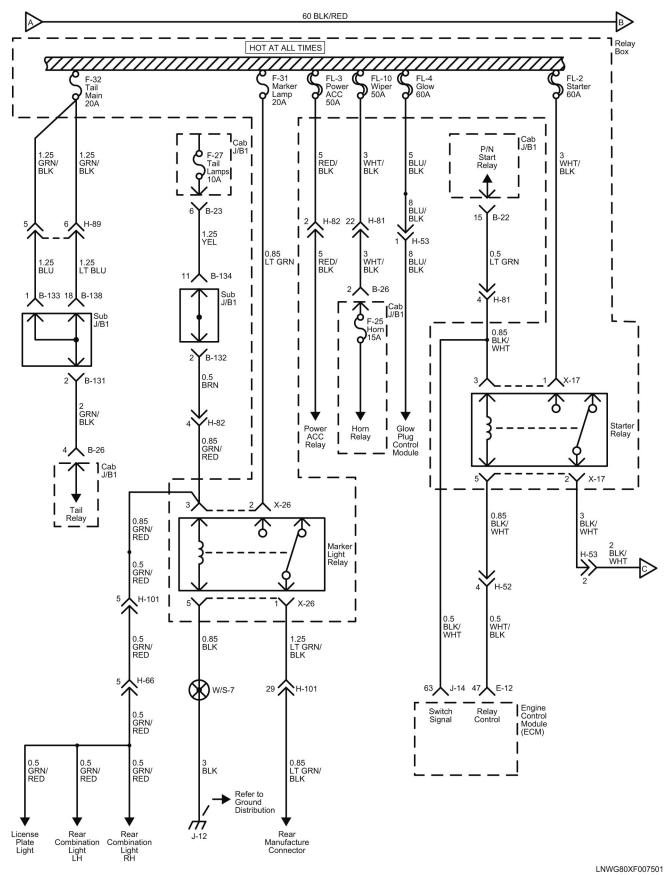


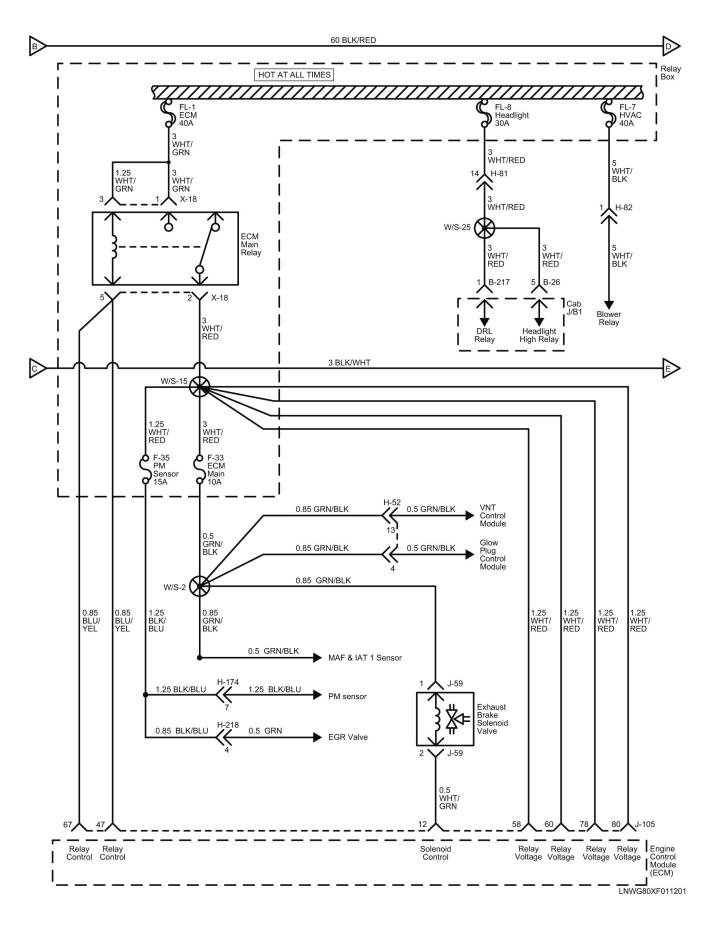


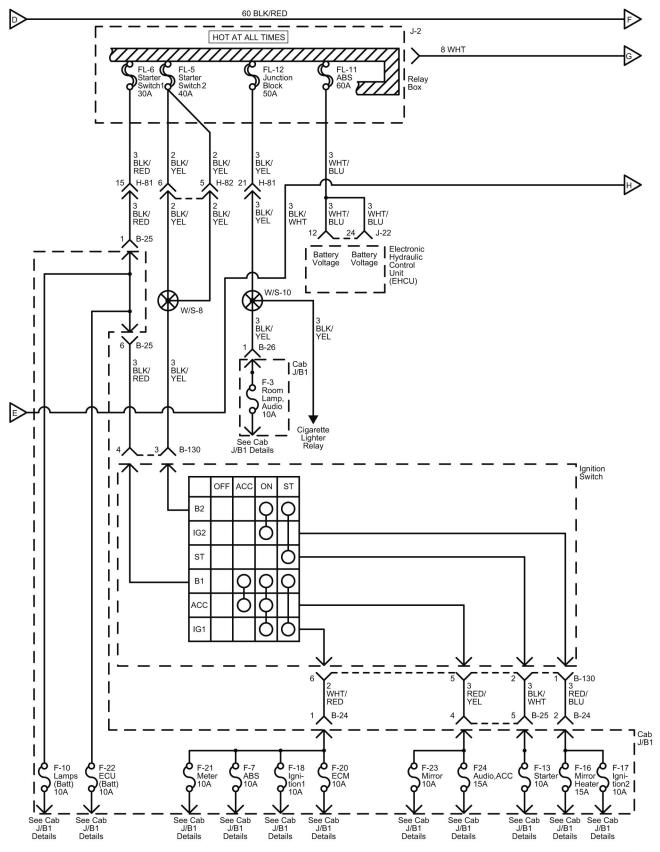


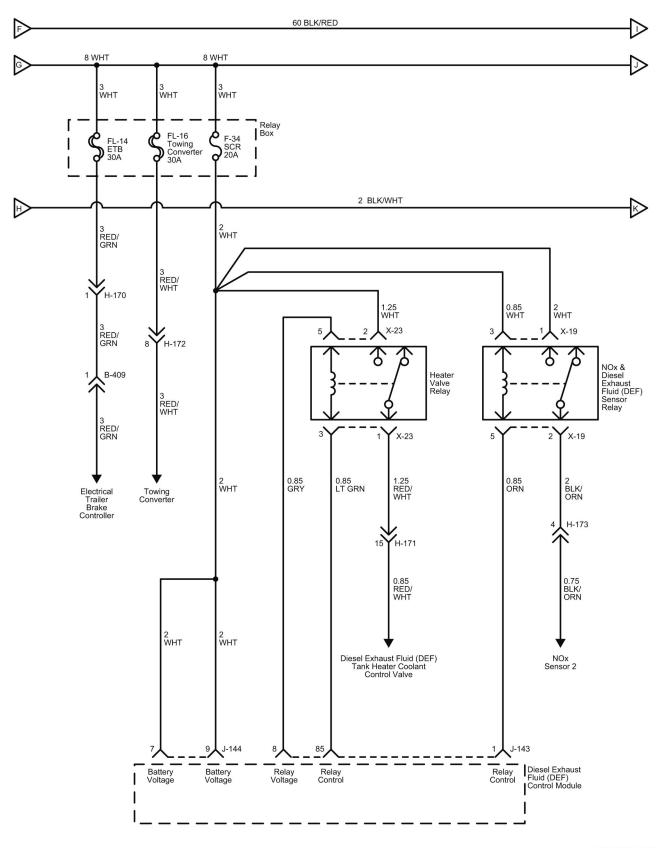


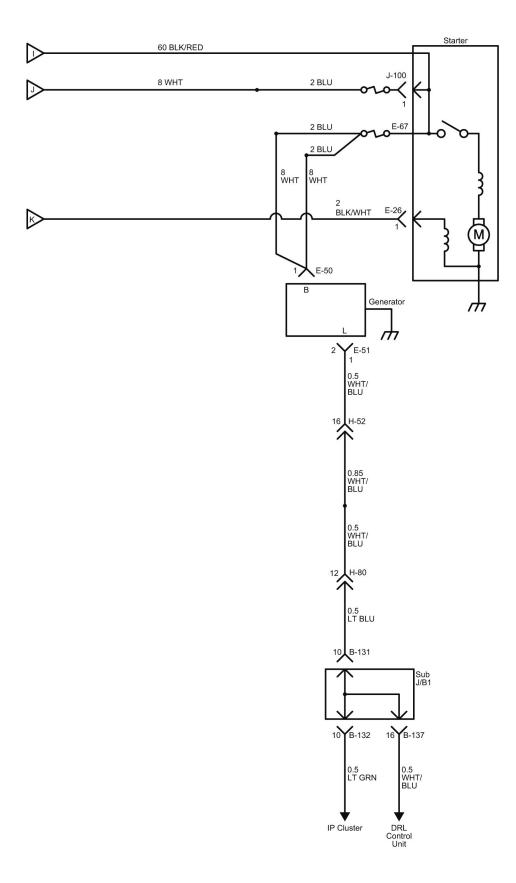


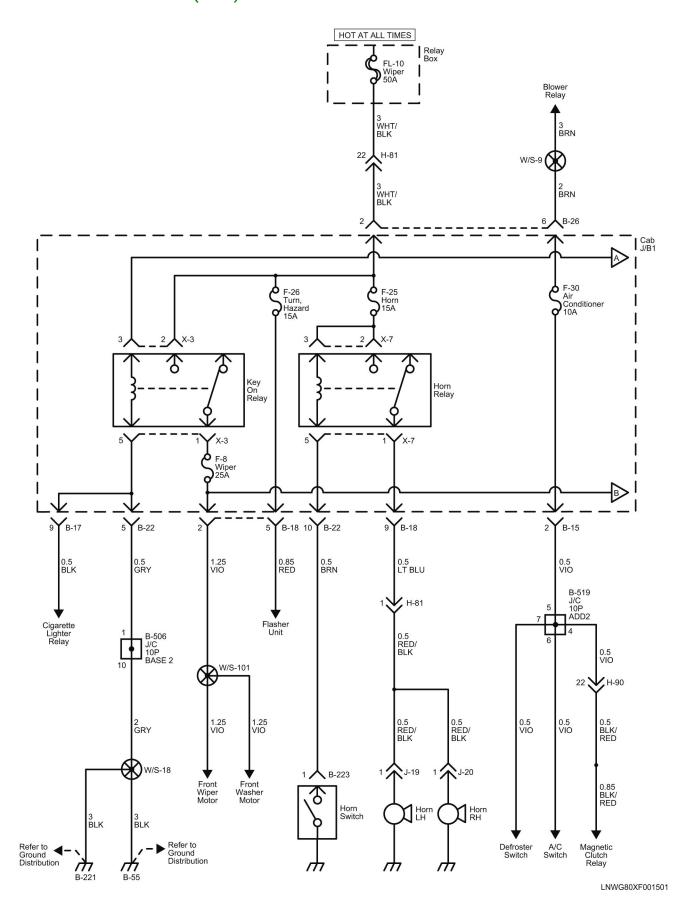


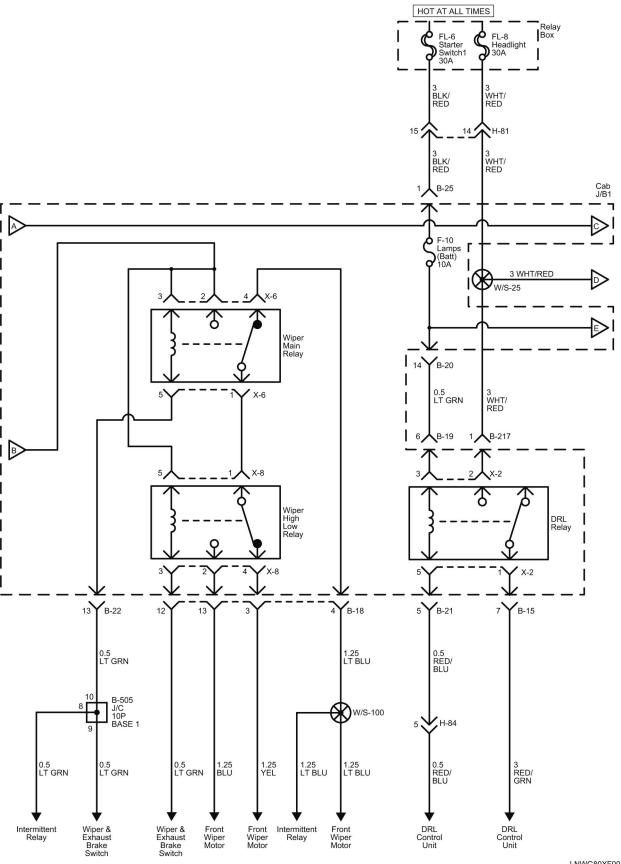


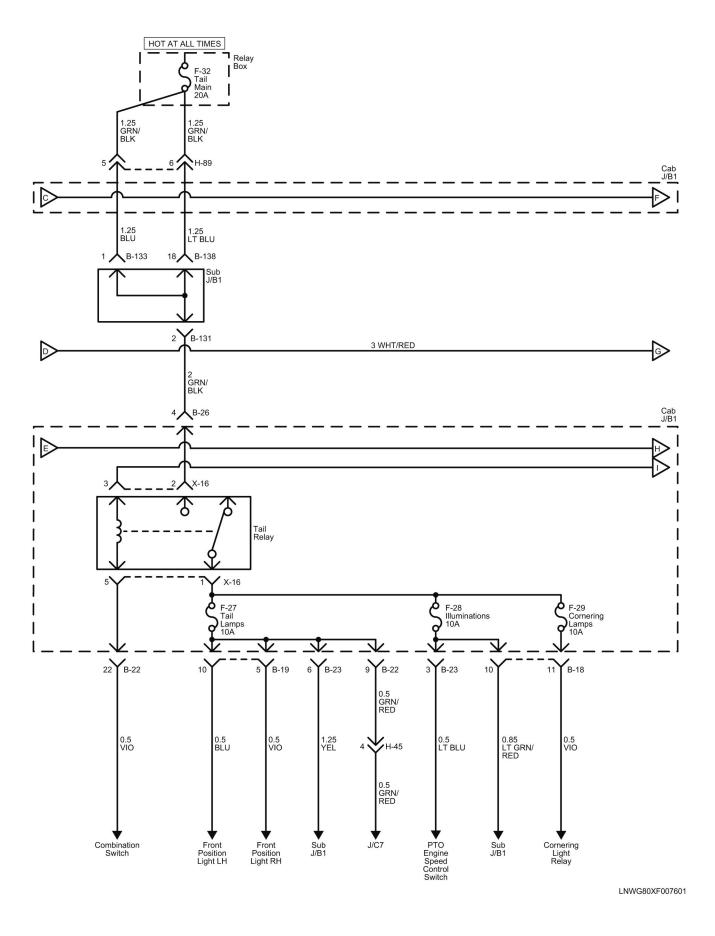


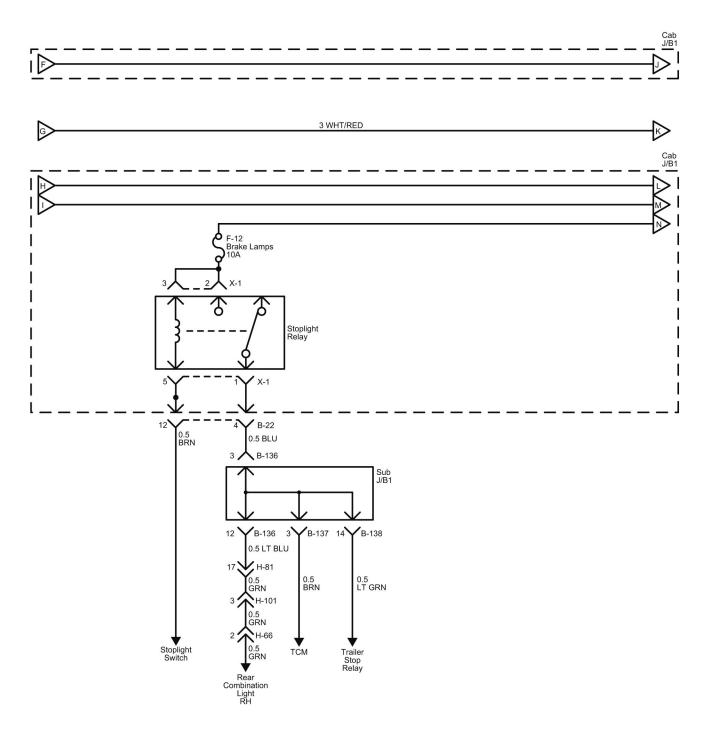





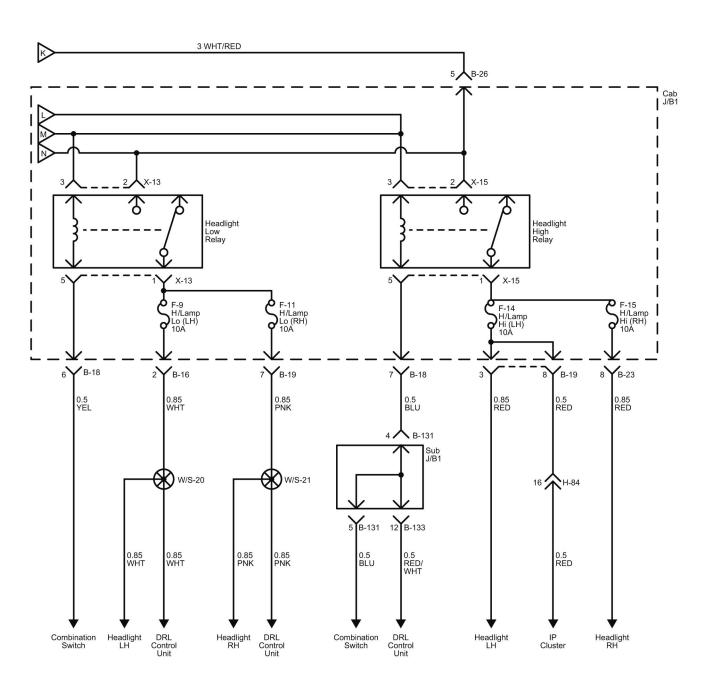


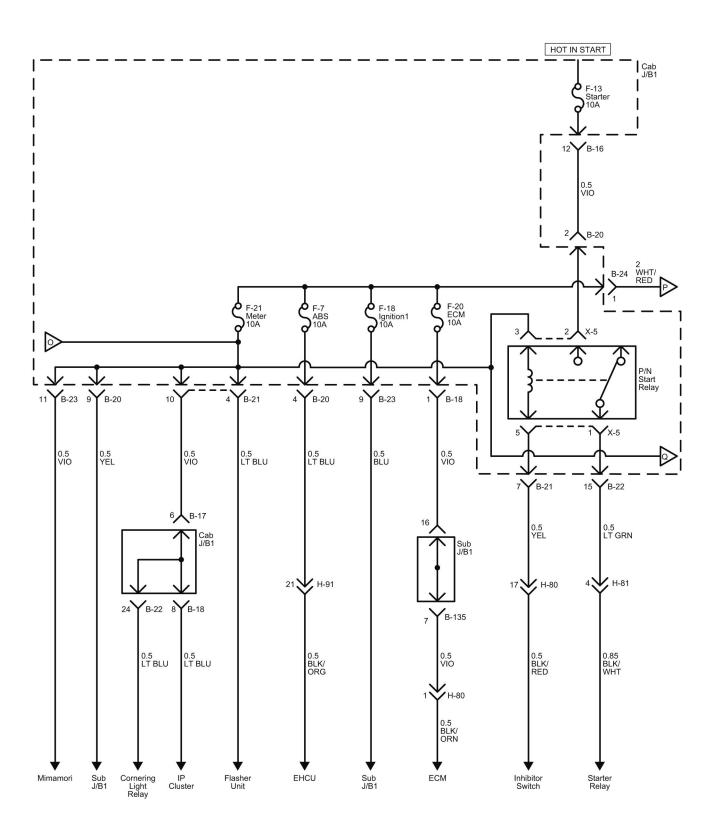


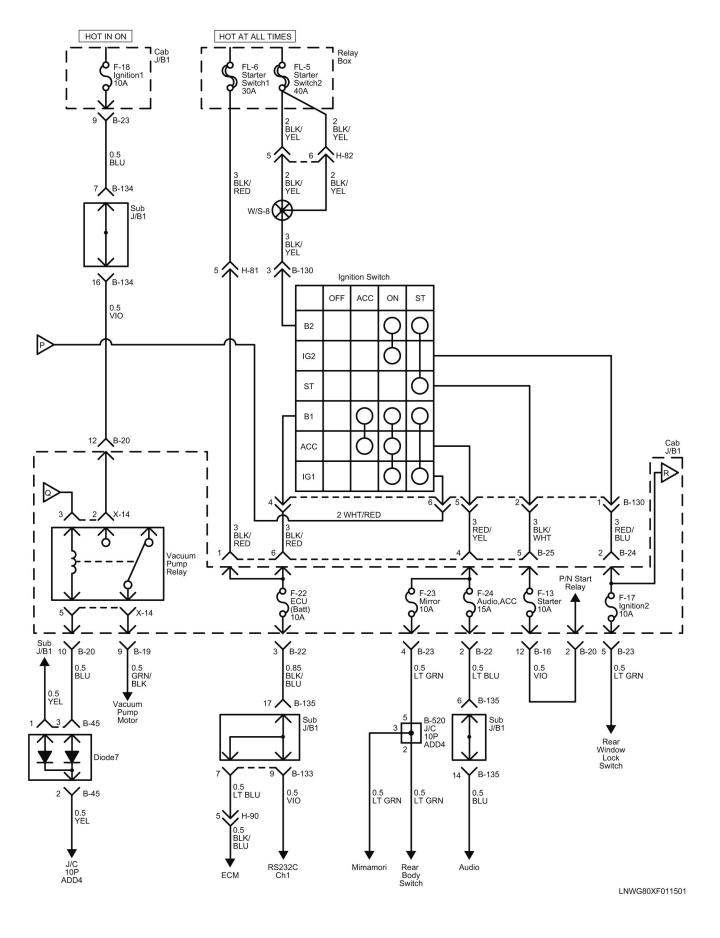


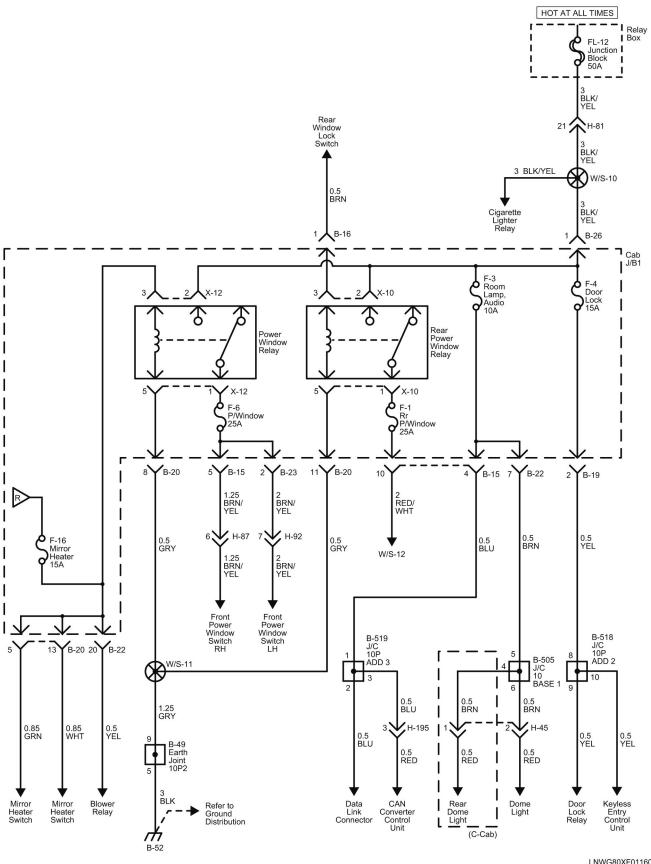


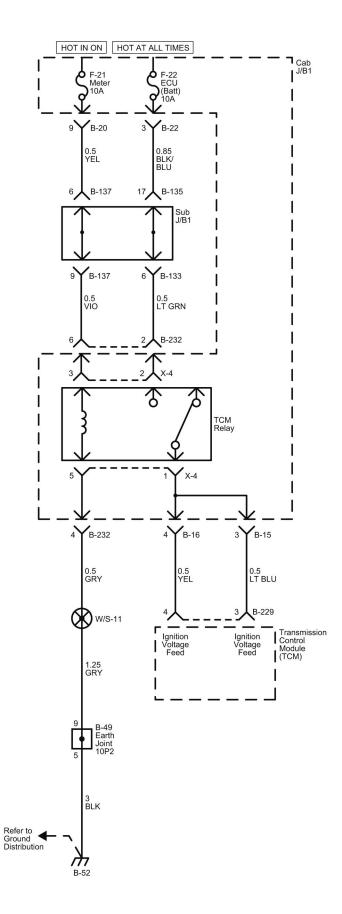


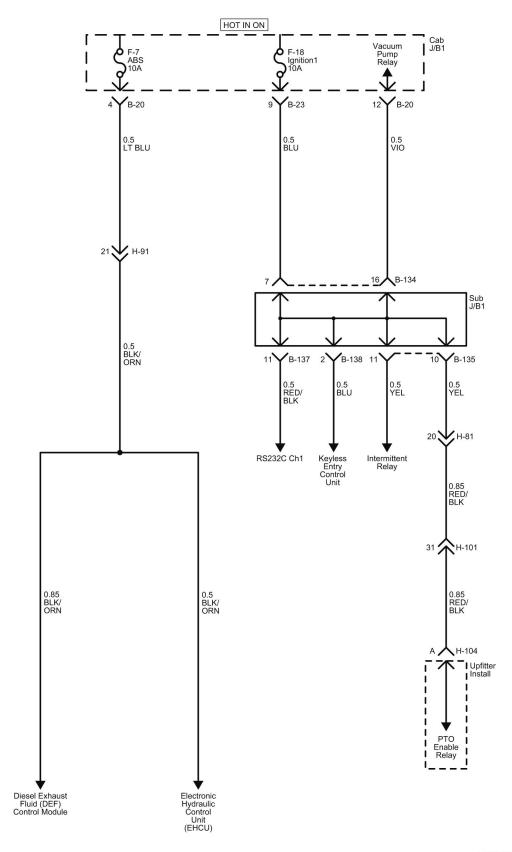


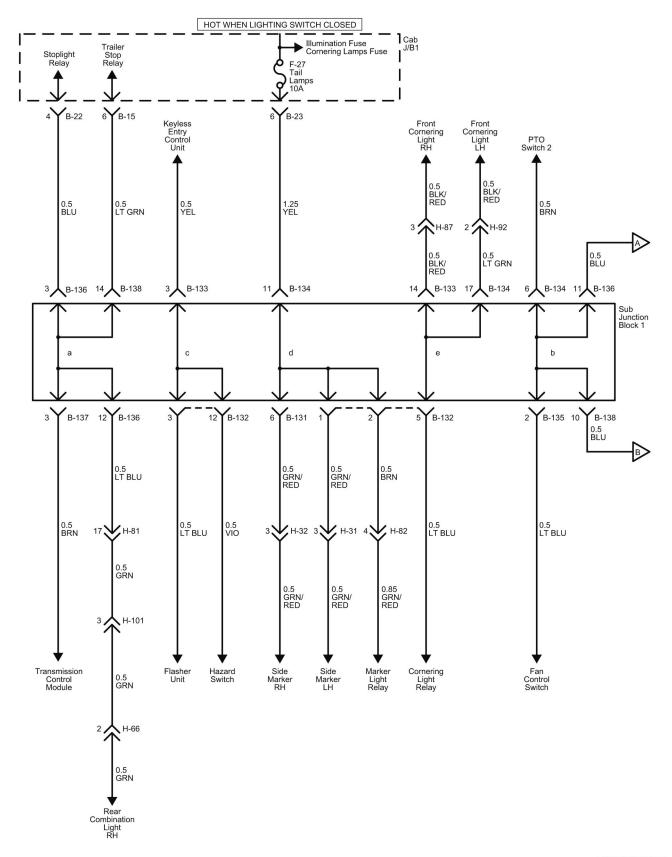


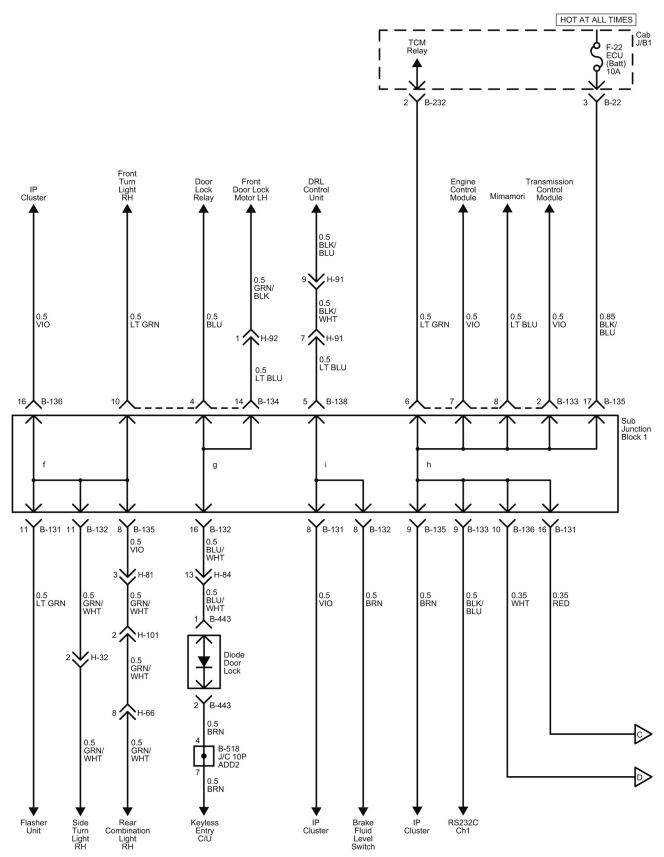


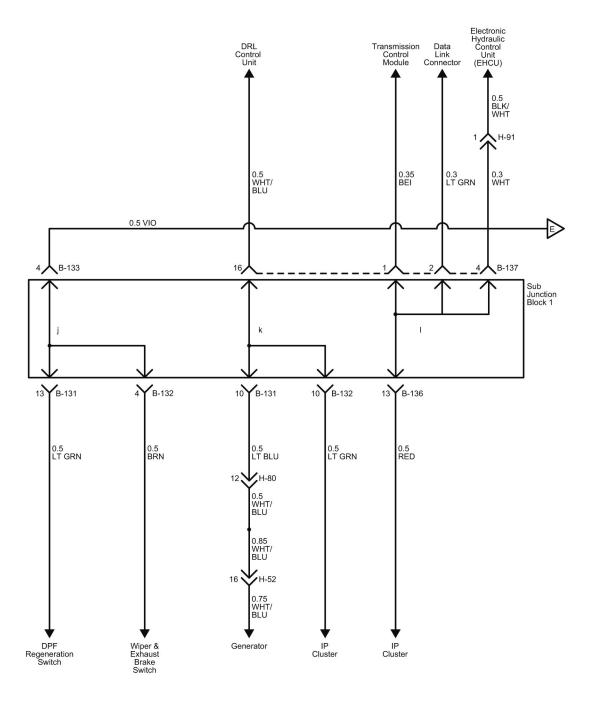

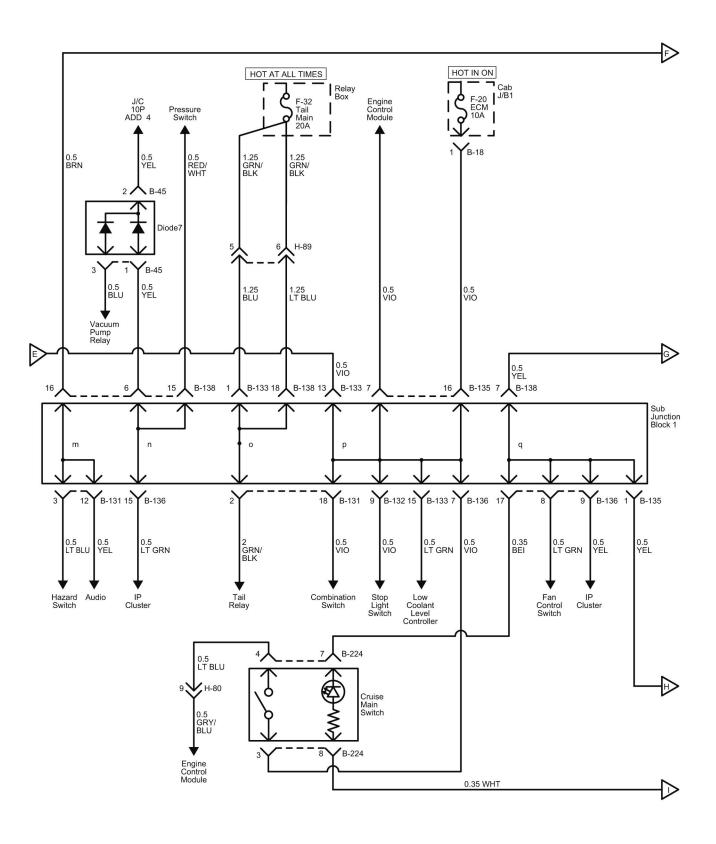


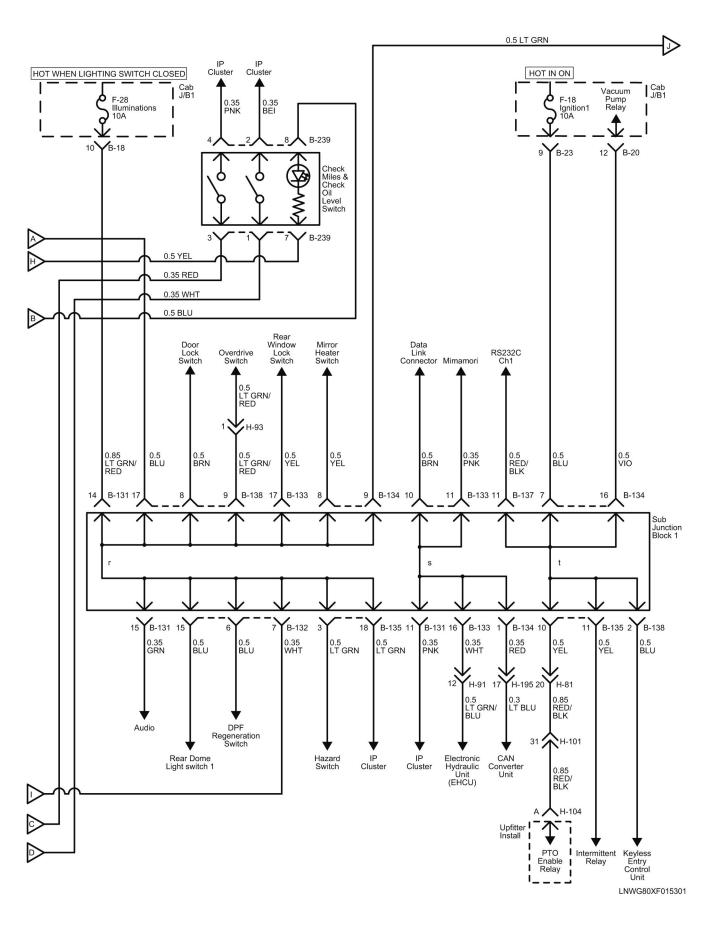


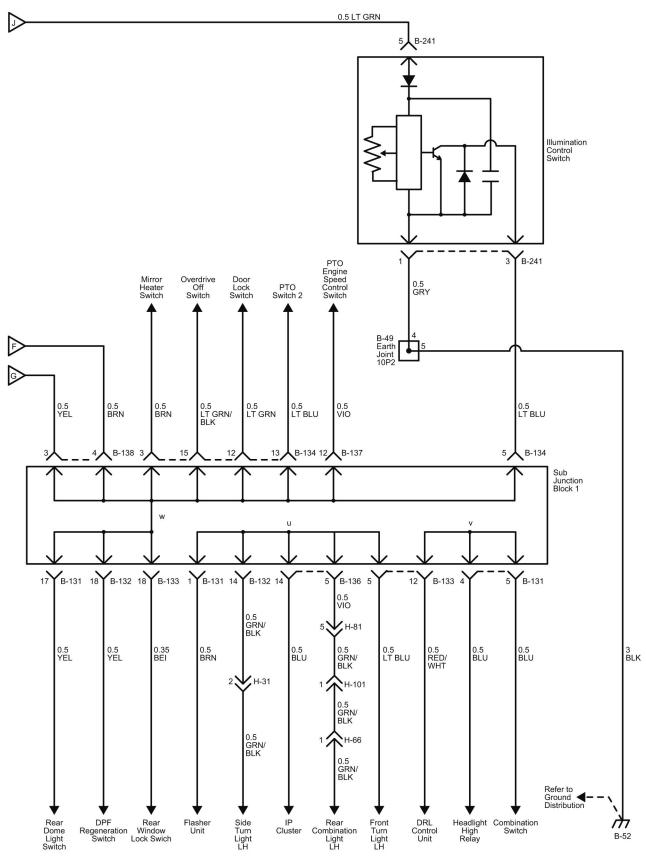


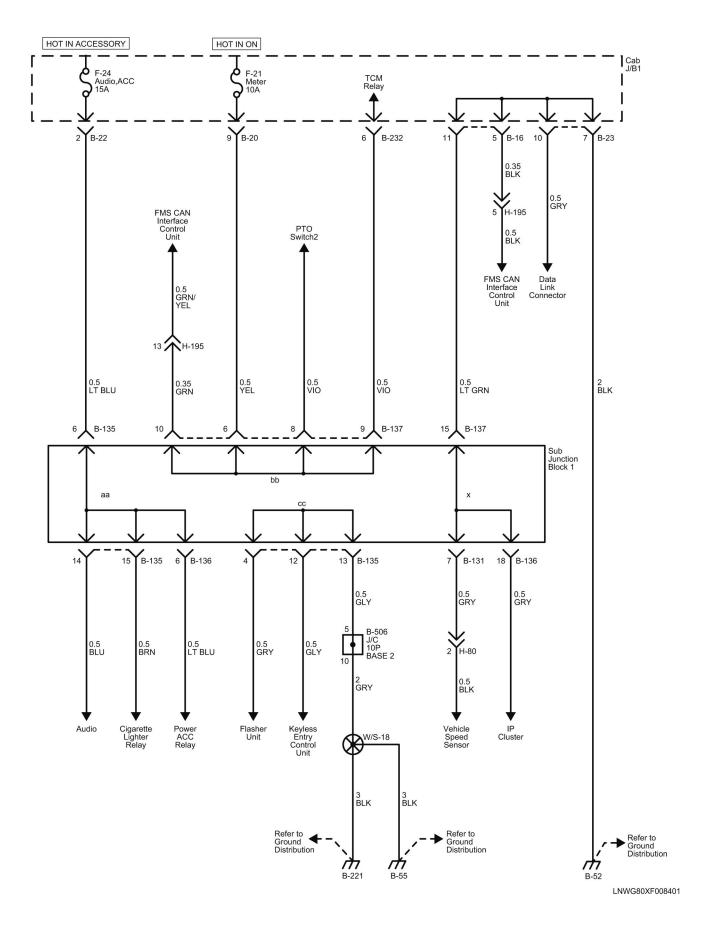


## Cab Harness (S-CAB) Routing

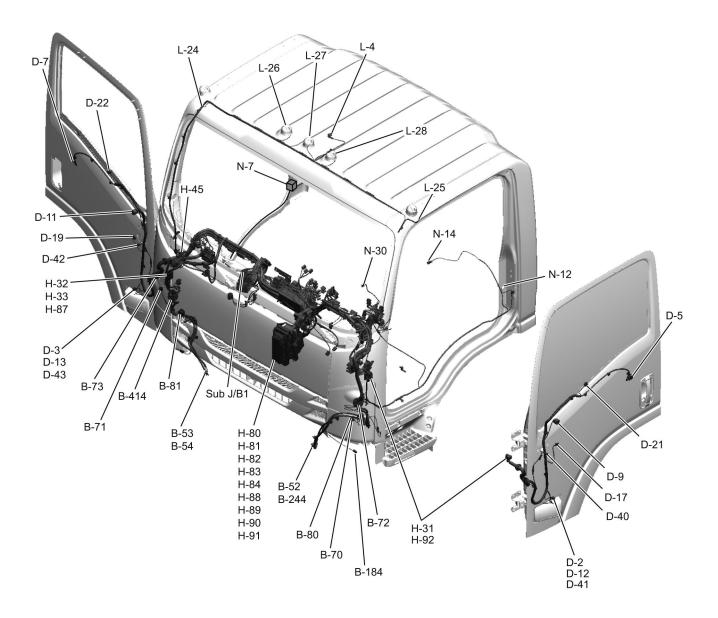


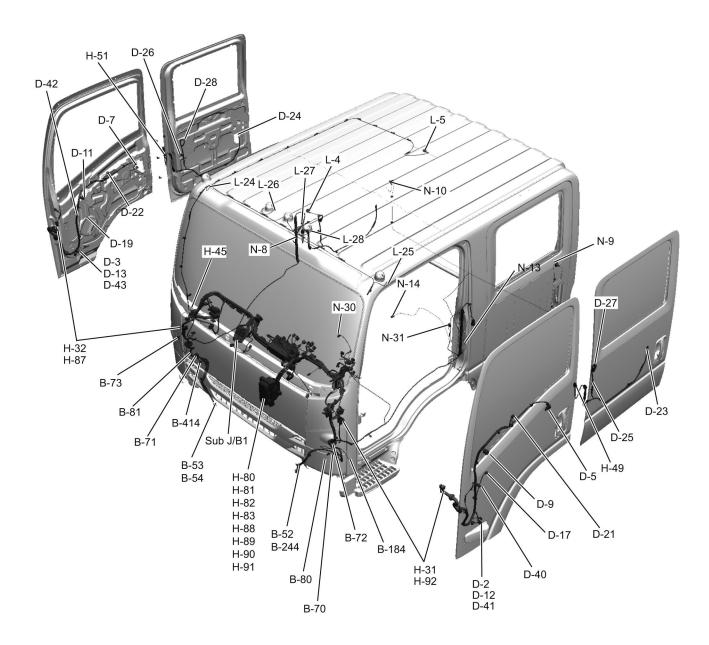


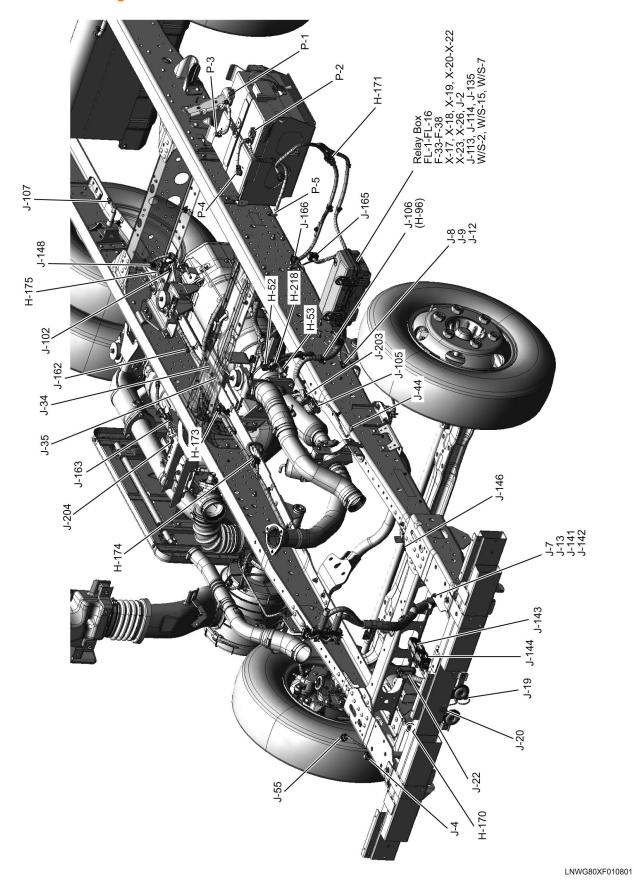


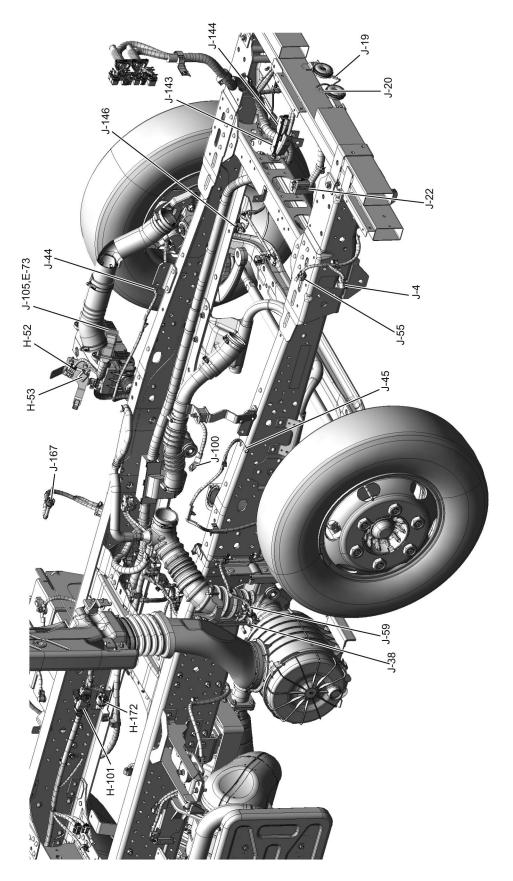


LNWF80XF025701

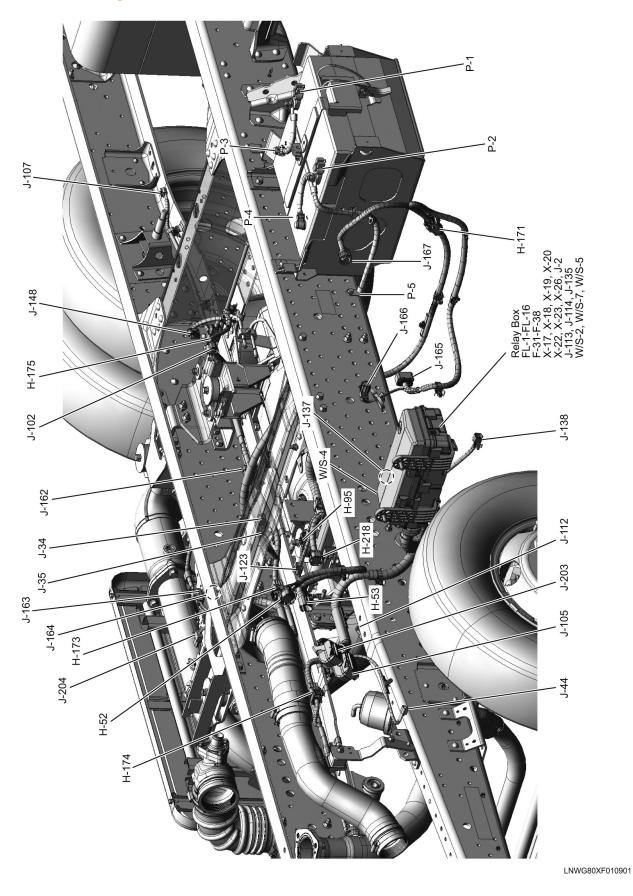

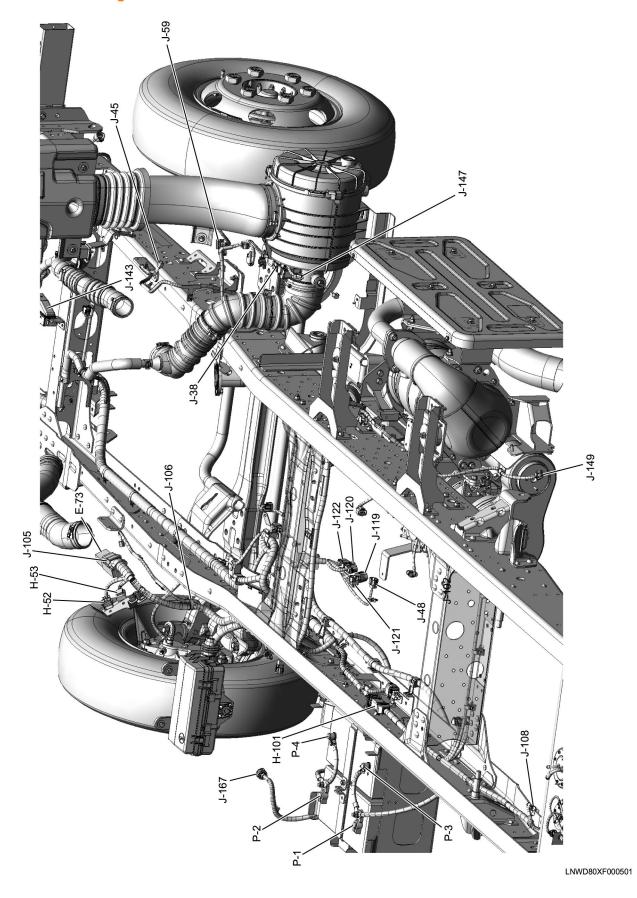


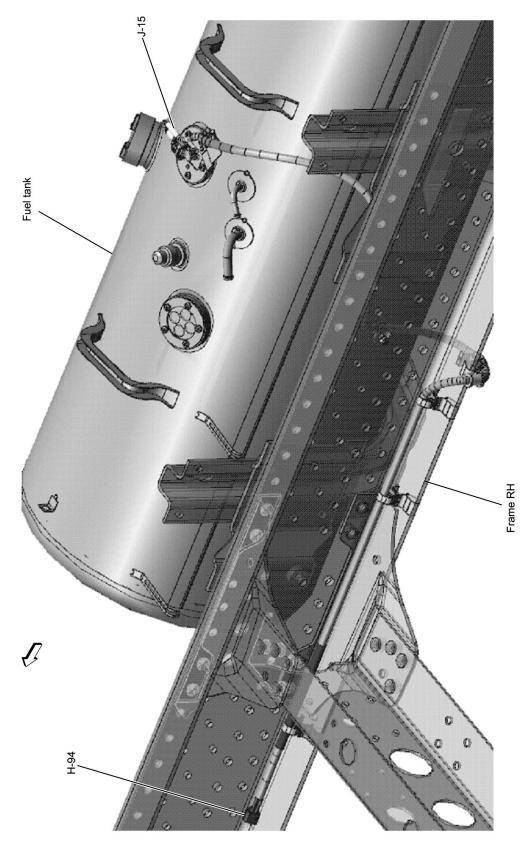



LNWE80XF001501

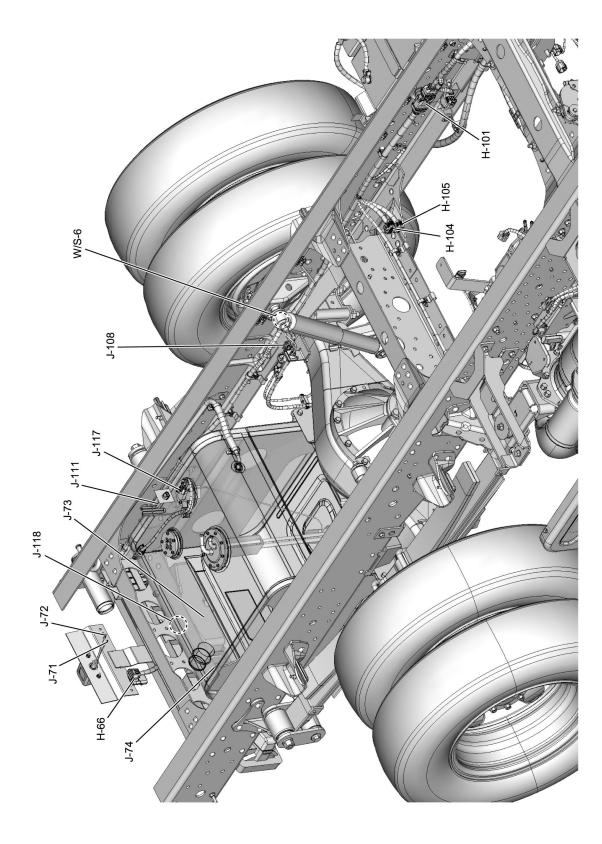


LNWE80XF008301

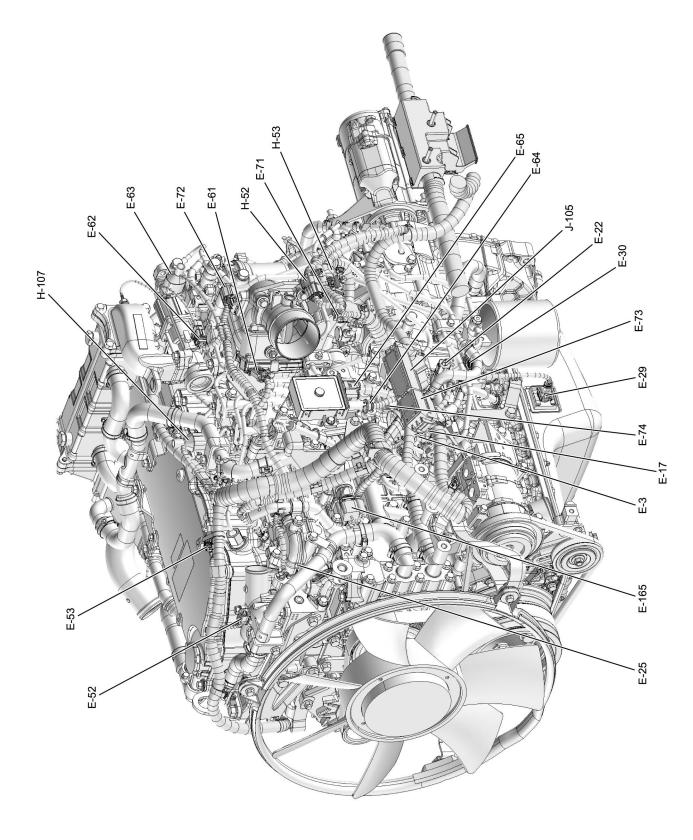


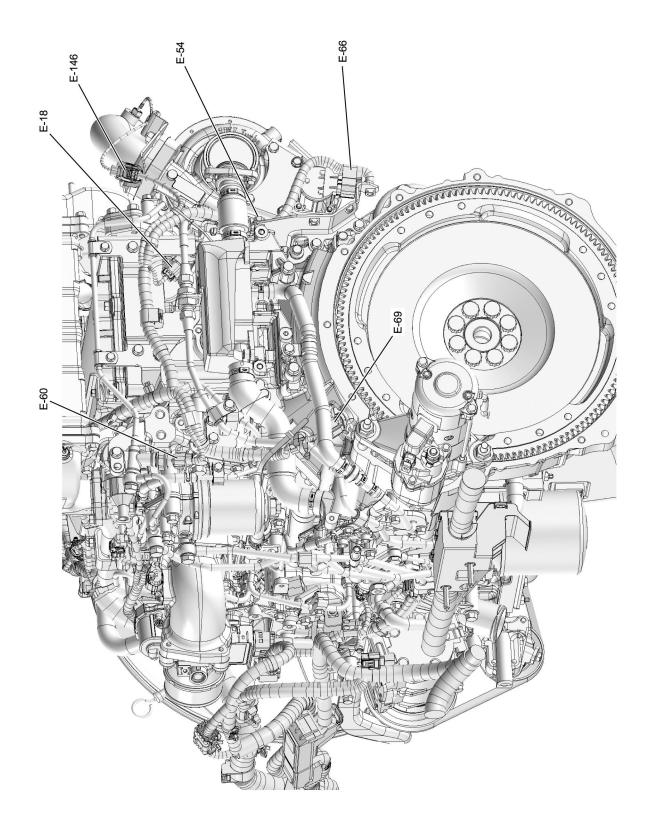


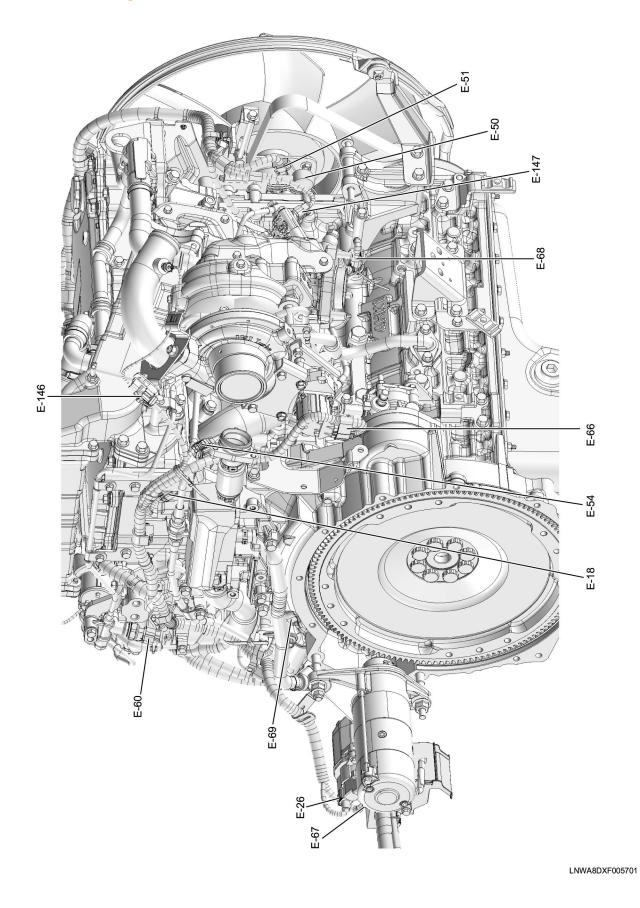


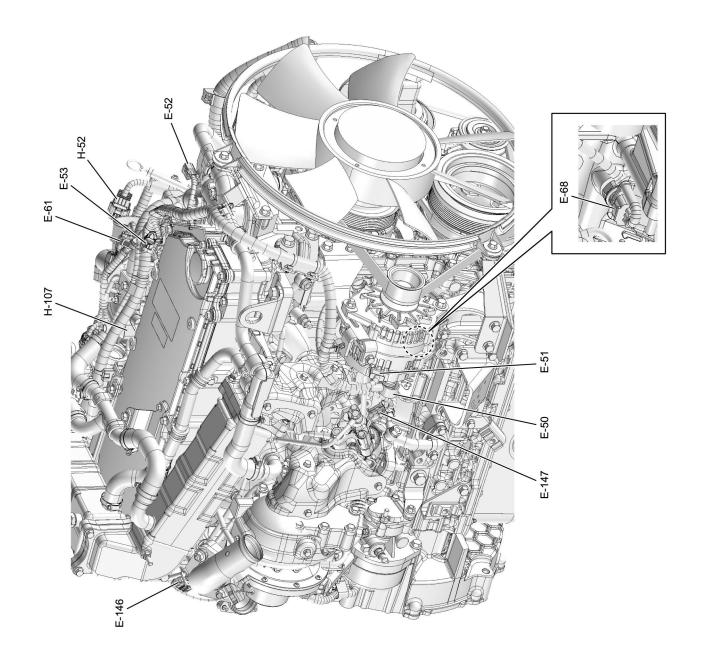


61 / 290

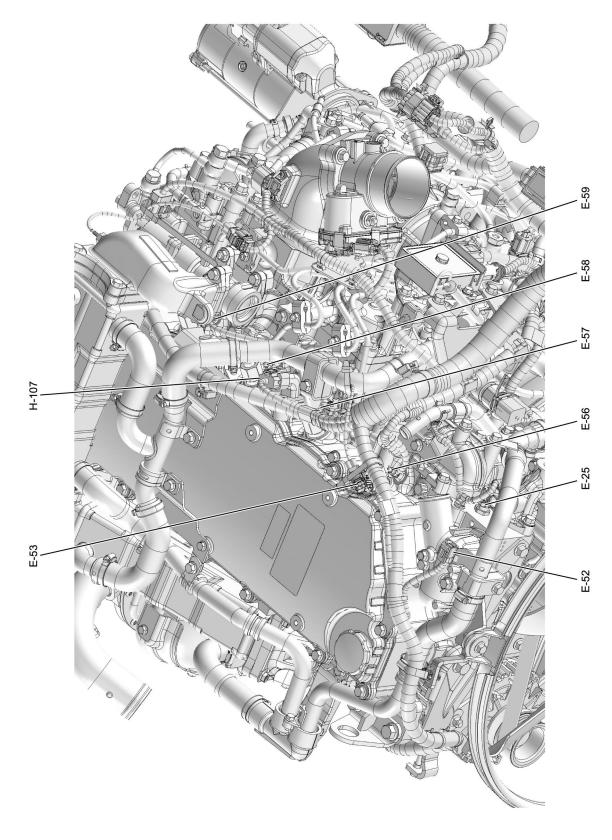

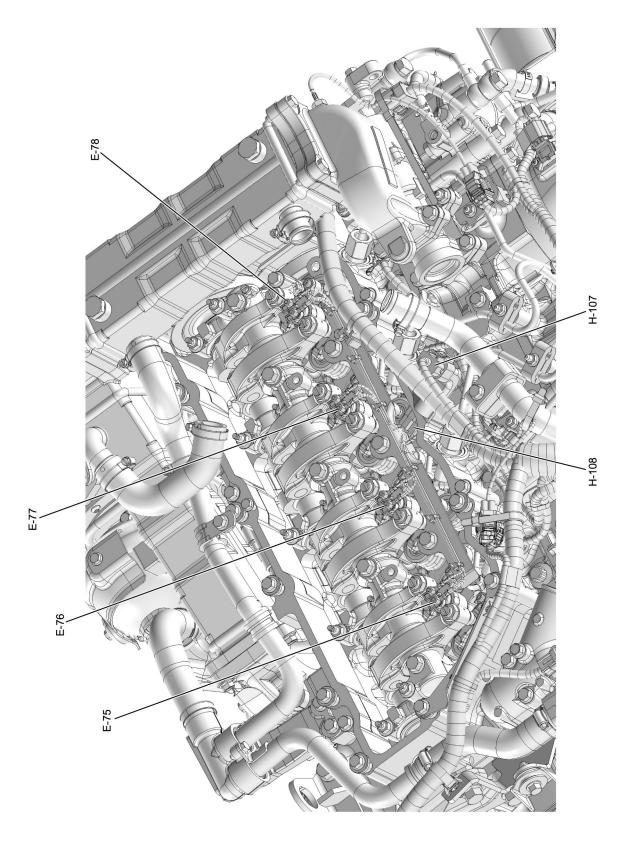


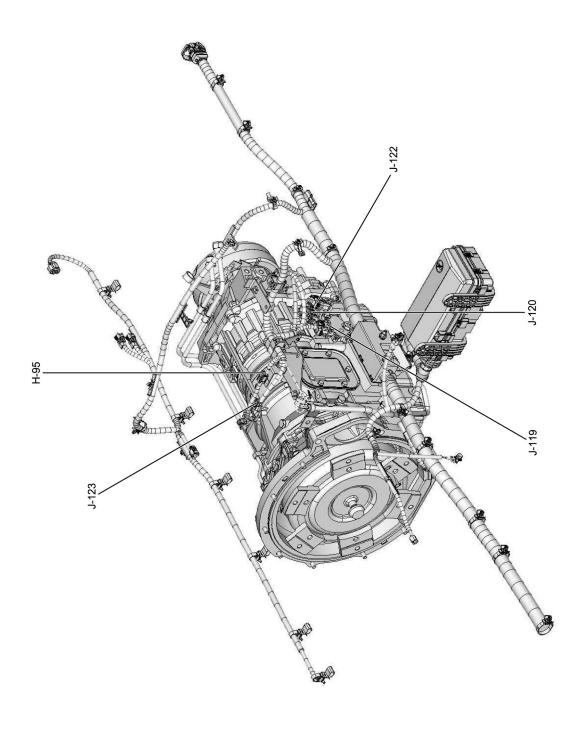


LNW78DXF011401

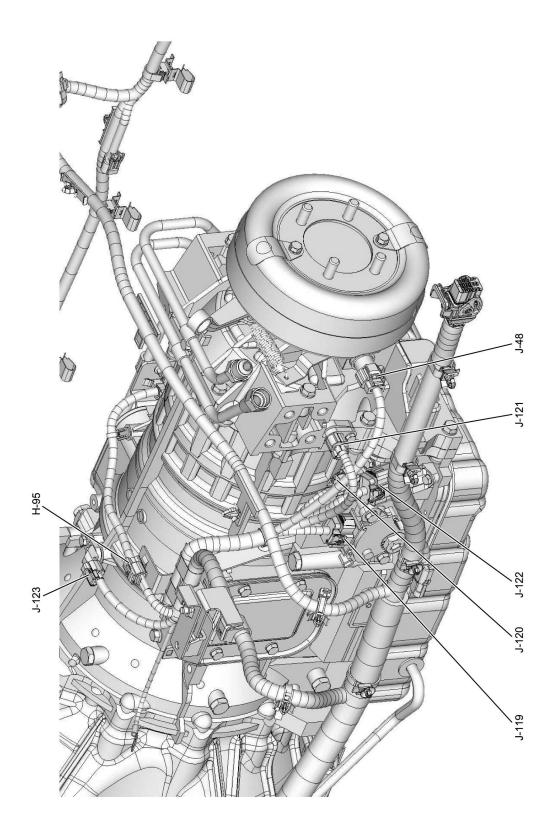


LNW78DXF011501

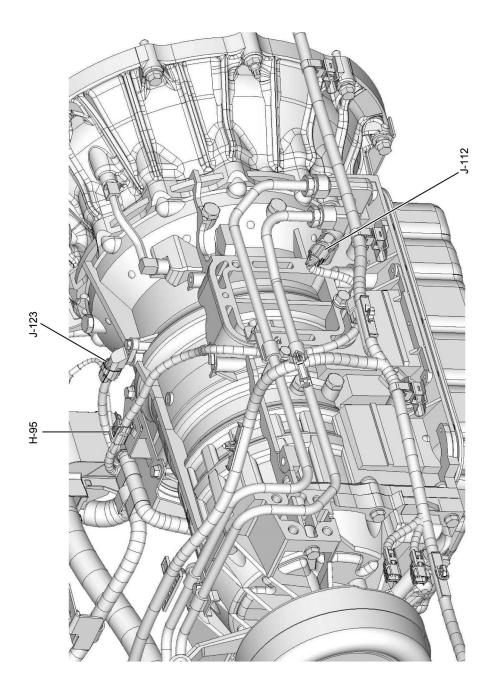

LNW78DXF011601

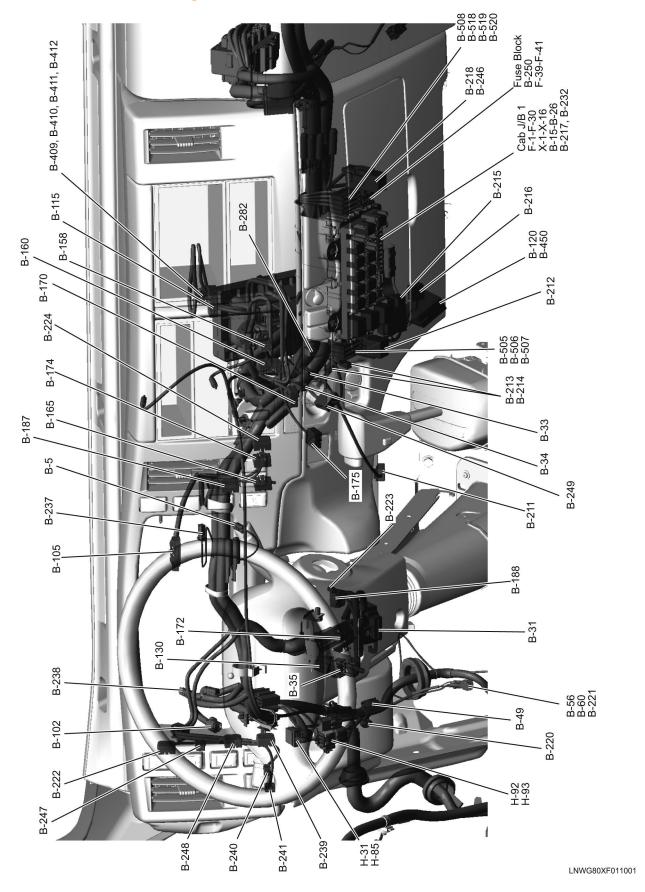

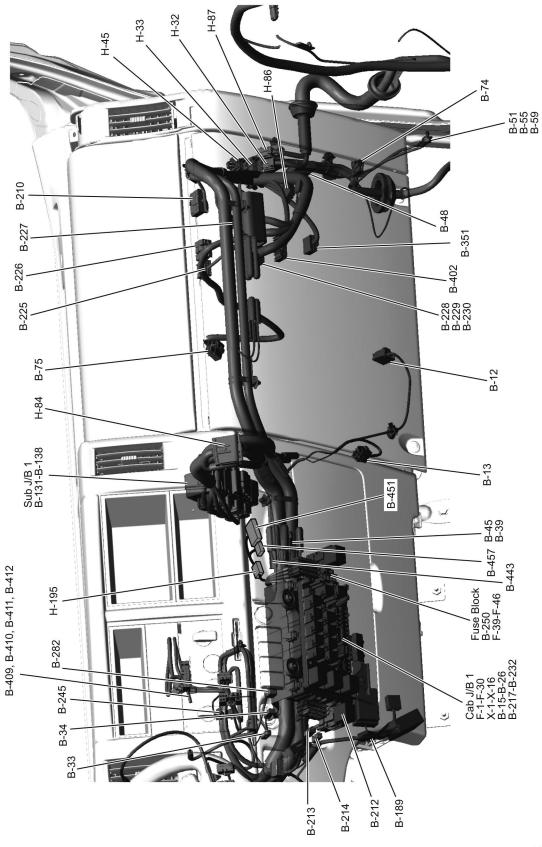

## **Visual Identification**

## **Connector List**

No.	Connector Face
B-5	
Gray	
	1     2     3       4     5     6
	006-115
	Accelerator Pedal Position Sensor
B-12	
White	
	002-267
	Blower Motor
B-13	
White	
	3 4
	004-129  Blower Resistor
2.42	Diowel Nesister
B-15 Blue	1 2 3 4
	5 6 7 8 9 10
	010-062
	Cab J/B1.A
B-16	
White	1 2 3 4 5 6
	7 8 9 10 11 12
	Cab J/B1.B
B-17	
White	1 2 3
	4 5 6 7 8 9
	009-021 Cab J/B1.D
D.40	
B-18 White	1 2 3 4 5
	6 7 8 9 10 11 12 13
	013-008
	Cab J/B1.E

B-19	
White	
	1     2     3     4     5       6     7     8     9     10
	010-061
	Cab J/B1.F
B-20	
White	1 2 3 4 5 6
	7 8 9 10 11 12 13 14
	014-026
	Cab J/B1.G
B-21	
White	1 2 3 4
	5 6 7 8 9 10
	010-062
	Cab J/B1.H
B-22	
White	1     2     3     4     5     6     7     8     9     10     11     12       13     14     15     16     17     18     19     20     21     22     23     24
	13 14 15 16 17 18 19 20 21 22 23 24
	024-025
	Cab J/B1.J
B-23	
White	1 2 3 4
	5 6 7 8 9 10
	010-062
	Cab J/B1.K
B-24	
White	
	002-267
	Cab J/B1.L
B-25	
White	1 2
	3 4 5 6
	006-116
	Cab J/B1.N
B-26	
White	1 2
	3 4 5 6
	006-116
	Cab J/B1.P

B-31 Gray	16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1
	016-088
	Data Link Connector
B-33	
White	
	001-039
	Cigarette Lighter.A
B-34	
Black	
	001-039 Cigarette Lighter.B
B-35	
White	1 2 3 4 5 6 7 8 9
	10 11 12 13 14 15 16 17 18
	018-024  Combination Switch
B-39	
Black	
	002-268  Diode 1
B-45	
Orange	
	003-150
	Diode 7
B-48	
White	1 2 3 4 5 6 7 8 9 10
	010-061
	Earth Joint 10P1
B-49	
White	1     2     3     4     5       6     7     8     9     10
	Earth Joint 10P2

B-51	
	000-049
	Earth Body 15
B-52	
	000-049
	Earth Body 17
B-53	
	000-049
	Earth Body 18
B-54	
	000-049
	Earth Body 19
B-55	
	000-049
	Earth Body 22
B-56	
	000-049
	Earth Body 3
B-59	
	000-049
	Earth Body 8
B-60	
	000-049
	Earth Body 9

B-70 Gray	N
old,	
	002-267
	Front Position Light (LH)
B-71	
Gray	
	002-267
	Front Position Light (RH)
B-72	
Gray	
	002-267
	Front Turn Light (LH)
B-73	
Gray	
	002-267
	Front Turn Light (RH)
B-74	
White	
	2
	002-272 Front Washer Motor
	FIGUR WASHEL MOTOR
B-75	$\bowtie$
White	1 2 3
	4 5 6
	Front Wiper Motor
B-80 Black	
Diack	
	2 3
	Headlight (LH)
B-81 Black	
Diddi.	
	003-151
	Headlight (RH)

B-102	
Gray	
	1 2
	002-267
	Brake Fluid Level Switch
B-105	
White	
	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40
	040-008
	IP Cluster.A
B-115	
Gray	1 2 3 4 5 6 7
	8 9 10 11 12 13 14 15 16
	016-094
	Audio
B-120	
Gray	1 2 3 4
	5 6 7 8 9 10
	010-062
	RS232C ch1
B-130	
White	
	4 5 6
	006-115
	Starter Switch 1
B-131	
White	1 2 3 4 5 6 7 8 9
	10 11 12 13 14 15 16 17 18
	018-024
	Sub J/B1.A
B-132	_
Black	1 2 3 4 5 6 7 8 9
	10 11 12 13 14 15 16 17 18
	018-024
	Sub J/B1.B
B-133	
Gray	1 2 3 4 5 6 7 8 9
	10 11 12 13 14 15 16 17 18
	018-024
	Sub J/B1.C

B-134	
Blue	
	1 2 3 4 5 6 7 8 9
	10 11 12 13 14 15 16 17 18
	Sub J/B1.D
B-135	
Red	1 2 3 4 5 6 7 8 9
	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18
	018-024
	Sub J/B1.E
B-136	
Brown	1 2 3 4 5 6 7 8 9
	10 11 12 13 14 15 16 17 18
	018-024
	Sub J/B1.F
B-137	
Green	
	1 2 3 4 5 6 7 8 9
	10 11 12 13 14 15 16 17 18
	Sub J/B1.G
	S.I.d. dub
B-138	
Orange	1 2 3 4 5 6 7 8 9
	10 11 12 13 14 15 16 17 18
	018-024
	Sub J/B1.H
B-158	
White	
	3 4 5 6
	006-116
	A/C Switch
	740 OWIGH
B-160	
White	1 2 3
	4 5 6 7 8
	008-078
	Blower Switch
B-165	
Blue	
	1   2       3   4         5   6   7   8   9   10
	010-062
	DPF Regeneration Switch

B-170	
Black	
	1   2   3   4         5   6   7   8   9   10
	010-062
	Hazard Switch
B-172	
White	$\bowtie$
	1 2
	002-267
	Key Reminder Switch
B-174	
Gray	1 2 3 4
	5 6 7 8 9 10
	010-062
	Mirror Heater Switch
B-175	
White	1 2 3 4
	5 6 7 8 9 10
	010-062
	Rear Power Window (LH)
	Real Power William (Ln)
B-184	
Gray	
	001-039
	Vacuum Tank Switch
B-187	
Orange	1 2 3 4
	5 6 7 8 9 10
	010-062
	Rear Window Lock Switch
D 400	
B-188 White	$\bowtie$
vvinte	1 2 3 4 5 6 7 8
	9 10 11 12 13 14 15 16
	016-084
	Wiper and Exhaust Brake SW
B-189	
Black	
	1 2 3 4 5
	005-037
	Electronic Thermostat

B-210 Black	1 2 3 4 5 6 7 8
	008-076
	Intermittent Relay
B-211	
White	
	3 4
	Stoplight Switch
B-212	
Black	
	004-134
	Accessory Power Relay
B-213	
Black	
	001-039
	ACC Socket.A
B-214	
White	
	001-039
	ACC Socket.B
B-215	
Black	2 1 3
	004-134
	Blower Relay
B-216	
Blue	1 2 3
	4 5 6 7 8
	008-077
	Flasher Unit
B-217	
White	
	1 2 3
	003-150
	Cab J/B1.M

B-218 Black	
	3 4 5
	Cigarette Lighter Relay
B-220	
White	
	001-039
	Power Source
B-221	
	(1)
	000-049 Earth Body 21
B-222	
Black	1 2 3 4
	5 6 7 8 9 10
	010-062
	Rear Dome Light Switch
B-223 White	
vvinte	
	001-039  Horn Switch
	TIOTH OWNER.
B-224 Brown	1 2 3 4
	5 6 7 8 9 10
	010-062
	Cruise Main Switch
B-225	
Black	1     2     3     4       5     6     7     8     9     10
	010-062
	DRL Control Unit. A
B-226	
Black	1     2       3     4     5     6
	DRL Control Unit .B

B-227	
Gray	1 2 3
	4 5 6 7 8
	008-077
	Door Lock Relay
B-228	
White	1 2 3 4 5 6
	7     8     9     10     11     12       13     14     15     16     17
	017-007
	TCM (A)
B-229	
White	1     2     3     4     5     6     7       8     9     10     11     12     13     14     15     16
	17 18 19 20 21 22 23 24 O24-027
	TCM (B)
B-230 White	1 2 /// 3 4 5 6 7 8 9
	1       2       3       4       5       6       7       8       9         10       11       12       13       14       15       16       17       18       19       20       21         22       23       24       25       26       27       28       29       30       31
	22   23   24   25   26   27   28   29   30   31   031-008
	TCM (C)
B-232	
White	1 2 3
	4 5 6 7 8
	008-077
	Cab J/B1.C
B-235	
White	1 2 3 4
	004-128  CAN2 Joint check - L
B-236 White	
	1 2 3 4
	004-128
	CAN2 Joint check - H
B-237	
Black	
	1 2
	002-267
	Pressure Switch

B-238	
White	
vvinte	
	002-267
	Vacuum Pump
	vacuum tump
B-239	
Blue	
	5 6 7 8 9 10
	010-062
	Check Miles and Check Oil Level Switch
B-240	
Blue	
	1     2     3       4     5     6
	006-115
	Door Lock Switch
B-241	
Black	
	1 2 3 4 5
	005-037
	Illumination Control Switch
B-244	
	000-049
	Earth Body 2
B-245	
White	
	1 2
	002-267
	Defroster Switch
	Derroster Switch
B-246	
Black	
2 don	
	3   4   5   005-039
	Cornering Light Relay
B-247	
Orange	
	1 2 3
	4 5 6
	006-115
	PTO Engine Speed Control Switch

B-248	
Green	1 2 3 4
	5 6 7 8 9 10
	010-062
	PTO Switch 2
	1 TO SWILLITZ
B-249	lacksquare
White	
	4 5 6
	006-115
	Low Coolant Level Controller
B-250	
	$\left  \begin{array}{c c} 3 & 4 \\ \hline 5 & 6 \end{array} \right $
	7 8
	Fuse Block 1
B-267	
White	
	004-128
	J/C-100
B-268	
White	
	1 2 3 4
	004-128
	J/C-101
5.000	
B-269 White	
Wince	1 2 3 4
	004-128
	J/C-50
B-282	
White	
	4 5 6
	006-115
	Rear Body Switch
B-351	
White	
	1   2   3   4         5   6   7   8   9   10
	010-062
	Keyless Entry Control Unit
	Regiess Etili y Cuttiuli Utili

B-402	
Gray	21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 2
	040-009
	MIMAMORI C/U
B-403 White	
vvinte	1 2 3 4
	004-128
	J/C-CAN1 MIMAMORI - L
B-404 White	
	1 2 3 4
	004-128
	J/C-CAN1 MIMAMORI - H
B-405 White	
	1 2 3 4
	004-128
	J/C-CAN2 MIMAMORI - L
B-406 White	abla
	1 2 3 4
	004-128  J/C-CAN2 MIMAMORI - H
D 400	J/C-CANZ INIINIAMICKI - II
B-409	
	000-049  EXT_ETB-1
B-410	
	000-049  EXT_ETB-2
B-411	
	000-049
	EXT_ETB-3

B-412		
		000-049
	EXT_ETB-4	
B-414		
Black	$\bowtie$	
	1	
		001-084
	TR Brake	
B-443		
Black	^	
	1 2	
		002-043
	Diode Door Lock	
B-450		
White	$\bowtie$	
	1 2	
		002-267
	FMS CAN Connector	
B-451	The final page of connector list	
B-455		
White		
	1 2 3 4	
		004-128
	J/C CANOUT-H	
B-456		
White		
	1 2 3 4	
		004-128
	J/C CANOUT-L	
B-457		
Blue		
		002-272
	Terminal FMS	
B-458		
White		
	1 2 3 4	
		004-128
Revision 1.0 - Date: 4/29/2017	CAN Joint - FMS-L	83 / 290
1.0 - Date. 4/29/2011	2016 CHEVROLET LOW CAB FORWARD (LCF) ELECTRICAL SECTION	837.290

B-459	
White	
	004-128
	CAN Joint - FMS-H
B-505	
White	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$
	010-070
	J/C 10P BASE 1
B-506	
Green	
	J/C 10P BASE 2
	WO TO BASE 2
B-507 Green	
Gleen	$\begin{array}{ c c c c c c c c c c c c c c c c c c c$
	010-071
	J/C 10P BASE 3
D 500	
B-508 Black	
	$\begin{array}{ c c c c c c c c c c c c c c c c c c c$
	010-072
	J/C 10P ADD 1
B-518	
White	$lackbox{lackbox{}}$
	1 2 3 4 5 6 7 8 9 10
	010-073
	J/C 10P ADD 2
B-519	
White	1 2 3 4 5 6 7 8 9 10
	J/C 10P ADD 3
B-520 White	
	1 2 3 4 5 6 7 8 9 10
	010-070
	J/C 10P ADD 4
	I.

D-2 Gray	
	002-267 Front Cornering Light (LH)
D-3	
Gray	
	002-267  Front Cornering Light (RH)
D-5	
Gray	1 2 3 4 5
	Front Door Lock Motor (LH)
D-7	
Gray	1 2
	002-267 Front Door Lock Motor (RH)
D-9 Green	1 2 3 4 5 6
	Front Power Window Motor (LH)
D-11 Green	1 2 3 4 5 6
	006-115 Front Power Window Motor (RH)
D-12	
Brown	
	002-267 Side Turn Light (LH)
D-13	
Brown	
	002-267 Side Turn Light (RH)

D-17	
Black	1 2
	002-270 Speaker (LH)
D-19	
Black	1 2
	002-270
	Speaker (RH)
D-21	
White	1     2     3       4     5     6     7     8
	008-077 Front Power Window Switch (LH)
D-22	
Gray	1 2 3 4 5
	1 2 3 4 5
	Front Power Window Switch (RH)
D-23	
Gray	
	002-267  Rear Door Lock Motor (LH)
D-24	
Gray	
	002-267
	Rear Door Lock Motor (RH)
D-25	
White	
	002-267  Rear Power Window Motor (LH)
D-26	Total Fortill William Motor (E1)
D-26 White	
	002-267  Rear Power Window Motor (RH)
	Neal Fowel William Motor (NT)

D-27	
White	
	1 2 3 4 5
	005-037
	Rear Power Window Switch (LH)
D-28	
White	
	1 2 3 4 5
	005-037
	Rear Power Window Switch (RH)
D-40	
Gray	
	1 2
	002-267
	Heater Mirror (LH)
D 44	
D-41	
Gray	
	1 2
	002-267
	Side Marker (LH)
D-42	
Gray	
	002-267
	Heater Mirror (RH)
5.40	
D-43	
Gray	
	002-267
	Side Marker (RH)
	Side Ividikei (KFI)
E-3	
Black	
	001-039
	A/C Compressor
E-17	
Black	
	002-267
	FRP Regulator

E-18	
Black	
	1 2 3
	003-150
	Camshaft Position Sensor
E-22	
Black	
	002-267
	Fuel Temp Sensor
E-25	
Green	
	002-267  Engine Coolant Temp Sensor
E-26	
White	
	001-039
	Starter (C)
E-29	
Gray	
	002-267
	Oil Level Switch
E-30	
Gray	
	001-039
	Engine Oil Pressure Switch
E-50	
	AC Generator (B)
	AC Generator (D)
E-51 Gray	
	1 2
	002-267
	AC Generator

E-52	
Black	
	002-267
	Low Water Level Sensor
E-53 Gray	
Glay	
	002-267
	IAT Sensor 2
E-54	
Gray	
	002-267
	EGR Gas Temp (In) Sensor 1
E-56	
	000-020
	Glow Plug #1
E-57	
	000-020
	Glow Plug #2
E-58	
	000-020
	Glow Plug #3
E-59	
	000-020
	Glow Plug #4
E-60	
White	
	003-150  Diesel Particulate Filter (DPF) Fuel Pressure Sensor

E-61 White	
vvinc	1 2 3 4 5 6
	006-107
	Intake Airflow Throttle
	Intake / timest   Timeste
E-62	
Black	
	002-267  EGR Gas Temp (Out) Sensor 1
	EGN das reliip (Out) delisor i
E-63	
Black	1 2 3 4
	004-128  EGR Valve
	LOIX vaive
E-64	
Black	
	001-041  Glow Plug Control Module 1
	Clow Finds Control Module 1
E-65	
Black	
	012-080
	Glow Plug Control Module 2
E-66 Black	
Bidok	1 2 3 4
	5 6 7 8
	VNT Actuator and Sensor
F 07	
E-67	
	000-021
	Starter (B)
E-68	
Black	
	1 2 3
	003-150
	Engine Oil Pressure Sensor

	<del>,</del>
E-69 Black	1 2 3  003-150  Crankshaft Position Sensor
E-71 Gray	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16  VNT Control Module
E-72 Black	1 2 3  003-150  Boost Pressure Sensor
E-73 Black	The final page of connector list
E-74	000-012 Engine Earth
E-75	Cylinder No.1 (Injector No.1)
E-76	Cylinder No.2 (Injector No.4)
E-77	Cylinder No.3 (Injector No.2)

E-78	
	003-125
	003-125
	Cylinder No.4 (Injector No.3)
E-146	
Light Gray	
	002-267
	Turbocharger Outlet Air Temperature Sensor
E-147	
Gray	
	002-267
	DPF Fuel Injector
E-165	
Black	1 2 3
	4 5 6
	Fuel Rail Pressure (FRP) Sensor
H-31	
White	
	6   5   4   3
	Inst H.~Door (LH) H.
H-31	
White	1 2
	3 4 5 6
	006-116
	Inst H.~Door (LH) H.
H-32 Black	2 1
	6 5 4 3
	006-118
	Inst H.~Door (RH) H.
H-32	
Black	1     2       3     4     5     6
	006-116
	Inst H.~Door (RH) H.

153  Ulbox   3   2   1   200 test     104   1   100 (104)   1   100 (104)   1     143		
S   Z   1	H-33	
	Black	
Heat 14 - Flace (Rid)   H.     Heat 15 - Flace (Rid)   H.     Heat 16 - Flace (Rid)   H.     Heat 17 - Flace (Rid)   H.     Heat 18 - Flace (Rid)   H.     Heat 19 - Flace (Rid)   H.		3 2 1
133   Sack		
		Inst H.~ Floor (RH) H.
145   150	H-33	
1445	Black	
H-45   H-45   H-45   H-46		
H-45 White    1		
White    2		Inst H.~ Floor (RH) H.
H-45		
Mast H ~ Roof H.	White	
Inst H Recf H.		
H-45 White    1		
White  1		Inst H.∼ Roof H.
H-49   OB-116   OB-117     H-49   OB-117   OB-117     H-49   OB-117   OB-117     H-49   OB-115   OB-115     H-51   OB-117   OB-117     H-51   OB-117   OB-117     H-51   OB-115   OB-117     H-51   OB-115   OB-115     OB-115   OB-115     OB-115   OB-115		
1	White	
H-49   Gray		
H-49 Gray  Floor (LH) H Rear Door (LH) H.  H-49 Gray  Floor (LH) H Rear Door (LH) H.  H-51 Gray  The state of the st		
Gray    3   2   1   6   5   4		IIISt ⊓.∼ KOUI ⊓.
3   2   1		
Gray  H-49 Gray  Floor (LH) H Rear Door (LH) H.  H-51 Gray  Gray  Tool (LH) H Rear Door (LH) H.  H-51 Gray  Tool (LH) H Rear Door (LH) H.  H-51 Gray  Tool (LH) H Rear Door (RH) H.  H-51 Gray  Tool (RH) H Rear Door (RH) H.  H-51 Gray  Tool (RH) H Rear Door (RH) H.	Gray	
Floor (LH) H.~ Rear Door (LH) H.  H-49 Gray  O08-115  Floor (LH) H.~ Rear Door (LH) H.  H-61 Gray  The state of the state		
H-49 Gray    1   2   3     4   5   6     006-115    Floor (LH) H Rear Door (LH) H.    H-51     Gray   3   2     6   5   4     006-117    Floor (RH) H Rear Door (RH) H.    H-51     Gray   1   2   3     4   5   6     006-115		
Gray    1   2   3     4   5   6     006-115    Floor (LH) H.~ Rear Door (LH) H.    H-51     Gray		Titos (2 1) Titos (2 1) Titos
1 2 3 4 5 6 006-115  Floor (LH) H.~ Rear Door (LH) H.  H-51 Gray  006-117  Floor (RH) H.~ Rear Door (RH) H.  H-51 Gray  006-117  Floor (RH) H.~ Rear Door (RH) H.		
Floor (LH) H Rear Door (LH) H.  H-51 Gray  Floor (RH) H Rear Door (RH) H.  Floor (RH) H Rear Door (RH) H.  H-51 Gray  O06-117  Floor (RH) H Rear Door (RH) H.	Clay	1 2 3
Floor (LH) H.~ Rear Door (LH) H.  H-51 Gray  3 2 1 6 5 4  006-117  Floor (RH) H.~ Rear Door (RH) H.  H-51 Gray  1 2 3 4 5 6		
H-51 Gray    3   2   1   6   5   4     006-117  Floor (RH) H.~ Rear Door (RH) H.  H-51 Gray    1   2   3   4   5   6     006-115		
Gray    3   2   1     6   5   4     006-117    Floor (RH) H.~ Rear Door (RH) H.    H-51     Gray	11.54	
3   2   1		
006-117 Floor (RH) H.~ Rear Door (RH) H.  H-51 Gray  1 2 3 4 5 6		
H-51 Gray  1 2 3 4 5 6		
H-51 Gray  1 2 3 4 5 6		
Gray  1 2 3 4 5 6  006-115	H 51	
1 2 3 4 5 6 006-115		
006-115		
Floor (RH) H.~ Rear Door (RH) H.		
		Floor (RH) H.~ Rear Door (RH) H.

H-52	
Black	4     3     2     1       8     7     6     5
	12 11 10 9
	16 15 14 13 016-090
	Frame Front H.~ Engine1 H.
	The state of the s
H-52	
Black	1     2     3     4       5     6     7     8
	9 10 11 12
	13 14 15 16 016-086
	Frame Front H.~ Engine1 H.
H-53	
Gray	
	2 1
	002-271
	Frame Front H.~ Engine2 H.
H-53	
Gray	
	002-267
	Frame Front H.~ Engine2 H.
H-66	$\bowtie$
Black	4 3 2 1
	8 7 6 5
	008-079
	Frame Rear H.~ Rear Combi H.
11.00	
H-66 Black	
Black	1 2 3 4
	5 6 7 8
	008-076
	Frame Rear H.~ Rear Combi H.
H-80	
Black	
Didox	11 10 9 8 7 6 5 4 3 2 1
	22 21 20 19 18 17 16 15 14 13 12
	022-039
	Inst H.~ Frame Front H.
H-80	
Black	
	1 2 3 4 5 6 7 8 9 10 11
	12 13 14 15 16 17 18 19 20 21 22
	022-038
	Inst H.~ Frame Front H.

H-81 Green	4 3 2 1 10 9 8 7 6 5 18 17 16 15 14 13 12 11 24 23 22 21 20 19  024-029  Inst H.~ Frame Front H.
H-81 Green	1 2 3 4 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 024-030  Inst H.~ Frame Front H.
H-82 Gray	2 1 1 6 5 4 3 006-127  Inst H.~ Frame Front H.
H-82 Gray	1 2 3 4 5 6 006-128  Inst H.~ Frame Front H.
H-83 White	5 4 3 2 1 10 9 8 7 6 Inst H. Frame Front H.
H-83 White	1 2 3 4 5 6 7 8 9 10 010-061 Inst H. Frame Front H.
H-84 White	8 7 6 5 4 3 2 1 18 17 16 15 14 13 12 11 10 9  018-027  Inst H.~ Inst H.
H-84 White	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 018-023 Inst H.~ Inst H.

H-85	
Black	2 1
	6 5 4 3
	006-118
	Inst H.∼ Floor (LH) H.
	Institute Floor (En) Ti.
H-85	
Black	1 2
	3 4 5 6
	006-116
	Inst H.~ Floor (LH) H.
11.00	
H-86 White	
VVIIIC	4     3     2     1       10     9     8     7     6     5
	010-064
	Inst H.~ Floor (RH) H.
H-86	
White	1 2 3 4
	5 6 7 8 9 10
	010-062
	Inst H.∼ Floor (RH) H.
H-87	
Green	4 3 2 1
	10 9 8 7 6 5
	010-064
	Inst H.~ Door(RH) H.
H-87	
Green	1 2 3 4
	5 6 7 8 9 10
	010-062
	Inst H.∼ Door(RH) H.
H-88	
Blue	11 10 9 8 7 6 5 4 3 2 1
	22 21 20 19 18 17 16 15 14 13 12
	022-039
	Inst H.∼ Frame Frt H.
H-88	
Blue	
	1     2     3     4     5     6     7     8     9     10     11       12     13     14     15     16     17     18     19     20     21     22
	022-038
	Inst H.~ Frame Frt H.
	IIISTI.~ LIGHIC LITT.

H-89 Orange	
Orange	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$
	006-118 Inst H.∼ Frame Frt H.
H-89	
Orange	1 2 3 4 5 6
	006-116
	Inst H.~ Frame Frt H.
H-90 White	11   10   9   8   7   6   5   4   3   2   1
	Inst H.~ Frame Frt H.
H-90 White	1       2       3       4       5       6       7       8       9       10       11         12       13       14       15       16       17       18       19       20       21       22
	022-038  Inst H.∼ Frame Frt H.
H-91 Gray	
Glay	11     10     9     8     7     6     5     4     3     2     1       22     21     20     19     18     17     16     15     14     13     12   022-039
	Inst H.~ Frame Frt H.
H-91 Gray	1       2       3       4       5       6       7       8       9       10       11         12       13       14       15       16       17       18       19       20       21       22
	Inst H.~ Frame Frt H.
H-92 Black	4       3       2       1         10       9       8       7       6       5         16       15       14       13       12       11
	Inst H.~ Door (LH) H.
H-92 Black	1       2       3       4         5       6       7       8       9       10         11       12       13       14       15       16
	inst H.~ Door (LH) H.

H-93	
White	
vvinte	4 3 2 1
	10 9 8 7 6 5
	010-064
	Inst H.~ Floor (LH) H. MT AT
	IIISt n.~ Floor (En) n. Wit At
H-93	
White	
	5 6 7 8 9 10
	010-062
	Inst H.~ Floor (LH) H. MT AT
	` '
H-94	
Black	
	3
	003-155
	Frame Front H.~ Fuel Tank
H-94	$\bowtie$
Black	
	003-152
	Frame Front H.~ Fuel Tank
H-95	
Black	N
	002-271
	Frame Front H.~ AFT Temp
H-95	
Black	
	1 2
	002-267
	Frame Front H.~ AFT Temp
H-96	
Black	2 1
	4 3
	004-132
	Brake Fluid Level Switch (HBB) (C-Cab)
	Brance Find Ecrol Owner (FIDD) (O Odd)
H-96	
Black	
	1 2
	3   4
	004-129
	Brake Fluid Level Switch (HBB) (C-Cab)

H-101 Black	## 3   2   1   8   7   8   5   12   11   10   9   16   15   14   13   22   17   24   23   22   27   28   27   28   27   28   22   23   23   30   28   032-028  Frame Front H.~ Frame Rear H.
H-101 Black	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 12 23 24 25 26 27 28 29 30 31 32  Frame Front H.~ Frame Rear H.
H-104 Black	F G H J K E D C B A  010-068  Frame Rear H.~ PTO2 H.
H-104 Black	K
H-105 Black	E F G H D C B A  008-090  Frame Rear H.~ PTO1 H.
H-105 Black	H G F E A B C D  008-089  Frame Rear H.~ PTO1 H.
H-107 Gray	1 2 3 4 5 6 7 8 008-076  Engine ~ Injector
H-107 Gray	4 3 2 1 8 7 6 5 008-079  Engine ~ Injector

	,
H-108	
Gray	
	5 6 7 8
	1 2 3 4
	008-087
	Engine ~ Injector
H-108	
Gray	
	8     7     6     5       4     3     2     1
	008-088
	Engine ~ Injector
H-170	
Gray	
	001-084
	INST H Frame H.
H-170	
Gray	
,	
	001-084
	INST H Frame H.
H-171	
Black	
Black	E F G H
	D C B A
	008-090
	Frame H SCR EXT H.
H-171	
Black	1 2 3 4
Diack	5 6 7 8
	9 10 11 12
	13 14 15 16 016-086
	Frame H SCR EXT H.
H-172	
Black	
Diack	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$
	008-086
	Frame H Towing H.
H-172	
Black	
Didok	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$
	7 8
	008-084
	Frame H Towing H.
	I .

H-173 Black	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16  Frame H Dosing EXT H.
H-173	
Black	4 3 2 1 8 7 6 5 12 11 10 9 16 15 14 13 016-090 Frame H Dosing EXT H.
H-174	
Black	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16  Frame H EXT SCR TEMP C/Cab H.
H-174	
Black	4 3 2 1 8 7 6 5 12 11 10 9 16 15 14 13  O16-090  Frame H EXT SCR TEMP C/Cab H.
H-175	
Black	1 2 3 4 5 6 7 8 008-076  Dosing EXT H EXT DPF H.
H-175	
Black	4 3 2 1 8 7 6 5
	Dosing EXT H EXT DPF H.
H-195 White	018-019
	INST H EXT Tacho H.
H-195 White	1 2 3 4 5 6 7 8 9 1011 1213 1415 1617 18 018-018 INST H EXT Tacho H.

H-218 Black	1 2 3 4 5 6 7 8 9 10 11 12  O12-075  Frame H Engine 3.
H-218 Black	4 3 2 1 8 7 6 5 12 11 10 9 012-076 Frame H Engine 3.
J-2	20   22   24
J-4 Gray	1 2 002-267 Condenser Fan
J-7	000-049 Earth Body 10
J-8	000-049 Earth Body 11
J-9	000-049 Earth Body 12
J-12	000-049 Earth Body 4

J-13		
		000-049
	Earth Body 5	
J-15		
Black	1 2 3	
		003-150
	Fuel Tank Unit	
J-19		
White	1	
	Horn (I H)	001-039
	Horn (LH)	
J-20		
White	1	
		001-039
	Horn (RH)	001000
J-22	The final page of connector list	
	The ilia page of conflector list	
J-34 Gray		
Clay	2 1	
		002-271
	Exhaust Gas Temperature Sensor 1	
J-35		
Gray		
	2 1	
		002-271
	Exhaust Gas Temperature Sensor 2	
J-38		
Black		
	1 2 3 4 5	
		005-037
	MAF and IAT 1 Sensor	
J-44		
Black	2 1	
	Wheel Speed Sensor Front Left	002-271
Revision 1.0 - Date: 4/29/2017	2016 CHEVROLET LOW CAB FORWARD (LCF) ELECTRICAL SECTION	103 / 290

J-45	
Black	
	002-271
	Wheel Speed Sensor Front Right
J-48	
Gray	
	003-150
	Vehicle Speed Sensor
J-55	
Black	$\begin{bmatrix} 2 & 1 \\ 1 & 3 \end{bmatrix}$
	004-130
	Triple Pressure Switch
J-59	
Black	
	002-267
	Exhaust Brake Solenoid Valve
J-71	
Green	
	000-025
	License Plate Light (A)
J-72	
Green	
	000-026
	License Plate Light (B)
J-73	
White	3 2 1
	6 5 4
	Rear Combination Light (LH)
J-74	
White	3 2 1
	6 5 4
	Rear Combination Light (RH)

J-100		
		000-021
	Starter (D)	
J-102		
Black	1 2 3	
	1 2 3	
		003-150
	Exhaust Differential Pressure Sensor	
J-105	The final page of connector list	
	page a sameta no	
J-106	$\bowtie$	
Black	2 1	
	4 3	
		004-132
	Brake Fluid Level Switch (HBB)	
J-107		
Black	$\bowtie$	
	2 1	
		002-271
	Wheel Speed Sensor Front Right	332 27 .
	This open collect training it	
J-108		
Black	2 1	
		002-271
	Wheel Speed Sensor Front Left	
J-109		
		000-049
	Earth Body 14	
J-110		
		000-049
	Earth Body 20	
J-111		
Black		
	2 1	
		002-271
D. 10 D. 10000000	Back Buzzer (Upfitter Install)	
Revision 1.0 - Date: 4/29/2017	2016 CHEVROLET LOW CAB FORWARD (LCF) ELECTRICAL SECTION	105/290

J-112	
White	
	1 2
	002-267
	ATF Temperature Sensor (Torque Converter Clutch)
1440	
J-113 Black	
Black	1 2
	002-268
	Diode 3
	Diode 3
J-114	
Black	
	1 2
	002-268
	Diode 1
J-117	
Black	
	1 2 3
	003-150
	Fuel Tank Unit In
J-118	
Black	abla
	D C B A
	004-139
	Rear Manufacture Connector
J-119	
Gray	
	1 2 3 4 5
	6 7 8 9 10
	Frame Front H.~ TM Solenoid 1
J-120	
Black	1 2 3 4 5 6
	7   8   9   10   11   12
	012-074
	Frame Front H.~ TM Solenoid 2
J-121	
Gray	
	002-267
	Frame Front H.~ TM Speed

J-122			
Black	1 2 3 4 5		
	6 7 8 9 10		
	Frame Front H.~ TM NSSW		
J-123			
Gray			
	002-267		
	Frame Front H.~ TM Turbine		
J-135			
Black	1 2		
	002-268		
	Diode 2		
J-137			
Black	2 1		
	002-271		
	Rear Body Connector		
J-138			
Gray			
	002-267		
	Sedimenter Switch		
J-141			
	000-049		
	Earth Body SCR 1		
J-142			
	000-049		
	Earth Body 10		
J-143	The final page of connector list		
J-144	The final page of connector list		

J-146 Dark Gray				
Dark Gray				
	002-267  Charge Air Cooler (CAC) Temperature Sensor 2			
J-147				
Blue				
	002-267 Air Cleaner Switch			
J-148				
Black	54321			
	005-033 NOx Sensor 1			
J-149				
Black				
	002-267  Diesel Exhaust Fluid (DEF) Injector			
J-162				
Black				
	002-267 Resistor			
J-163				
Black				
	002-267 Exhaust Gas Temperature (EGT) Sensor 3			
J-164				
Black	54321			
	005-033 NOx Sensor 2			
J-165 Black	6 5 4 3 2 1 12 11 10 9 8 7			
	Diesel Exhaust Fluid (DEF) Pump			

J-166			
Gray			
	002-267		
	Diesel Exhaust Fluid (DEF) Tank Heater Coolant Control Valve		
J-167			
Black			
	1 2		
	002-267		
	Diesel Exhaust Fluid (DEF) Tank Level and Temperature Sensor		
J-203	The final page of connector list		
J-203	The final page of connector list		
J-204			
Black			
	4 3 2 1		
	004-131		
	PM Sensor		
L-4			
White	1		
	3		
	003-156		
	Dome Light		
L-5 White			
vviite			
	3		
	003-156		
	Rear Dome Light		
L-20			
White	$\bowtie$		
	1 2 3 4		
	004-128		
	J/C 3		
	J/O 3		
L-21			
White			
	1 2 3 4		
	004-128		
	J/C 4		
L-22			
White	1 2 3 4		
	004-128		
Revision 1.0 - Date: 4/29/2017	J/C 5	400 4000	
NEVISIUM 1.0 - Dale. 4/29/2017	2016 CHEVROLET LOW CAB FORWARD (LCF) ELECTRICAL SECTION	109 / 290	

1 22			
L-23			
White			
	1 2 3 4		
	004-128		
	J/C 7		
L-24			
White			
vviite			
	1 2		
	002-267		
	Marker 1		
L-25			
White			
	1 2		
	002-267		
	Marker 2		
	THAT ICE		
L-26			
White			
	1 2		
	002-267		
	ID 1		
L-27			
White			
	002-267		
	ID 2		
	ID Z		
L-28			
White			
	202.207		
	002-267		
	ID 3		
N-7			
White			
	1		
	001-039		
	Door Switch (RH)		
	Door Omtor (141)		
N-8			
	F71		
White			
	001-039		
	Door Switch (RH) (C-Cab)		

N-9		
Black		
	001-039	
	Rear Door Switch (LH)	
N-10		
Black		
	001-039	
	Rear Door Switch (RH)	
N-12		
White		
	001-039	
	Door Switch (LH)	
N-13		
White		
	001-039	
	Door Switch (LH) (C-Cab)	
N-14		
White		
	001-039	
	Parking Brake Switch	
N-30 White		
vviite	1 2 3 4	
	004-128	
	Overdrive Off Switch	
N-31		
White		
	003-151	
	Rear HTR	
N-32		
White		
	004-128	
	J/C 29	


P-1	
	000-049
	Battery (+)
P-2	
	000-049
	Battery (-)
P-3	
	000-049
	Battery (+)
P-4	
	000-049
	Battery (-)
P-5	
	000-049
	Battery Earth
X-1	5 /////
White	
	005-047
	Stoplight Relay
X-2 White	5
AATIIIG	
	005-047
	DRL Relay
X-3 White	5
vviille	
	005-047
	Key On Relay

	,
X-4 White	1 2 3 4 5 005-039  TCM Relay
X-5 White	
	3   4   5   005-039  P/N Start Relay
X-6 White	1 2 3 4 5
	Wiper Main Relay
X-7 White	1 2 2 3 4 5 005-039
	Horn Relay
X-8 White	1 2 3 4 5 005-039 Wiper Hi/Lo Relay
X-9 White	1 2 2 3 4 5 005-039  Trailer Stop Relay
X-10 White	1 2 3 4 5 005-039  Rear Power Window Relay
X-12 White	1 2 3 4 5
	Front Power Window Relay

X-13 White	1 2 3 4 5 005-039  Headlight(Lo) Relay	
X-14		
White	1 2 3 4 5 005-039  Vacuum Pump Relay	
V.45		
X-15 White	1	
X-16 White	1	
X-17 Gray	1 2 3 5 005-040  Starter Relay	
X-18		
Gray	1 2 3 5 005-040  ECM Main Relay	
X-19		
Black	1     2       3     5	
	NOx and Diesel Exhaust Fluid (DEF) Sensor Relay	
X-20 Gray	1 4 2 005-041  Magnetic Clutch Relay	


X-21 Gray	1 2 3 4 5 005-039  Condenser Fan Relay
X-22 Gray	1 2 2 3 4 5 005-039  Rearr Dome Light Relay
X-23 Gray	1
X-26 Black	1 2 3 4 5 005-039  Marker Light Relay

## B-451 (Gray) FMS CAN Interface Control Unit

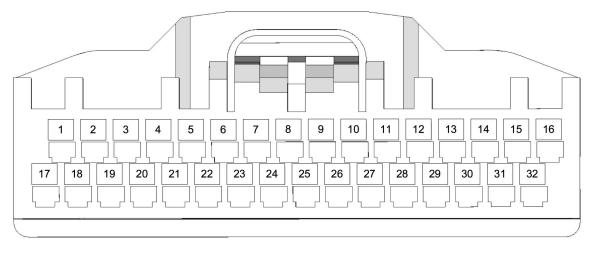


LNWA8KSF000101

## E-73 (Black) ECM

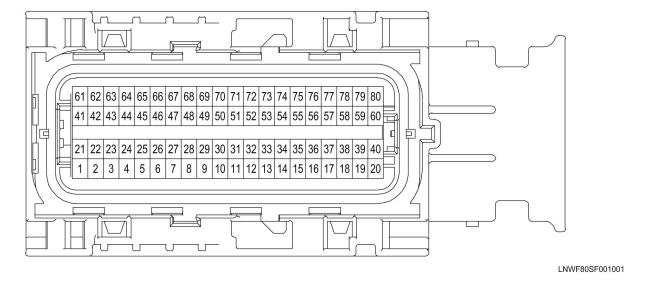


## J-22 (Black) EHCU

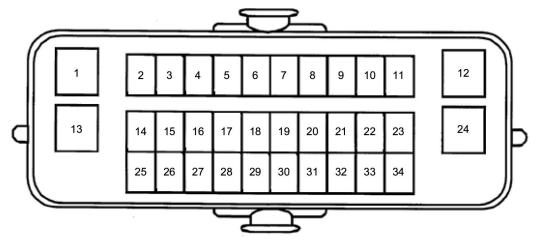


LNWD5ASF000101

## J-105 (Black) ECM

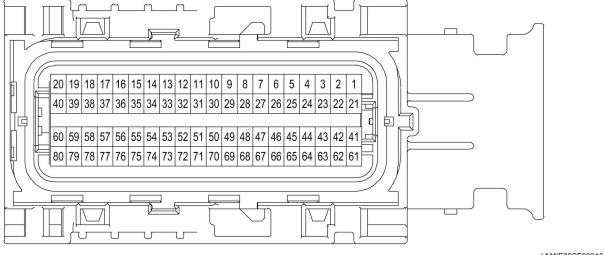


LNWF80SF000101

## J-143 (Black) Diesel Exhaust Fluid (DEF) Control Module

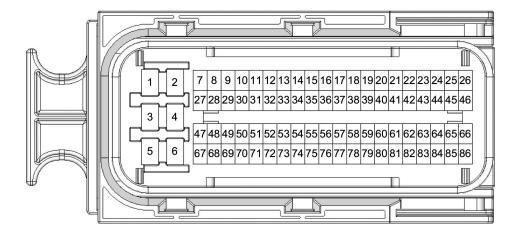


LNWA6FSF000101

## J-144 (Black) Diesel Exhaust Fluid (DEF) Control Module

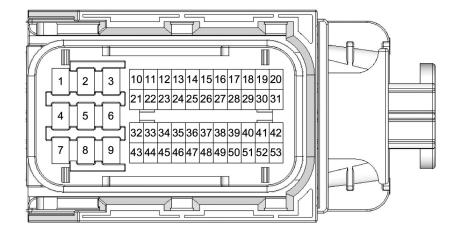

LNWA6FSF000201

## J-203 (Black) ECM

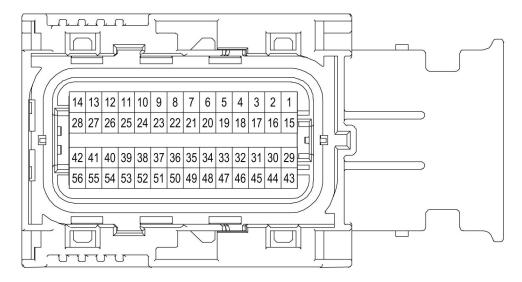

LNWF80SF000201

## **Connector Test Adapter List**

Connector	Test Adapter No.	
No.	Male	Female
B-5	J-35616-2A	J-35616-3
B-12	J-35616-44	J-35616-45
B-13	J-35616-40	J-35616-41
B-15	J-35616-18	J-35616-19
B-16	J-35616-18	J-35616-19
B-17	J-35616-18	J-35616-19
B-18	J-35616-18	J-35616-19
B-19	J-35616-18	J-35616-19
B-20	J-35616-18	J-35616-19
B-21	J-35616-4A	J-35616-5
B-22	J-35616-18	J-35616-19
B-23	J-35616-18	J-35616-19
B-24	J-35616-40	J-35616-41
B-25	J-35616-40	J-35616-41
B-26	J-35616-42/ J-35616-44	J-35616-43/ J-35616-45
B-27	_	_
B-28	_	_
B-31	J-35616-12	J-35616-13
B-32	_	_
B-33	J-35616-44	J-35616-45
B-34	J-35616-44	J-35616-45
B-35	J-35616-18	J-35616-19
B-39	J-35616-4A	J-35616-5
B-45	J-35616-4A	J-35616-5
B-48	_	_
B-49	_	_
B-51	_	_

B-52	_	_
B-53	_	_
B-54	_	_
B-55	_	_
B-56	_	_
B-59	_	_
B-60	_	_
B-70	J-35616-12	J-35616-13
B-71	J-35616-12	J-35616-13
B-72	J-35616-12	J-35616-13
B-73	J-35616-12	J-35616-13
B-74	J-35616-42	J-35616-43
B-75	J-35616-42	J-35616-43
B-80	J-35616-44	J-35616-45
B-81	J-35616-44	J-35616-45
B-101	_	_
B-102	J-35616-12	J-35616-13
B-105	J-35616-12	J-35616-13
B-106	_	_
B-115	J-35616-4A	J-35616-5
B-120	J-35616-4A	J-35616-5
B-125	_	_
B-130	J-35616-40	J-35616-41
B-131	J-35616-12	J-35616-13
B-132	J-35616-12	J-35616-13
B-133	J-35616-18	J-35616-19
B-134	J-35616-18	J-35616-19
B-135	J-35616-12	J-35616-13
B-136	J-35616-12	J-35616-13
B-137	J-35616-18	J-35616-19
	<del></del>	<del></del>

B-138	J-35616-18	J-35616-19
B-139	_	_
B-140		_
B-141	-	_
B-142	1	_
B-143	-	_
B-144	-	_
B-145	П	_
B-146	Ι	_
B-158	J-35616-12	J-35616-13
B-160	J-35616-12/	J-35616-13/
	J-35616-40	J-35616-41
B-165	J-35616-4A	J-35616-5
B-170	J-35616-33	J-35616-34
B-172	J-35616-33	J-35616-34
B-174	J-35616-4A	J-35616-5
B-175	J-35616-12	J-35616-13
B-176	J-35616-12	J-35616-13
B-184	J-35616-18	J-35616-19
B-187	J-35616-4A	J-35616-5
B-188	J-35616-12	J-35616-13
B-189	J-35616-12	J-35616-13
B-210	J-35616-31	J-35616-32
B-211	J-35616-42	J-35616-43
B-212	J-35616-44/	J-35616-45/
	J-35616-21	J-35616-22
B-213	J-35616-42	J-35616-43
B-214	J-35616-42	J-35616-43
P 045	1 25646 441	1 25646 451
B-215	J-35616-44/ J-35616-21	J-35616-45/ J-35616-22
B-216	J-35616-4A	J-35616-5
B-217 Pavision	J-35616-44 1.0 - Date: 4/29/201	J-35616-45
Revision 1.0 - Date: 4/29/201/		

B-218	J-35616-44	J-35616-45
B-219	_	_
B-220	J-35616-12	J-35616-13
B-221	_	_
B-222	J-35616-4A	J-35616-5
B-223	J-35616-64B	J-35616-65B
B-224	J-35616-4A	J-35616-5
B-225	J-35616-4A	J-35616-5
B-226	J-35616-40	J-35616-41
B-227	J-35616-4A	J-35616-5
B-228	J-35616-12	J-35616-13
B-229	J-35616-12	J-35616-13
B-230	J-35616-12	J-35616-13
B-231	_	_
B-232	J-35616-18	J-35616-19
B-233	_	_
B-234	_	_
B-235	J-35616-18	J-35616-19
B-236	J-35616-18	J-35616-19
B-237	J-35616-4A	J-35616-5
B-238	J-35616-4A	J-35616-5
B-239	J-35616-4A	J-35616-5
B-240	J-35616-12	J-35616-13
B-241	J-35616-18	J-35616-19
B-242	_	_
B-243	_	_
B-244	_	_
B-245	J-35616-12	J-35616-13
B-246	J-35616-44	J-35616-45
B-247	J-35616-12	J-35616-13
I		

B-248	J-35616-4A	J-35616-5
B-249	J-35616-12	J-35616-13
B-250	_	_
B-251	_	_
B-252	_	_
B-270	_	_
B-280	_	_
B-281	_	_
B-282	J-35616-16	J-35616-17
B-351	J-35616-12	J-35616-13
B-370	_	_
B-371	_	_
B-402	J-35616-18	J-35616-19
B-403	J-35616-18	J-35616-19
B-404	J-35616-18	J-35616-19
B-405	J-35616-18	J-35616-19
B-406	J-35616-18	J-35616-19
B-407	_	_
B-408	_	_
B-409	_	_
B-410	_	_
B-411	_	_
B-412	_	_
B-413	J-35616-44	J-35616-45
B-414	J-35616-44	J-35616-45
B-443	J-35616-4A	J-35616-5
B-450	J-35616-64B	J-35616-65B
B-451	J-35616-64B	J-35616-65B
B-452	_	_
B-453	_	_

B-455       J-35616-18       J-35616-19         B-456       J-35616-18       J-35616-19         B-457       —       —         B-458       J-35616-18       J-35616-19         B-459       J-35616-18       J-35616-19         B-505       J-35616-4A       J-35616-5         B-506       J-35616-4A       J-35616-5         B-507       J-35616-4A       J-35616-5         B-508       J-35616-4A       J-35616-5	
B-457       —         B-458       J-35616-18       J-35616-19         B-459       J-35616-18       J-35616-19         B-505       J-35616-4A       J-35616-5         B-506       J-35616-4A       J-35616-5         B-507       J-35616-4A       J-35616-5         B-508       J-35616-4A       J-35616-5	
B-458       J-35616-18       J-35616-19         B-459       J-35616-18       J-35616-19         B-505       J-35616-4A       J-35616-5         B-506       J-35616-4A       J-35616-5         B-507       J-35616-4A       J-35616-5         B-508       J-35616-4A       J-35616-5	
B-459       J-35616-18       J-35616-19         B-505       J-35616-4A       J-35616-5         B-506       J-35616-4A       J-35616-5         B-507       J-35616-4A       J-35616-5         B-508       J-35616-4A       J-35616-5	
B-505       J-35616-4A       J-35616-5         B-506       J-35616-4A       J-35616-5         B-507       J-35616-4A       J-35616-5         B-508       J-35616-4A       J-35616-5	
B-506 J-35616-4A J-35616-5  B-507 J-35616-4A J-35616-5  B-508 J-35616-4A J-35616-5	
B-507 J-35616-4A J-35616-5 B-508 J-35616-4A J-35616-5	
B-508 J-35616-4A J-35616-5	
B-518 J-35616-4A J-35616-5	
B-519 J-35616-4A J-35616-5	
B-520 J-35616-4A J-35616-5	
D-2 J-35616-33 J-35616-34	
D-3 J-35616-33 J-35616-34	
D-5 J-35616-12 J-35616-13	
D-7 J-35616-33 J-35616-34	
D-9 J-35616-12 J-35616-13	
D-11 J-35616-12 J-35616-13	
D-12 J-35616-12 J-35616-13	
D-13 J-35616-12 J-35616-13	
D-17 J-35616-42 J-35616-43	
D-19 J-35616-42 J-35616-43	
D-21 J-35616-18 J-35616-19	
D-22 J-35616-16 J-35616-17	
D-23 J-35616-4A J-35616-5	
D-24 J-35616-4A J-35616-5	
D-25 J-35616-4A J-35616-5	
D-26 J-35616-4A J-35616-5	-
D-27 J-35616-12 J-35616-13	

D-28	J-35616-12	J-35616-13
D-40	J-35616-4A	J-35616-5
D-41	J-35616-12	J-35616-13
D-42	J-35616-4A	J-35616-5
D-43	J-35616-12	J-35616-13
E-3	J-35616-18	J-35616-19
E-5	_	_
E-6	_	_
E-7	_	_
E-8	_	_
E-12	_	_
E-13	_	_
E-16	_	_
E-17	J-35616-18	J-35616-19
E-18	J-35616-12	J-35616-13
E-22	J-35616-12	J-35616-13
E-24	J-35616-33	J-35616-34
E-25	J-35616-33	J-35616-34
E-25	J-35616-12	J-35616-13
E-26	J-35616-44	J-35616-45
E-29	J-35616-4A	J-35616-5
E-30	J-35616-12	J-35616-13
E-31	_	_
E-50	_	_
E-51	J-35616-42	J-35616-43
E-52	J-35616-18	J-35616-19
E-53	J-35616-12	J-35616-13
E-54	J-35616-12	J-35616-13
E-56	_	_
E-57	_	_
	<del></del>	

E-58	_	_
E-59	_	_
E-60	J-35616-12	J-35616-13
E-61	J-35616-12	J-35616-13
E-62	J-35616-12	J-35616-13
E-63	J-35616-12	J-35616-13
E-64	J-35616-4A	J-35616-5
E-65	J-35616-4A	J-35616-5
E-66	J-35616-18	J-35616-19
E-67	0-00010-10	0-00010-10
E-68	J-35616-12	J-35616-13
E-69	J-35616-12	J-35616-13
E-70	_	_
E-71	J-35616-12	J-35616-13
E-72	J-35616-12	J-35616-13
E-73	J-35616-2A	J-35616-3
E-74	_	_
E-75	_	_
E-76	_	_
E-77	_	_
E-78	_	_
E-146	J-35616-33	J-35616-34
E-147	J-35616-33	J-35616-34
E-148	_	_
E-149	_	_
E-150	_	_
E-163	_	_
E-164	_	_
E-165	J-35616-33	J-35616-34
H-31	J-35616-4A	J-35616-5
	•	

H-32	J-35616-4A	J-35616-5
H-33	J-35616-18	J-35616-19
H-45	J-35616-4A	J-35616-5
H-49	J-35616-4A	J-35616-5
H-51	J-35616-4A	J-35616-5
H-52	J-35616-12	J-35616-13
H-53	J-35616-21	J-35616-22
H-66	J-35616-18	J-35616-19
H-80	J-35616-18	J-35616-19
H-81	J-35616-12/	J-35616-13/
	J-35616-40	J-35616-41
	-	
H-82	J-35616-12/	J-35616-13/
	J-35616-44	J-35616-45
H-83	J-35616-18	J-35616-19
H-84	J-35616-4A	J-35616-5
H-85	J-35616-4A	J-35616-5
H-86	J-35616-4A	J-35616-5
H-87	J-35616-4A	J-35616-5
H-88	J-35616-16	J-35616-17
H-89	J-35616-4A	J-35616-5
H-90	J-35616-18	J-35616-19
H-91	J-35616-18	J-35616-19
H-92	J-35616-4A	J-35616-5
H-93	J-35616-4A	J-35616-5
H-94	J-35616-18	J-35616-19
H-95	J-35616-18	J-35616-19
H-96	J-35616-18	J-35616-19
H-101	J-35616-2A/	J-35616-3/
	J-35616-64B	J-35616-65B
H-104	J-35616-12	J-35616-13
H-105	J-35616-12	J-35616-13
H-107 Revision	J-35616-12 1.0 - Date: 4/29/201	J-35616-13 7

H-108	_	_
H-168		
H-169	_	_
H-170	J-35616-44	J-35616-45
H-171	J-35616-18	J-35616-19
H-172	J-35616-42	J-35616-43
H-173	J-35616-18	J-35616-19
H-174	J-35616-18	J-35616-19
H-175	J-35616-18	J-35616-19
H-176	_	_
H-177	_	_
H-195	J-35616-18	J-35616-19
H-218	J-35616-18	J-35616-19
J-10	_	_
J-12	_	_
J-13	_	_
J-14	_	_
J-15	J-35616-33	J-35616-34
J-19	J-35616-42	J-35616-43
J-20	J-35616-42	J-35616-43
J-22	J-35616-64A/	J-35616-65A/
	J-35616-40	J-35616-41
J-34	J-35616-12	J-35616-13
J-35	J-35616-12	J-35616-13
J-38	J-35616-64B	J-35616-65B
J-44	J-35616-18	J-35616-19
J-45	J-35616-18	J-35616-19
J-48	J-35616-33	J-35616-34
J-55	J-35616-18	J-35616-19
J-59	J-35616-18	J-35616-19
J-71 Revision	— 1.0 - Date: 4/29/201	


J-73         J-35616-18         J-35616-19           J-74         J-35616-18         J-35616-19           J-100         —         —           J-101         —         —           J-102         J-35616-12         J-35616-13           J-103         —         —           J-104         —         —           J-105         J-35616-2A         J-35616-3           J-106         J-35616-18         J-35616-19           J-107         J-35616-18         J-35616-19           J-108         J-35616-18         J-35616-19           J-109         —         —           J-110         —         —           J-111         J-35616-18         J-35616-19           J-112         J-35616-4A         J-35616-5           J-112         J-35616-4A         J-35616-5           J-113         —         —           J-114         —         —           J-115         —         —           J-117         J-35616-33         J-35616-34           J-118         J-35616-33         J-35616-34           J-120         J-35616-18         J-35616-19           J-121         J-35616-12<	J-72	_	_
J-100         —         —           J-101         —         —           J-102         J-35616-12         J-35616-13           J-103         —         —           J-104         —         —           J-105         J-35616-2A         J-35616-3           J-106         J-35616-18         J-35616-19           J-107         J-35616-18         J-35616-19           J-108         J-35616-18         J-35616-19           J-109         —         —           J-110         —         —           J-111         J-35616-4A         J-35616-5           J-112         J-35616-4A         J-35616-5           J-113         —         —           J-114         —         —           J-115         —         —           J-117         J-35616-33         J-35616-34           J-118         J-35616-33         J-35616-34           J-119         J-35616-18         J-35616-19           J-120         J-35616-18         J-35616-19           J-121         J-35616-12         J-35616-13           J-122         J-35616-12         J-35616-13           J-123         J-35616-1	J-73	J-35616-18	J-35616-19
J-101         —         —           J-102         J-35616-12         J-35616-13           J-103         —         —           J-104         —         —           J-105         J-35616-2A         J-35616-3           J-106         J-35616-18         J-35616-19           J-107         J-35616-18         J-35616-19           J-108         J-35616-18         J-35616-19           J-109         —         —           J-110         —         —           J-111         J-35616-4A         J-35616-5           J-112         J-35616-4A         J-35616-5           J-113         —         —           J-114         —         —           J-115         —         —           J-116         —         —           J-117         J-35616-33         J-35616-34           J-118         J-35616-33         J-35616-34           J-119         J-35616-18         J-35616-19           J-120         J-35616-12         J-35616-13           J-121         J-35616-12         J-35616-13           J-122         J-35616-12         J-35616-13           J-124         —	J-74	J-35616-18	J-35616-19
J-102         J-35616-12         J-35616-13           J-103         —         —           J-104         —         —           J-105         J-35616-2A         J-35616-3           J-106         J-35616-18         J-35616-19           J-107         J-35616-18         J-35616-19           J-108         J-35616-18         J-35616-19           J-109         —         —           J-110         —         —           J-111         J-35616-4A         J-35616-5           J-112         J-35616-4A         J-35616-5           J-113         —         —           J-114         —         —           J-115         —         —           J-117         J-35616-33         J-35616-34           J-118         J-35616-33         J-35616-34           J-119         J-35616-18         J-35616-19           J-120         J-35616-18         J-35616-13           J-121         J-35616-12         J-35616-13           J-122         J-35616-12         J-35616-13           J-123         J-35616-12         J-35616-13           J-136         —         —           J-137	J-100	_	_
J-103         —         —           J-104         —         —           J-105         J-35616-2A         J-35616-3           J-106         J-35616-18         J-35616-19           J-107         J-35616-18         J-35616-19           J-108         J-35616-18         J-35616-19           J-109         —         —           J-110         —         —           J-111         J-35616-4A         J-35616-5           J-112         J-35616-4A         J-35616-5           J-113         —         —           J-114         —         —           J-115         —         —           J-117         J-35616-33         J-35616-34           J-118         J-35616-33         J-35616-34           J-119         J-35616-18         J-35616-19           J-120         J-35616-18         J-35616-19           J-121         J-35616-12         J-35616-13           J-122         J-35616-12         J-35616-13           J-123         J-35616-12         J-35616-13           J-124         —         —           J-136         —         —           J-137         J-35616-4	J-101	_	_
J-104         —         —           J-105         J-35616-2A         J-35616-3           J-106         J-35616-18         J-35616-19           J-107         J-35616-18         J-35616-19           J-108         J-35616-18         J-35616-19           J-109         —         —           J-110         —         —           J-111         J-35616-4A         J-35616-5           J-112         J-35616-4A         J-35616-5           J-113         —         —           J-114         —         —           J-115         —         —           J-117         J-35616-33         J-35616-34           J-118         J-35616-33         J-35616-34           J-119         J-35616-18         J-35616-19           J-120         J-35616-18         J-35616-13           J-121         J-35616-12         J-35616-13           J-122         J-35616-12         J-35616-13           J-123         J-35616-12         J-35616-13           J-136         —         —           J-137         J-35616-4A         J-35616-5	J-102	J-35616-12	J-35616-13
J-105       J-35616-2A       J-35616-3         J-106       J-35616-18       J-35616-19         J-107       J-35616-18       J-35616-19         J-108       J-35616-18       J-35616-19         J-109       —       —         J-110       —       —         J-111       J-35616-4A       J-35616-5         J-112       J-35616-4A       J-35616-5         J-113       —       —         J-114       —       —         J-115       —       —         J-117       J-35616-33       J-35616-34         J-118       J-35616-33       J-35616-9         J-119       J-35616-18       J-35616-19         J-120       J-35616-12       J-35616-13         J-121       J-35616-12       J-35616-13         J-122       J-35616-18       J-35616-19         J-123       J-35616-12       J-35616-13         J-124       —       —         J-136       —       —         J-137       J-35616-4A       J-35616-5	J-103	_	_
J-106       J-35616-18       J-35616-19         J-107       J-35616-18       J-35616-19         J-108       J-35616-18       J-35616-19         J-109       —       —         J-110       —       —         J-111       J-35616-4A       J-35616-5         J-112       J-35616-4A       J-35616-5         J-113       —       —         J-114       —       —         J-115       —       —         J-117       J-35616-33       J-35616-34         J-118       J-35616-33       J-35616-9         J-119       J-35616-18       J-35616-19         J-120       J-35616-12       J-35616-13         J-121       J-35616-12       J-35616-13         J-122       J-35616-12       J-35616-13         J-123       J-35616-12       J-35616-13         J-124       —       —         J-136       —       —         J-137       J-35616-4A       J-35616-5	J-104	_	_
J-107       J-35616-18       J-35616-19         J-108       J-35616-18       J-35616-19         J-109       —       —         J-110       —       —         J-111       J-35616-4A       J-35616-5         J-112       J-35616-4A       J-35616-5         J-113       —       —         J-114       —       —         J-115       —       —         J-117       J-35616-33       J-35616-34         J-118       J-35616-33       J-35616-9         J-119       J-35616-18       J-35616-19         J-120       J-35616-12       J-35616-13         J-121       J-35616-12       J-35616-13         J-122       J-35616-18       J-35616-19         J-123       J-35616-12       J-35616-13         J-124       —       —         J-136       —       —         J-137       J-35616-4A       J-35616-5	J-105	J-35616-2A	J-35616-3
J-108       J-35616-18       J-35616-19         J-109       —       —         J-110       —       —         J-111       J-35616-4A       J-35616-5         J-112       J-35616-4A       J-35616-5         J-113       —       —         J-114       —       —         J-115       —       —         J-117       J-35616-33       J-35616-34         J-118       J-35616-33       J-35616-9         J-119       J-35616-18       J-35616-9         J-119       J-35616-18       J-35616-19         J-120       J-35616-12       J-35616-13         J-121       J-35616-12       J-35616-13         J-122       J-35616-12       J-35616-19         J-123       J-35616-12       J-35616-13         J-124       —       —         J-136       —       —         J-137       J-35616-4A       J-35616-5	J-106	J-35616-18	J-35616-19
J-109         —         —           J-110         —         —           J-111         J-35616-4A         J-35616-5           J-112         J-35616-4A         J-35616-5           J-113         —         —           J-114         —         —           J-115         —         —           J-117         J-35616-33         J-35616-34           J-118         J-35616-8         J-35616-9           J-119         J-35616-18         J-35616-19           J-120         J-35616-12         J-35616-13           J-121         J-35616-12         J-35616-13           J-122         J-35616-18         J-35616-19           J-123         J-35616-12         J-35616-13           J-124         —         —           J-136         —         —           J-137         J-35616-4A         J-35616-5	J-107	J-35616-18	J-35616-19
J-110       —       —         J-111       J-35616-4A       J-35616-5         J-112       J-35616-4A       J-35616-5         J-113       —       —         J-114       —       —         J-115       —       —         J-117       J-35616-33       J-35616-34         J-118       J-35616-33       J-35616-34         J-119       J-35616-8       J-35616-9         J-119       J-35616-18       J-35616-19         J-120       J-35616-12       J-35616-13         J-121       J-35616-12       J-35616-13         J-122       J-35616-12       J-35616-19         J-123       J-35616-12       J-35616-13         J-124       —       —         J-136       —       —         J-137       J-35616-4A       J-35616-5	J-108	J-35616-18	J-35616-19
J-111       J-35616-4A       J-35616-5         J-112       J-35616-4A       J-35616-5         J-113       —       —         J-114       —       —         J-115       —       —         J-117       J-35616-33       J-35616-34         J-118       J-35616-8       J-35616-9         J-119       J-35616-18       J-35616-19         J-120       J-35616-12       J-35616-13         J-121       J-35616-12       J-35616-13         J-122       J-35616-18       J-35616-19         J-123       J-35616-12       J-35616-13         J-124       —       —         J-136       —       —         J-137       J-35616-4A       J-35616-5	J-109	_	_
J-112       J-35616-4A       J-35616-5         J-113       —       —         J-114       —       —         J-115       —       —         J-117       J-35616-33       J-35616-34         J-118       J-35616-8       J-35616-9         J-119       J-35616-18       J-35616-19         J-120       J-35616-12       J-35616-13         J-121       J-35616-12       J-35616-13         J-122       J-35616-18       J-35616-19         J-123       J-35616-12       J-35616-13         J-124       —       —         J-136       —       —         J-137       J-35616-4A       J-35616-5	J-110	_	_
J-113       —       —         J-114       —       —         J-115       —       —         J-117       J-35616-33       J-35616-34         J-118       J-35616-8       J-35616-9         J-119       J-35616-18       J-35616-19         J-120       J-35616-12       J-35616-13         J-121       J-35616-12       J-35616-13         J-122       J-35616-18       J-35616-19         J-123       J-35616-12       J-35616-13         J-124       —       —         J-136       —       —         J-137       J-35616-4A       J-35616-5	J-111	J-35616-4A	J-35616-5
J-114       —       —         J-115       —       —         J-117       J-35616-33       J-35616-34         J-118       J-35616-8       J-35616-9         J-119       J-35616-18       J-35616-19         J-120       J-35616-12       J-35616-13         J-121       J-35616-12       J-35616-13         J-122       J-35616-18       J-35616-19         J-123       J-35616-12       J-35616-13         J-124       —       —         J-136       —       —         J-137       J-35616-4A       J-35616-5	J-112	J-35616-4A	J-35616-5
J-115       —       —         J-117       J-35616-33       J-35616-34         J-118       J-35616-8       J-35616-9         J-119       J-35616-18       J-35616-19         J-120       J-35616-12       J-35616-13         J-121       J-35616-12       J-35616-13         J-122       J-35616-18       J-35616-19         J-123       J-35616-12       J-35616-13         J-124       —       —         J-136       —       —         J-137       J-35616-4A       J-35616-5	J-113	_	_
J-117       J-35616-33       J-35616-34         J-118       J-35616-8       J-35616-9         J-119       J-35616-18       J-35616-19         J-120       J-35616-12       J-35616-13         J-121       J-35616-12       J-35616-13         J-122       J-35616-18       J-35616-19         J-123       J-35616-12       J-35616-13         J-124       —       —         J-136       —       —         J-137       J-35616-4A       J-35616-5	J-114	_	_
J-118       J-35616-8       J-35616-9         J-119       J-35616-18       J-35616-19         J-120       J-35616-12       J-35616-13         J-121       J-35616-12       J-35616-13         J-122       J-35616-18       J-35616-19         J-123       J-35616-12       J-35616-13         J-124       —       —         J-136       —       —         J-137       J-35616-4A       J-35616-5	J-115	_	_
J-119       J-35616-18       J-35616-19         J-120       J-35616-12       J-35616-13         J-121       J-35616-12       J-35616-13         J-122       J-35616-18       J-35616-19         J-123       J-35616-12       J-35616-13         J-124       —       —         J-136       —       —         J-137       J-35616-4A       J-35616-5	J-117	J-35616-33	J-35616-34
J-120       J-35616-12       J-35616-13         J-121       J-35616-12       J-35616-13         J-122       J-35616-18       J-35616-19         J-123       J-35616-12       J-35616-13         J-124       —       —         J-136       —       —         J-137       J-35616-4A       J-35616-5	J-118	J-35616-8	J-35616-9
J-121       J-35616-12       J-35616-13         J-122       J-35616-18       J-35616-19         J-123       J-35616-12       J-35616-13         J-124       —       —         J-136       —       —         J-137       J-35616-4A       J-35616-5	J-119	J-35616-18	J-35616-19
J-122 J-35616-18 J-35616-19  J-123 J-35616-12 J-35616-13  J-124 — —  J-136 — —  J-137 J-35616-4A J-35616-5	J-120	J-35616-12	J-35616-13
J-123 J-35616-12 J-35616-13  J-124 — —  J-136 — —  J-137 J-35616-4A J-35616-5	J-121	J-35616-12	J-35616-13
J-124 — — — — J-136 — — — J-137 J-35616-4A J-35616-5	J-122	J-35616-18	J-35616-19
J-136 — — — — J-137 J-35616-4A J-35616-5	J-123	J-35616-12	J-35616-13
J-137 J-35616-4A J-35616-5	J-124	_	_
	J-136	_	_
J-138 J-35616-18 J-35616-19	J-137	J-35616-4A	J-35616-5
	J-138	J-35616-18	J-35616-19


J-141	_	_
J-142	_	_
J-143	J-35616-64B/ J-35616-4B	J-35616-65B/ J-35616-5
J-144	J-35616-64B/ J-35616-4B	J-35616-65B/ J-35616-5
J-145	_	_
J-146	J-35616-33	J-35616-34
J-147	J-35616-33	J-35616-34
J-148	J-35616-64B	J-35616-65B
J-149	J-35616-4B	J-35616-5
J-162	J-35616-33	J-35616-34
J-163	J-35616-33	J-35616-34
J-164	J-35616-64B	J-35616-65B
J-165	J-35616-64B	J-35616-65B
J-166	J-35616-18	J-35616-19
J-167	J-35616-8	J-35616-55
J-168	_	_
J-169	_	_
J-174	_	_
J-203	J-35616-2A	J-35616-3
J-204	J-35616-12	J-35616-13
J-241	_	_
L-4	J-35616-18	J-35616-19
L-5	J-35616-18	J-35616-19
L-20	J-35616-18	J-35616-19
L-21	J-35616-18	J-35616-19
L-22	J-35616-18	J-35616-19
L-23	J-35616-18	J-35616-19
L-24	J-35616-33	J-35616-34
L-25	J-35616-33	J-35616-34


L-26 J-35616-33 J-35616-34  L-27 J-35616-33 J-35616-34  L-28 J-35616-33 J-35616-34  N-7 J-35616-18 J-35616-19  N-8 J-35616-18 J-35616-19  N-9 J-35616-18 J-35616-19  N-10 J-35616-18 J-35616-19  N-12 J-35616-12 J-35616-13  N-13 J-35616-18 J-35616-19  N-14 J-35616-33 J-35616-34  N-30 J-35616-33 J-35616-34  N-31 J-35616-4A J-35616-5  N-32 J-35616-18 J-35616-19			
L-28 J-35616-33 J-35616-34  N-7 J-35616-18 J-35616-19  N-8 J-35616-18 J-35616-19  N-9 J-35616-18 J-35616-19  N-10 J-35616-18 J-35616-19  N-12 J-35616-12 J-35616-13  N-13 J-35616-18 J-35616-19  N-14 J-35616-33 J-35616-34  N-30 J-35616-34 J-35616-34  N-31 J-35616-4A J-35616-5	L-26	J-35616-33	J-35616-34
N-7 J-35616-18 J-35616-19  N-8 J-35616-18 J-35616-19  N-9 J-35616-18 J-35616-19  N-10 J-35616-18 J-35616-19  N-12 J-35616-12 J-35616-13  N-13 J-35616-18 J-35616-19  N-14 J-35616-33 J-35616-34  N-30 J-35616-33 J-35616-34  N-31 J-35616-4A J-35616-5	L-27	J-35616-33	J-35616-34
N-8 J-35616-18 J-35616-19  N-9 J-35616-18 J-35616-19  N-10 J-35616-18 J-35616-19  N-12 J-35616-12 J-35616-13  N-13 J-35616-18 J-35616-19  N-14 J-35616-33 J-35616-34  N-30 J-35616-33 J-35616-34  N-31 J-35616-4A J-35616-5	L-28	J-35616-33	J-35616-34
N-9 J-35616-18 J-35616-19  N-10 J-35616-18 J-35616-19  N-12 J-35616-12 J-35616-13  N-13 J-35616-18 J-35616-19  N-14 J-35616-33 J-35616-34  N-30 J-35616-33 J-35616-34  N-31 J-35616-4A J-35616-5	N-7	J-35616-18	J-35616-19
N-10 J-35616-18 J-35616-19  N-12 J-35616-12 J-35616-13  N-13 J-35616-18 J-35616-19  N-14 J-35616-33 J-35616-34  N-30 J-35616-33 J-35616-34  N-31 J-35616-4A J-35616-5	N-8	J-35616-18	J-35616-19
N-12 J-35616-12 J-35616-13  N-13 J-35616-18 J-35616-19  N-14 J-35616-33 J-35616-34  N-30 J-35616-33 J-35616-34  N-31 J-35616-4A J-35616-5	N-9	J-35616-18	J-35616-19
N-13 J-35616-18 J-35616-19  N-14 J-35616-33 J-35616-34  N-30 J-35616-33 J-35616-34  N-31 J-35616-4A J-35616-5	N-10	J-35616-18	J-35616-19
N-14 J-35616-33 J-35616-34  N-30 J-35616-33 J-35616-34  N-31 J-35616-4A J-35616-5	N-12	J-35616-12	J-35616-13
N-30 J-35616-33 J-35616-34 N-31 J-35616-4A J-35616-5	N-13	J-35616-18	J-35616-19
N-31 J-35616-4A J-35616-5	N-14	J-35616-33	J-35616-34
	N-30	J-35616-33	J-35616-34
N-32 J-35616-18 J-35616-19	N-31	J-35616-4A	J-35616-5
	N-32	J-35616-18	J-35616-19


# **Component Locator**


## **Ground Views**

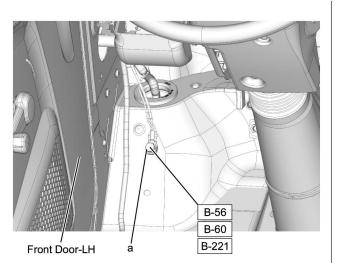


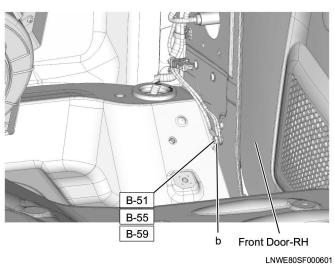


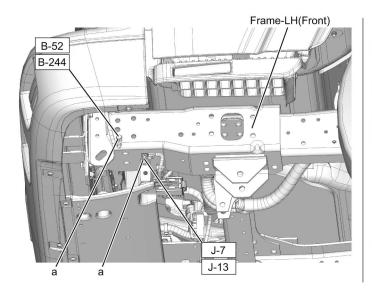


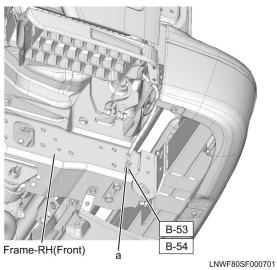

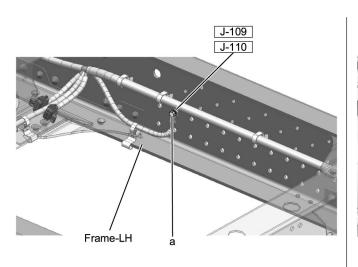

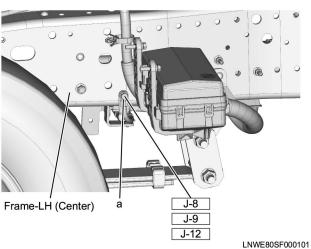

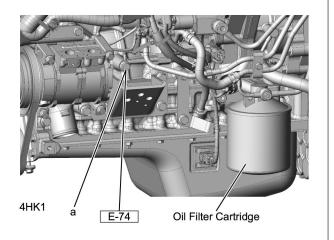


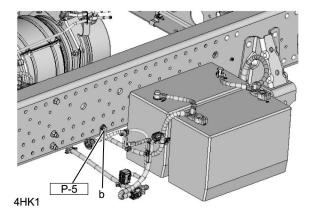


LNWA80SF000501

## **Visual Identification**

## **Inline Harness Connector End Views**



Connector No.		H-31			
Connector Color		White			
Test Adapter No.		(M) J-35616-4A		(F) J-35616-5	
		Male	Female		
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function	
1	GRY	J/C 10P BASE3 B-507(7)	BLK	Side Turn Light(LH)	
2	GRN/BLK	Sub Junction Block 1 B-132(14)	GRN/BLK	Side Turn Light(LH)	
3	GRN/RED	Sub Junction Block 1 B-132(1)	GRN/RED	Side Marker Light(LH)	
4	ORN	Audio	ORN	Speaker(LH)	
5	GRN/BLK	Combination Switch	GRN/BLK	Front Cornering Light(LH)	
6	BLK	Audio	BLK	Speaker(LH)	

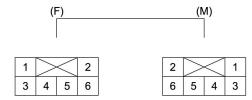


Connector No.	H-32				
Connector Color		Black			
Test Adapter No.		(M) J-35616-4A		(F) J-35616-5	
		Male Female			
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function	
1	GRY	J/C 10P BASE2 B-506(7)	BLK	Side Turn Light(RH)	
2	GRN/WHT	Sub Junction Block 1 B-132(11)	GRN/WHT	Side Turn Light(RH)	
3	GRN/RED	Sub Junction Block 1 B-131(6)	GRN/RED	Side Marker Light(RH)	
4	GRY	Audio	GRY	Speaker(RH)	
5	GRN/WHT	Combination Switch	GRN/WHT	Front Cornering Light(RH)	
6	GRN	Audio	GRN	Speaker(RH)	



#### LNWF80SH000401

Connector No.	Н-33			
Connector Color	Black			
Test Adapter No.	(M) J-35616-44 (F) J-35616-45			(F) J-35616-45
		Male	Female	
Pin No.	Wire Color	Wire Color Pin Function		Pin Function
1	VIO	Cab Junction Block1 B-20(7)	GRY	Door Switch RH
2	_	Not Used	_	Not Used
3	_	Not Used	_	Not Used

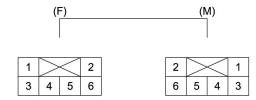


Connector No.


#### LNW78DSH000201

Connector Color	White			
Test Adapter No.		(M) J-35616-4A		(F) J-35616-5
		Male		Female
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function
1	BRN	J/C 10P BASE1 B-505(4)	_	Not Used
2	BRN	J/C 10P BASE1 B-505(6)	RED	Dome Light
3	GRY	Cab Junction Block1 B-22(6)	GRY/BLU	Dome Light
4	GRN/RED	Cab Junction Block1 B-22(9)	GRN/RED	Joint Connector7
5	GRY	Cab Junction Block1 B-22(9)	_	Not Used
6	GRY	J/C 10P BASE2 B-506(8)	BLK	Joint Connector5
Connector No.		н	45	
Connector Color		Wi	nite	
Test Adapter No.		(M) J-35616-4A		(F) J-35616-5
		Male (C-Cab)		Female (C-Cab)
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function
1	_	_	RED	Rear Dome Light
2	_	_	RED	Dome Light
3	_	_	GRY/BLU	Dome Light
4	_	_	GRN/RED	Joint Connector 7
5	_	_	GRY/BLU	Rear Dome Light
Revision 1.0 - D	ate: 4/29/2017	2016 CHEVR	OLET LOW CAB	FORWARD (LCF) ELECTRICAL SE


H-45



Connector No.	H-49  Gray  (M) J-35616-4A  (F) J-35616-5			
Connector Color				
Test Adapter No.				
		Male	Female	
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function
1	RED/WHT	H-93(10)	RED/WHT	Rear Power Window Switch(LH)
2	GRN/BLK	H-93(9)	GRN/BLK	Rear Power Window Switch(LH)
3	GRN/YEL	H-93(8)	GRN/YEL	Rear Power Window Switch(LH)
4	_	Not Used	_	Not Used
5	GRN/YEL	H-93(6)	GRN/YEL	Rear Door Lock Motor(LH)
6	GRN/RED	H-93(5)	GRN/RED	Rear Door Lock Motor(LH)



Connector No.	H-51			
Connector Color	White			
Test Adapter No.		(F) J-35616-5		
		Male		Female
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function
1	RED/WHT	H-86(10)	RED/WHT	Rear Power Window Switch (RH)
2	GRN	H-86(9)	GRN/BLK	Rear Power Window Switch (RH)
3	BLU/YEL	H-86(8)	GRN/YEL	Rear Power Window Switch (RH)
4	_	Not Used	_	Not Used
5	GRN/YEL	H-86(6)	GRN/YEL	Rear Door Lock Motor (RH)
6	GRN/RED	H-86(5)	GRN/RED	Rear Door Lock Motor (RH)




Connector No.	H-52			
Connector Color  Test Adapter No.  Pin No.	Black			
	(M) J-35616-12		(F) J-35616-13	
		Male Fe		Female
	Wire Color	Pin Function	Wire Color	Pin Function
1	BLU/YEL	Engine Oil Pressure Switch	BLU/YEL	H-81 (23)
2	GRN/WHT	Oil Level Switch	GRN/WHT	H-80 (7)
3	BRN/YEL	A/C Compressor	BRN/YEL	Triple Pressure Switch
			BRN/YEL	Diode 2
			BRN/YEL	ECM
4	GRN/BLK	Glow Plug Control Module	GRN/BLK	W/S-2
5	BLU/WHT	VNT Control Module	BLU/WHT	ECM
6	BLU	VNT Control Module	BLU	ECM
7	BLU/WHT	Glow Plug Control Module	BLU/WHT	H-90 (8)
	BLU/WHT	VNT Control Module	BLU/WHT	EHCU
8	BLU	Glow Plug Control Module	BLU	H-90 (7)
	BLU/WHT	VNT Control Module	BLU	EHCU
9	BRN	Turbocharger Outlet Air Temperature Sensor	ORN	ECM
10	PNK	Turbocharger Outlet Air Temperature Sensor	BLU/ORN	ECM
11	YEL/RED	Intake Airflow (IAF) Valve	YEL/RED	ECM

13	GRN/BLK	VNT Control Module	GRN/BLK	W/S-2
14	BLU/BLK	Intake Airflow (IAF) Valve	BLU/BLK	ECM
15	GRY/BLK	Low Water Level Switch	GRY/BLK	H-90 (19)
16	WHT/BLU	Generator	WHT/BLU	H-80 (12)



Connector No.	H-53				
Connector Color		Gray			
Test Adapter No.		(M) J-35616-21 (F) J-35616-22			
		Male Female			
Pin No.	Wire Color Pin Function		Wire Color	Pin Function	
1	BLU/BLK	SBF GLOW	WHT/BLK	Glow Plug Control Module	
2	BLK/WHT	Starter Relay	BLK/WHT	Starter	

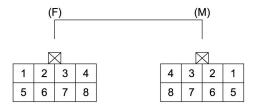


Connector No.	H-66			
Connector Color	(M) J-35616-18 (F) J-35616-19			
Test Adapter No.				(F) J-35616-19
		Male Female		
Pin No.	Wire Color	Wire Color Pin Function Wire Col		Pin Function
1	GRN/BLK	Rear Combination Light(LH)	GRN/BLK	H-101(1)
2	GRN	Rear Combination Light(RH)	GRN	H-101(3)
3	_	Not Used	_	Not Used
4	_	Not Used	_	Not Used
5	GRN/RED	License Plate Light	GRN/RED	H-101(5)
6	RED/BLU	Rear Combination Light(LH)	RED/BLU	H-101(28)
7	BLK	Rear Combination Light(RH)	BLK	W/S-6
8	GRN/WHT	Rear Combination Light(RH)	GRN/WHT	H-101(2)




Connector No.		н-	80		
Connector Color	Black				
Test Adapter No.		(M) J-35616-18 Male		(F) J-35616-19 Female	
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function	
1	VIO	Sub Junction Block 1 B-135 (7)	BLK/ORN	ECM	
2	GRY	Sub Junction Block 1 B-131 (7)	BLK	Vehicle Speed Sensor	
3	LT GRN	Combination Switch	PNK/BLU	ECM	
4	_	Not Used	_	Not Used	
5	_	Not Used	_	Not Used	
6	_	Not Used	_	Not Used	
7	GRN/WHT	IP Cluster	GRN/WHT	H-52 (2)	
8	ORN/BLU	IP Cluster	ORN/BLU	ECM	
9	GRY/BLU	Cruise Main Switch	GRY/BLU	ECM	
10	LT GRN/RED	Wiper Exhaust Brake Switch	LT GRN/RED	ECM	
11	YEL/BLK	IP Cluster	YEL/BLK	ECM	
12	LT BLU	Sub Junction Block 1 B-131 (10)	WHT/BLU	H-52 (16)	
13	_	Not Used	_	Not Used	
14	_	Not Used	_	Not Used	
15	GRY	Combination Switch	GRY	ECM	
16	BLK/ORN	IP Cluster	BLK/ORN	Air Cleaner Switch	
Revisjøn 1.0 - E	ate: 4/29/2017	P/N Start Relay 2016 CHEVF	OLETILLO WHO CAB	FORMARSWILGF) ELECTRICAL SE	

17	TEL	F/IN Statt Relay	DLIVICED	HIHIDIOI SWITCH
18	_	Not Used	_	Not Used
19	BLU/WHT	DPF Regeneration Switch	BLU/WHT	ECM
20	YEL	J/C 10P BASE1 B-505 (3)	YEL	Rear Dome Light Relay
21	RED	Rear Dome Light Switch 1	RED	Fuse Rear Dome Light (15A)
22	LT GRN	Stoplight Switch	RED/WHT	ECM

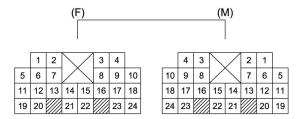


Connector No.	H-81 Green				
Connector Color					
Test Adapter No.	(M	) J-35616-12/ J-35616-40	(F	) J-35616-13/ J-35616-41	
		Male		Female	
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function	
1	LT BLU	Cab Junction Block1 B-18 (9)	RED/BLK	Horn (RH), (LH)	
2	_	Not Used	_	Not Used	
3	VIO	Sub Junction Block 1 B-135 (8)	GRN/WHT	H-101 (2)	
4	LT GRN	Cab Junction Block 1 B-22 (15)	BLK/WHT	Starter Relay	
5	VIO	Sub Junction Block 1 B-136 (5)	GRN/BLK	H-101 (1)	
6	RED/BLU	H-84 (12)	RED/BLU	Linear Solenoid 2	
7	RED/YEL	H-84 (7)	RED/YEL	Linear Solenoid 2	
8	RED/WHT	H-84 (10)	RED/WHT	Linear Solenoid 4	
9	RED/BLK	H-84 (3)	RED/BLK	Linear Solenoid 4	
10	BRN	IP Cluster	LT GRN/WHT	H-173 (9)	
			LT GRN/WHT	H-101 (6)	
11	_	Not Used	_	Not Used	
12	RED	H-84 (11)	RED	Linear Solenoid 3	
13	RED/GRN	H-84 (6)	RED/GRN	Linear Solenoid 3	
14	WHT/RED	W/S-25	WHT/RED	SBF Headlight (30A)	
15	BLK/RED	Cab Junction Block 1 B-25 (1)	BLK/RED	SBF Starter Switch 1 (30A)	
Revision 1.0 - D	ate; <sub>B</sub> 4/29/2917	IP Cluster 2016 CHEVF	OLETRAMHÇAB	FORWARD (SOF) ELECTRICAL SEC	


טו	ן סקוא/אטחו	IF Clusiel	DKIW/WHI	Seuimentei Switch
17	GRN	Sub Junction Block 1 B-131 (12)	GRN	H-101 (3)
18	_	Not Used	_	Not Used
19	_	Not Used	_	Not Used
20	YEL	Sub Junction Block 1 B-135 (10)	RED/BLK	H-101 (31)
21	BLK/YEL	W/S-10	BLK/YEL	SBF Junction Block (50A)
22	WHT/BLK	Cab Junction Block 1 B-26 (2)	WHT/BLK	SBF Wiper (50A)
23	LT GRN	IP Cluster	BLU/YEL	H-52 (1)
24	_	Not Used	_	Not Used

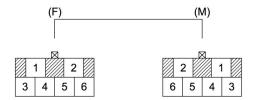

Connector No.	H-82				
Connector Color		Gı	ray		
Test Adapter No.	(M	) J-35616-12/ J-35616-44	(F	) J-35616-13/ J-35616-45	
		Male	Female		
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function	
1	WHT/BLK	Blower Relay	WHT/BLK	SBF HVAC(40A)	
2	RED/BLK	Power ACC Relay	RED/BLK	SBF POWER ACC(50A)	
3	_	Not Used	_	Not Used	
4	BRN	Sub Junction Block 1 B-132(2)	GRN/RED	Marker Light Relay	
5	BLK/YEL	W/S-8	BLK/YEL	SBF Starter Switch 2 (40A)	
6	BLK/YEL	W/S-8	BLK/YEL	SBF Starter Switch 2 (40A)	

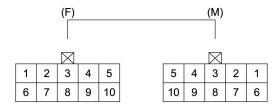


Connector No.	H-83 White				
Connector Color					
Test Adapter No.		(M) J-35616-18		(F) J-35616-19	
		Male		Female	
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function	
1	GRY	J/C-101	BLK	ECM	
2	WHT	Accelerator Pedal Position Sensor	WHT	ECM	
3	_	Not Used	_	Not Used	
4	BLU/WHT	Accelerator Pedal Position Sensor	BLU/WHT	ECM	
5	BLU	Accelerator Pedal Position Sensor	BLU	ECM	
6	GRY	J/C-101	* /S	ECM	
7	RED	Accelerator Pedal Position Sensor	RED	ECM	
8	_	Not Used	_	Not Used	
9	BLU	J/C-100	BLU/RED	ECM	
10	BLU	J/C-100	* /S	Shield	

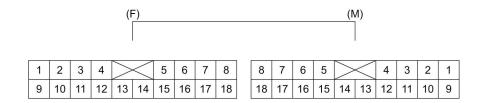

LNWF80SF000301

Connector No.		H-84			
Connector Color		W	hite		
Test Adapter No.		(M) J-35616-4A (F) J-35616-5			
		Male		Female	
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function	
1	BLU	IP Cluster	BLU	CAN1 JOINT Mimamori 1	
2	YEL/BLK	IP Cluster	YEL/BLK	TCM	
3	RED/BLK	H-81 (9)	RED/BLK	TCM	
4	WHT/BLK	H-85 (4)	WHT/BLK	DRL Control Unit	
5	RED/BLU	DRL Relay	RED/BLU	DRL Control Unit	
6	RED/GRN	H-81 (13)	RED/GRN	TCM	
7	RED/YEL	H-81 (7)	RED/YEL	TCM	
8	VIO	IP Cluster	VIO	TCM	
9	BLU/WHT	IP Cluster	BLU/WHT	CAN1 JOINT Mimamori 2	
10	RED/WHT	H-81 (8)	RED/WHT	тсм	
11	RED	H-81 (12)	RED	тсм	
12	RED/BLU	H-81 (6)	RED/BLU	тсм	
13	BLU/WHT	Sub Junction Block 1 B-132 (16)	BLU/WHT	Diode Door Lock	
14	PNK/BLU	Key Remained Switch	PNK/BLU	Keyless Entry Control Unit	
15	YEL/GRN	IP Cluster	YEL/GRN	DRL Control Unit	
16	RED	IP Cluster	RED	Cab Junction Block 1 B-19 (8)	
Revisjøn 1.0 - E	ate: 4/29/2017	Cab Junction Block1 B-20 <b>2916 CHEVROLET/ILIDINESAB FORWARD (ந்தொக்க</b>			

17	LIGKN	Cab Julicuoti Diock i D-20 (3)	WHI/KEU	Comening Light Relay
18	WHT/BLU	IP Cluster	WHT/BLU	ТСМ




Connector No.

## LNW78DSH000201


Connector Color	Black				
Test Adapter No.		(M) J-35616-4A	(F) J-35616-5		
		Male		Female	
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function	
1	_	Not Used	_	Not Used	
2	GRY	Door Switch (LH)	GRY	Cab Junction Block1 B-17 (2)	
3	_	Not Used	_	Not Used	
4	WHT/BLK	Parking Brake Switch	WHT/BLK	H-84 (4)	
5	_	Not Used	_	Not Used	
6	_	Not Used	RED/YEL	W/S-19	
Connector No.		H-	85		
Connector Color		Bla	ack		
Test Adapter No.		(M) J-35616-4A		(F) J-35616-5	
		Male (C-Cab)		Female (C-Cab)	
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function	
1	_	Not Used	_	_	
2	GRY	JC29	_	_	
3	_	Not Used	_	_	
4	WHT/BLK	Parking Brake Switch	_	_	
5	_	Not Used	_	_	
Revision 1.0 - E	ate: 4/29/2017	2016 CHEVR	OLET LOW CAB	FORWARD (LCF) ELECTRICAL SEC	

H-85


6 RED/YEL Rear Heater — — —



Connector No.	H-86					
Connector Color		White				
Test Adapter No.		(M) J-35616-4A		(F) J-35616-5		
		Male		Female		
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function		
1	GRY	Cab Junction Block1 B-20 (7)	GRY	Door Switch (RH)		
2	_	Not Used	_	Not Used		
3	_	Not Used	_	Not Used		
4	_	Not Used	_	Not Used		
5	VIO	J/C 10P ADD1 B-508 (4)	GRN/RED	H-51 (6)		
6	LT BLU	J/C 10P ADD1 B-508 (9)	GRN/YEL	H-51 (5)		
7	_	Not Used	_	Not Used		
8	BLU/YEL	Rear Power Window Switch (RH)	BLU/YEL	H-51 (3)		
9	GRN	Rear Power Window Switch (RH)	GRN	H-51 (2)		
10	RED/WHT	W/S-12	RED/WHT	H-51 (1)		

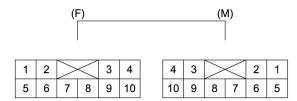


Connector No.	H-87					
Connector Color		Green				
Test Adapter No.		(M) J-35616-4A		(F) J-35616-5		
		Male		Female		
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function		
1	BLK	Earth Joint 10P1	BLK	Mirror Heater (RH)		
2	VIO	J/C 10P BASE ADD1 B-508(3)	GRN/RED	Front Door Lock Motor (RH)		
3	BLK/RED	Sub Junction Block 1 B-133(14)	BLK/RED	Front Cornering Light (RH)		
4	BLU/WHT	H-92(16)	BLU/WHT	Front Power Window Switch (RH)		
5	GRY	W/S-13	BLK	Side Marker Light(RH)		
6	BRN/YEL	Cab Junction Block 1 B-15(5)	BRN/YEL	Front Power Window Switch (RH)		
7	LT BLU	J/C 10P BASE ADD1 B-508(8)	GRN/YEL	Front Door Lock Motor (RH)		
8	BLU/RED	H-92(4)	BLU/RED	Front Power Window Switch (RH)		
9	RED/YEL	Mirror Heater Switch	RED/YEL	Mirror Heater (RH)		
10	_	Not Used	_	Not Used		



Connector No.		н-	88		
Connector Color		ВІ	ue		
Test Adapter No.		(M) J-35616-16	(F) J-35616-17		
		Male		Female	
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function	
1	BRN	тсм	BLK/GRN	H-95 (2)	
2	LT BLU	тсм	BLK/YEL	TM SOI1 (J-119)	
3	YEL	тсм	WHT	TM SOI1 (J-119)	
4	BLU	тсм	WHT/RED	TM NSSW (J-122)	
5	VIO	тсм	RED/BLU	TM NSSW (J-122)	
6	_	Not Used	_	Not Used	
7	LT BLU	тсм	BLU/YEL	TM NSSW (J-122)	
8	LT GRN	тсм	BLU/RED	TM NSSW (J-122)	
9	BRN	тсм	BLU/WHT	TM NSSW (J-122)	
10	BRN	тсм	YEL/RED	TM SOI1 (J-119)	
11	YEL	тсм	YEL/BLK	TM SOI1 (J-119)	
12	_	Not Used	_	Not Used	
13	VIO	тсм	ORN	TM SOI2 (J-120)	
14	BRN	тсм	RED/YEL	ECM	
15	VIO	тсм	GRY	TM SOI2 (J-120)	
16	LT GRN	тсм	VIO	TM SOI2 (J-120)	
Revisjøn 1.0 - E	ate: 4/ <u>2</u> 9/2017	TCM 2016 CHEVR	OLET LAPHY CAB	FORWARD (LOF) ELECTRICAL SECT	

17	DLU	I CIVI	VVII I	TIVI 3011 (J-118)
18	LT BLU	тсм	YEL	TM SOI1 (J-119)
19	BLU	тсм	RED	TM SOI2 (J-120)
20	BRN	тсм	BLU/BLK	TM SOI1 (J-119)
21	YEL	тсм	WHT/BLU	TM SOI1 (J-119)
22	BLU	тсм	BLU	TM NSSW (J-122)

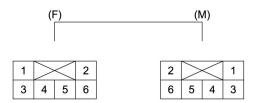

Connector No.		H-89				
Connector Color	Orange					
Test Adapter No.		(M) J-35616-4A		(F) J-35616-5		
	Male		Female			
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function		
1	BLU	тсм	WHT/GRN	TM SOI2(J-120)		
2	VIO	тсм	YEL/BRN	TM SOI2(J-120)		
3	LT BLU	тсм	YEL	TM SOI2(J-120)		
4	LT GRN	тсм	RED/YEL	TM SOI2(J-120)		
5	BLU	тсм	YEL/RED	TM SOI1(J-119)		
6	LT BLU	тсм	YEL/BLK	TM SOI1(J-119)		




Connector No.		H-90			
Connector Color		WI	nite		
Test Adapter No.		(M) J-35616-18		(F) J-35616-19	
		Male		Female	
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function	
1	_	Not Used	_	Not Used	
2	_	Not Used	_	Not Used	
3	_	Not Used	_	Not Used	
4	_	Not Used	_	Not Used	
5	VIO	Sub Junction Block1 B-133 (7)	BLK/BLU	ECM	
6	_	Not Used	_	Not Used	
7	BLU	CAN1 JOINT FMS-L	BLU	H-52 (8)	
8	BLU/WHT	CAN1 JOINT FMS-H	BLU/WHT	H-52 (7)	
9	_	Not Used	_	Not Used	
10	_	Not Used	_	Not Used	
11	BRN	Electronic Thermostat	GRY	Magnetic Clutch Relay	
12	_	Not Used	_	Not Used	
13	BRN	J/C 10P ADD4 B-520 (7)	PNK	ECM	
14	_	Not Used	_	Not Used	
15	_	Not Used	_	Not Used	
16	_	Not Used	_	Not Used	
Revisjøn 1.0 - E	ate: 4/29/2017	Rear Body Switch 2016 CHEVF	OLETELOWN CAR	FORWARD (LGG) ELGGTRICAL SE	

17	VIO	Real Douy Swilch	GRT/FINN	FIOHE MAHUIACIUIE COMECIOI
18	GRY/BLU	Low Coolant Level Controller	GRY/BLU	ECM
19	GRY/BLK	Low Coolant Level Controller	GRY/BLK	H-52 (15)
20	BLU	PTO Engine Speed Control Switch	BLU/ORN	H-101 (4) Diode 2
21	BLU	PTO Engine Speed Control Switch	BLU/YEL	H-101 (7) Diode 3
22	VIO	J/C 10P ADD3 B-519 (4)	BLK/RED	Magnetic Clutch Relay




Connector No.		H-91			
Connector Color		G	ray		
Геst Adapter No.		(M) J-35616-18		(F) J-35616-19	
		Male		Female	
Pin	Wire Color	Pin Function	Wire Color	Pin Function	
1	WHT	Sub Junction Block 1 B-137 (4)	BLK/YEL	EHCU	
2	GRN/WHT	CAN2 JOINT Check-H	GRN/WHT	H-174 (15)	
3	_	Not Used	_	Not Used	
4	BRN	тсм	BLK/RED	Input Shaft Speed Sensor	
5	YEL	тсм	WHT/BLK	Output Shaft Speed Sensor	
6	_	Not Used	_	Not Used	
7	LT BLU	Sub Junction Block 1 B-138 (5)	BLK/WHT	Brake Fluid Level Switch (HBB)	
			BLK/WHT	H-96 (3) (C-Cab)	
8	YEL	J/C 10P ADD4 B-520 (8)	RED/YEL	Brake Fluid Level Switch (HBB)	
			RED/YEL	H-96 (1) (C-Cab)	
9	BLK/BLU	DRL Control Unit	BLK/BLU	Brake Fluid Level Switch (HBB)	
			BLK/BLU	H-96 (4) (C-Cab)	
10	_	Not Used	_	Not Used	
11	BLU	Sub Junction Block1 B-137 (7)	GRN/YEL	Vehicle Speed Sensor	
12	WHT	Sub Junction Block 1 B-133 (16)	LT GRN/BLU	EHCU	
13	GRN	CAN2 JOINT Check-L	GRN	H-174 (16)	
Revisjon 1.0 - [	ate: 4/29/2017	Not Used 2016 CHEVF	OLET LOW CAB	FORWARD (LCF) ELECTRICAL S	

14	-	INULUSEU	-	INUL USEU
15	LT BLU	J/C-50	WHT/RED	Input Shaft Speed Sensor
16	LT BLU	J/C-50	WHT/RED	Output Shaft Speed Sensor
17	_	Not Used	_	Not Used
18	_	Not Used	_	Not Used
19	YEL	тсм	BLU/BLK	ECM
20	_	Not Used	_	Not Used
21	LT BLU	Cab Junction Block 1 B-20 (4)	BLK/ORN	EHCU
22	_	Not Used	_	Not Used

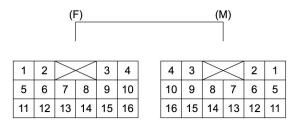

Connector No.	H-92 Black				
Connector Color					
Test Adapter No.		(M) J-35616-4A		(F) J-35616-5	
		Male		Female	
Pin	Wire Color	Pin Function	Wire Color	Pin Function	
1	LT BLU	Sub Junction Block 1 B-134(14)	GRN/BLK	Front Door Lock Motor (LH)	
2	LT GRN	Sub Junction Block 1 B-134(17)	BLK/RED	Front Cornering Light (LH)	
3	VIO	Keyless Entry Control Unit	RED/GRN	Front Door Lock Motor (LH)	
4	BLU/RED	H-87(8)	BLU/RED	Front Power Window Switch (LH)	
5	VIO	J/C 10P ADD1 B-508(2)	GRN/RED	Front Door Lock Motor	
6	_	Not Used	_	Not Used	
7	BRN/YEL	Cab Junction Block 1 B-23(2)	BRN/YEL	Front Power Window Switch (LH)	
8	LT GRN	J/C 10P ADD3 B-519(10)	RED/YEL	Mirror Heater (LH)	
9	GRY	Earth Joint 10P2	BLK	Mirror Heater (LH)	
10	GRY	W/S-11	BLK	Front Door Lock Motor (LH)	
11	BLK	Earth Joint 10P2	BLK	Front Power Window Switch (LH)	
12	_	Not Used	_	Not Used	
13	LT BLU	J/C 10P ADD1 B-508(7)	GRN/YEL	Front Door Lock Motor (LH)	
14	_	Not Used	_	Not Used	
15	GRY	W/S-16	BLK	Side Marker Light (LH)	
16	BLU/WHT	H-87(4)	BLU/WHT	Front Power Window Switch (LH)	

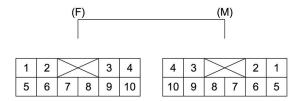


Revision 1.0 - Date: 4/29/2017

Overdrive Switch


Connector No.	H-93				
Connector Color	White				
Test Adapter No.		(M) J-35616-4A	(F) J-35616-5		
		Male		Female	
Pin	Wire Color	Pin Function	Wire Color	Pin Function	
1	LT GRN/RED	Overdrive Switch	LT GRN/RED	Sub Junction Block 1 B-138 (9)	
2	WHT/BLU	Overdrive Switch	WHT/BLU	тсм	
3	LT GRN/BLK	Overdrive Switch	LT GRN/BLK	Sub Junction Block 1 B-134 (15)	
4	BLK	Overdrive Switch	GRY	W/S-11	
5	_	Not Used	VIO	J/C 10P ADD1 B-508 (5)	
6	_	Not Used	LT BLU	J/C 10P ADD1 B-508 (10)	
7	_	Not Used	_	Not Used	
8	_	Not Used	GRN	Rear Power Window Switch (LH)	
9	_	Not Used	RED	Rear Power Window Switch (LH)	
10	_	Not Used	RED/WHT	W/S-12	
Connector No.		H-	93		
Connector Color		Wi	nite		
Test Adapter No.		(M) J-35616-4A		(F) J-35616-5	
		Male (C-Cab)	Female (C-Cab)		
Pin	Wire Color	Pin Function	Wire Color	Pin Function	
1	LT GRN/RED	Overdrive Switch	_	_	

2016 CHEVROLET LOW CAB FORWARD (LCF) ELECTRICAL SECTION

2	WHT/BLU	Overdrive Switch	_	-
3	LT GRN/BLK	Overdrive Switch	_	_
4	BLK	Overdrive Switch	_	_
5	GRN/RED	H-49 (6)	_	_
6	GRN/YEL	H-49 (5)	_	_
7	_	Not Used	_	_
8	GRN/YEL	H-49 (3)	_	_
9	GRN/BLK	H-49 (2)	_	_
10	RED/WHT	H-49 (1)	_	_




Connector No.	H-94					
Connector Color		Black				
Test Adapter No.		(M) J-35616-18	(F) J-35616-19			
		Male I				
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function		
1	_	Not Used	_	Not Used		
2	YEL/RED	Fuel Tank Unit	LT GRN/WHT	H-173 (9)		
3	BLK	Fuel Tank Unit	BLK	H-173 (10)		



Connector No.		H-95		
Connector Color		Black		
Test Adapter No.		(M) J-35616-18 (F) J-35616-19		
		Male Female		
Pin No.	Wire Color	Pin Function	Wire Color Pin Function	
1	WHT	H-88 (3)	WHT	TFT Sensor TCC
2	BLK/GRN	H-88 (1)	BLK/ORN	TFT Sensor TCC




Connector No.	H-96 (J-106)				
Connector Color		Black			
Test Adapter No.		(M) J-35616-18	(F) J-35616-19 Female		
		Male			
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function	
1	RED/YEL	H-91 (8)	_	Not Used	
2	BLK	W/S-4	_	Not Used	
3	BLK/WHT	H-91 (7)	BLK/WHT	Short Connector	
4	BLK/BLU	H-91 (9)	BLK/WHT	Short Connector	
Connector No.		H-96 (	(J-106)		
Connector Color		Bi	ack		
Test Adapter No.		(M) J-35616-18		(F) J-35616-19	
		Male(C-Cab)		Female (C-Cab)	
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function	
1	RED/YEL	H-91 (8)	RED/YEL	Brake Fluid Level Switch (HBB)	
2	BLK	W/S-4	BLK	Brake Fluid Level Switch (HBB)	
3	BLK/WHT	H-91 (7)	BLK/WHT	Brake Fluid Level Switch (HBB)	
4	BLK/BLU	H-91 (9)	BLK/BLU	Brake Fluid Level Switch (HBB)	




Connector No.		Н-	101	
Connector Color	Gray/Black			
Test Adapter No.	(M)	J-35616-2A/ J-35616-64B	(F	) J-35616-3/ J-35616-65B
		Male		Female
Pin	Wire Color	Pin Function	Wire Color	Pin Function
1	GRN/BLK	H-66 (1)	GRN/BLK	H-81 (5)
2	GRN/WHT	H-66 (8)	GRN/WHT	H-81 (3)
3	GRN	H-66 (2)	GRN	H-81 (17)
4	BLU/ORN	H-105 (H)	BLU/ORN	Diode 2
5	GRN/RED	H-66 (5)	GRN/RED	Marker Light Relay
6	LT GRN/WHT	Fuel Tank Unit (In)	LT GRN/WHT	H-81 (10)/H-173 (9)
7	BLU/YEL	H-105 (D)	BLU/YEL	Diode 3
8	PNK/GRN	H-105 (B)	PNK/GRN	ECM
9	BLK/WHT	H-105 (A)	BLK/WHT	ECM
10	YEL	H-105 (F)	YEL	ECM
11	PNK/BLK	H104 (F)	PNK/BLK	ECM
12	RED/GRN	H104 (B)	RED/GRN	ECM
13	WHT/BLU	Wheel Speed Sensor Rear Left	WHT/BLU	EHCU
14	ORN/BLU	Wheel Speed Sensor Rear Left	ORN/BLU	EHCU
15	WHT	Wheel Speed Sensor Rear Right	WHT	EHCU
16	VIO	Wheel Speed Sensor Rear Right	VIO	EHCU
Revisjøn 1.0 - [	ate: 4/28/2017	H-104 (J) 2016 CHEVR	OLETELOWK CAB	F@RWARD (LCF) ELECTRICAL S


17	KEU/TEL	□-1∪4 (J)	RED/GRN	ECIVI
18	RED/BLK	H-104 (K)	RED/BLK	ECM
19	BRN	H-104 (E)	BRN	ECM
20	GRY/RED	H-104 (D)	GRY/RED	ECM
21	RED/BLU	H-104 (C)	RED/BLU	ECM
22	_	Not Used	_	Not Used
23	BLU	H-105 (E)	BLU	ECM
24	BLU/RED	H-105 (G)	BLU/RED	ECM
25	BLK	Body Earth 20	BLK	W/S-4
26	BLK	W/S-6	BLK	W/S-4
27	RED	Rear Manufacture Connector	RED	FUSE:RR Dome Light (15A)
28	RED/BLU	H-66 (6)	RED/BLU	H-88 (5)
29	LT GRN/BLK	Rear Manufacture Connector	LT GRN/BLK	Marker Light Relay
30	PNK	H-105 (C)	PNK	H-90 (13)
31	RED/BLK	H-104 (A)	RED/BLK	H-81 (20)
32	WHT/BLK	Rear Manufacture Connector	WHT/BLK	RR Dome Light Relay

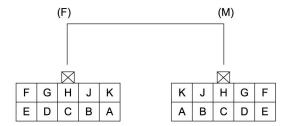


Connector No.		H-104			
Connector Color		Black			
Test Adapter No.		(M) J-35616-12		(F) J-35616-13	
		Male		Female	
Pin	Wire Color	Pin Function	Wire Color	Pin Function	
А	_	_	RED/ BLK	H-101(31)	
В	_	_	RED/GRN	H-101(12)	
С	_	_	RED/BLU	H-101(21)	
D	_	_	GRY/RED	H-101(20)	
E	_	_	BRN	H-101(19)	
F	_	_	PNK/BLK	H-101(11)	
G	_	_	_	Not Used	
Н	_	_	BLK	W/S-6	
J	_	_	RED/YEL	H-101(17)	
К	_	_	RED/BLK	H-101(18)	

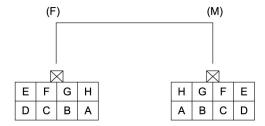

Connector No.	H-105					
Connector Color		Black				
Test Adapter No.		(M) J-35616-12		(F) J-35616-13		
		Male		Female		
Pin	Wire Color	Pin Function	Wire Color	Pin Function		
А	_	_	BLK/WHT	H-101(9)		
В	_	_	PNK/GRN	H-101(8)		
С	_	_	PNK	H-101(30)		
D	_	_	BLU/YEL	H-101(7)		
E	_	_	BLU	H-101(23)		
F	_	_	YEL	H-101(10)		
G	_	_	BLU/RED	H-101(24)		
Н	_	_	BLU/ORN	H-101(4)		

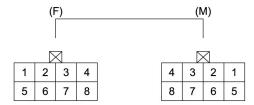

Connector No.		H-107			
Connector Color		Gray			
Test Adapter No.		(M) J-35616-12	(F) J-35616-13		
		Male		Female	
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function	
1	_	_	WHT/RED	ECM	
2	_	_	RED/WHT	ECM	
3	_	_	VIO	ECM	
4	_	_	LT GRN	ECM	
5	_	_	GRN/RED	ECM	
6	_	_	GRN/BLK	ECM	
7	_	_	BLK/YEL	ECM	
8	_	_	WHT/VIO	ECM	

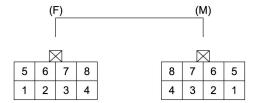


Connector No.	H-108			
Connector Color		Gi	ray	
Test Adapter No.		_		_
		Male		Female
Pin No.	Wire Color	Pin Function	Wire Color	Pin Function
1	_	_	WHT	Injector Unit(1)
2	_	_	RED	Injector Unit(2)
3	_	_	RED	Injector Unit(3)
4	_	_	WHT	Injector Unit(4)
5	_	_	BLK	Injector Unit(1)
6	_	_	YEL	Injector Unit(2)
7	_	_	BLU	Injector Unit(3)
8	_	_	GRN	Injector Unit(4)




## LNWA8DSH000601

Connector No.	H-170			
Connector Color	Gray			
Test Adapter No.		(M) J-35616-44	(F) J-35616-45	
	Male		Female	
Pin	Wire Color	Pin Function	Wire Color	Pin Function
1	RED/ GRN	Relay Box FL-14 ETB	RED/ GRN	Up Filter Install (ETB)




Connector No.			171 		
Connector Color		Black			
Test Adapter No.		(M) J-35616-18		(F) J-35616-19	
		Male		Female	
Pin	Wire Color	Pin Function	Wire Color	Pin Function	
1	RED/BLU	Diesel Exhaust Fluid (DEF) Control Module	RED/BLU	Diesel Exhaust Fluid (DEF) Pump	
2	WHT/BLK	Diesel Exhaust Fluid (DEF) Control Module	WHT/BLK	Diesel Exhaust Fluid (DEF) Pump	
3	GRY	Diesel Exhaust Fluid (DEF) Control Module	GRY	Diesel Exhaust Fluid (DEF) Pump	
4	RED	Diesel Exhaust Fluid (DEF) Control Module	RED	Diesel Exhaust Fluid (DEF) Pump	
5	LT GRN	Diesel Exhaust Fluid (DEF) Control Module	LT GRN	Diesel Exhaust Fluid (DEF) Pump	
6	WHT/BLU	Diesel Exhaust Fluid (DEF) Control Module	WHT/BLU	Diesel Exhaust Fluid (DEF) Pump	
7	VIO/YEL	Diesel Exhaust Fluid (DEF) Control Module	VIO/YEL	Diesel Exhaust Fluid (DEF) Pump	
8	PNK	Diesel Exhaust Fluid (DEF) Control Module	PNK	Diesel Exhaust Fluid (DEF) Pump	
9	BLU/WHT	Diesel Exhaust Fluid (DEF) Control Module	BLU/WHT	Diesel Exhaust Fluid (DEF) Tank Levand Temperature Sensor	
10	BLU/WHT	H-174 (9)	BLU/WHT	Diesel Exhaust Fluid (DEF) Tank Lev	
11	BLU/ORN	NOx and Diesel Exhaust Fluid (DEF) Sensor Relay	BLU/WHT	Diesel Exhaust Fluid (DEF) Tank Lev	
Revisjon 1.0 - E	ate: 4 <u>/2</u> 9/2017	Earth Body SCR 2 2016 CHEVR	OLETNIKOWHCAB	FORWARDA(LOF) LELECTRIGALLS	

14	DLIX	Laitii Douy SOIX 2	I INIV VVIII	and Temperature Sensor
13	BLU	H-174 (10)	BLU	Diesel Exhaust Fluid (DEF) Tank Level and Temperature Sensor
14	BLU	Diesel Exhaust Fluid (DEF) Control Module	BLU	Diesel Exhaust Fluid (DEF) Tank Level and Temperature Sensor
15	RED/WHT	Heater Valve Relay	RED/WHT	Diesel Exhaust Fluid (DEF) Tank Heater Coolant Control Valve
16	BLK	Earth Body SCR 2	BLK	Diesel Exhaust Fluid (DEF) Tank Heater Coolant Control Valve




## LNWA8DSH000501


Connector No.		H-172 Black			
Connector Color					
Test Adapter No.		(M)J-35616-42		(F) J-35616-43	
		Male		Female	
Pin	Wire Color	Pin Function	Wire Color	Pin Function	
1	GRN	H-81(17)	_	_	
2	GRN/RED	Maker Light Relay	_	_	
3	GRN/BLK	H-81(5)	_	_	
4	GRN/WHT	H-81(3)	_	_	
5	BLK	W/S-4	_	_	
6	_	Not Used	_	_	
7	_	Not Used	_	_	
8	RED/WHT	Relay Box Fuse FL-16 Towing Converter	_	_	




Connector No.	H-173 Black				
Connector Color					
Test Adapter No.		(M) J-35616-18		(F) J-35616-19	
		Male		Female	
Pin	Wire Color	Pin Function	Wire Color	Pin Function	
1	VIO/WHT	H-175 (1)	VIO/WHT	ECM	
2	GRN/YEL	H-175 (2)	GRN/YEL	ECM	
3	WHT/ORN	H-175 (3)	WHT/ORN	ECM	
4	BLK/ORN	H-175 (4)	BLK/ORN	H-174 (3)	
5	BLK	H-175 (5)	BLK	H-174 (4)	
6	BLU	NOx Sensor 1	BLU	NOx Sensor 2	
7	BLU/WHT	NOx Sensor 1	BLU/WHT	NOx Sensor 2	
8	_	Not Used	_	Not Used	
9	VIO/YEL	H-94 (2)	LT GRN/ WHT	H-81 (10)	
10	BLK	H-94 (3)	BLK	Earth Body 4	
11	_	Not Used	_	Not Used	
12	_	Not Used	_	Not Used	
13	VIO/YEL	Exhaust Gas Temperature Sensor 1	VIO/YEL	ECM	
14	RED	Exhaust Gas Temperature Sensor 1	RED	ECM	
15	VIO/GRN	Exhaust Gas Temperature Sensor 2	VIO/GRN	ECM	
16	YEL/RED	Exhaust Gas Temperature Sensor 2	YEL/RED	ECM	



Connector No.	H-174			
Connector Color		Bla	ack	
Test Adapter No.		(M) J-35616-18		(F) J-35616-19
3		Male		Female
Pin	Wire Color	Pin Function	Wire Color	Pin Function
1	LT GRN/RED	Exhaust Gas Temperature (EGT) Sensor 3	LT GRN/RED	Exhaust Fluid (DEF) Control Module
2	VIO	Exhaust Gas Temperature (EGT) Sensor 3	VIO	Exhaust Fluid (DEF) Control Module
3	BLK/ORN	NOx Sensor 2	BLK/ORN	H-173 (4)
4	BLK	NOx Sensor 2	BLK	H-173 (5)
5	RED	Diesel Exhaust Fluid (DEF) Injector	RED	Exhaust Fluid (DEF) Control Module
6	BLU	Diesel Exhaust Fluid (DEF) Injector	BLU	Exhaust Fluid (DEF) Control Module
7	BLK/BLU	PM Sensor	BLK/BLU	Fuse 35
8	BLK	PM Sensor	BLK	Earth Body 12
9	BLU/WHT	NOx Sensor 2	BLU/WHT	H-171 (10)
10	BLU	NOx Sensor 2	BLU	H-171 (13)
11	BLU	NOx Sensor 2	BLU	H-173 (6)
12	BLU/WHT	NOx Sensor 2	BLU/WHT	H-173 (7)
13	GRN/WHT	PM Sensor	GRN/WHT	H-218 (11)
14	GRN	PM Sensor	GRN	H-218 (12)
15	GRN/WHT	PM Sensor	GRN/WHT	H-91 (2)
Revision 1.0 - E	ate: 4 <b>/29</b> /2017	PM Sensor 2016 CHEVE	OLET 26W CAB	FÖRWARD (LCF) ELECTRICAL SEC

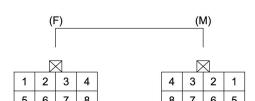


Connector No.	H-175				
Connector Color		Black			
Test Adapter No.		(M) J-35616-18		(F) J-35616-19	
		Male		Female	
Pin	Wire Color	Pin Function	Wire Color	Pin Function	
1	VIO/WHT	Exhaust Differential Pressure Sensor	VIO/WHT	H-173 (1)	
2	GRN/YEL	Exhaust Differential Pressure Sensor	GRN/YEL	H-173 (2)	
3	WHT/ORN	Exhaust Differential Pressure Sensor	WHT/ORN	H-173 (3)	
4	BLK/ORN	NOx Sensor 1	BLK/ORN	H-173 (4)	
5	BLK	NOx Sensor 1	BLK	H-173 (5)	
6	BLU	NOx Sensor 1	BLU	H-173 (6)	
7	BLU/WHT	NOx Sensor 1	BLU/WHT	H-173 (7)	
8	_	Not Used	_	Not Used	

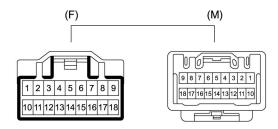

## LNWE8DSH000101

Connector No.		H-195			
Connector Color	White				
Test Adapter No.	(M) J-35616-18		(F) J-35616-19		
	Male		Female		
Pin	Wire Color	Pin Function	Wire Color	Pin Function	
1	_	Not Used	BLU	Digital Tachograph B (7)	
2	_	Not Used	BLK/WHT	Digital Tachograph B (3)	
3	BLU	J/C 10P ADD3 B-519 (3)	RED	FMS Control Unit (16)	
4	_	Not Used	LT GRN	Analog Tachograph A (9)	
5	BLK	Cab Junction Block 1 B16 (5)	BLK	FMS Control Unit(5)	
6	BLU	CAN Joint FMS-L (3)	BLU	FMS Control Unit (23)	
7	_	Not Used	LT GRN	Digital Tachograph A(1)	
8	_	Not Used	LT GRY/RED	Digital Tachograph B(4) Analog Tachograph A(19)	
9	BRN	CAN Connector	BRN	J/C CAN OUT-L (4)	
10	_	Not Used	_	Not Used	
11	_	Not Used	_	Not Used	
12	_	Not Used	YEL/RED	Analog Tachograph (20)	
13	GRN	Sub Junction Block 1 B-137 (10)	GRN/YEL	FMS Control Unit (1)	
14	_	Not Used	_	Not Used	
15	BLK/WHT	CAN Joint FMS-H (4)	BLK/WHT	FMS Control Unit (6)	
<sup>16</sup> Revision 1.0 - E	ate: 4/29/2017	Not Used 2016 CHEVE	OLET LOW CAB	Not Used FORWARD (LCF) ELECTRICAL SEC	

17	RED	Sub Junction Block 1 B-134 (1)	LT BLU	FMS Control Unit (3)
18	BRN/WHT	CAN Connector	BRN/WHT	J/C CAN OUT-H (4)

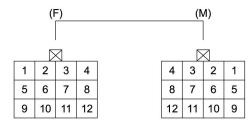


## LNWA8DSH000701

Connector No.	H-218 Black				
Connector Color					
Test Adapter No.	(M) J-35616-18 Male		(F) J-35616-19 Female		
1	LT GRN	Diesel Particulate Filter(DPF) Fuel Pressure Sensor	LT GRN	ECM	
2	WHT/ORN	Diesel Particulate Filter(DPF) Fuel Pressure Sensor	WHT/ORN	ECM	
3	YEL/BLK	Diesel Particulate Filter(DPF) Fuel Pressure Sensor	YEL/BLK	ECM	
4	GRN	EGR Valve	BLK/BLU	Fuse F-35 PM Sensor (13A)	
5	WHT	Engine Oil Pressure Sensor	YEL/BRN	ECM	
6	RED	Engine Oil Pressure Sensor	BRN/WHT	ECM	
7	BLK	Engine Oil Pressure Sensor	PNK	ECM	
8	_	Not Used	_	Not Used	
9	GRN/WHT	EGR Valve	GRN/WHT	ECM/Diesel Exhaust Fluid (DEF) Control Module	
10	GRN	EGR Valve	GRN	ECM/Diesel Exhaust Fluid (DEF) Control Module	
11	GRN/WHT	EGR Valve	GRN/WHT	H-174 (13)	
12	GRN	EGR Valve	GRN	H-174 (14)	

# **Component Locator**

## **Bulb Usage Chart**

**Bulb Specifications (Under Creation)** 

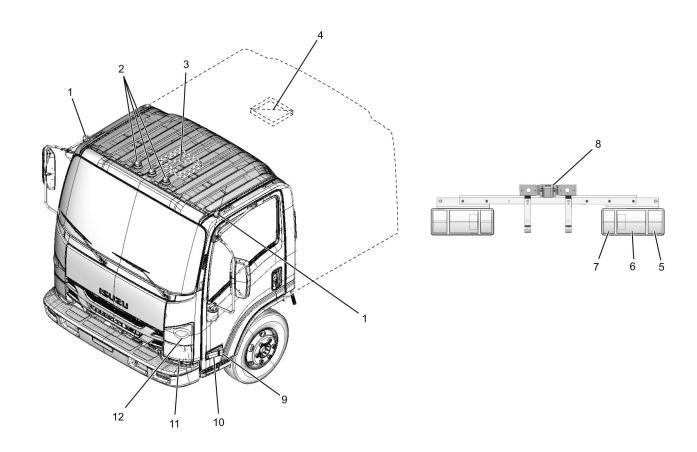


LNWG9ALF000101

**Note:** Do not grip the clearance lights and the identification lights to prevent damage or water leakage.


Light Name		Rated Power	Number of Bulb	Lens Color
Headlight	Rectangular Type	60W/55W	2	Clear
Parking Light		5W	2	Clear
Front Turn Signal Light		27W	2	Clear
Cornering Light		27W	2	Clear
Side Turn Signal Light		5W	2	Clear
Side Maker Light	5W	2	Clear	
Rear Combination Light	Brake light, Turn Signal Light / Taillight	27W/8W	4	Red

	Backup Light	27W	2	Clear
License Plate Light	7.5W	1	Clear	
Clearance Light	5W	2	Amber	
Identification Light		5W	3	Amber
Dome Light		10W	1	White
Rear Dome Light		10W	1	White
Indicator/Warning lamp (In the Instrument Panel Cluster)	Engine Oil Pressure	LED	1	Red
institution Pariel Gluster)	Brake Booster	LED	1	Red
	Charge	LED	1	Red
	High Beam	LED	1	Blue
	Turn Signal / Hazard Warning	LED	2	Green
	MIL	LED	1	Amber
	DRL	LED	1	Green
	ABS	LED	1	Amber
	Check Trans	LED	1	Amber
	Oil Level	LED	1	Green
	Glow	LED	1	Amber
	A/T Oil Temp	LED	1	Red
	Cruise Main	LED	1	Green
	Cruise Set	LED	1	Green
	svs	LED	1	Amber
	Idle Stop	LED	1	Green
	Exhaust Brake	LED	1	Green
	Diesel Exhaust Fluid (DEF)	LED	1	Amber
Engine Shut Down		LED	1	Red
Illumination and Indicator lamp	n and Indicator lamp Hazard Warning Switch		1	Red
	A/C Switch	LED	1	Yellow Green
	Cruise Main Switch	LED	1	Yellow Green
	Oil Level Check and Miles Check Switch	LED	2	Amber
	Heater Bezel	1.1W	2	Amber
Revision 1.0 - Date: 4/2	0/2017	146 CHEVROLET LOW		E) EL EGEDIO AL OEG

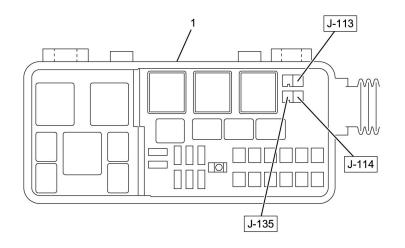

Connector No.	Usage
J-113	ECM
J-114	A/C
J-135	ECM

LNWA8DSF000101

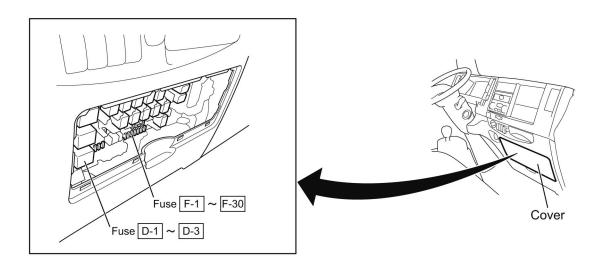


#### **FUSE LABEL**

RR P/WINDOW		ROOM LAMP, AUDIO	DOOR LOCK	TRAILER BRAKE	P/WINDOW	ABS	WIPER	H/LAMP LO (LH)	LAMPS (BATT)	H/LAMP LO (RH)	BRAKE LAMPS	STARTER	Н/LAMP НІ (LH)	H/LAMP HI (RH)
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
25A		10A	15A	15A	25A	10A	25A	10A	10A	10A	10A	10A	10A	10A
					SPA	ARE		SPARE		SPA	ARE		SPARE	
													ဟ	~

					SPA	\RE		SPARE		SPA	ARE		SPARE	
MIRROR HEATER	IGNITION2	IGNITION1		ECM	METER	ECU (BATT)	MIRROR	AUDIO. ACC	HORN	TURN, HAZARD	TAIL LAMPS	ILLUMINATIONS	CORNERING LAMPS	AIR CONDITIONER
16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
15A	10A	10A		10A	10A	10A	10A	15A	15A	15A	10A	10A	10A	10A


D-1	20A	CIGAR
D-2	15A	ACCESSORIES SOCKET
D-3	20A	POWER SOURCE
D-4		

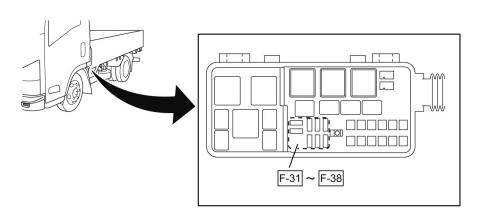

20A F-31	MARKER LAMP
20A F-32	TAIL MAIN
15A F-33	ECM MAIN
20A F-34	SCR
15A F-35	PM SENSOR
15A F-36	RR DOME LIGHT
20A F-37	CONDENSER FAN
10A F-38	AIR CONDITIONER

LNWF80XF000401


**Note:** The fuse numbers (1)-(30) indicated on the fuse labels are expressed as [F-1] ~ [F-30] in the circuit diagrams of this manual. The fuse numbers (D-1)-(D-3) indicated on the fuse labels are expressed as [F-39] ~ [F-41] in the circuit diagrams of this manual.

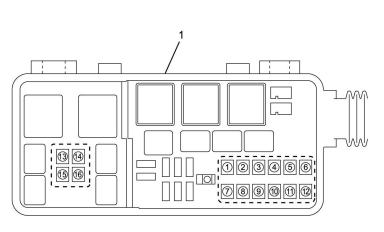

No.	SBF No.	Name	Capacity
1	FL-1	ECM	40A
2	FL-2	STARTER	60A
3	FL-3	POWER ACC	50A
4	FL-4	GLOW	60A
(5)	FL-5	STARTER SWITCH 2	40A
6	FL-6	STARTER SWITCH 1	30A
7	FL-7	HVAC	40A
8	FL-8	HEADLIGHT	30A
9	FL-9	RR DOME LIGHT	30A
10	FL-10	WIPER	50A
11)	FL-11	ABS	60A
12	FL-12	JUNCTION BLOCK	50A
13	FL-13	_	-
14)	FL-14	ETB	30A
15)	FL-15	_	_
(16)	FL-16	TOWING CONVERTER	30A


LNWE80MF000101

Note: The slow blow fuse numbers (1)-(12) indicated on the fuse labels are expressed as [FL-1] ~ [FL-12] in the circuit diagrams of this manual.

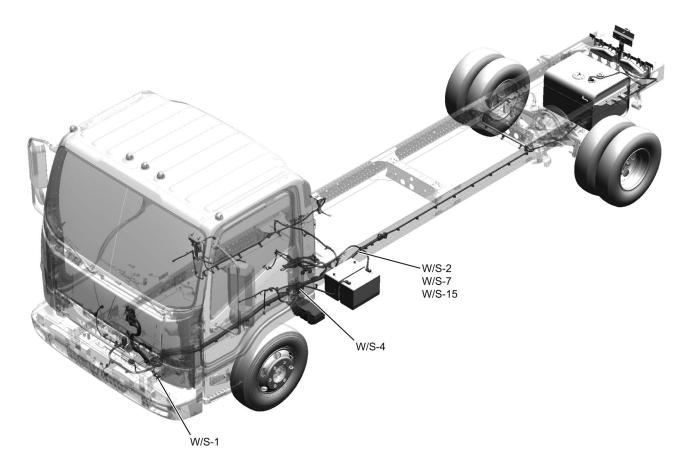

LNWF80XF012801

**Body Cable Harness** 

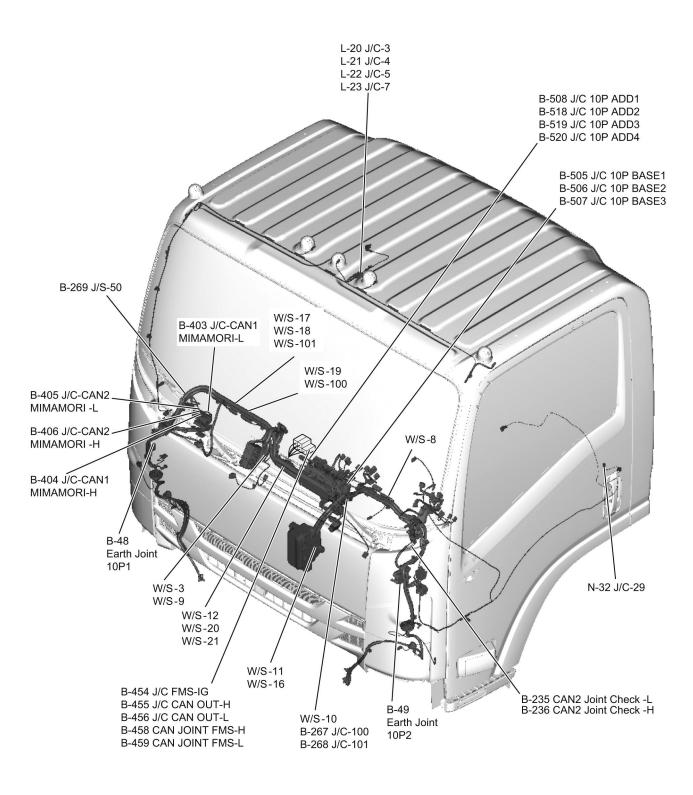

LNWG80XF016801

**Joint Connection Circuit** 

B-48 Joint Connection 10P1

		$\boxtimes$		
1	2	3	4	5
•	•	•	•	•
•	-	•	•	•
6	7	8	9	10

Joint Point	Terminal No.	Connection
•	1	DRL Control Unit
<b>—</b>	2	Heater Mirror RH Ground
<b>—</b>	3	Ext ETB-4
•	4	Joint Connection 10P2
•	5	Power Window Switch
•	6	W/S-13
•	7	Power Window Switch
•	8	Power Window Switch
•	9	Headlight RH Ground
•	10	Body Ground

B-49 Joint Connection 10P2

		$\bowtie$		
1	2	3	4	5
•	•	•	•	•
•	-	$- \bullet -$	-	<b>-•</b> ∣
6	7	8	9	10

Joint Point	Terminal No.	Connection
•	1	Power Window Driver Switch Ground
<b>—</b>	2	Power Window Rear LH Switch Ground
<b>—</b>	3	W/S-16
<b>—</b>	4	Illumination Control Switch
•	5	Body Ground
•	6	Headlight LH Ground
•	7	Vacuum Pump Ground
<b>—</b>	8	Heater Mirror LH Ground
•	9	W/S-11
-	10	Joint Connection 10P1

B-235 CAN2 Joint Check -L



Joint Point	Terminal No.	Connection
•	1	Diesel Exhaust Fluid (DEF) Control Module
•	2	-
•	3	J/C-CAN 2 MIMAMORI -L
_	4	Data Link Connector

B-236 CAN2 Joint Check -H



Joint Point	Terminal No.	Connection	
•	1	Diesel Exhaust Fluid (DEF) Control Module	
•	2	-	
•	3	J/C-CAN 2 MIMAMORI -H	
•	4	Data Link Connector	

B-267	Joint Connection
	100

		$\triangleleft$	
1	2	3	4
•	•	•	-• □

Joint Point	Terminal No.	Connection	
•	1	OPEN	
<b>—</b>	2	ECM	
<b>—</b>	3	OPEN	
-	4	Accelerator Pedal Position Sensor	

B-268 Joint Connection 101



	oint oint	Terminal No.	Connection	
	•	1	OPEN	
	•	2	ECM	
	•	3	OPEN	
- 1	•	4	Accelerator Pedal Position Sensor	

LNWF80MF000701

L-20	Joint Connection
	3

	$\triangleright$	7	
1	2	3	4

Joint Point	Terminal No.	Connection	
•	1	ID 3	
•	2	ID 2	
•	3	Marker 1	
-	4	Joint Connection 7	

L-21 Joint Connection 4



	Joint Point	Terminal No.	Connection
ſ	•	1	ID 3
ſ	•	2	ID 2
ſ	•	3	Marker 1
	•	4	Joint Connection 5

L-22 Joint Connection 5



Joint Point	Terminal No.	Connection	
•	1	ID 1	
•	2	Marker 2	
•	3	Joint Connection 4	
•	4 Sub Junction Block 2, G		

L-23 Joint Connection 7



Joint Point	Terminal No.	Connection	
•	1	ID 1	
<b>—</b>	2	Marker 2	
•	3	Joint Connection 3	
•	4	Cab Junction Block 1, J	

LNW780XF002001

B-269 Joint Connection 50

	$\triangleright$	◁	
1	2	3	4
•	•	•	•

Joint Point	Terminal No.	Connection
•	1	Automatic Transmission
<b>—</b>	2	TCM
<b>—</b>	3	Automatic Transmission
•	4	-

N-32 Joint Connection 29 (C-Cab)

	$\triangleright$	◁	
1	2	3	4
	•	•	•

Join Poin	Arminal No	Connection
•	1	Rear Door Switch (LH)
•	2	Rear Door Switch (RH)
•	3	Door Switch (LH)
•	4	Sub Junction Block 1, A

LNWE8DXF000601

### B-403 J/C-CAN 1 MIMAMORI - L



Joint Point	Terminal No.	Connection
•	1	MIMAMORI Control Unit
<b>—</b>	2	CAN Joint-FMS-L
•	3	TCM
•	4	Instrument Panel (IP) Cluster

### B-404 J/C-CAN 1 MIMAMORI - H



Joint Point	Terminal No.	Connection
•	1	MIMAMORI Control Unit
<b>—</b>	2	CAN Joint-FMS-H
•	3	TCM
•	4	Instrument Panel (IP) Cluster

### B-405 J/C-CAN 2 MIMAMORI - L



Joint Point	Terminal No.	Connection
•	1	CAN 2 Joint Check -L
•	2	-
<b>—</b>	- 3	TCM
•	4	MIMAMORI Control Unit

### B-406 J/C-CAN 2 MIMAMORI - H



Joint Point	Terminal No.	Connection
•	1	CAN 2 Joint Check -H
•	2	-
•	3	TCM
-	4	MIMAMORI Control Unit

B-455 J/C CAN OUT-L

	$\triangleright$	<	
1	2	3	4
•	•	•	•

Joint Point	Terminal No.	Connection
•	1	CAN Converter Control Unit
•	2	Terminator
•	3	_
-	4	CAN Connector

B-456 J/C CAN OUT-H



Joint Point	Terminal No.	Connection
•	1	CAN Converter Control Unit
<b>—</b>	- 2	Terminator
<b>—</b>	3	_
•	4	CAN Connector

B-458 CAN Joint-FMS-H




Joint Point	Terminal No.	Connection
•	1	EHCU
•	2	_
•	3	J/C-CAN1 MIMAMORI -H
•	4	CAN Converter Control Unit

B-459 CAN Joint-FMS-L




Joint Point	Terminal No.	Connection
•	1	_
-	2	EHCU
-	3	CAN Converter Control Unit
•	4	J/C-CAN1 MIMAMORI -L

# B-505 J/C 10P BASE 1




Joint Point	Terminal No.	Connection
•	1	Rear Dome Light Switch (1)
•	2	Rear Dome Light Switch (5)
<u> </u>	3	Inst H.~Frame Frt H.
•	4	Inst H.~Roof H.
<b>—</b>	5	Cab J/B1.J
<u> </u>	6	Inst H.~Roof H.
•	7	Audio
•	8	Intermittent Relay
•	9	Wiper & Exhaust Brake SW
_	10	Cab J/B1.J

# B-506 J/C 10P BASE 2




Joint Point	Terminal No.	Connection
•	1	Cab J/B1.J
•	2	Accessory Power Relay
<b>—</b>	3	IP Cluster.A
<b>—</b>	4	Blower Resistor
<b>—</b>	5	Sub J/B1.E
<b>—</b>	6	Intermittent Relay
•	7	Inst H.~Door(RH) H.
•	8	Inst H.~Roof H.
•	9	Stoplight Switch
_	10	W/S-18

# B-507 J/C 10P BASE 3




Joint Point	Terminal No.	Connection
•	1	W/S-18
•	2	Combination Switch
•	3	Rear Dome Light Switch (2)
<b>—</b>	4	Audio
•	5	Combination Switch
•	6	Hazard Switch
•	7	Inst H.~Door(LH) H.
•	8	Brake Fluid Level Switch
•	9	Combination Switch
•	10	Wiper & Exhaust Brake SW

# B-508 J/C 10P ADD 1




Joint Point	Terminal No.	Connection
•	1	Door Lock Relay
•	2	Inst H.~Door(LH) H.
•	3	Inst H.~Door(RH) H.
<b>—</b>	4	Inst H.~Floor(RH) H.
-	5	Inst H.~Floor(LH) H. MT AT
•	6	Door Lock Relay
<b>—</b>	7	Inst H.~Door(LH) H.
<b>—</b>	8	Inst H.~Door(RH) H.
•	9	Inst H.~Floor(RH) H.
•	10	Inst H.~Floor(LH) H. MT AT

# B-518 J/C 10P ADD 2




Joint Point	Terminal No.	Connection
•	1	Door Lock Relay
•	2	Door Lock Switch
•	3	Keyless Entry Control Unit
•	4	Diode Door Lock
<b>—</b>	5	Door Lock Relay
<b>—</b>	6	Door Lock Switch
-	7	Keyless Entry Control Unit
•	8	Cab J/B1.F
•	9	Door Lock Relay
•	10	Keyless Entry Control Unit

# B-519 J/C 10P ADD 3



Joint Point	Terminal No.	Connection
•	1	Cab J/B1.A
•	2	Data Link Connector
•	3	INST H EXT Tacho H.
•	4	Inst H.~Frame Frt H.
•	5	Cab J/B1.A
•	6	A/C Switch
•	7	Defroster Switch
•	- 8	Mirror Heater Switch
•	9	Mirror Heater Switch
•	10	Inst H.~Door(LH) H.

B-520 J/C 10P ADD 4



Joint Point	Terminal No.	Connection
•	1	Cab J/B1.K
<b>—</b>	2	Rear Body Switch
<b>—</b>	3	MIMAMORI C/U
•	4	PTO Switch 2
<b>—</b>	5	PTO Switch 2
<b>—</b>	6	PTO Engine Speed Control Switch
<b>—</b>	7	Inst H.~Frame Frt H.
•	8	Inst H.~Frame Frt H.
•	9	Diode 7
•	10	Vacuum Tank Switch

LNWG80XF000301

### Reference Table of Weld Splice

Connector No.	Usage
W/S-1	Diesel Exhaust Fluid (DEF) Control Module
	Diesel Exhaust Fluid (DEF) Control Module

Revision 1.0 - Date: 4/29/2017

	Diesel Exhaust Fluid (DEF) Control Module
	Diesel Exhaust Fluid (DEF) Control Module
	Earth Body SCR 1
W/S-2	Exhaust Brake Solenoid Valve
	ECM
	MAF and IAT Sensor
	VNT Control Module
	Fuse 33
	Glow Plug Control Module
W/S-3	Blower Motor
	Blower Resistor
	Fan Control Switch
W/S-4	Earth Body 11
	Earth Body 20
	Towing Converter
	Condenser Fan Motor
	Triple Pressure Switch
	Brake Fluid Level Switch (HBB)
	Inhibitor Switch
	Air Cleaner Switch
	Sedimenter Switch
	W/S-6
W/S-6	Body Earth 14
	Rear Combination Light (RH)
	To PTO 2 (Set Speed Switch)
	Back Buzzer (Upfitter Install)
	W/S-4
W/S-7	Body Earth 4
	ECM
	ECM


	ECM
	ECM
	ECM
	ECM
	ECM
	Marker Light Relay
	Diode 2
W/S-8	Slow Blow Fuse 5
	Ignition Switch
	Slow Blow Fuse 5
W/S-9	Cab Junction Block 1.P (Fuse 30)
	Blower Relay
	Blower Motor
W/S-10	Cigarette Lighter Relay
	Cab Junction Block 1.P (Fuse 3)
	Slow Blow Fuse 12
W/S-11	Door Lock Motor LH
	Door Lock Switch
	Mirror Heater Switch
	Front Turn Light LH
	Front Position Light LH
	Cab J/B1.C
	Cab J/B1.G
	OverDrive Off Switch
W/S-12	Rear Power Window Switch(LH)
	Cab Junction Block 1.A (Fuse 1)
	Rear Power Window Switch(RH)
	Rear Power Window Switch(LH)
	Rear Power Window Switch(RH)
W/S-13	ТСМ

	ТСМ
	Inst H Door(RH) H.
	Door Lock Relay
	Door Lock Relay
	Keyless Entry Control Unit
	MIMAMORI C/U
	Front Turn Light(RH)
W/S-15	ECM
	ECM Main Relay
	ECM Main Relay
	ECM
	ECM
	ECM
	Fuse 33
	Fuse 35
W/S-16	PTO Switch 2
	Pressure Switch
	Electronic Thermostat
	Side Marker LH
	A/C Switch
	Data Link Connector
	RS232C Ch1
W/S-17	Body Earth 15
	Body Earth 9
	Front Wiper Motor
	Fan Control Switch
W/S-18	Body Earth 22
	Body Earth 21
	Sub Junction Block 2.F
	Sub Junction Block 2.H

	ACC Socket B
	Cigarette Lighter B
W/S-19	Rear Heater (Crew Cab )
	Cigarette Lighter A
	Fuse 39
W/S-20	Headlight (LH)
	DRL Control Unit B
	Cab Junction Block 1.B (Fuse 9)
W/S-21	Headlight (RH)
	DRL Control Unit B
	Cab Junction Block 1.F (Fuse 11)
W/S-25	Relay Box
	Cub Junction Block 1.P
	Cub Junction Block 1.M
W/S-100	Front Wiper Motor
	Intermittent Relay
	Wiper Main Relay
W/S-101	Front Wiper Motor
	Front Washer Motor
	Cab Junction Block 1.F (Fuse 8)


### **Parts Location**

The parts location shows the location of the parts (1) and the connector (2) used in each harness routing (3).

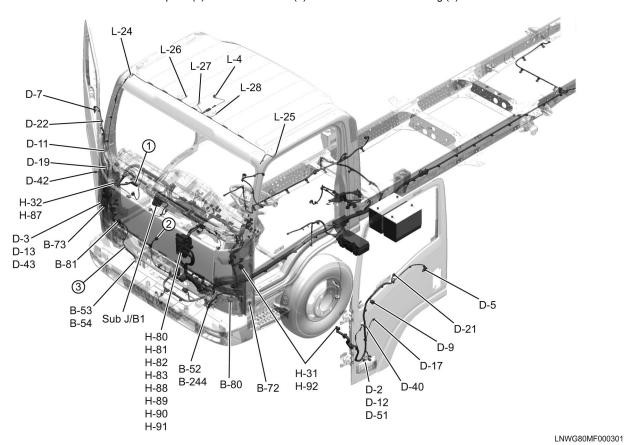

### **Circuit Diagram**

The circuit diagram shows the power supply (4) the load or loads (5) and the grounding point(s) (6).

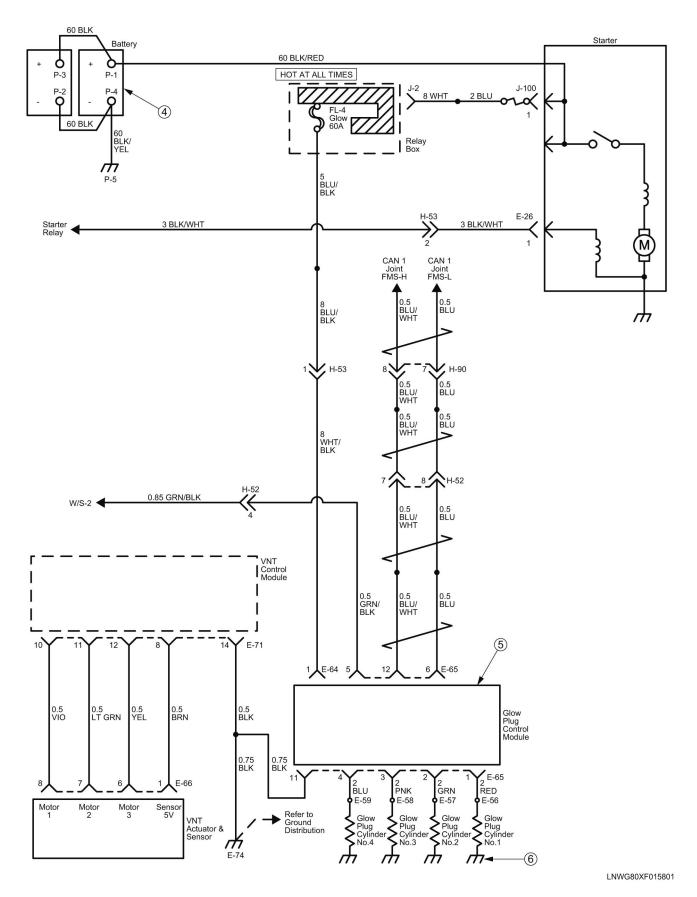

#### **Connector List**

The connector list shows each connector's configuration (1) and the pin number (2).

No.	Connector Face		
B-5	1 2 3 4 5 6		
(Gray)	Accel Sensor 006-115		
B-12	1 1 2		
(White)	2 Blower 002-267		
B-13 (White)	1 2 3 4 Blower Resistor	004-129	
B-15 (Blue)	1 2 3 4 5 6 7 8 9 10 Cab J/B 1 A	010-062	

No.	Connector Face			
B-20	1 2 3 4 5 6 7 8 9 10 11 12 13 14 Cab J/B 1 G			
(White)	014-026			
B-28	1 2 3 4			
(White)	Cani Joint 4 <sub>004-128</sub>			
B-35	1 2 3 4 5 6 7 8 9			
	10   11   12   13   14   15   16   17   18			
(White)	Combination SW 018-024			
B-55	Body Earth 000-049			


LNWA8DLF000301

### **Connector Symbol**

Connector Symbol	Harness name	Connector Symbol	Harness name
В	Body (Inst.) Harness	L	Dome Light Harness
D	Door Harness	N	Floor Harness (LH and RH)
E	Engine Harness	Р	Battery Harness
Н	For joint between harnesses	×	Body & frame front harness
J	Frame front and frame rear harness		

### **Joint Connection**


This connector has the structure of plural number of terminals collectively connected inside the connector.

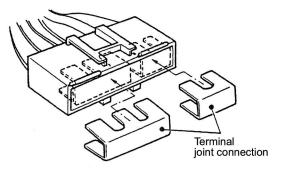

LNW48ASH003101

### How to show joint connection in the circuit diagram


1. When joint connection can be shown as actual circuit diagram.

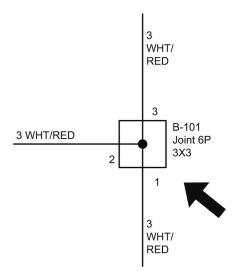

#### LNWG80SH000301


### **Weld Splice**

Weld splice is a harness that welds the point of the harness and does joint.




RTW58DSH000101

### How to show weld splice in the circuit diagram

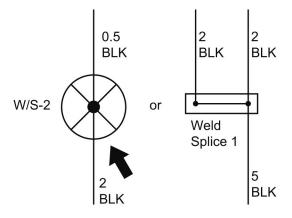

LNWG80SH000401

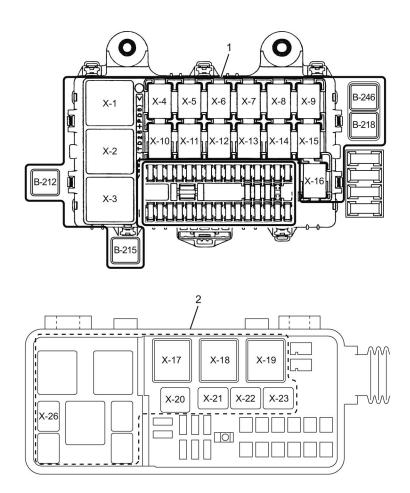

LNWG80LF000701

# Relay List

Connector No.	Relay Name
Connector No.	Relay Name
X-1	Stoplight
X-2	Daytime Running Light
X-3	Key On
X-4	ТСМ
X-5	P/N Start
X-6	Wiper Main
X-7	Horn
X-8	Wiper High/ Low

X-9	Trailer Stop
X-10	Rear Power Window
X-11	_
X-12	Front Power Window
X-13	Headlight(Low)
X-14	Vacuum Pump
X-15	Headlight(High)
X-16	Taillight
B-212	Accessory Power
B-215	Blower Motor
B-218	Cigarette Lighter
B-246	Cornering Light
X-17	Starter
X-18	ECM Main
X-19	NOx & Diesel Exhaust Fluid (DEF) Sensor
X-20	Magnetic Clutch
X-21	Condenser Fan
X-22	Rear Dome Light
X-23	Heater Valve
X-26	Marker Lamp

### **Diagnostic Information and Procedures**

#### **General Electrical Diagnosis**

Caution: When fasteners are removed, always reinstall them at the same location from which they were removed. If a fastener needs to be replaced, use the correct part number fastener for that application. If the correct part number fastener is not available, a fastener of equal size and strength (or stronger) may be used. Fasteners that are not reused, and those requiring thread locking compound, will be called out. The correct torque values must be used when installing fasteners that require it. If the above conditions are not followed, parts or system damage could result.

The chassis electrical system is of 12-volt specifications with a negative ground polarity.

Wire sizes are appropriate to respective circuits, and classified by color. (The classification of harnesses by color is shown on the circuit diagram for ease of harness identification.)

The wire size is determined by load capacity and the length of wire required.


The vehicle harnesses are: body harness, floor harness, engine harness, frame front harness, frame rear harness, rear body harness, dome light harness, door harness and battery cable.

The harnesses are protected either by tape or corrugated tube, depending on harness location.

The circuit for each system consists of the power source, wire, fuse, relay switch, load parts and ground, all of which are shown on the circuit diagram.

In this manual, each electrical device is classified by system. For major parts shown on the circuit based on the circuit diagram for each system, a summary, diagnosis of troubles, inspection and removal and installation procedures are detailed.

#### **Notes for Working on Electrical Items**

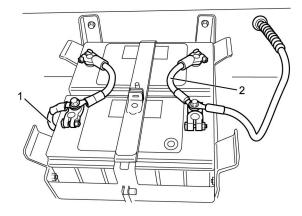

LNW780SH009401

### **Disconnecting the Battery Cable**

1. All switches should be in the "LOCK" position.

Warning: Refer to CELL Link Error - Link target cell (cell ID 178001) is invalid for this publication..

2. Disconnect the battery ground cable (1).

#### Note:

- Do not disconnect within 3 minute after turning OFF the ignition switch.
- The ECM may malfunction if the battery cable is disconnected within 3 minutes.
- 3. Disconnect the battery positive cable (2).

Note: It is important that the battery ground cable be disconnected first. Disconnecting the battery positive cable first can result in a short circuit.

#### **Connecting the Battery Cable**

Follow the disconnecting procedure in the reverse order.

Note: Clean the battery terminal and apply a light coat of grease to prevent terminal corrosion.

#### **Battery Diagnosis**

#### **Visual Inspection**

Battery case or cover for cracks or breaks that could permit loss of electrolyte. Replace the battery if badly damaged, determine the cause of the damage, and correct as needed.

#### **Hydrometer Check**

#### **Green Dot Visible**

If the hydrometer has a GREEN DOT visible, the battery is ready for testing. Proceed to "Load Test" later in this section.

#### **Green Dot not Visible or Dark**

Charge the battery as outlined under the heading "Battery Charging Procedure" later in this section.

#### Light or Bright Indicator; Illustrated as "CLEAR"

Do not charge, test or jump start the battery.

Replace the battery.

#### **Load Test**

#### **Top Terminal Batteries**

If there is more than one battery in the vehicle, check each battery separately after disconnecting them from each other.

- 1. Remove battery cables from battery terminals and proceed as follows:
- 2. Attach terminal hex nuts, required for testing and charging as shown in figure 5.

#### Note:


- The alligator clamps of the tester or charger should be placed between the terminal nuts and the lead pads of the terminal studs as shown in figure 5. If the tester clamps cannot be attached between nuts and lead pads of the terminals, the load value of "Load Test" should be 210 amperes.
- 3. Connect a voltmeter and a battery load tester across the battery terminals.
- 4. Remove the surface charge from all batteries that have been on charge IF THE GREEN HYDROMETER DOT IS VISIBLE. This includes batteries in the vehicle having been charged by the vehicle generator.

Do not remove surface charge from batteries that have been in storage. To remove surface charge, apply a 300-ampere load across the terminals for 15 seconds. Then turn off load and wait for 15 seconds to allow the battery to recover.

#### **Voltage and Temperature Chart:**

#### **Degrees Temperature**

- 21°C (70°F) and Above; 9.6 minimum voltage
- 10°C (50°F); 9.4 minimum voltage
- -1°C (30°F); 9.1 minimum voltage
- -10°C (14°F); 8.8 minimum voltage
- -18°C (0°F); 8.5 minimum voltage
- 5. If battery voltage does not drop below the minimum voltage as shown in the previous "Voltage and Temperature Chart," the battery is good and should be returned to service. (The battery temperature must be estimated by feel and by the temperature the battery has been exposed to for the preceding few hours.) If battery voltage drops below the minimum voltage listed, replace the battery.

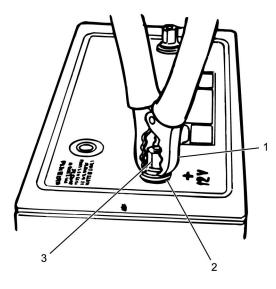

LNW46DMH000301

## **Repair Instructions**

#### **Battery Charging**

#### **Battery Charging Procedure and Rules**

The following basic rules apply to any sealed battery charging situation:

- 1. Do not charge a battery if the hydrometer is clear or light yellow replace the battery.
- 2. Charge rates between three and fifty amperes are satisfactory as long as spewing of electrolyte does not occur or the battery does not feel excessively hot (over 52°C (125°F)). If spewing occurs or temperature exceeds 52°C (125°F), the charging rate must be reduced or temporarily halted to permit cooling.
- 3. The battery is sufficiently charged when the green dot in the built-in hydrometer is visible. No further charging is required. Shake or tilt the battery at hourly intervals during charging to mix the electrolyte and see if the green dot appears.
- 4. Battery charging consists of a charge current in amperes for a period of time in hours. Thus a 25-ampere charging rate for two hours would be 50 ampere-hour charge to the battery. In most cases, batteries whose load test values are less than 200 amperes will have the green dot visible after least a 50 ampere-hour charge. Most batteries whose load test values are greater than 200 amperes will have the green dot visible after at least a 75 ampere-hour charge. In the event that the green dot does not appear, after this amount of charging, continue charging for another 50 to 75 ampere-hours. If the green dot still does not appear, replace the battery.
- 5. The time required for a charge will vary because:
  - Size of Battery Example: A completely discharged large heavy-duty battery requires more than twice the recharging as a completely discharged small passenger car battery.
  - Temperature Example: A longer time will be needed to charge any battery at -18°C (0°F) than at 27°C (80°F). When a fast charger is connected to a cold battery, the current accepted by the battery will be very low at first, then in time the battery will accept a higher rate as it warms up.
  - State of Charge Example: A completely discharged battery requires more than twice as much as a half-charged battery. Because of a completely discharged battery the electrolyte is nearly pure water and a poor conductor, thus current flow accepted is very low at first. As the charging current causes the electrolyte acid content to increase, the charging current will likewise increase.
  - Charger Capacity Example: A charger that can supply only 5 amperes will require a much longer period of charging than a charger that can supply 30 amperes or more.

#### **Battery Cables**

Excessive resistance caused by poor terminal connections and partial short circuits through defective cable insulation will result in abnormal voltage drop in the starter cable. Low voltage at the starter will cause hard starting.

Note: To prevent the vehicle from moving and the engine from starting while performing these checks, engage the parking brake and place the transmission in "Neutral" position.

On diesel engines, disconnect the battery feed terminal connector at the fuel shutoff valve, or pull the "Engine Stop" knob out, as equipped.

#### Measure

- 1. Voltage drop between negative (–) battery terminal and vehicle frame.
  - Place one prod of test voltmeter on grounded battery post (not on cable clamp) and the other on frame. Operate starter and note the voltage reading.
- 2. Voltage drop between the positive (+) battery terminal and starter terminal stud with starter operating.
- 3. Voltage drop between starter housing and frame with starter operating
  - If the voltage drop in any of the above is more than 1.0 volt, there is excessive resistance in the circuit. To eliminate resistance, the cables should be disconnected and connections cleaned. If cables are frayed or the clamps excessively corroded, the cables should be replaced. When selecting new cables, be sure they are at least as large as the ones being replaced.

#### **Jump Starting**

If vehicle has a discharged battery, it can be started by using energy from another battery – a procedure called "jump starting."

Warning: The instructions below must be followed exactly or personal injury (particularly to eyes) or property damage may result from battery explosion, battery acid, or electrical (short circuit) burns. The major safety precaution is to make the final connection to ground on the engine at some distance from the battery. This helps reduce the chance of an explosion due to sparks. To lessen the chance of an explosion, never expose the battery to open flames or electric sparks. Do NOT smoke near the battery. Batteries give off a gas that is flammable and explosive. To lessen the risk of injury in case an explosion does occur, wear eye protection or shield your eyes when working near any battery. Do NOT lean over a battery. Do NOT allow battery fluid to contact eyes, skin, fabrics, or painted surfaces because battery fluid is a corrosive acid. Flush any contacted area with water immediately and thoroughly. Also get medical help if eyes are affected. To lessen the risk of a short circuit, remove rings, metal watch bands and other metal jewelry. Do NOT allow metal tools to contact the positive battery terminal (or metal in contact with it) and any other metal on the vehicle. Be certain when attaching the jumper cable clamps to the positive terminals of the batteries that neither clamp contacts any other metal.

- 1. This vehicle has a 12-volt starting system and a negative ground electrical system. Be sure that the other vehicle also has a 12-volt starting system and negative ground. Its owner's manual may give you that information.
  - IF YOU ARE UNSURE OF THE OTHER VEHICLE'S VOLTAGE (OR IF THE VOLTAGE AND GROUND ARE DIFFERENT FROM YOUR VEHICLE), DO NOT TRY TO JUMP START, AS PERSONAL INJURY OR SEVERE DAMAGE TO ELECTRICAL AND ELECTRONIC PARTS MAY RESULT.
  - Because of the extra torque needed to start many diesel engines, diesel powered vehicles often have more than one battery. While it is possible to use the procedure described here to jump start a single-battery vehicle from a vehicle with more than one battery, the opposite may not be true. For example, at low temperature it may not be possible to start a diesel engine. Never connect "+" (red) to "-" (black), or "-" to "+".
- 2. Position the vehicle with the good (charged) battery so that the jump starting cables will reach. DO NOT ALLOW THE VEHICLES TO TOUCH.
- 3. Turn off all electrical motors and accessories in both vehicles. Turn off all lights except those needed to protect the vehicle or light up the work area. Turn off the ignition, apply the parking brake firmly. If the vehicle(s) have an automatic transmission, shift to "PARK" (if no "PARK" position, shift to "NEUTRAL". If the vehicle(s) has a manual transmission, shift to "NEUTRAL". Do this in both vehicles. For vehicles with AC wheel lock control, refer to step 10.
- 4. If the discharged battery has filler caps, check the fluid level. DO NOT CHECK NEAR AN OPEN FLAME AND DO NOT SMOKE. Add clear drinking water to the proper level if low, and replace caps before jump starting.
- 5. Connect the first jumper cable from positive "+" (red) terminal on one battery to the "+" (red) terminal on the other battery. Never connect "+" (red) to "-" (black), or "-" to "+".
- 6. Connect one end of the second cable to the grounded negative "-" (black) terminal of the good (charged) battery.
- 7. Connect the other end of the second jumper cable to a solid, stationary, metallic point on the engine of the vehicle with the discharged battery but at a point AWAY FROM THE BATTERY, 450 mm (18 in) or more from the Revision 1.0 Date: 4/29/2017 2016 CHEVROLET LOW CAB FORWARD (LCF) ELECTRICAL SECTION

battery if possible. Do not connect it to pulleys, fans, or other parts that will move when the engine is started.

Do not touch hot manifolds as they can cause severe burns. If hot or moving parts can be avoided, the MOUNTING BRACKETS for the generator, or the air conditioning compressor, generally make a good point for this final ground attachment point. Take care that the jumper cable does not contact moving parts on or near the generator or compressor.

- 8. Start the engine on the vehicle with the good (charged) battery and run the engine at a moderate speed.
- 9. Start the engine of the vehicle that has the discharged battery.
- 10. Jump Starting AC Wheel Lock Controls if it is necessary to jump start the vehicle from a booster battery, the circuit boards in the wheel lock control may be damaged. In order to avoid this condition, the following procedure should be used for jump starting vehicles equipped with wheel lock control:
  - 10.1. Connect the jumper cables between the booster battery and the discharged vehicle battery, per normal recommended procedures.
  - 10.2. Start the vehicle per normal procedures.
  - 10.3. Turn on major electrical accessories including lights and heater blower.
  - 10.4. Disconnect the jumper cables from the vehicle battery per normal procedures.


The above procedure allows the transient energy to be dissipated through several circuits rather than having it all flow through the wheel lock control system.

11. Remove the battery cables by reversing the connecting sequence exactly. Begin by removing the last clamp first; that is, remove the jumper cable from the engine of the vehicle with the discharged battery as the first step.

Note: Make connections in numerical order.

Do not allow the vehicles to touch.

Make last connection on frame away from the battery.

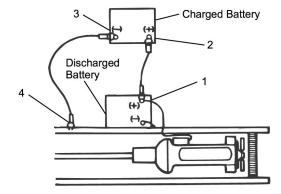

LNW46DSH002901

### **Battery Replacement**

When handling a battery, the following safety precautions should be observed:

- 1. Hydrogen gas is produced by the battery. A flame or spark near the battery may cause the gas to ignite.
- 2. Battery fluid is highly acidic. Avoid spilling on clothing or other fabric. Any spilled electrolyte should be flushed with large quantities of water and cleaned immediately.

#### **Removal Procedure**

Caution: Refer to CELL Link Error - Link target cell (cell ID 178001) is invalid for this publication...

**1.** Remove the battery ground cable from negative terminal.

#### Note:

- Do not disconnect within 3 minute after turning OFF the ignition switch.
- The ECM may malfunction if the battery cable is disconnected within 3 minutes.
- Remove the battery positive cable from positive terminal.
- 3. Remove the battery hold-down clamp.
- Remove the battery.

#### **Inspection Procedure**

Inspect the battery for physical damage, such as a cracked top or battery case, and correct.


#### **Installation Procedure**

- 1. Install the battery.
  - Draw down the hold-down clamp, being careful not to distort or crack the case or cover.
  - Check polarity to be sure the battery is not revered with respect to the generator.
- 2. Install the battery positive cable to positive terminal.

Caution: Refer to CELL Link Error - Link target cell (cell ID 178169) is invalid for this publication...

3. Install the battery ground cable to negative terminal.

Tighten the battery cables to the battery.

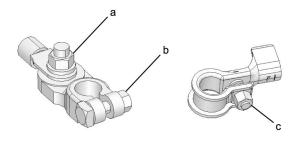

LNWE80SH000901

# **Description and Operation**

### **Exterior Lights Circuit Description**


The circuit consists of lights (headlight, side marker light, clearance light, parking light, turn signal light [front, side and rear], cornering light, identification light, stoplight, taillight, backup light and license plate light), switches (ignition switch, combination switch, hazard warning switch, illumination control switch, backup light switch and inhibitor switch), relays and other units.


The circuit has the DRL (Daytime Running Light) function. The DRL unit lights up the headlight automatically when the engine is running and the parking brake is released. When the lighting switch is turned to the headlight ON position, the DRL unit turns OFF the headlight.


The combination switch consists of the lighting switch, the dimmer switch and the turn signal switch. The each of lights are operated by the combination switch or other switches.


# **Schematic and Routing Diagrams**


## **Exterior Lights Schematics**

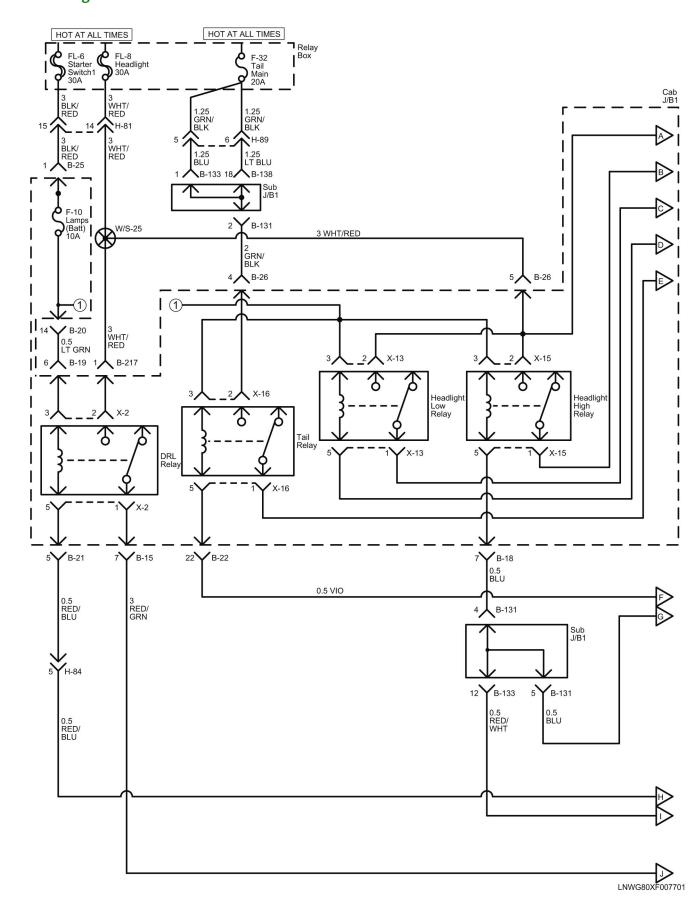

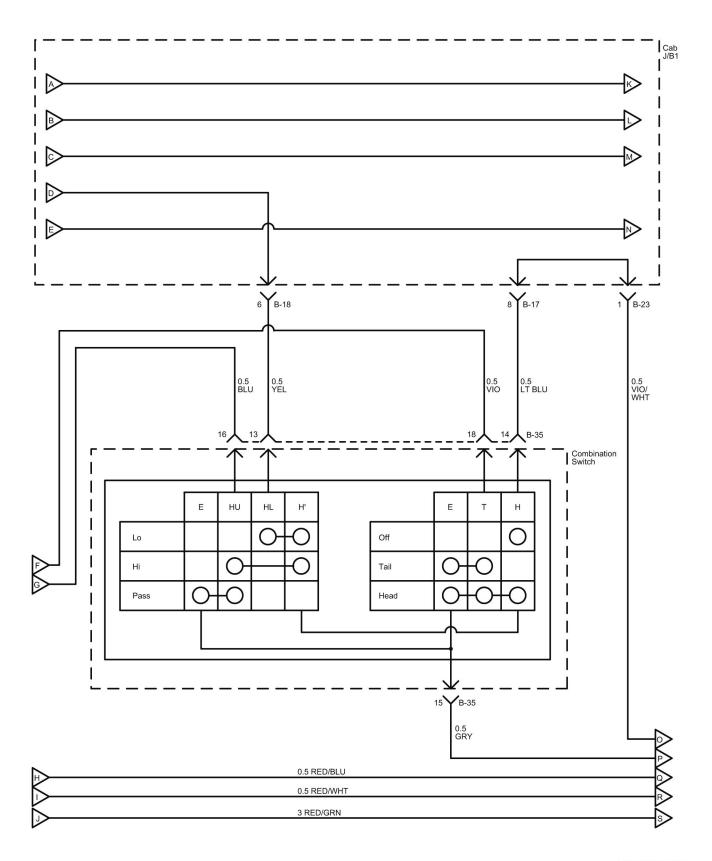


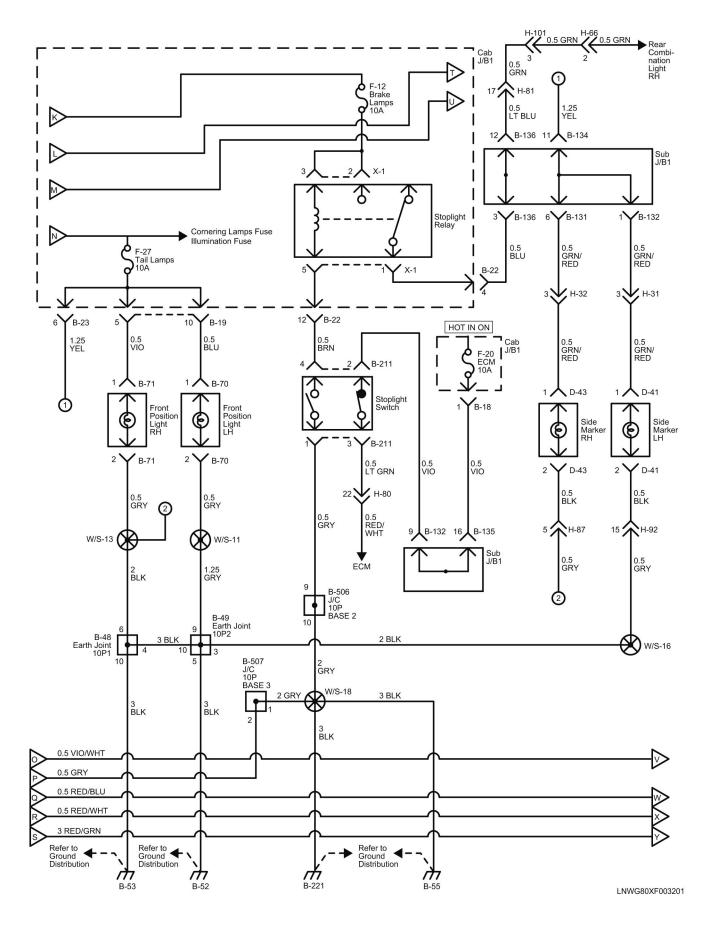


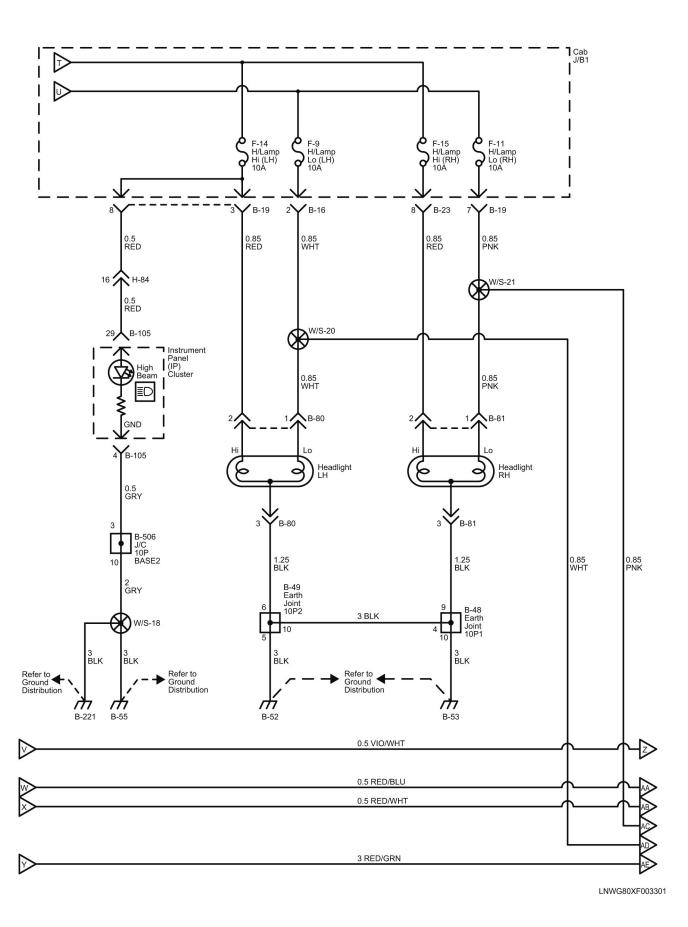


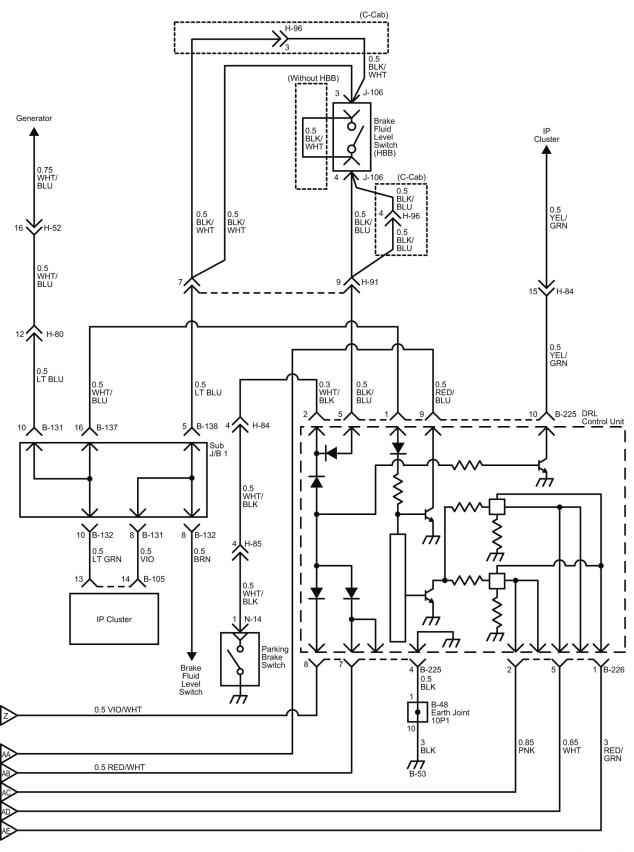



LNWG80XF012901

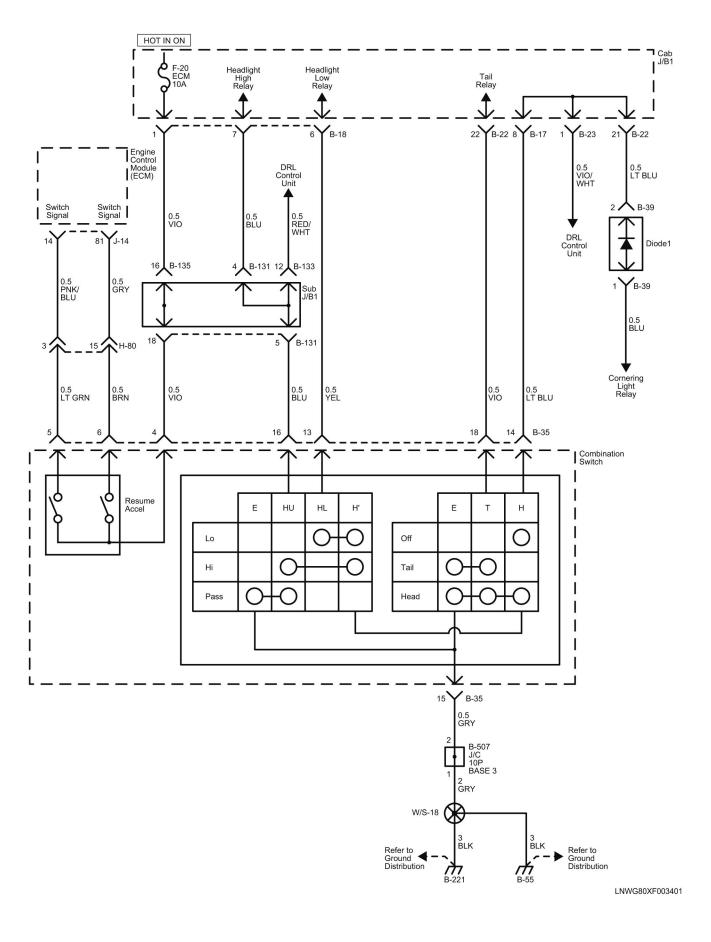

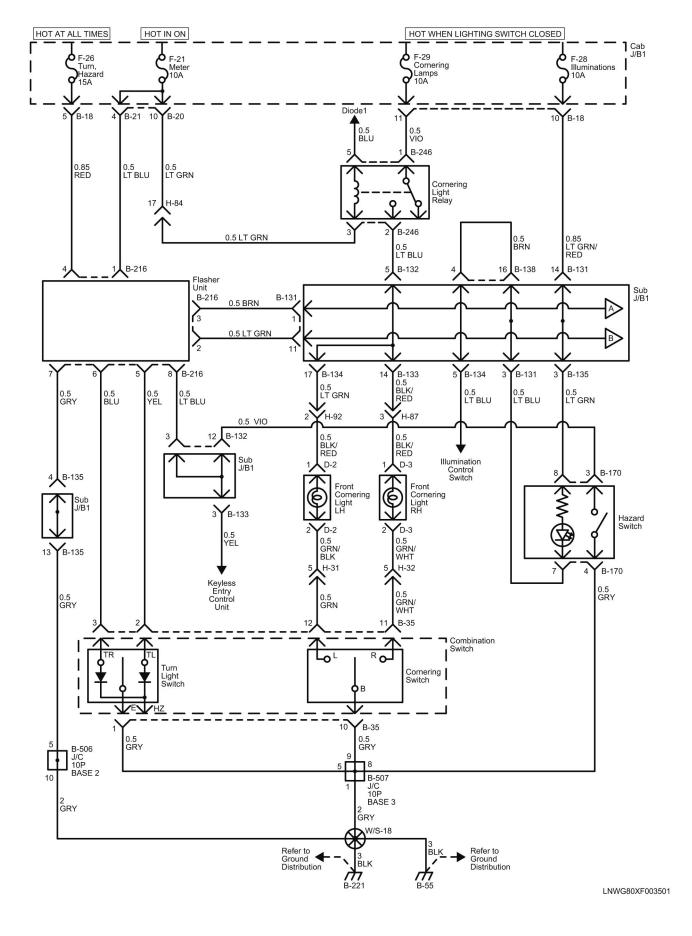

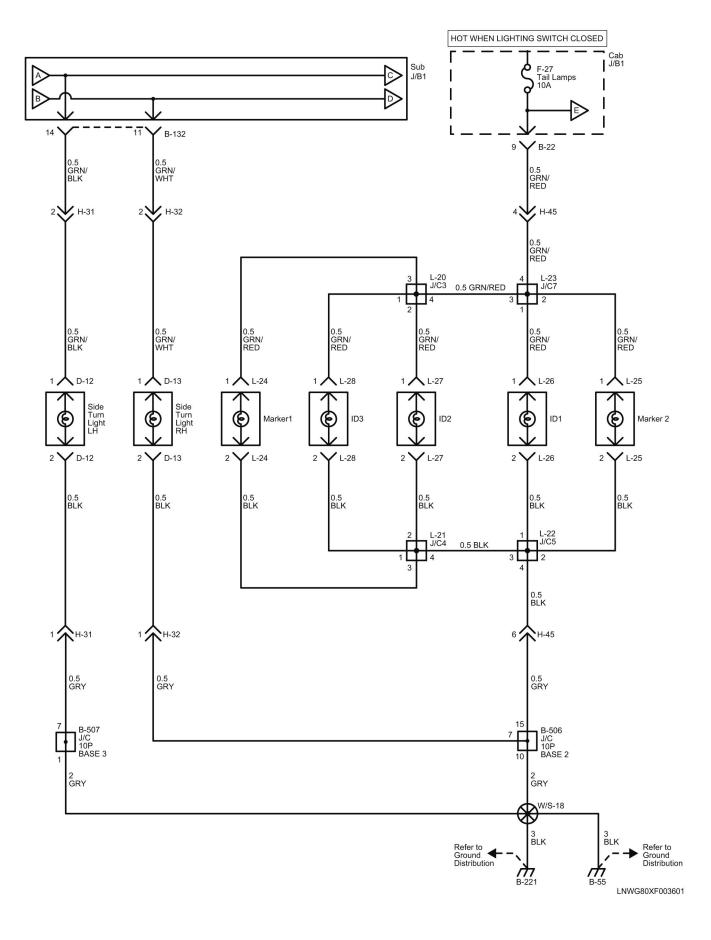

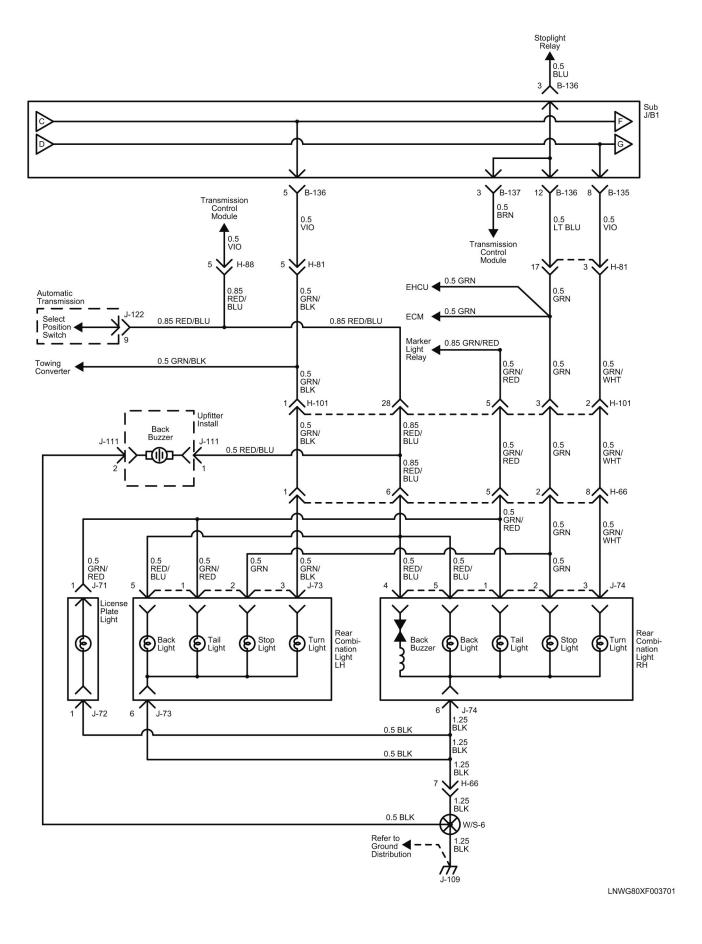

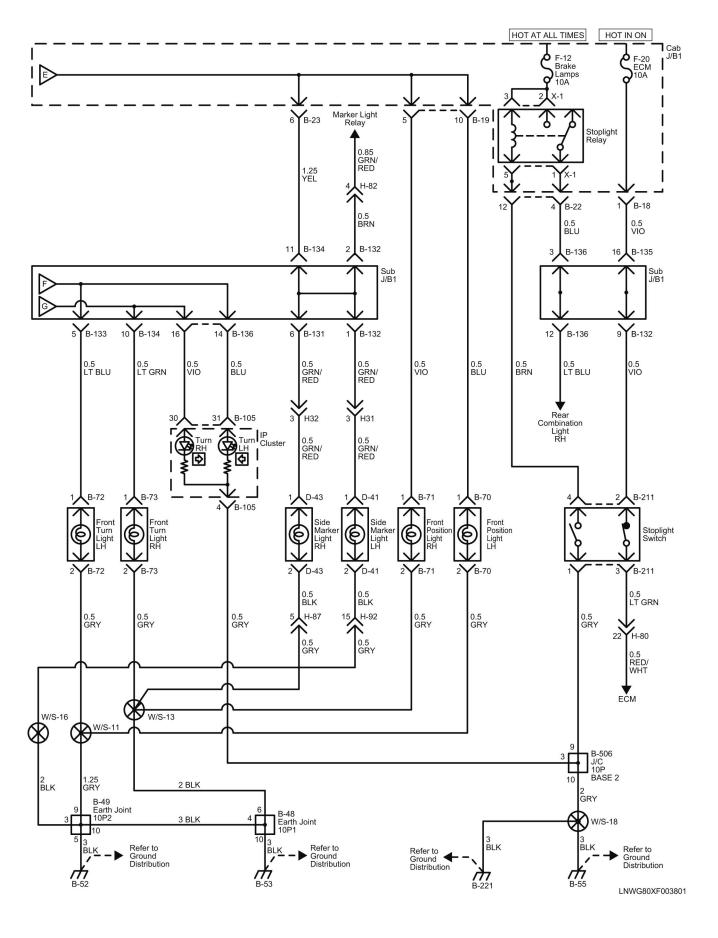


## **Repair Instructions**

## **Headlamp Aiming**

#### **Aiming of Headlight**

Place the unloaded vehicle on a level surface and check to see if the inflation pressure of the tires is correct, the lenses are clean, and the battery is sufficiently charged. Adjust the aim with the headlight tester.

When adjusting, follow the procedure of the tester manufacturer.

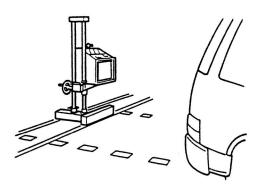


LNW38ASH006101

## **Vertical Adjustment**

Insert the tip of a screwdriver into the hole beneath the headlight (the shaft of the screwdriver must be slanted up) until entering the space between teethe of the adjusting screw. Turn the gear wheel to adjust headlight focus up or down.


Two vertical aim gear wheels should be turned in the same direction at the same time to adjust aiming.

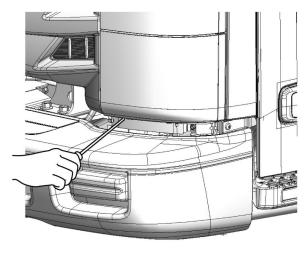

LNWG9ASH000401

#### **Horizontal Adjustment**

Insert the tip of a screwdriver into the hole beneath the headlight (the shaft of the screwdriver must be slanted up) until entering the space between teethe of the adjusting gear wheel. Turn the gear wheel to adjust headlight focus to the left or right.

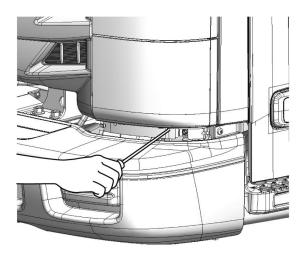

LNWG9ASH000501

## **Daytime Running Lamp Control Module Replacement**


#### **Removal Procedure**

Warning: Refer to CELL Link Error - Link target cell (cell ID 178001) is invalid for this publication..

1. Disconnect the battery ground cable


#### Note:

- Do not disconnect within 3 minute after turning OFF the ignition switch.
- The ECM may malfunction if the battery cable is disconnected within 3 minutes.
- 2. Remove the lower cover (3).
  - 2.1. Remove the two clips.
- 3. Remove the side cover (passenger side) (2).
  - **3.1.** Remove the clip and screw.
- 4. Remove the washer tank (1).
  - 4.1. Refer to CELL Link Error Link target cell (cell ID 281970) is invalid for this publication. in this section.

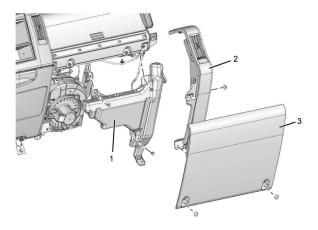

LNW880SH002301


- 5. Disconnect the harness connectors.
  - 5.1. Disconnect the DRL control unit harness connectors (1).
  - 5.2. Disconnect the door lock relay harness connector (2).
  - **5.3.** Disconnect the intermittent relay harness connector (3).
  - 5.4. Disconnect the TCM harness Connector (4).
  - **5.5.** Disconnect the MIMAMORI control unit harness connector (5).

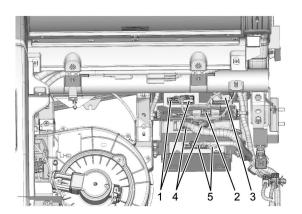

LNWA8DSH000201


- **6.** Remove the bracket with the MIMAMORI control unit, the TCM, the DRL control unit, the intermittent relay and the door lock relay.
  - **6.1.** Remove the fixing bolts of the bracket.

6.2. Remove the bracket with the MIMAMORI control unit, the TCM, the DRL control unit, the intermittent relay and the door lock relay.

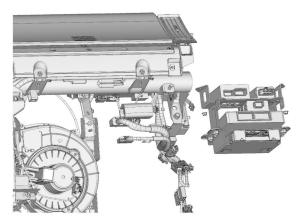

LNWA8DSH000101

7. Pull out the DRL control unit with your hand from the bracket.

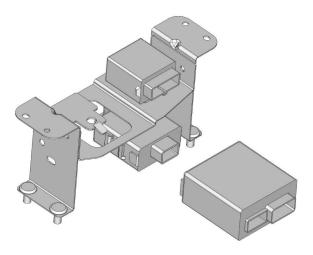

LNW780SH008301

## **Installation Procedure**

Follow the removal procedure in the reverse order.

## **Description and Operation**

## Wiper/Washer System Circuit Description


The circuit consists of the ignition switch, windshield wiper and washer switch, wiper motor, washer motor the intermittent relay horn switch and horn.

When the wiper and washer switch is turned on with starter switch on, the battery voltage is applied to the wiper motor to activate the wiper.

The washer motor squirts glass cleaning fluid while the washer switch is being pushed. The intermittent relay is used to control motion of the wiper.

### Operation of Windshield Wiper Motor (When Wiper "LO" or "INT" Position)


1. Condition of wiper switch is "LO" or "INT" position (Wiper motor is starting to operate)



NOTE: Arrow marks " ⇒ " indicate the direction of current.

LNW38ASH009301


2. Condition of wiper motor is operating



NOTE: Arrow marks " => " indicate the direction of current.

LNW38ASH009401


3. Condition of wiper switch is just "OFF" (Wiper motor is still operating until auto-stop position)



NOTE: Arrow marks " ⇒ " indicate the direction of current.

LNW38ASH009501


### 4. Wiper motor stops at auto-stop position




LNW38ASH009601

## **Schematic and Routing Diagrams**

## Wiper/Washer Schematics

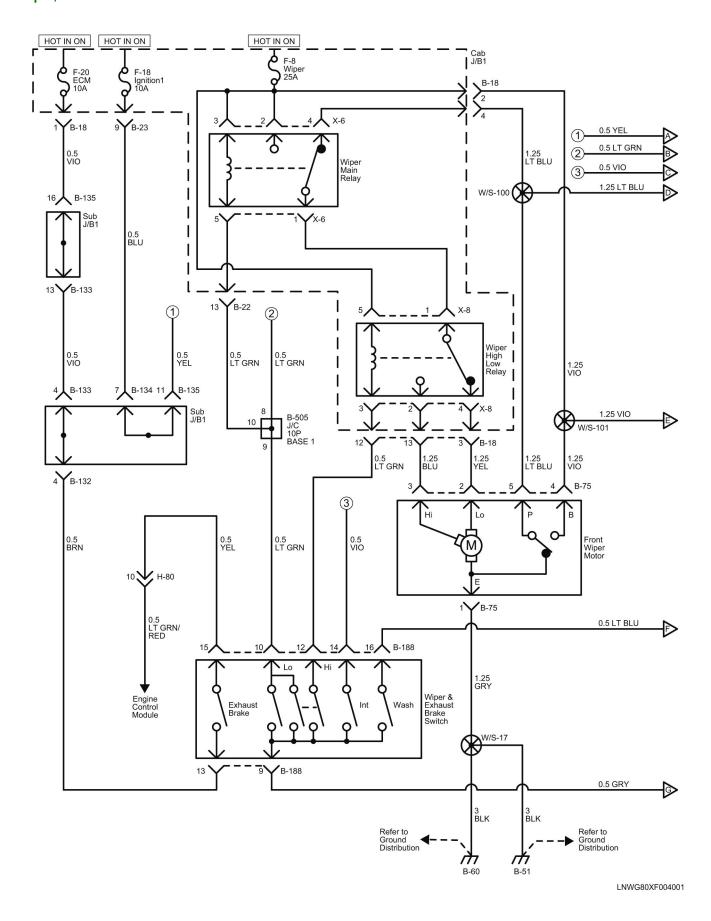


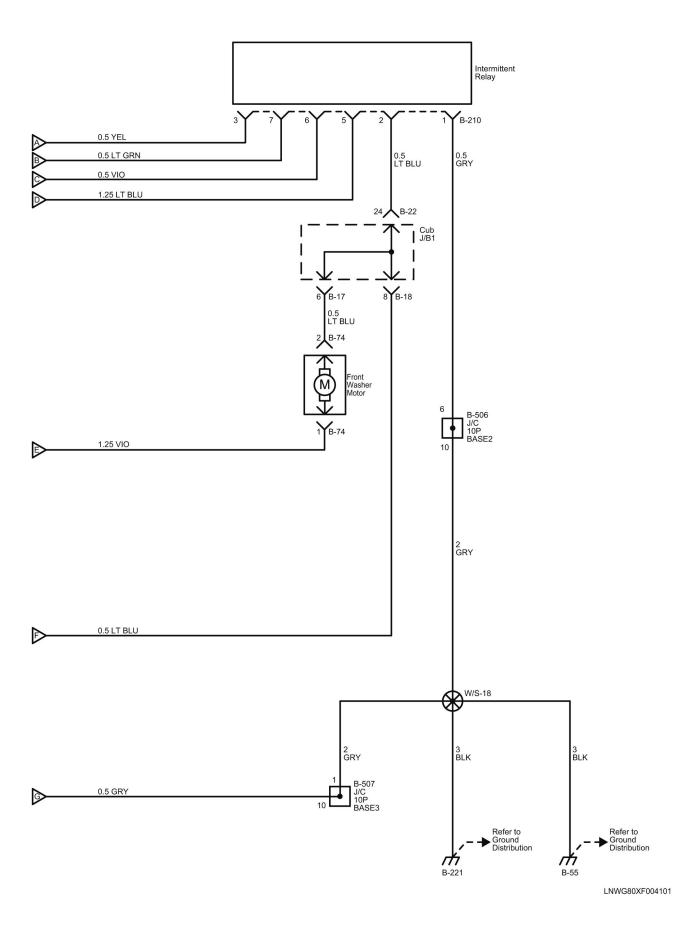

# **Description and Operation**

## **Horns Circuit Description**

The circuit consists of the horns, the horn switch and the relay. Horn operation is not dependent upon starter switch position. Pressing the horn pad (horn switch) activates the relay and causes the horns to sound.

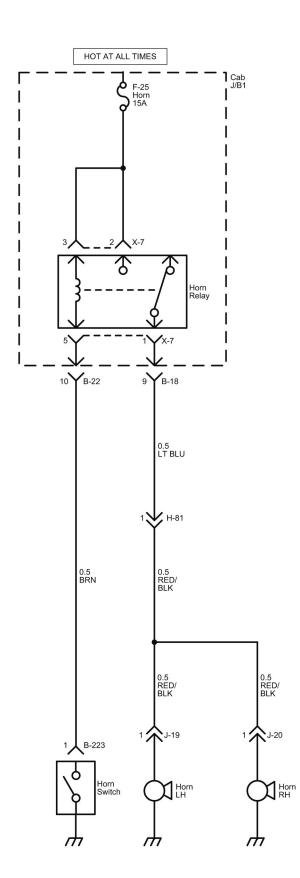

LNWG80XF010101

## **Description and Operation**


## **Radio and Cigarette Lighter Circuit Description**


The circuit consists of the ignition switch, audio, cigarette lighter and the relay.

The audio circuit is designed for the current to flow through the receiver circuit when the audio switch is turned on with the ignition switch in "ACC" or "ON". Current runs through the memory circuit of the audio regardless of the position of the ignition switch.

When the cigarette lighter is pushed in with the ignition switch at either "ACC" or "ON" position, a circuit is formed in the cigarette lighter case to heat the lighter coil. The cigarette lighter is spring back to its original position after the lighter coil is heated.

## **Radio and Cigarette Lighter Schematics**

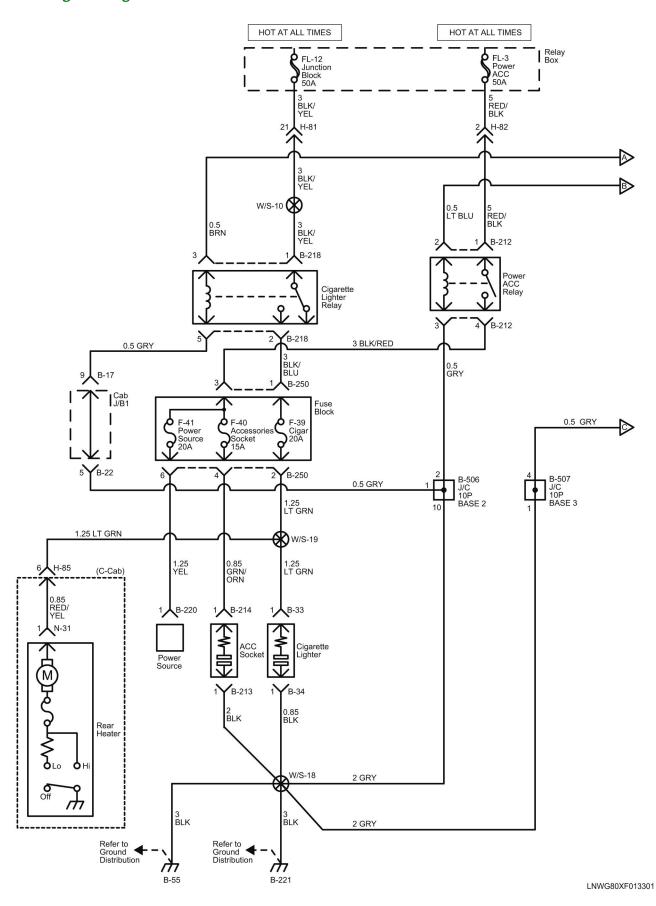

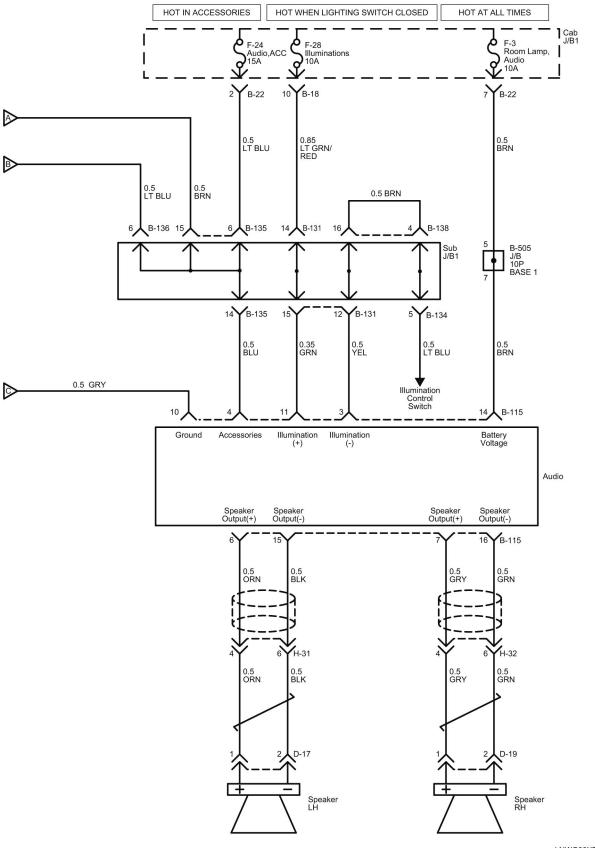

LNWG80XF004301

## **Diagnostic Information and Procedures**

## **Instrument Cluster Diagnosis**


### LED (Warning Lamp and Indicator Lamp) Display Test

The instrument panel (IP) cluster verifies that the system functions properly when the ignition switch is "ON". When the system is running normal, the LEDs light up or blink for a certain period of time as shown below.

#### **Self-Diagnosing Function**

Perform the odometer-trip meter segment check, and inspect the CPU inside the IP cluster and the circuits to the various meters (speedometer, tachometer, fuel gauge, thermometer, engine coolant temperature gauge).

- 1. After trip meter A or trip meter B is selected, the ignition switch is turned off.
- 2. When the ignition switch is ON, confirm that the trip display is 00000.0. After 0.8 seconds or longer, turn OFF (release) the Select/ Reset knob, and then repeat turning ON and OFF the trip-reset switch for 3 times. (Perform the operation within 7 seconds after the ignition switch turns ON)



LNWA80SH000301

#### Meter operation

All the segments of the odometer/ trip meter illuminate.




Odometer / Trip meter (in speedometer)

MFW89ESH000101

• When you turn ON the Select/ Reset knob again, the gauge needle of each gauge will move 45°. A ROM No. (5-digit alphanumeric characters starting with alphabet A) will be displayed at the odometer/ trip meter and the low fuel warning will stop illuminating. When you turn the switch to "OFF", all gauge needles will return to zero, and the fuel warning will light up.

A special ROM No. will be displayed in the multi-information display.

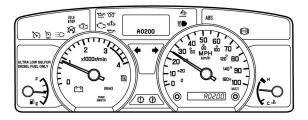

#### LNWA80SH000101

- 3. Self-diagnosis mode will be cancelled when any of the following conditions are met.
  - By turning the ignition switch to "OFF".
  - When the input of vehicle speed signal or the engine revolution signal is detected.

## **Checking the Multi-Information Display**

- Replace the IP cluster when the meter failure is displayed.
- · Perform the applicable functional inspection when CAN system error is displayed.



LNWA80SH000201

#### **Maintenance Display and Reset Function**

### **Engine Oil and Filter Inspection**

By feeding the engine oil life data from MIMAMORI control unit via CAN communication, the running distance remaining until the next inspection timing will be counted down on the multi information display. When the vehicle is run beyond the remaining distance, the distance in negative will be displayed. Turn the MID select knob to display and inspect the followings:

ENG OlLand FILTER

Note: When the replacement has been done, reset the indication of "ENG OIL& FILTER".

#### Resetting of "ENG OIL&FILTER"

When the reset is done, the display of "ENG OIL& FILTER" will be reset to 10,000 mile (16,000 km).

• Press and hold the MID select knob at the "ENG OIL& FILTER" display screen > The reset screen will be displayed > Press and hold the MID select knob

### **Transmission inspection**

By feeding the transmission and differential gear oil life data from MIMAMORI control unit via CAN communication, the running distance remaining until the next inspection timing will be counted down on the multi information display. When the vehicle is run beyond the remaining distance, the distance in negative will be displayed. Turn the MID select knob to display and inspect the followings:

T/M&DIFF OIL

Note: When the replacement has been done, reset the indication of "T/M&DIFF OIL"

#### Resetting of "T/M&DIFF OIL"

When the reset is done, the display of "T/M&DIFF OIL" will be reset to 30,000 mile (48,000 km).

Press and hold the MID select knob at the "T/M&DIFF OIL" display screen > The reset screen will be displayed > Press and hold the MID select knob

#### **Fuel Filter Inspection**

Based on the data calculated from the odometer distance, the running distance remaining until the next inspection timing will be counted down on the multi information display. When the vehicle is run beyond the remaining distance, the distance in negative will be displayed. Turn the MID select knob to display and inspect the followings:

FUEL FILTER

Note: When the replacement has been done, reset the indication of "FUEL FILTER"

#### Resetting of "FUEL FILTER"

When the reset is done, the display of "FUEL FILTER" will be reset to 15,000 mile (24,000 km).

Press and hold the MID select knob at the "FUEL FILTER" display screen > The reset screen will be displayed > Press and hold the MID select knob

#### **Power Steering Fluid Inspection**

Based on the data calculated from the odometer distance, the running distance remaining until the next inspection timing will be counted down on the multi information display. When the vehicle is run beyond the remaining distance, the distance in negative will be displayed. Turn the MID select knob to display and inspect the followings:

STEFRING OIL

Note: When the replacement has been done, reset the indication of "STEERING OIL"

#### Resetting of "STEERING OIL"

When the reset is done, the display of "STEERING OIL" will be reset to 30,000 mile (48,000 km).

Press and hold the MID select knob at the "STEERING OIL" display screen > The reset screen will be displayed > Press and hold the MID select knob

#### **Tire Rotation**

Based on the data obtained from the odometer reading, the running distance remaining until the next tire rotation timing preset by the driver will be counted down on the multi information display. When the vehicle is run beyond the remaining distance, the distance in negative will be displayed. Turn the MID select knob to display and inspect the followings:

TIRE ROTATION

Note: When the tire rotation has been done, reset the indication of "TIRE ROTATION"

#### Setting/Resetting of "TIRE ROTATION"

You can freely change the tire rotation timing by setting/resetting it.

- Press and hold the MID select knob at the "TIRE ROTATION" display screen > The setting/resetting screen will be displayed >
  - Turn right the MID select knob, it increases the distance.
  - Turn left the MID select knob, it decreases the distance.
- > Press and hold the MID select knob

#### **Maintenance Indicator Light**

This indicator displays and hides maintenance items. When "Maintenance ON" is displayed, maintenance items will be displayed and when "Maintenance OFF" is displayed, maintenance items will not be displayed.

#### **Setting of Maintenance Indicator Display**

You can change the maintenance indicator show/hide.

Press and hold the MID select knob at the "MAINTENANCE ON/OFF" display screen.

The setting screen will be displayed.

Turn right/left the MID select knob, it switch on/off of the maintenance display.

## Starter inspection

Starter inspection, vehicles equipped with idling stop start system.

By feeding the starter start count data from MIMAMORI control unit via CAN communication, the starter start count will be displayed on the multi-display. When the starter start count reaches 50,000 times, the check engine warning lamp comes on with the background color changed to amber to recommend the replacement.

Operate the 3 mode switch to display the following screen for inspection.

#### Starter

Note: When the replacement has been done, reset the starter display.

Resetting Starter Display
Revision 1.0 - Date: 4/29/2017

When the reset operation is performed, the starter display will be reset to 50,000 times.

Press and hold the 3 mode switch at the starter screen, and after reset display is shown, press and hold the 3 mode switch

### Resetting of "STARTER"

Enter the resetting screen by pressing and holding the MID select knob for more than 10 seconds.

Note: If you want to cancel the setting procedure, press the MID select knob once.

The display goes back to the screen that was displayed just before entering the setting change screen.

Complete the resetting by pressing and holding the MID select knob for more than 10 seconds.

#### **Speedometer Diagnosis**

#### **Speedometer And Odometer Do Not Function**

#### **Visual and Physical Checks**

Check and repair the following items:

Battery voltage

If a problem found, charge the battery or replace the battery.

Fuses

If the fuse continues to open, repair the short to ground on one of the circuits that is fed by the fuse or replace the shorted attached component.

Ground terminals

If an intermittent, a poor connection or corrosion is found, repair the connection or clean the terminal.

- Electrical connections or wiring
  - Check for poor mating of the connector halves, or terminals not fully seated in the connector body, backed-out.
  - Check for improperly formed or damaged terminals. Carefully reform or replace all the connector terminals in the problem circuit to ensure the proper contact tension.
  - Check for poor terminal to wire connections. This requires removing the terminal from the connector body to check.
- Improper installation of non-factory or aftermarket add on accessories such as lights, 2-way radios, amplifiers, electric motors, remote starters, alarm systems, cell phones, etc. (These accessories may lead to an emission related failure while in use, but do not fail when the accessories are not in use.)

If a problem found, remove accessories or correct the installation.

#### **Components Check**

Check and repair the following items:

Vehicle speed sensor

Check the diagnostic trouble code (DTC) related to vehicle speed sensor in the engine control system or transmission control system. Refer to 'Engine Control System' or 'Transmission Control System'.

If the DTC is set, go to applicable DTC chart.

Controller area network (CAN) communication.

Check the diagnostic trouble code (DTC) related to CAN communication in the engine control system or transmission control system. Refer to 'Engine Control System' or 'Transmission Control System'.

Speedometer and odometer

If a problem at the other parts and circuits not found, replace the instrument panel (IP) cluster.

### **Speedometer Does Not Function (Odometer is Normal)**

#### Visual and Physical Checks

Check and repair the following items:

Battery voltage

If a problem found, charge the battery or replace the battery.

Fuses

If the fuse continues to open, repair the short to ground on one of the circuits that is fed by the fuse or replace the shorted attached component.

Ground terminals

If an intermittent, a poor connection or corrosion is found, repair the connection or clean the terminal.

- Electrical connections or wiring
  - Check for poor mating of the connector halves, or terminals not fully seated in the connector body, backed-out.
  - Check for improperly formed or damaged terminals. Carefully reform or replace all the connector terminals in the problem circuit to ensure the proper contact tension.
  - Check for poor terminal to wire connections. This requires removing the terminal from the connector body to check.
- Improper installation of non-factory or aftermarket add on accessories such as lights, 2-way radios, amplifiers, electric motors, remote starters, alarm systems, cell phones, etc. (These accessories may lead to an emission related failure while in use, but do not fail when the accessories are not in use.)

If a problem found, remove accessories or correct the installation.

#### **Components Check**

Replace the instrument panel (IP) cluster.

#### **Odometer Does Not Function (Speedometer is Normal)**

## Visual and Physical Checks

Check and repair the following items:

Revision 1.0 - Date: 4/29/2017

Battery voltage

If a problem found, charge the battery or replace the battery.

Fuses

If the fuse continues to open, repair the short to ground on one of the circuits that is fed by the fuse or replace the shorted attached component.

Ground terminals

If an intermittent, a poor connection or corrosion is found, repair the connection or clean the terminal

- Electrical connections or wiring
  - Check for poor mating of the connector halves, or terminals not fully seated in the connector body, backed-out.
  - Check for improperly formed or damaged terminals. Carefully reform or replace all the connector terminals in the problem circuit to ensure the proper contact tension.
  - Check for poor terminal to wire connections. This requires removing the terminal from the connector body to check.
- Improper installation of non-factory or aftermarket add on accessories such as lights, 2-way radios, amplifiers, electric motors, remote starters, alarm systems, cell phones, etc. (These accessories may lead to an emission related failure while in use, but do not fail when the accessories are not in use.)

If a problem found, remove accessories or correct the installation.

#### Components Check

Replace the instrument panel (IP) cluster.

#### **Speedometer Needle Fluctuates (May Be Wide Fluctuation)**

### **Visual and Physical Checks**

Check and repair the following items:

Battery voltage

If a problem found, charge the battery or replace the battery.

Fuses

If the fuse continues to open, repair the short to ground on one of the circuits that is fed by the fuse or replace the shorted attached component.

Ground terminals

If an intermittent, a poor connection or corrosion is found, repair the connection or clean the terminal.

- Electrical connections or wiring
  - Check for poor mating of the connector halves, or terminals not fully seated in the connector body, backed-out.
  - Check for improperly formed or damaged terminals. Carefully reform or replace all the connector terminals in the problem circuit to ensure the proper contact tension.
  - Check for poor terminal to wire connections. This requires removing the terminal from the connector body to check.
- Improper installation of non-factory or aftermarket add on accessories such as lights, 2-way radios, amplifiers, electric motors, remote starters, alarm systems, cell phones, etc. (These accessories may lead to an emission related failure while in use, but do not fail when the accessories are not in use.)

If a problem found, remove accessories or correct the installation.

## **Components Check**

Check and repair the following items:

Vehicle speed sensor

Check the diagnostic trouble code (DTC) related to vehicle speed sensor in the engine control system or transmission control system. Refer to "Engine Control System" or "Transmission Control System".

If the DTC is set, go to applicable DTC chart.

Controller area network (CAN) communication.

Check the diagnostic trouble code (DTC) related to CAN communication in the engine control system or transmission control system. Refer to "Engine Control System" or "Transmission Control System".

Speedometer

If a problem at the other parts and circuits not found, replace the instrument panel (IP) cluster.

#### **Speedometer Needle Jumps Erratically**

#### Visual and Physical Checks

Check and repair the following items:

Air pressure of tires

If air pressure of tires, adjust sir pressure.

Battery voltage

If a problem found, charge the battery or replace the battery. Revision 1.0 - Date: 4/29/2017

Fuses

If the fuse continues to open, repair the short to ground on one of the circuits that is fed by the fuse or replace the shorted attached component.

Ground terminals

If an intermittent, a poor connection or corrosion is found, repair the connection or clean the terminal.

- Electrical connections or wiring
  - Check for poor mating of the connector halves, or terminals not fully seated in the connector body, backed-out.
  - Check for improperly formed or damaged terminals. Carefully reform or replace all the connector terminals in the problem circuit to ensure the proper contact tension.
  - Check for poor terminal to wire connections. This requires removing the terminal from the connector body to check.
- Improper installation of non-factory or aftermarket add on accessories such as lights, 2-way radios, amplifiers, electric motors, remote starters, alarm systems, cell phones, etc. (These accessories may lead to an emission related failure while in use, but do not fail when the accessories are not in use.)

If a problem found, remove accessories or correct the installation.

#### **Components Check**

Check and repair the following items:

Vehicle speed sensor

Check the diagnostic trouble code (DTC) related to vehicle speed sensor in the engine control system or transmission control system. Refer to Engine Control System or Transmission Control System.

If the DTC is set, go to applicable DTC chart.

• Controller area network (CAN) communication

Check the diagnostic trouble code (DTC) related to CAN communication in the engine control system or transmission control system. Refer to Engine Control System or Transmission Control System.

Speedometer

If a problem at the other parts and circuits not found, replace the instrument panel (IP) cluster.

#### **Engine Coolant Temperature Indicator Diagnosis**

#### **Engine Coolant Temperature Gauge Needle Does Not Move**

#### Visual and Physical Checks

Check and repair the following items:

Battery voltage

If a problem found, charge the battery or replace the battery.

Fuses

If the fuse continues to open, repair the short to ground on one of the circuits that is fed by the fuse or replace the shorted attached component.

Ground terminals

If an intermittent, a poor connection or corrosion is found, repair the connection or clean the terminal

- Electrical connections or wiring
  - Check for poor mating of the connector halves, or terminals not fully seated in the connector body, backed-out.
  - Check for improperly formed or damaged terminals. Carefully reform or replace all the connector terminals in the problem circuit to ensure the proper contact tension.
  - Check for poor terminal to wire connections. This requires removing the terminal from the connector body to check.
- Improper installation of non-factory or aftermarket add on accessories such as lights, 2-way radios, amplifiers, electric motors, remote starters, alarm systems, cell phones, etc. (These accessories may lead to an emission related failure while in use, but do not fail when the accessories are not in use.)

If a problem found, remove accessories or correct the installation.

#### **Components Check**

Check and repair the following items:

Engine coolant temperature (ECT) sensor

Check the diagnostic trouble code (DTC) related to ECT sensor in the engine control system. Refer to Engine Control System.

If the DTC is set, go to applicable DTC chart.

Controller area network (CAN) communication.

Check the diagnostic trouble code (DTC) related to CAN communication in the engine control system or transmission control system. Refer to Engine Control System.

ECT gauge

If a problem at the other parts and circuits not found, replace the instrument panel (IP) cluster.

### **Engine Coolant Temperature Gauge Reading is Too Low (or High)**

## Visual and Physical Checks

Check and repair the following items:

Battery voltage

If a problem found, charge the battery or replace the battery.

Fuses

If the fuse continues to open, repair the short to ground on one of the circuits that is fed by the fuse or replace the shorted attached component.

Ground terminals

If an intermittent, a poor connection or corrosion is found, repair the connection or clean the terminal.

- Electrical connections or wiring
  - Check for poor mating of the connector halves, or terminals not fully seated in the connector body, backed-out.
  - Check for improperly formed or damaged terminals. Carefully reform or replace all the connector terminals in the problem circuit to ensure the proper contact tension.
  - Check for poor terminal to wire connections. This requires removing the terminal from the connector body to check.
- Improper installation of non-factory or aftermarket add on accessories such as lights, 2-way radios, amplifiers, electric motors, remote starters, alarm systems, cell phones, etc. (These accessories may lead to an emission related failure while in use, but do not fail when the accessories are not in use.)

If a problem found, remove accessories or correct the installation.

#### **Components Check**

Check and repair the following items:

Engine coolant temperature (ECT) sensor

Check the diagnostic trouble code (DTC) related to ECT sensor in the engine control system. Refer to Engine Control System.

If the DTC is set, go to applicable DTC chart.

Controller area network (CAN) communication.

Check the diagnostic trouble code (DTC) related to CAN communication in the engine control system or transmission control system. Refer to Engine Control System.

Thermostat

Refer to CELL Link Error - Link target cell (cell ID 281299) is invalid for this publication..

If a problem found, replace the thermostat.

ECT gauge

If a problem at the other parts and circuits not found, replace the instrument panel (IP) cluster.

#### Needle Overshoots (or Goes Up to the "H" Range)

#### Visual and Physical Checks

Check and repair the following items:

Battery voltage

If a problem found, charge the battery or replace the battery.

Fuses

If the fuse continues to open, repair the short to ground on one of the circuits that is fed by the fuse or replace the shorted attached component.

Ground terminals

If an intermittent, a poor connection or corrosion is found, repair the connection or clean the terminal.

- Electrical connections or wiring
  - Check for poor mating of the connector halves, or terminals not fully seated in the connector body, backed-out.
  - Check for improperly formed or damaged terminals. Carefully reform or replace all the connector terminals in the problem circuit to ensure the proper contact tension.
  - Check for poor terminal to wire connections. This requires removing the terminal from the connector body to check.
- Improper installation of non-factory or aftermarket add on accessories such as lights, 2-way radios, amplifiers, electric motors, remote starters, alarm systems, cell phones, etc. (These accessories may lead to an emission related failure while in use, but do not fail when the accessories are not in use.)

If a problem found, remove accessories or correct the installation.

## **Components Check**

Check and repair the following items:

• Engine coolant temperature (ECT) sensor

Check the diagnostic trouble code (DTC) related to ECT sensor in the engine control system. Refer to Engine Control System..

If the DTC is set, go to applicable DTC chart.

• Controller area network (CAN) communication.

Check the diagnostic trouble code (DTC) related to CAN communication in the engine control system or transmission control system. Refer to Engine Control System.


ECT gauge

If a problem at the other parts and circuits not found, replace the instrument panel (IP) cluster.


## **Description and Operation**

**Instrument Cluster Description** 


LAYOUT FOR GAUGES, WARNING, INDICATOR AND ILLUMINATION LIGHTS (MID)

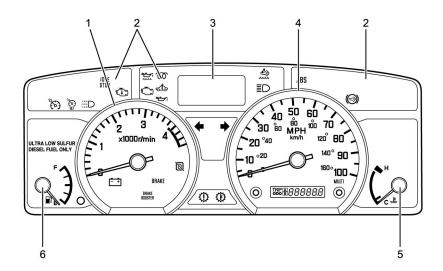

LNWD80MF000101

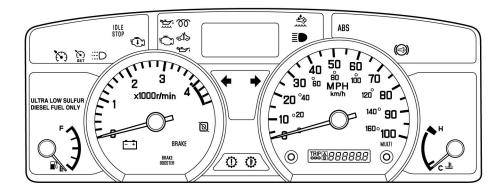


### Canada equipment

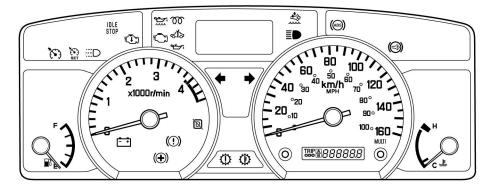


LNWD80LF000401

### **Instrument Cluster Connector End View**

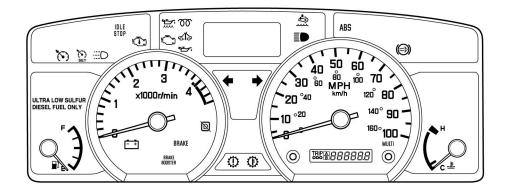

## Canada equipment

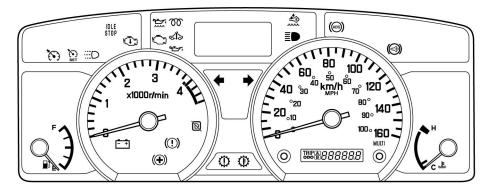

LNWD80LF000401


## B-105

Terminal No.	Connected to
1	Battery
2	Ignition
3	Miles Check
4	Power Ground
5	Signal Ground
6	Illumination (+)
7	Illumination (-)
8	Fuel Input
9	CAN - H

10	CAN - L
11	(Reserved : kw)
12	DIAG
13	Charge
14	Brake Oil Tank/HAB Tank
15	Park Brake
16	Brake Booster
17	(Reserved: B8)
18	(Reserved: C3)
19	Oil Pressure and Level
20	Oil Level Switch
21	Oil Level Check Switch
22	Malfunction Indicator Lamp
23	Water Separator
24	Glow
25	Check Trans
26	AT Oil Temp
27	OD OFF
28	(Reserved: A22)
29	High Beam
30	Turn RH
31	Turn LH
32	(Reserved: A7)
33	DRL
34	Air Cleaner
35	(Reserved: A19)
36	(Reserved: A10)
37	(Reserved: A18)
38	(Reserved: B3)
39	(Reserved: A8)

## **Diagnostic Information and Procedures**

## **Speedometer Test**



#### LNWA80SH000401

The speedometer is made up of the stepper motor type ammeter (movement) that displays indications, the stepper motor that drives and adds up the odometer and trip meter, and the driving circuit (printed circuit board) that makes exchanges between the pulse signals and the current.

Odometer alternates with trip meter by pushing select/reset knob.

#### **On-Vehicle Service**

Check the instrument panel (IP) cluster display accuracy and the operation of the odometer with the speedometer tester.

Tester Display Speed	Instrument Panel Cluster Display Permissible Level
40 MPH	39.2 – 40.8 MPH
60 km/h	58.5 – 61.5 km/h
60 MPH	59.0 – 61.0 MPH
100 km/h	98.5 – 101.5 km/h

**Note:** Inappropriate tire inflation may affect the accuracy of the odometer.

(To conduct this test, refer to the tester manufacture instruction manual.)

Since the instrument panel (IP) cluster display permissible levels above are specifications solely for the instrument panel (IP) cluster, they are to be used as reference values when conducting on-vehicle service.

### **Keyless Entry System Circuit Description**

The circuit consists of the keyless entry control unit, remote controller key, key remaind switch, door lock relay, door lock motor, door switch, and etc..

The signal that the keyless entry control unit receives is sent to the door lock relay when the remote controller key button is pressed. The door lock relay operates the door lock motor and the doors will be locked or unlocked.

The Keyless Entry System is equipped with the following functions.

- · Lock and unlock functions by remote controller operation, auto re-lock function and retry function.
- Remote controller key registration function
- Answer-back function

For lock and unlock functions with the remote controller operation, when locking/unlocking, the driver side door and passenger side door are controlled at the same time. For double cab models, the rear doors are also controlled at the same time

The auto re-lock function locks the door automatically if the door is not open for 30 seconds or more after unlocking

The remote controller operation is disabled if the following are met.

- Battery power supply is not applied to the keyless entry control unit.
- The key is inserted into the key cylinder.
- The door is open.
- The ignition switch position is ON or ACC.

If the driver side door is not locked when the doors are locked by the remote controller operation, the retry function locks automatiocally one second later (only once).

When any of the following are met, until the retry function activates, the retry function is disabled.

- The door is open.
- The remote controller key is inserted to the key cylinder.
- An operation is newly performed by the remote controller key.

For the remote controller key registration function, the remote controller operation registration is accepted only from the genuine remote controller key. It is possible to register a maximum of 4 remote controller keys.


If 4 remote controller keys are registered, the oldest code is cleared for additional registrations. For the registration procedure of the remote controller key, refer to Registration of the remote controller key.


For the answer-back function, perform the answer-back using the hazard lights. There are the following 2 patterns for the answer-back. Answer-back will not activate when auto re-lock is performed.


- 1 flash: when locked by the remote controller key or locked by the auto re-lock function.
- 2 flashes: when unlocked by the remote controller key

# **Schematic and Routing Diagrams**

# **Keyless Entry Schematics**

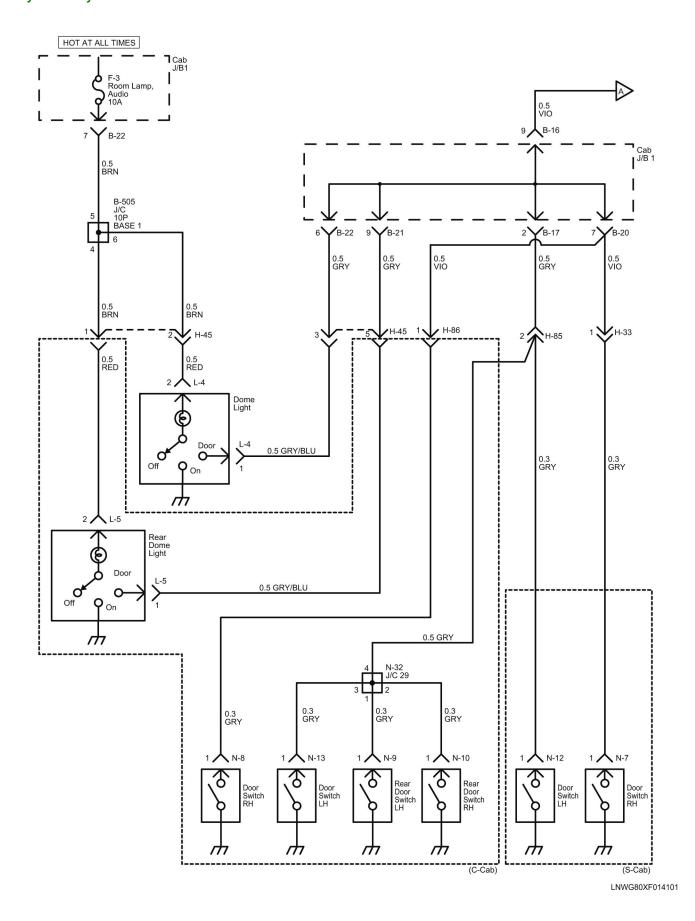

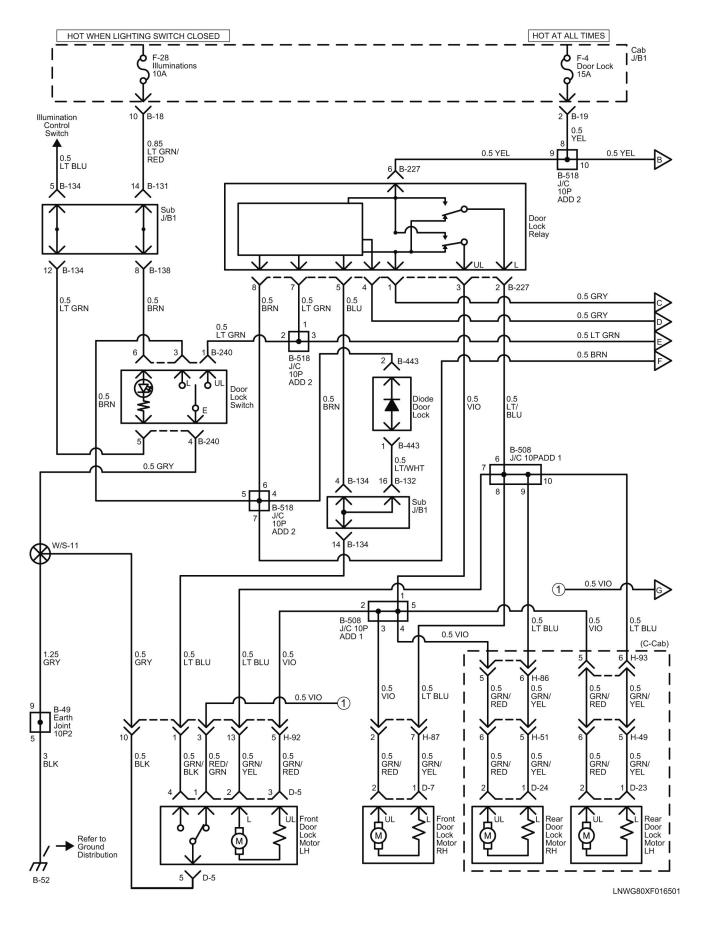

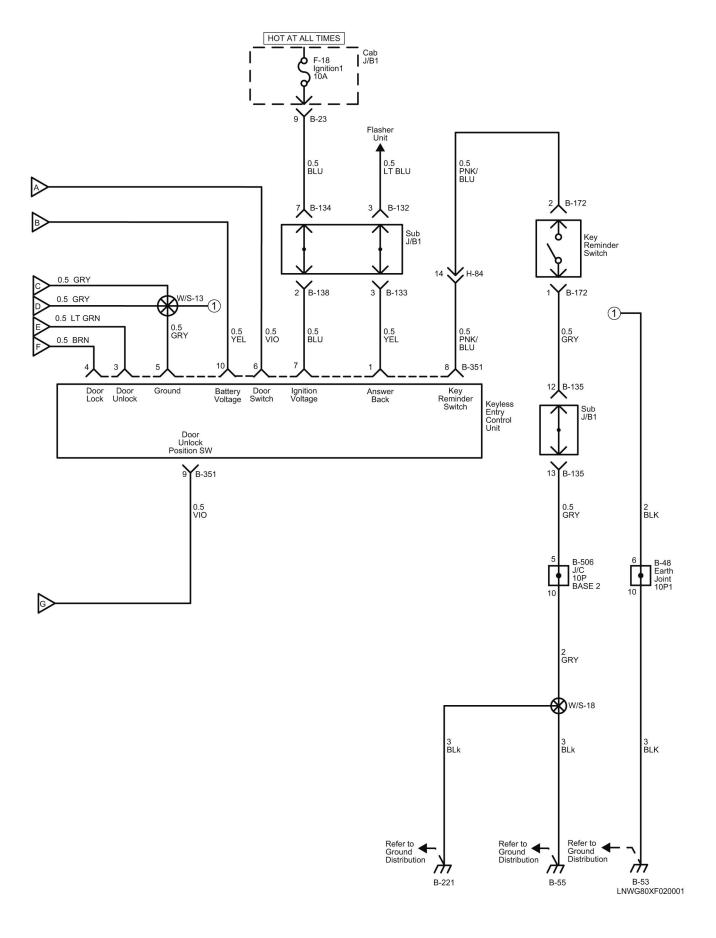



## **HVAC Circuit Description**


The air conditioning circuit consists of compressor, A/C switch, fan switch, etc. When the engine is rotating, the A/C starts to work with both the A/C and fan switches "ON", followed by the engagement of the magnetic clutch. It stops to work when either the fan switch or the A/C switch turns "OFF". In addition, the A/C has the function of temporary stop of its operation by function of the pressure switch when sensing abnormal rise of the refrigerant pressure.

# **Schematic and Routing Diagrams**

### **HVAC Schematics**

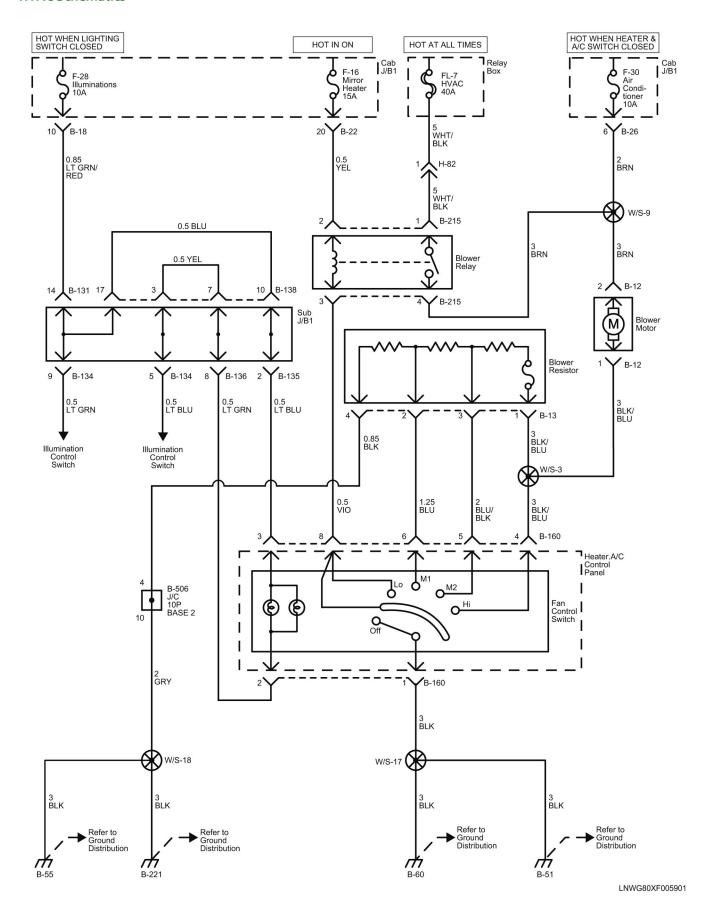

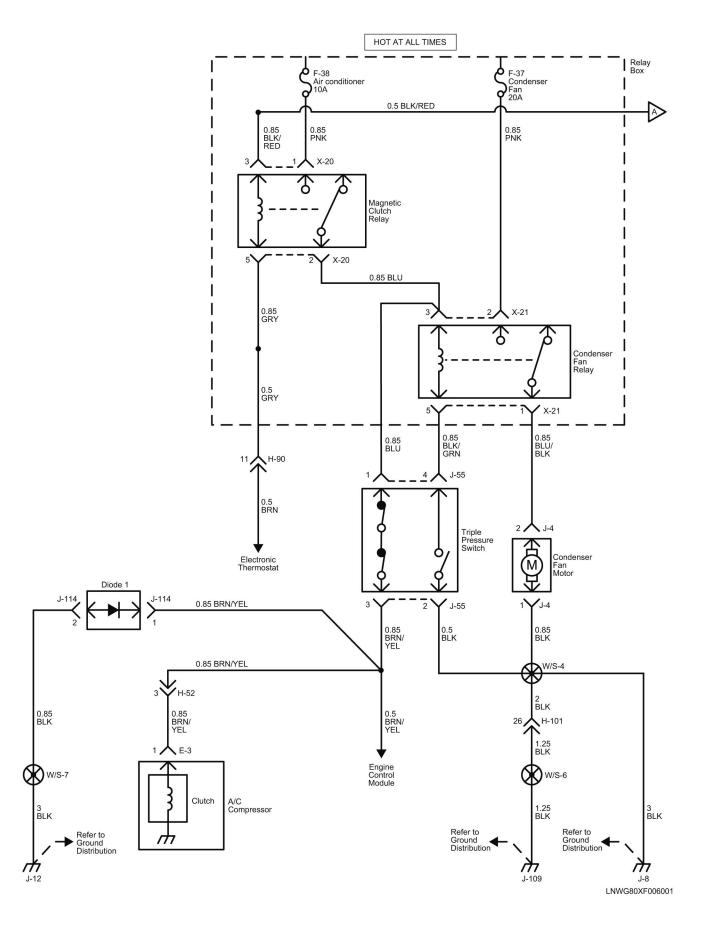


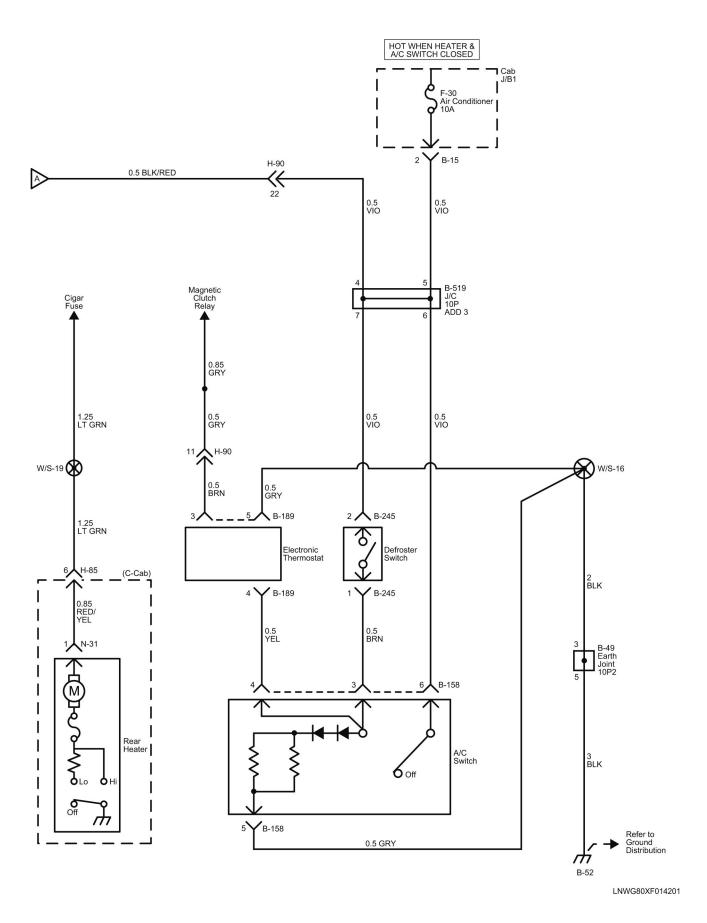

### **Service Terminal Circuit Description**


The circuit consists of the maker light relay, and the connector for the service terminal.


The service terminal connector is provided for Installation of optional equipment (S). This circuit incorporates a 20A fuse. Make sure that the total current of all installed parts does not exceed 20A.

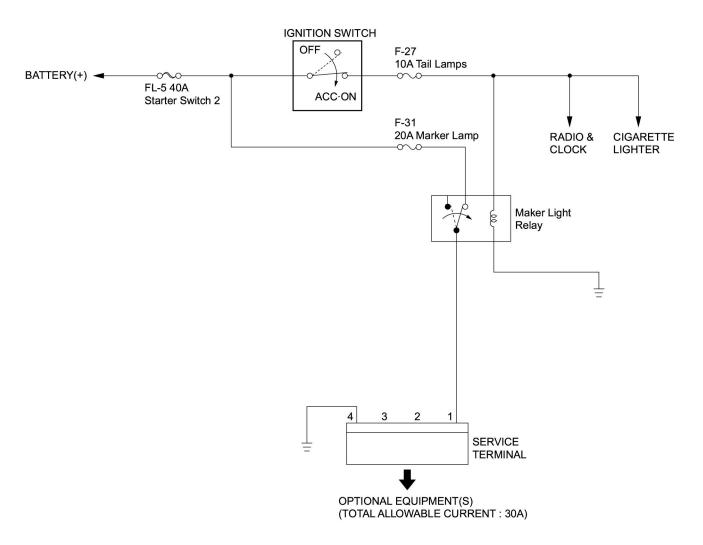

LNWD80LF000701

### **Service Terminal Schematics**

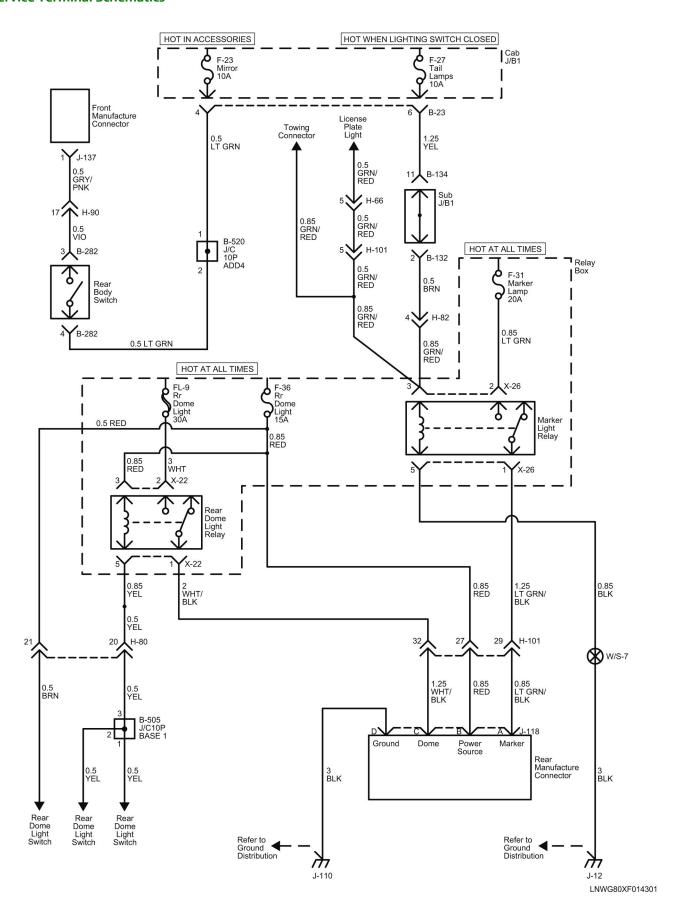

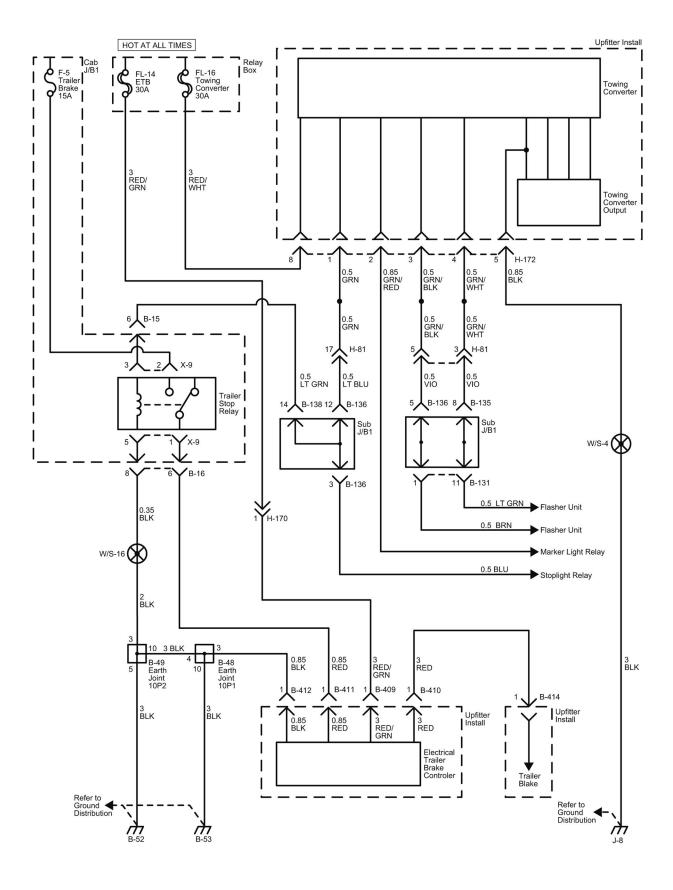


# **Antilock Brake System**

The Anti-lock Brake System (ABS) works on all four wheels. A combination of wheel speed sensor and Electronic and Hydraulic Control Unit (EHCU) can determine when a wheel is about to stop turning and adjust brake pressure to maintain best braking.

This system helps the driver main greater control of the vehicle under heavy braking conditions.

## **Antilock Brake System Schematics**

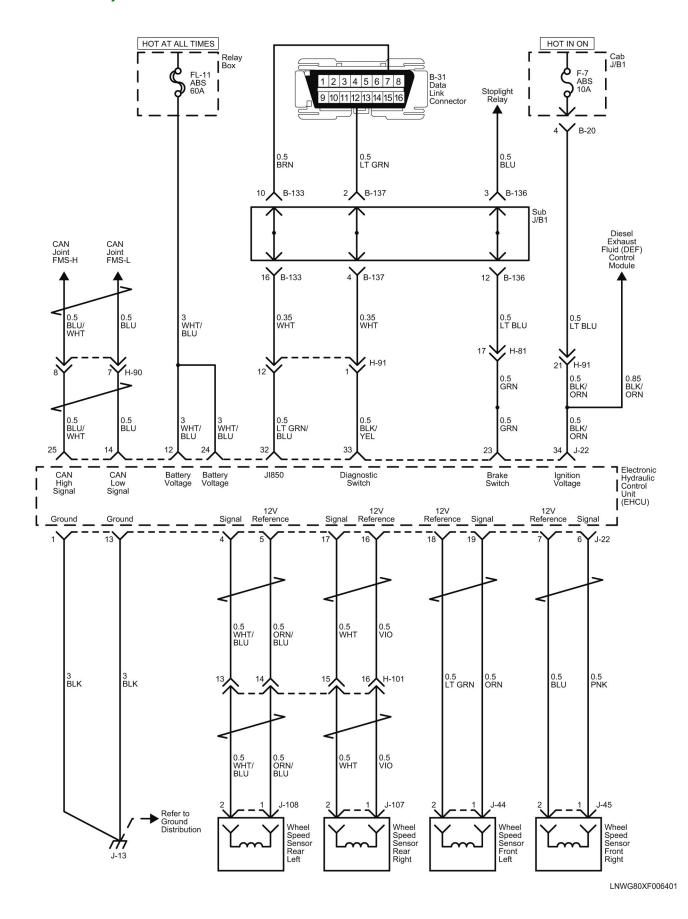

### **Power Windows**


The circuit consist of the ignition switch, power window switch for each of the windows and power window motor.

When the ignition switch is turned on, the battery voltage is applied to each of the power window switches through the circuit breaker and the power window relay on the circuit.


By operating the switches of each window to select "UP" or "DOWN", the revolving direction of the power window motor changes to open or close the window.

The driver's power window switch has a built-in one-touch operating circuit which allows to automatically open the window by operating the switch to the AUTO position.

#### **Power Window Switch Location**

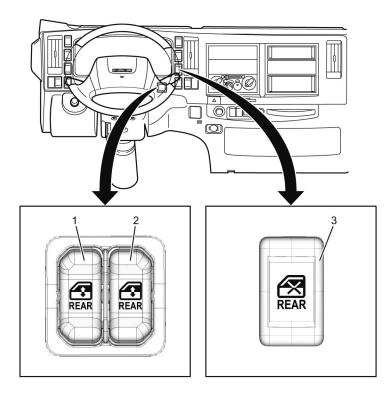

LNWG9CMF000101

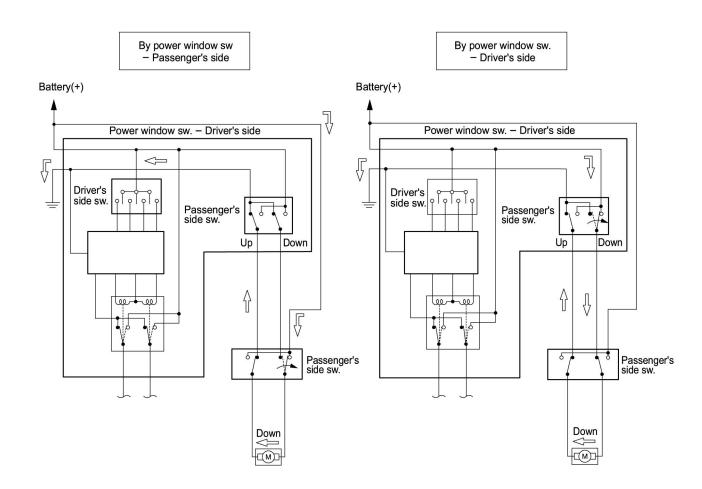



NOTE: Arrow marks " => " indicate the direction of current

LNW78DLF000501

# **Schematic and Routing Diagrams**

### **Power Window Schematics**

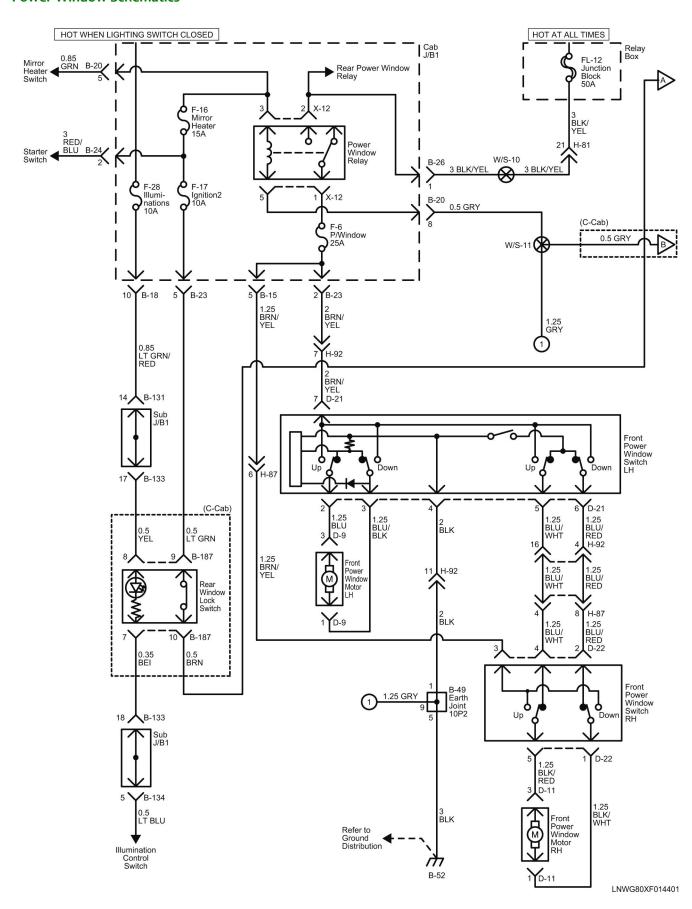

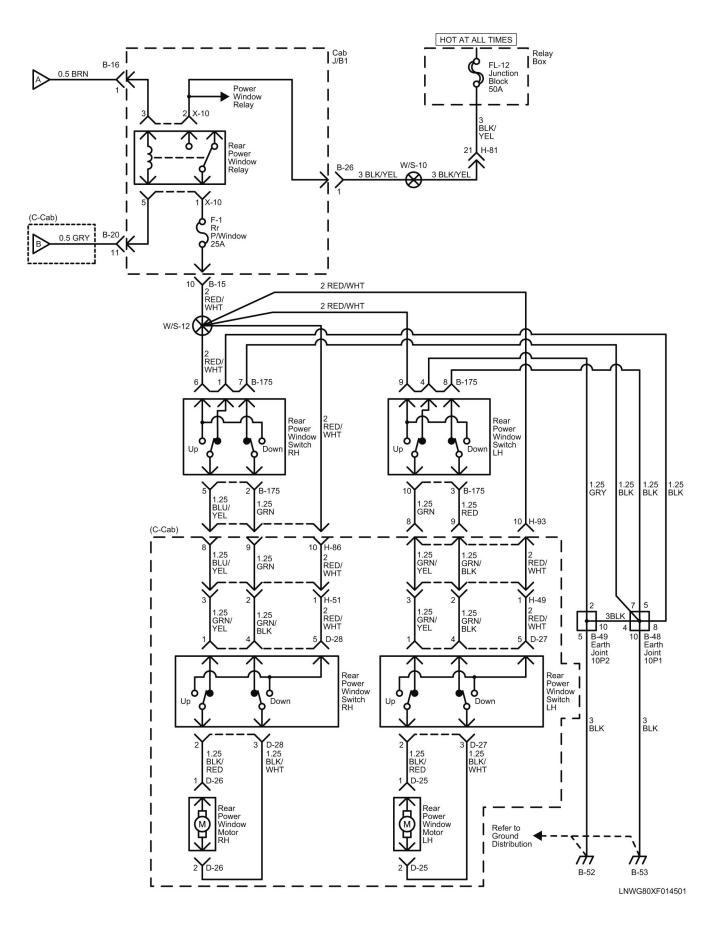


#### **Power Door Locks Circuit Description**

The circuit consists of the door lock switch, actuator for the front passenger side door, and the door lock controller.

The door lock relay is always provided with battery voltage. The key or the inside lock knob on the drivers side door can activate the lock mechanism of all the doors.

When the drivers side door lock switch is turned on, current flows for about one second to the door lock actuator of each door connected in parallel with the relay to activates the actuator to lock and unlock the doors.


#### **OPERATION OF DOOR LOCK CONTROLLER**

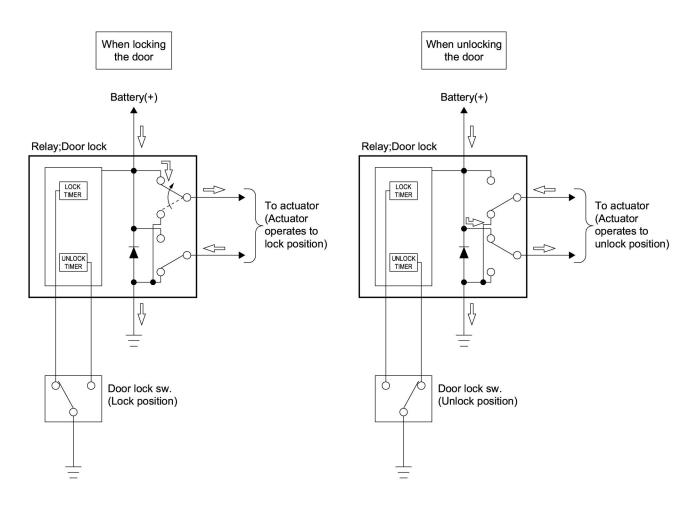


NOTE: Arrow marks " => " indicate the direction of current

LNW78DLF000401

#### **Power Door Lock Schematics**

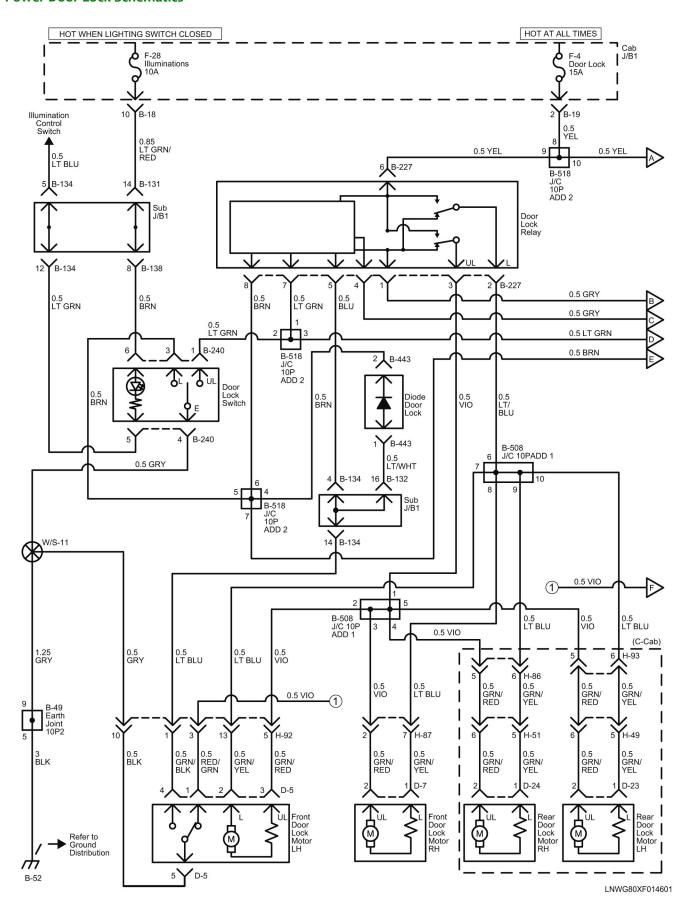

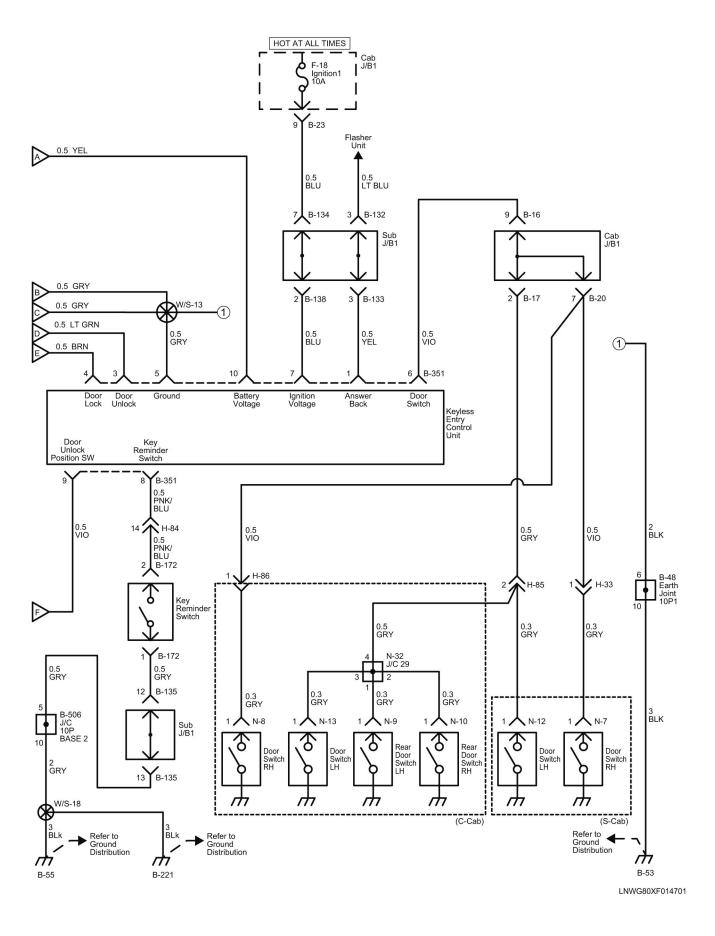


# **Backup Alarm System Circuit Description**

The circuit consists of the backup light switch (or the inhibitor switch) and back buzzer.

When the reverse position is selected, the backup light switch (or the inhibitor switch) is turned ON and the back buzzer sound.

# **Schematic and Routing Diagrams**

# **Backup Alarm System Schematics**

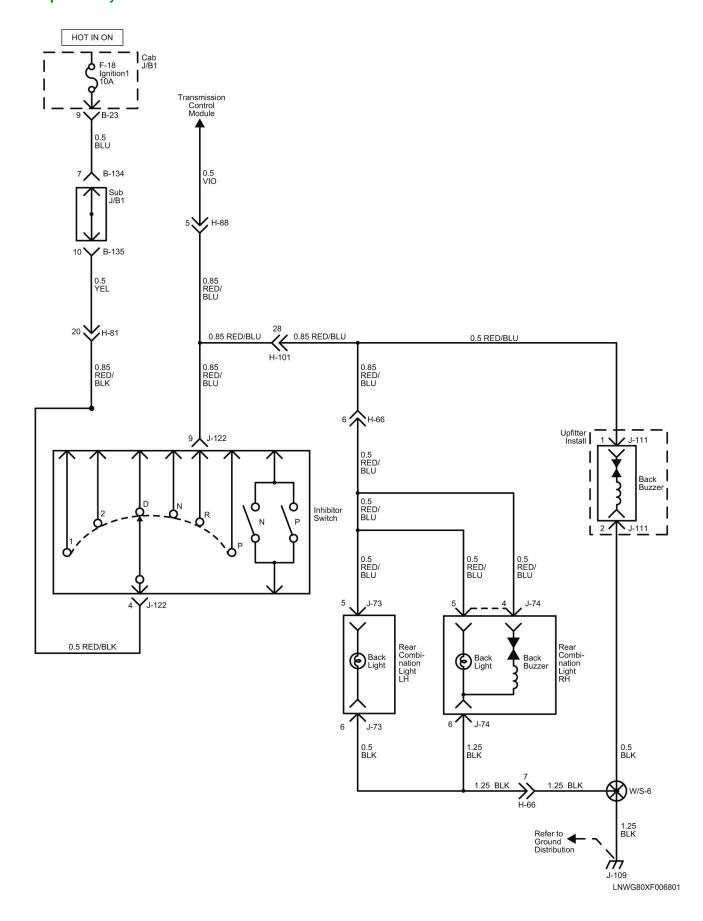

# **Heated Mirror Circuit Description**

The circuit consists of the mirror heater switch and the mirror heater.

When the mirror heater switch is turned ON, the mirror heater is operated.

### **Battery Description**

The battery has three main functions. It provides a source of energy for cranking the engine, acts as a voltage stabilizer for the electrical system and, for a limited time, can provide energy when the electrical load exceeds the output of the generator.

Refer to "Specifications" at the end of this section for specific application.

Water never needs to be added to the sealed battery so there are no filler caps on the cover. The special chemical composition inside the battery reduces gassing to a very small amount at normal charging voltages. There are small vent holes in the cover to allow what little gas is produced inside the battery to escape. The special chemistry is also designed to greatly reduce the possibility of overcharge damage.

Since there are vent holes in the cover, the battery should always be kept in an upright position. A small amount of electrolyte may leak from the top of the battery if it is tipped at an angle of more than 45 degrees.


Do not tip the battery more than 45 degrees when carrying or installing it.

Evidence of electrolyte leakage does not necessarily mean that the battery is defective.


#### **Ratings**

A battery generally has two classifications of ratings:

- 1. A reserve capacity rating at 27°C (80°F).
- 2. A cold rating at -18°C (0°F), which indicates the cranking load capacity.

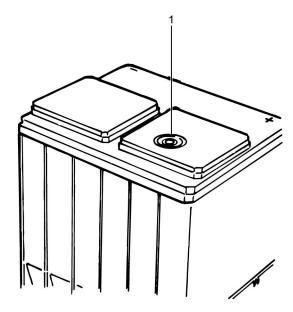

LNW46DMH000101

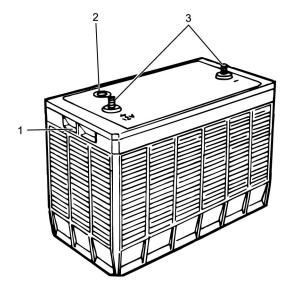


LNW46DMH000201

#### **Built-in Hydrometer**

The sealed battery has a special temperature compensated hydrometer built into the cover to show the battery's state of charge.

The hydrometer has a green ball within a cage that is attached to a clear plastic rod. The green ball floats at a predetermined specific gravity of the electrolyte representing about a 65 percent state of charge. When the green ball floats, it rises within the cage and positions itself under the rod. A green dot then can be seen in the center of the hydrometer. The built-in hydrometer provides a guide for battery testing and charging. In testing, a visible green dot means the battery is charged enough for testing. If the green dot is not visible, it means the battery must be charged before the test procedure is performed.

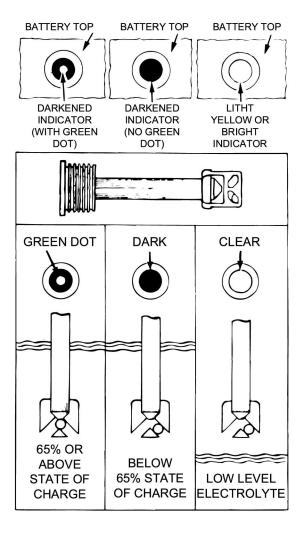

LNW46DLH000101

In charging, the appearance of the green dot means that the battery is sufficiently charged. Charging can then be stopped to prevent overcharging.

The hydrometer on some batteries may be clear or light yellow. This means the fluid level is below the bottom of the rod and attached cage.

This may have been caused by excessive or prolonged charging, a broken case, excessive tipping or normal battery wearout. If a cranking complaint exists, and the hydrometer is clear or light yellow, replace the battery – do not charge, test or jump start the battery.

In order to properly observe the hydrometer, the top of the battery should be clean. A light may also be required when working in a poorly lit area.

#### **Common Causes of Failure**

If tests show that a battery is good, yet it does not perform well in service, one of the following conditions may be the problem:

- 1. Vehicle accessories left on for an extended period of time.
- 2. Problem in the charging system, such as a slipping fan belt, high wiring resistance, or a faulty generator or regulator.
- 3. A vehicle electrical load exceeding the generator capacity, with the addition of electrical devices such as radio equipment, air conditioning, window defoggers, or light systems.
- 4. Problems in the electrical system, such as shorted or pinched wires.
- 5. Extended slow-speed driving with many accessories turned on.
- 6. Loose or poor battery cable-to-post connections, previous improper charging or run-down battery, or loose hold-downs.
- 7. High-resistance connections or other problems in the cranking system.

#### **Electrolyte Freezing**

The freezing point of electrolyte depends on its specific gravity. Since freezing may ruin a battery, it should be protected against freezing by keeping it in a charged condition.

#### **Carrier and Hold-Down**

The battery carrier and hold-down should be clean and free from corrosion before installation.


The carrier should be in a sound mechanical condition so that it will support the battery securely and keep it level. Be certain there are no foreign objects in the carrier before installation.

To prevent the battery from shaking in its carrier, the hold-down bolts should be tight. However, the bolts should not be tightened to the point where the battery case or cover will be placed under a severe strain.

### **Connector Description**


The connector pin shape (1) determines whether the connector is male (2) or female (3).

The connector housing configuration does not determine whether a connector is male or female.

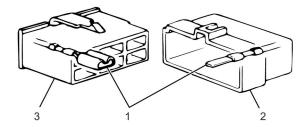


LNW29DSH001101

The symbol illustrated in the figure is used as connector, In the circuit of this section.




HCW480SH000201

Connector is identified with a number.

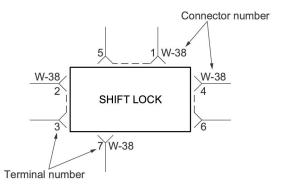

HCW480SH000301

The applicable terminal number is shown for each connector.

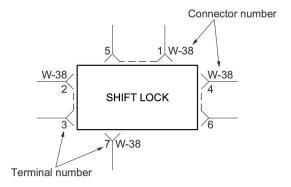


HCW480SH000301

Connector terminal numbers (5) are clearly shown.

Male side connector (2) terminal numbers are in sequence from upper right to lower left.


Female side connector (3) terminal numbers are in sequence from upper left to lower right.

Do lock part (6) of the connector up in any case and lock from the opening.

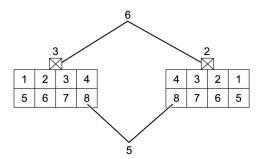

#### LNW79DSH000101

Note: For those connectors on which specific terminal numbers or symbols are shown (such as ECM), the terminal numbers or symbols are used in the circuit diagram, irrespective of the above rule.

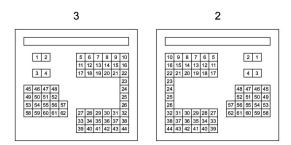


#### LNW79DSH000201

The connectors used for relays have their own terminal number assignment, irrespective of the above rule.







LNW78DSH003101

## **Reading the Circuit Diagram**

In this manual, each system has its own parts location illustration, circuit diagram and connector configuration used in the circuit diagram.

### Controller Area Network (CAN) Circuit Description

The circuit consists of the engine control module (ECM), the transmission control module (TCM), the glow plug control module (GPCM), and the instrument panel (IP) cluster. These ECU always communicate each other through the CAN circuit.

The ECM and the TCM have another CAN circuit for communicate with a scan tool. The circuit consists of the ECM, the TCM and the data link connector (DLC).

### **Data Link Connector Circuit Description**

The Data Link Connector (DLC) is the connector for communications and connections with external diagnostic devices (scan tools) and controllers. The Diagnostic Trouble Code (DTC) stored in the ECM, TCM, Mimamori, DEF and EHCU memory can be read either through a hand-held diagnostic scanner such as external diagnostic devices plugged into the DLC or by counting the number of flashes of the light when the diagnostic test terminal of the DLC is grounded.

### **Engine Control Module Description**

The ECM is located on the chassis frame of the engine left side via mounting bracket. The ECM controls the following:

- The fuel supply control
- The fuel injection timing control
- The exhaust gas recirculation (EGR) control
- The on-board diagnostics for engine control
- The cruise control
- The exhaust brake control

The ECM constantly observes the information from various sensors. The ECM controls the systems that affect vehicle performance. The ECM performs the diagnostic function of the system. The ECM can recognize operational problems, alert the driver through the malfunction indicator lamp (MIL), and store diagnostic trouble codes (DTCs). DTCs identify the system faults to aid the technician in making repairs.

Refer to the Engine Control System.

#### Fuse, Fusible Link, and Slow-Blow Fuse Description

#### **Fuse**


Fuses are the most common form of circuit protection used in vehicle wiring. A fuse is a thin piece of wire or strip of metal encases in a glass or plastic housing. It is wired in series with the circuit it protects. When there is an overload of current in a circuit, such as a short of a ground, the wire or metal strip is designed to burn out and interrupt the flow of current. This prevents a surge of high current from reaching and damaging other components in the circuit.

Determine the cause of the overloaded before replacing the fuse.

The replacement fuse must have the same amperage specifications as the original fuse.

Never replace a blown fuse with a fuse of a different amperage specification.

Doing so can result in an electrical fire or other serious circuit damage. A blown fuse is easily identified.



LNW780SH011301


#### **Fusible Link**

The fusible link is primarily used to protect circuits where high amounts of current flow and where it would not be practical to use a fuse. For example, the starter circuit. When a current overload occurs, the fusible link melts open and interrupts the flow of current so as to prevent the rest of the wiring harness from burning.

Determine the cause of the overload before replacing the fusible link. The replacement fusible link must have the same amperage specification as the original fusible link.

Never replace a blown fusible link with fusible link of a different amperage specification. Doing so can result in an electrical fire or other serious circuit damage.

A blown fusible link is easily identified.



LNW48ASH004001

#### **Slow-Blow Fuse**


A slow-blow fuse is used in a circuit having a very high current flow (starter) or in an area where an ordinary fuse would be impractical.


Excessive current flow causes the fusible link inside the fuse to melt. Current flow is interrupted. Circuit damage caused by fire or heat is prevented.


Before replacing a fuse, determine the cause of the excessive current.

Always replace the burnt-out fuse with a new fuse of the same amperage rating. Replacing the fuse with one having a higher rating can result in a serious and expensive electrical fire.

Figure 1 shows a normal slow-blow fuse. Figure 2 shows a burnt-out fuse. it is easy to distinguish between the 2 fuses.







LNW780SH012101

# **Slow Blow Fuse Specifications**


Туре	Rating	Case Color	Maximum Circuit Current (A)
Connector	30A	Pink	15
Connector	40A	Green	20
Connector	50A	Red	25
Connector	60A	Yellow	30

## **MIMAMORI Circuit Description**

#### **CAN Communication Function**

The MIMAMORI control unit communicates with the engine control module (ECM), the transmission control module (TCM), etc., to send and receive signals for engine RPM, vehicle speed, accelerator opening, gear position, etc. CAN (Controller Area Network) communication is used for the communication method, allowing a single communication circuit to send and receive a large amount of information.

Data transmission function to the meter the MIMAMORI control unit counts up several data and sends the data upon request from the meters.




#### LNW38ASH002701


Battery and load location may require that a switch be placed some distance from either component. This means a longer wire and a higher voltage drop (1). The installation the battery and the load reduces the voltage drop (2). Because the switch controls the relay, amperage through the switch can be reduced.

## **Relay Specification and Configuration**


Name/Color	Rated Voltage/Coil Resistance	Internal Circuit
ACB 12201/Orange	12V/ Approx. 103Ω Minimum operating voltage: 7V at 20°C (68°F)	
		LNW780SH011401
MR82C/ White Label	12V/ Approx. 23Ω Minimum operating voltage: 7V at 25°C (77°F)	
		LNW780SH011501

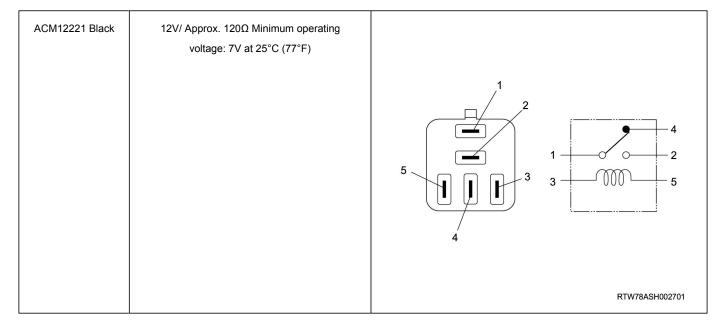


### **Relay Exchange Method**

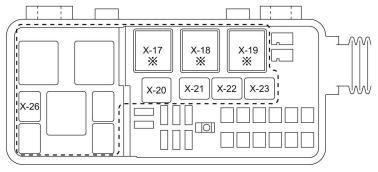

When detaching the  $\mbox{\em \%}$  marked relays, carry out work in accordance with the below procedures.

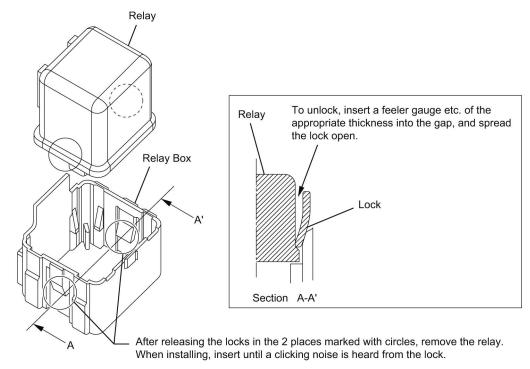

LNWG80LF000601



LNW38ASH002201

All wires have color-coded insulation.

Wires belonging to a system's main harness will have a single color. Wires belonging to a system's sub-circuits will have a colored stripe. Striped wires use the following code to show wire size and colors.



#### HCW480SH000101

Abbreviations are used to indicate wire color within a circuit diagram.

Refer to the following table.


#### Wire Color Coding

Wire Solor Soding			
Color-Coding	Meaning	Color-Coding	Meaning
BLK	Black	BRN	Brown
WHT	White	LT GRN	Light Green
RED	Red	GRY	Gray
GRN	Green	PNK	Pink
YEL	Yellow	LT BLU	Light Blue
BLU	Blue	VIO	Violet
ORN	Orange	BEI	Beige

Base Color	Circuits	Base Color	Circuits
BLK	Starter circuit	YEL	Instrument Circuit
WHT	Charging circuit	BLU, ORN, BRN, Other Circuit	Other Circuit
RED	Lighting circuit	LT GRN, GRY, PNK, LT BLU, VIO, BEI	
GRN	Signal circuits	. 521	

#### Wire Size

The size of wire used in a circuit is determined by the amount of current (amperage), the length of the circuit, and the voltage drop allowed. The following wire size and load capacity, shown below, are specified by AWG (American Wire Gauge) (Nominal size means approximate cross sectional area).

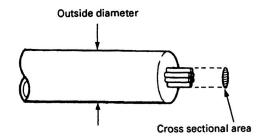

LNW38ASH002301

### Wire Size Table

Nominal Size	Cross Sectional Area (mm2	Outside Diameter (mm)	Allowable Current (A)	AWG Size (Cross Reference)
0.3	0.372	1.8	9	22
0.5	0.563	2.0	12	20
0.85	0.885	2.2	16	18
1.25	1.287	2.5	21	16
2	2.091	2.9	28	14
3	3.296	3.6	37.5	12
5	5.227	4.4	53	10
8	7.952	5.5	67	8
15	13.36	7.0	75	6
20	20.61	8.2	97	4

# **Special Tools and Equipment**

# **Special Tools**

special roots			
Illustration	Tool Number/ Description		
	GE-48717 Nozzle Adjuster		
GE48717			
5852100160	J-29752 Steering Wheel Remover		
J35616-C	J-35616 Connector Test Adapter Kit (With Test Lamp)		