

SPECIAL APPLICATIONS – FULL SIZE K SERIES (4x4)

SNOWPLOW PREP PACKAGE (VYU)	SP— 1
Ballast Compensating Weight.....	SP— 2
‘K’ Series Snow Plow Prep Package	SP— 3
CMVSS 105 and FMVSS 105 – Hydraulic and Electric Brake Systems	SP—5
CMVSS 105 and FMVSS 105 Allowable Center of Gravity Calculation	SP— 7
CMVSS 126 and FMVSS 126 Allowable Center of Gravity Charts	SB— 14
CMVSS 135 and FMVSS 135 Allowable Center of Gravity Calculation	SP—21
CMVSS 204 and FMVSS 204 – Steering Control Rearward Displacement	SP— 26
CMVSS 212 and FMVSS 212 – Windshield Mounting	SP— 29
CMVSS 219 and FMVSS 219 – Windshield Zone Intrusion	SP— 30
CMVSS 301 and FMVSS 301 – Fuel System Integrity MPV’S, Trucks and Buses	SP— 31
U.S. EPA, California, and Canadian Exhaust and Evaporative Emission Requirements and EPA Fuel Economy Regulations	SP— 34
Emission Related Components.....	SP— 34
Labels.....	SP— 35
Pickup Box Removal Fuel Fill System Modifications for Gasoline Vehicles	SP— 36
2011 C/K HDCS Cab Chassis Service Body Attachment Provisions	SP— 37
2011 C/K Fuel Filler Assembly Service Part #’s	SP— 38
2011 HDCS ‘Gas Vapor Sensor’ (shipped loose on ZW/9 Cab Chassis)	SP— 39
‘K’ Series Snow Plow Best Practices	SP— 40
‘K’ Series Snow Plow Applications—Max. Plow/Hardware Weights	SP— 41
ELECTRICAL INFORMATION	
Refer to Electrical - Pickups and Chassis Cabs (Chevrolet Silverado & GMC Sierra) and SUV Utilities (Chevrolet Tahoe & Suburban, GMC Yukon & Yukon XL)	

SNOWPLOW PREP PACKAGE (VYU)

The chart on the page SP-4 shows GMTG and General Motors approved models available with snowplow prep package-option VYU.

GM recommends that when a snowplow is mounted on a vehicle, only one passenger should accompany the driver. More than one passenger may exceed Front Gross Axle Weight Ratings.

Prior to installing a front mounted snowplow, the following process should be followed and necessary information obtained.

- Establish vehicle curb weight
- Establish chassis manufacturer's front and rear axle weight ratings
- Chevrolet and GMC truck dealers can provide availability, specifications, Gross Vehicle Weight Ratings (GVWR), and Front and Rear Gross Axle Weight Ratings (FGAWR/RGAWR). For vehicles already built, this information can be found on the certification label installed on driver's door/door frame or provided on the cover of the Incomplete Vehicle Document.

The following information should be obtained and provided by the manufacturers of snowplows and salt spreaders:

- Specifications, weights and center of gravity data
- Vehicle installation guidelines and instructions
- Calculation of weight distribution for the front and rear axles

The loaded vehicle with driver, passenger, aftermarket accessories, snowplows, spreader, and cargo must not exceed the Gross Vehicle Weight Rating (GVWR), and Front and Rear Gross Axle Weight Ratings. In addition, the completed curb weight vehicle, with all installed aftermarket accessories, snowplow, and spreader, and with 400 lbs. for vehicles less than 10,000 lbs. and 500 lbs. for vehicles greater than 10,000 lbs. distributed in the driver-passenger area of the vehicle, must have a center of gravity location that is located within the trapezoid formed by the coordinates A, B, C, D, H1 & H2, plus it must be to the rear of vertical line E and forward of vertical line F as defined in the ALLOWABLE CENTER OF GRAVITY CHARTS. If the center of gravity location does not fall within the specified trapezoid, ballast weight may be required to shift the center of gravity location until it falls within the specified trapezoid.

The snowplow manufacturer and the installer of the aftermarket equipment should determine the amount of rear ballast required to ensure that the vehicle, with the attached snowplow and aftermarket equipment, complies with the Allowable Center of Gravity Trapezoid and the resulting front and rear weight distribution ratio as defined in the Allowable Center of Gravity Charts published in this manual.

(Snowplow Prep Package – continued on next page)

(Snowplow Prep Package – continued from previous page)

Ballast Compensating Weight

The use of rear ballast weight may be required to prevent exceeding the Gross Axle Weight Rating of the front axle. The use of rear ballast weight may be required to ensure that the center of gravity location of the completed vehicle, with the attached snowplow and other installed equipment, complies with the Allowable Center of Gravity Trapezoid and the resulting front and rear weight distribution ratio, even though the actual front weight may be less than the Gross Axle Weight Rating of the front axle. In either case, the rear ballast weight should be securely attached in the cargo box or behind the rear axle of the vehicle in a manner which prevents it from moving during driving and stopping.



To help avoid personal injury, refer to Z-height setting procedure before adjusting torsion bars. If torsion bars are adjusted for aftermarket equipment, be sure to return them to specification when the equipment is removed. Otherwise, a front shock absorber may dislodge and damage a front brake line. This could result in an accident when minimum stopping distances are required.

SPECIAL APPLICATIONS – FULL SIZE K SERIES (4x4)

'K' – Series Snow Plow Prep Package

		PICKUPS - Single Rear Wheel (SRW)						
Model		K10703	K10903	K20753	K20743	K20903	K20953	K20943
Cab		Regular	Regular	Extended	Crew	Regular	Extended	Crew
Wheelbase inches		119	133	143.5	153	133	157.5	167
Pickup Box length feet / Cab to Axle length inches		6.5	8	6.5	6.5	8	8	8
GVWR lb.				9500/9900*/1	9500/9900*/10		9500/9900/10	9900/9900/10
GAWR lb. -Frt.		6400	6400	0000*	000*	9500/9900*	000*	000*
		3950	3950	4400/5200*	4800/5200*	4400/5200*	4800/5600*	4800/5600*
Engine Availability with VYU:		opt. code						
Vortec 4.8L V8 SFI Flex Fuel	LY20	S	S	N/A	N/A	N/A	N/A	N/A
Vortec 5.3L V8 SFI Flex Fuel	LMG / LC9	A	A	N/A	N/A	N/A	N/A	N/A
Vortec 6.0L V8 SFI Flex Fuel	L96	N/A	N/A	S	S	S	S	S
Vortec 6.2L V8 SFI	L9H	A	A	N/A	N/A	N/A	N/A	N/A
Duramax 6.6L V8 Diesel	LML / LGH	N/A	N/A	A	A	A	A	A
Base (B) Equipment Includes:								
Battery 600 CCA (Gasoline Engines)		S	S	S	S	S	S	S
Dual Batteries 730 CCA (6.6L Diesel Engine)	TUV	N/A	N/A	A	A	A	A	A
Provisions for Rear Back-Up Lighting								
Front Tow Hooks	V76	S	S	S	S	S	S	S
Floor Covering HD Rubber - Std. on Work Truck / Base without YE9	BG9	B & A	B & A	B & A	B & A	B & A	B & A	B & A
Snow Plow Prep Pkg. Includes:		VYU						
Increased Front Spring rate 4WD	F60	S	S	S	S	S	S	S
Air cleaner, high-capacity	K47	S	S	S	S	S	S	S
External Eng. Oil Cooler	KNP	A	A	R	R	R	R	R
Alternator 160 Amps - Gasoline Engines	KW1	S	S	S	S	S	S	S
Alternators - Dual 125 Amps - Diesel Engines	K76	N/A	N/A	S	S	S	S	S
Provision for Roof Mtd. Emergency Light	TRW	S	S	S	S	S	S	S
Transmission Cooler (air to oil) Auto only	KNP	S	S	S	S	S	S	S
***42mm Hole FOD with Rubber Grommet								
Fwd Lamp Harness with In-Line Connector								
Mntg. Location for Snow Plow Controls								
Suggested Optional Equipment :								
Battery 730 CCA - Gasoline Engines	6C5	A	A	A	A	A	A	A
3.73 Rear Axle Ratio	GT4	A	A	"B" Gas & "A" Diesel	B	B	B	B
4.10 Rear Axle Ratio	GT5	A	A	A	A	A	A	A
Skid Plate, "Off Road" - Included with Z71	NZZ	A & Y	A & Y	A & Y	A & Y	A & Y	A & Y	A & Y
Engine Block Heater (Req'd for Canada - opt. Z49)	K05	A	A	A	A	A	A	A
Locking Differential - Included with (NHT) Max Trailering Pack or (PCY) Towing Package or axle ratio GT5	G80							
Rear Window Defogger (N/A with A48 on Ext. & Crew Cabs) (Reqs. C67 AC on Reg. Cabs)	C49	A	A	A	A	A	A	A
Sliding Rear Window not avail. with C49	A48	N/A	N/A	A	A	N/A	A	A
Windshield Washer Fluid System, Heated (Reqs. Opt. YE9 or SLT)	XA7	A	A	A	A	A	A	A

* = DIESEL / k = x 1000 / s = SRW / d = DRW

B=base vehicle / A=available / X=included in package / Y=included where applicable / N/A=not available on this model / R=required on this model.

SPECIAL APPLICATIONS – FULL SIZE K SERIES (4x4)

'K' – Series Snow Plow Prep Package, cont.

		PICKUPS - Single(s) & Dual(d) Rear Wheels				Chassis-Cabs			Utility
Model		K30903	K30743	K30953	K30943	K31003	K31043	K31403	K20906
Cab		Regular	Crew	Extended	Crew	Regular	Crew	Regular	SUV
Wheelbase inches		133	167	157.5	167	137	161.5	161.5	130
Pickup Box length feet / Cab to Axle length inches		8	6.5	8	8	60" CA	60" CA	80" CA	N/A
GVWR lb.		10000/10700/ 11400*s 12800/13000*d	10000/10800/11 500*s	10000/11000/ 11600*s 13000/13000*d	11000/11600*s 13000/13000*d	13,200	13,200	13,200	8600
GAWR lb. -Frt.		4400/5200*	4800/5600*	4800/5600*	4800/5600*	4400/5200*	4800/5600*	5200/5600*	4180
Engine Availability with VYU:		opt. code							
Vortec 4.8L V8 SFI Flex Fuel	LY20	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Vortec 5.3L V8 SFI Flex Fuel	LMG / LC9	N/A	N/A	N/A	N/A	N/A	N/A	N/A	A
Vortec 6.0L V8 SFI Flex Fuel	L96	S	S	S	S	S	S	S	S
Vortec 6.2L V8 SFI	L9H	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Duramax 6.6L V8 Diesel	LML / LGH	A	A	A	A	A	A	A	N/A
Base (B) Equipment Includes:									
Battery 600 CCA (Gasoline Engines)		S	S	S	S	B	B	B	B
Dual Batteries 730 CCA (6.6L Diesel Engine)	TUV	A	A	A	A	A	A	A	N/A
Provisions for Rear Back-Up Lighting									
Front Tow Hooks	V76	S	S	S	S	S	S	S	S
Floor Covering HD Rubber - Std. on Work Truck / Base without YE9	BG9	B & A	B & A	B & A	B & A	B & A	B & A	B & A	A
Snow Plow Prep Pkg. Includes:		VYU							
Increased Front Spring rate 4WD	F60	S	S	S	S	S	S	S	N/A
Air cleaner, high-capacity	K47	S	S	S	S	S	S	S	A
External Eng. Oil Cooler	KNP	S	S	S	S	S	S	S	A
Alternator 160 Amps - Gasoline Engines	KW1	S	S	S	S	S	S	S	A
Alternators - Dual 125 Amps - Diesel Engines	K76	S	S	S	S	S	S	S	N/A
Provision for Roof Mtd. Emergency Light	TRW	S	S	S	S	S	S	S	N/A
Transmission Cooler (air to oil) Auto only	KNP	S	S	S	S	S	S	S	A
***42mm Hole FOD with Rubber Grommet									
Fwd Lamp Harness with In-Line Connector									
Mntg. Location for Snow Plow Controls									
Suggested Optional Equipment :									
Battery 730 CCA - Gasoline Engines	6C5	A	A	A	A	A	A	A	A
3.73 Rear Axle Ratio	GT4	B	B	B	B	B	B	B	B
4.10 Rear Axle Ratio	GT5	A	A	A	A	A	A	A	
Skid Plate, "Off Road" - Included with Z71	NZZ	A & Y	A & Y	A & Y	A & Y	A & Y	A & Y	A & Y	A
Engine Block Heater (Req'd for Canada - opt. Z49)	K05	A	A	A	A	A	A	A	A
Locking Differential - Included with (NHT) Max Trailering Pack or (PCY) Towing Package or axle ratio GT5	G80								
Rear Window Defogger (N/A with A48 on Ext. & Crew Cabs) (Reqs. C67 AC on Reg. Cabs)	C49	A	A	A	A	A	A	A	N/A
Sliding Rear Window not avail. with C49	A48	N/A	A	A	A	A	A	A	N/A
Windshield Washer Fluid System, Heated (Reqs. Opt. YE9 or SLT)	XA7	A	A	A	A	A	A	A	A & Y

* = DIESEL / k = x 1000 / s = SRW / d = DRW

B=base vehicle / A=available / X=included in package / Y=included where applicable / N/A=not available on this model / R=required on this model

CMVSS 105 and FMVSS 105 – HYDRAULIC AND ELECTRIC BRAKE SYSTEMS
Applies to all types of Incomplete Vehicles Contained in this Document
Greater than 3500 kg (7,716 lb) GVWR

TYPE 2 The following statement is applicable to all types of Incomplete Vehicles contained in this document with a greater than 3500 kg (7,716 lb) GVWR, (unless otherwise noted on the cover).

This incomplete vehicle when completed will conform to CMVSS 105 and FMVSS 105 provided it is completed in accordance with the following specific conditions by the (intermediate and) final stage manufacturer:

- A. Providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below (if equipped):

Anti-Lock Brake System	Hydraulic brake lines, fittings and routings
Brake assemblies and components (service/ parking) - (power boosters, master cylinder, wheel cylinder, calipers, wheel speed sensor, wheel speed sensor wiring, brake lining, etc.)	Hydraulic brake valves and components
Brake pedal, brake switch, parking brake hand lever or park brake switch and related mechanical components	Master cylinder-warning statement
Brake system electrical controls and logic	Parking brake actuator and related mechanical components
Gauges and warning devices, and statements	Power steering or vacuum lines and routing
Hydraulic brake fluid and reservoirs	Power steering or vacuum pump
	Tires and Wheels
	Vacuum brake lines, fittings and routings
	Vehicle wiring harnesses
	Wheelbases

- B. GVWR, GAWR front and rear weight ratings as listed on the Incomplete Vehicle Label affixed to the front cover of this document must not be exceeded.
- C. The center of gravity of the total vehicle falls within the areas referenced on the “ALLOWABLE CENTER OF GRAVITY CHART” that follows. Instructions for determining the allowable center of gravity variation are listed below:

These charts detail the envelope of allowable center of gravity variation for completed vehicles. This is significant for the lightly loaded portion of FMVSS 105, which is defined as curb plus 181.4 kg (400 lb) distributed in the driver-passenger area of the vehicle for vehicles with GVWR of 4536 kg (10,000 lb) or less or as curb plus 226.8 kg (500 lb) distributed in the driver-passenger area of the vehicle for vehicles with GVWR greater than 4536 kg (10,000 lb).

The lightly loaded center of gravity of complete vehicles needs to be restricted so it will meet FMVSS 105 stopping distances. The laden center of gravity does not need to be specified as it is controlled within the CMVSS 105 and FMVSS 105 test procedure by specific instructions as to how ballast is to be placed (while height is not controlled, it is assumed that for test purposes it would be reasonable).

CMVSS 105 and FMVSS 105 – HYDRAULIC AND ELECTRIC BRAKE SYSTEMS
Applies to all types of Incomplete Vehicles Contained in this Document
Greater than 3500 kg (7,716 lb) GVWR

For Body Builder's use, the center of gravity location can be approximated by the following formula:

$$d = \frac{[Wrc + Wrb + [(Hp)(Wp)/WB]] WB}{Wt}$$

$$h = \frac{[h1Wc + h2Wb + (h3)(Wp)]}{Wt}$$

d = horizontal distance from front wheels to completed vehicle center of gravity mm (in)

h = vertical distance from ground to completed vehicle center of gravity mm (in)

Wrc = rear component of Chassis weight kg (lb)

Wrb = rear component of body weight kg (lb)

WB = vehicle wheelbase mm (in)

Wt = total weight of chassis and body kg (lb) plus 181.4 kg (400 lb) for vehicles with GVWR of 4536 kg (10,000 lb) or less.

Wt = total weight of chassis and body kg (lb) plus 226.8 kg (500 lb) for vehicles with GVWR greater than 4536 kg (10,000 lb).

h1 = center of gravity height from ground of the Bare Chassis = 743 mm (29.25 in)

Wc = total weight of Chassis kg (lb)

h2 = center of gravity height of body from ground mm (in)

Wb = total weight of body kg (lb)

Wp = 181.4 kg (400 lb) Amount from lightly loaded definition that is evenly distributed in driver-passenger area of vehicle for vehicles with GVWR of 4536 kg (10,000 lb) or less.

Wp = 226.8 kg (500 lb) Amount from lightly loaded definition that is evenly distributed in driver-passenger area of vehicle for vehicles with GVWR greater than 4536 kg (10,000 lb).

Hp = 1482 mm (58.35 in) Horizontal distance from front axle to center of gravity of 181.4 kg (400 lb) or 226.8 kg (500 lb) evenly distributed in driver-passenger area of vehicle.

h3 = 1013 mm (39.88 in) Vertical center of gravity height of 181.4 kg (400 lb) evenly distributed in driver-passenger area for vehicles with GVWR of 4536 kg (10,000 lb) or less.

h3 = 1013 mm (39.88 in) Vertical center of gravity height of 226.8 kg (500 lb) evenly distributed in driver-passenger area for vehicles with GVWR greater than 4536 kg (10,000 lb).

SPECIAL APPLICATIONS – FULL SIZE K SERIES (4x4)

CMVSS 105 and FMVSS 105 ALLOWABLE CENTER OF GRAVITY CHARTS

Model	GVWR kg (lb)	Brake System	Wheel- Base mm (in)	Rear Wheel	Incomplete, Pickup Box Removal, or Snow Plow Prep Package Vehicles							
					Coordinates of Allowable C/G Variation at CMVSS/FMVSS Unladen, Curb Weight + 181.4 kg (400 lb) or 226.8 kg (500 lb) as defined by CMVSS 105 and FMVSS 105						Fwd C/G Limit mm (in)	RRwd C/G Limit mm (in)
					mm (in)						E	F
H ₁	H ₂	A	B	C	D							
C20743	4309 (9500)	J95	3904 (153.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1288 (50.7)	1542 (60.7)	2785 (109.6)	3039 (119.6)	1288 (50.7)	2733 (107.6)
C20743	4491 (9900)	J95	3904 (153.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1288 (50.7)	1542 (60.7)	2785 (109.6)	3039 (119.6)	1288 (50.7)	2733 (107.6)
C20743	4536 (10,000)	J95	3904 (153.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1288 (50.7)	1542 (60.7)	2785 (109.6)	3039 (119.6)	1288 (50.7)	2733 (107.6)
C20753	4309 (9500)	J95	3662 (144.2)	SRW	304.8 (12.0)	1219.2 (48.0)	1213 (47.8)	1467 (57.8)	2618 (103.1)	2871 (113.0)	1209 (47.6)	2564 (100.9)
C20753	4491 (9900)	J95	3662 (144.2)	SRW	304.8 (12.0)	1219.2 (48.0)	1213 (47.8)	1467 (57.8)	2618 (103.1)	2871 (113.0)	1209 (47.6)	2564 (100.9)
C20753	4536 (10,000)	J95	3662 (144.2)	SRW	304.8 (12.0)	1219.2 (48.0)	1213 (47.8)	1467 (57.8)	2618 (103.1)	2871 (113.0)	1209 (47.6)	2564 (100.9)
C20903	4218 (9300)	J95	3395 (133.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1131 (44.5)	1385 (54.5)	2433 (95.8)	2687 (105.8)	1120 (44.1)	2377 (93.6)
C20903	4491 (9900)	J95	3395 (133.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1131 (44.5)	1385 (54.5)	2433 (95.8)	2687 (105.8)	1120 (44.1)	2377 (93.6)
C20903	4536 (10,000)	J95	3395 (133.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1131 (44.5)	1385 (54.5)	2433 (95.8)	2687 (105.8)	1120 (44.1)	2377 (93.6)
C20943	4309 (9500)	J95	4259 (157.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1397 (55.0)	1651 (65.0)	3031 (119.3)	3284 (129.3)	1406 (55.4)	2982 (117.4)
C20943	4491 (9900)	J95	4259 (157.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1397 (55.0)	1651 (65.0)	3031 (119.3)	3284 (129.3)	1406 (55.4)	2982 (117.4)
C20943	4536 (10,000)	J95	4259 (157.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1397 (55.0)	1651 (65.0)	3031 (119.3)	3284 (129.3)	1406 (55.4)	2982 (117.4)
C20953	4309 (9500)	J95	4017 (158.2)	SRW	304.8 (12.0)	1219.2 (48.0)	1323 (52.1)	1576 (62.0)	2863 (112.7)	3117 (122.7)	1326 (52.2)	2812 (110.7)

SPECIAL APPLICATIONS – FULL SIZE K SERIES (4x4)

CMVSS 105 and FMVSS 105 ALLOWABLE CENTER OF GRAVITY CHARTS

Model	GVWR kg (lb)	Brake System	Wheel- Base mm (in)	Rear Wheel	Incomplete, Pickup Box Removal, or Snow Plow Prep Package Vehicles							
					Coordinates of Allowable C/G Variation at CMVSS/FMVSS Unladen, Curb Weight + 181.4 kg (400 lb) or 226.8 kg (500 lb) as defined by CMVSS 105 and FMVSS 105 mm (in)						Fwd C/G Limit mm (in)	RRwd C/G Limit mm (in)
					H ₁	H ₂	A	B	C	D	E	F
C20953	4491 (9900)	J95	4017 (158.2)	SRW	304.8 (12.0)	1219.2 (48.0)	1323 (52.1)	1576 (62.0)	2863 (112.7)	3117 (122.7)	1326 (52.2)	2812 (110.7)
C20953	4536 (10,000)	J95	4017 (158.2)	SRW	304.8 (12.0)	1219.2 (48.0)	1323 (52.1)	1576 (62.0)	2863 (112.7)	3117 (122.7)	1326 (52.2)	2812 (110.7)
C30743	4536 (10,000)	J95	3904 (153.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1288 (50.7)	1542 (60.7)	2785 (109.6)	3039 (119.6)	1288 50.7)	2733 (107.6)
C30743	4763 (10,500)	J95	3904 (153.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1074 (42.3)	1286 (50.6)	2971 (117.0)	3182 (125.3)	1171 (46.1)	2928 (115.3)
C30743	5035 (11,100)	J95	3904 (153.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1074 (42.3)	1286 (50.6)	2971 (117.0)	3182 (125.3)	1171 (46.1)	2928 (115.3)
C30903	4717 (10,400)	J95	3395 (133.7)	SRW	304.8 (12.0)	1219.2 (48.0)	943 (37.1)	1155 (45.5)	2593 (102.1)	2804 (110.4)	1019 (40.1)	2547 (100.3)

SPECIAL APPLICATIONS – FULL SIZE K SERIES (4x4)

CMVSS 105 and FMVSS 105 ALLOWABLE CENTER OF GRAVITY CHARTS

Model	GVWR kg (lb)	Brake System	Wheel- Base mm (in)	Rear Wheel	Incomplete, Pickup Box Removal, or Snow Plow Prep Package Vehicles							
					Coordinates of Allowable C/G Variation at CMVSS/FMVSS Unladen, Curb Weight + 181.4 kg (400 lb) or 226.8 kg (500 lb) as defined by CMVSS 105 and FMVSS 105						Fwd C/G Limit mm (in)	RRwd C/G Limit mm (in)
					H ₁	H ₂	A	B	C	D	E	F
C30903	5035 (11,100)	J95	3395 (133.7)	SRW	304.8 (12.0)	1219.2 (48.0)	943 (37.1)	1155 (45.5)	2593 (102.1)	2804 (110.4)	1019 (40.1)	2547 (100.3)
C30903	5670 (12,500)	J96	3395 (133.7)	DRW	304.8 (12.0)	1219.2 (48.0)	943 (37.1)	1155 (45.5)	2593 (102.1)	2804 (110.4)	1019 (40.1)	2547 (100.3)
C30903	5806 (12,800)	J96	3395 (133.7)	DRW	304.8 (12.0)	1219.2 (48.0)	943 (37.1)	1155 (45.5)	2593 (102.1)	2804 (110.4)	1019 (40.1)	2547 (100.3)
C30903	5897 (13,000)	J96	3395 (133.7)	DRW	304.8 (12.0)	1219.2 (48.0)	943 (37.1)	1155 (45.5)	2593 (102.1)	2804 (110.4)	1019 (40.1)	2547 (100.3)
C30903	6078 (13,400)	J96	3395 (133.7)	DRW	304.8 (12.0)	1219.2 (48.0)	943 (37.1)	1155 (45.5)	2593 (102.1)	2804 (110.4)	1019 (40.1)	2547 (100.3)
C30943	4536 (10,000)	J95	4259 (157.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1397 (55.0)	1651 (65.0)	3031 (119.3)	3284 (129.3)	1406 (55.4)	2982 (117.4)
C30943	4853 (10,700)	J95	4259 (157.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1165 (45.9)	1377 (54.2)	3235 (127.4)	3446 (135.7)	1278 (50.3)	3195 (125.8)
C30943	5171 (11,400)	J95	4259 (157.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1165 (45.9)	1377 (54.2)	3235 (127.4)	3446 (135.7)	1278 (50.3)	3195 (125.8)
C30943	5897 (13,000)	J96	4259 (157.7)	DRW	304.8 (12.0)	1219.2 (48.0)	1165 (45.9)	1377 (54.2)	3235 (127.4)	3446 (135.7)	1278 (50.3)	3195 (125.8)
C30953	4536 (10,000)	J95	4017 (158.2)	SRW	304.8 (12.0)	1219.2 (48.0)	1323 (52.1)	1576 (62.0)	2863 (112.7)	3117 (122.7)	1326 (52.2)	2812 (110.7)
C30953	4853 (10,700)	J95	4017 (158.2)	SRW	304.8 (12.0)	1219.2 (48.0)	1103 (43.4)	1315 (51.8)	3055 (120.3)	3266 (128.6)	1205 (47.4)	3013 (118.6)
C30953	5080 (11,200)	J95	4017 (158.2)	SRW	304.8 (12.0)	1219.2 (48.0)	1103 (43.4)	1315 (51.8)	3055 (120.3)	3266 (128.6)	1205 (47.4)	3013 (118.6)
C30953	5897 (13,000)	J96	4017 (158.2)	DRW	304.8 (12.0)	1219.2 (48.0)	1103 (43.4)	1315 (51.8)	3055 (120.3)	3266 (128.6)	1205 (47.4)	3013 (118.6)

SPECIAL APPLICATIONS – FULL SIZE K SERIES (4x4)

CMVSS 105 and FMVSS 105 ALLOWABLE CENTER OF GRAVITY CHARTS

Model	GVWR kg (lb)	Brake System	Wheel- Base mm (in)	Rear Wheel	Incomplete, Pickup Box Removal, or Snow Plow Prep Package Vehicles							
					Coordinates of Allowable C/G Variation at CMVSS/FMVSS Unladen, Curb Weight + 181.4 kg (400 lb) or 226.8 kg (500 lb) as defined by CMVSS 105 and FMVSS 105 mm (in)						Fwd C/G Limit mm (in)	RRwd C/G Limit mm (in)
					H ₁	H ₂	A	B	C	D	E	F
C31003	5987 (13,200)	J90	3493 (137.5)	DRW	304.8 (12.0)	1219.2 (48.0)	968 (38.1)	1180 (46.5)	2441 (96.1)	2759 (108.6)	1048 (41.3)	2619 (103.1)
C31003	5987 (13,200)	J96	3493 (137.5)	DRW	304.8 (12.0)	1219.2 (48.0)	968 (38.1)	1180 (46.5)	2666 (105.0)	2877 (113.3)	1048 (41.3)	2619 (103.1)
C31043	5987 (13,200)	J96	4356 (171.5)	DRW	304.8 (12.0)	1219.2 (48.0)	1190 (46.9)	1402 (55.2)	3307 (130.2)	3518 (138.5)	1307 (51.5)	3267 (128.6)
C31403	5987 (13,200)	J96	4115 (162.0)	DRW	304.8 (12.0)	1219.2 (48.0)	1128 (44.4)	1340 (52.8)	3128 (123.1)	3339 (131.5)	1234 (48.6)	3086 (121.5)
K20743	4309 (9500)	J95	3904 (153.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1288 (50.7)	1542 (60.7)	2785 (109.6)	3039 (119.6)	1288 50.7)	2733 (107.6)
K20743	4491 (9900)	J95	3904 (153.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1288 (50.7)	1542 (60.7)	2785 (109.6)	3039 (119.6)	1288 50.7)	2733 (107.6)
K20743	4536 (10,000)	J95	3904 (153.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1288 (50.7)	1542 (60.7)	2785 (109.6)	3039 (119.6)	1288 50.7)	2733 (107.6)
K20753	4309 (9500)	J95	3662 (144.2)	SRW	304.8 (12.0)	1219.2 (48.0)	1213 (47.8)	1467 (57.8)	2618 (103.1)	2871 (113.0)	1209 (47.6)	2564 (100.9)
K20753	4491 (9900)	J95	3662 (144.2)	SRW	304.8 (12.0)	1219.2 (48.0)	1213 (47.8)	1467 (57.8)	2618 (103.1)	2871 (113.0)	1209 (47.6)	2564 (100.9)

SPECIAL APPLICATIONS – FULL SIZE K SERIES (4x4)

CMVSS 105 and FMVSS 105 ALLOWABLE CENTER OF GRAVITY CHARTS

Model	GVWR kg (lb)	Brake System	Wheel- Base mm (in)	Rear Wheel	Incomplete, Pickup Box Removal, or Snow Plow Prep Package Vehicles							
					Coordinates of Allowable C/G Variation at CMVSS/FMVSS Unladen, Curb Weight + 181.4 kg (400 lb) or 226.8 kg (500 lb) as defined by CMVSS 105 and FMVSS 105 mm (in)						Fwd C/G Limit mm (in)	RRwd C/G Limit mm (in)
					H ₁	H ₂	A	B	C	D	E	F
K20753	4536 (10,000)	J95	3662 (144.2)	SRW	304.8 (12.0)	1219.2 (48.0)	1213 (47.8)	1467 (57.8)	2618 (103.1)	2871 (113.0)	1209 (47.6)	2564 (100.9)
K20903	4309 (9500)	J95	3395 (133.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1131 (44.5)	1385 (54.5)	2433 (95.8)	2687 (105.8)	1120 (44.1)	2377 (93.6)
K20903	4491 (9900)	J95	3395 (133.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1131 (44.5)	1385 (54.5)	2433 (95.8)	2687 (105.8)	1120 (44.1)	2377 (93.6)
K20943	4491 (9900)	J95	4259 (157.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1397 (55.0)	1651 (65.0)	3031 (119.3)	3284 (129.3)	1406 (55.4)	2982 (117.4)
K20943	4536 (10,000)	J95	4259 (157.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1397 (55.0)	1651 (65.0)	3031 (119.3)	3284 (129.3)	1406 (55.4)	2982 (117.4)
K20953	4309 (9500)	J95	4017 (158.2)	SRW	304.8 (12.0)	1219.2 (48.0)	1323 (52.1)	1576 (62.0)	2863 (112.7)	3117 (122.7)	1326 (52.2)	2812 (110.7)
K20953	4491 (9900)	J95	4017 (158.2)	SRW	304.8 (12.0)	1219.2 (48.0)	1323 (52.1)	1576 (62.0)	2863 (112.7)	3117 (122.7)	1326 (52.2)	2812 (110.7)
K20953	4536 (10,000)	J95	4017 (158.2)	SRW	304.8 (12.0)	1219.2 (48.0)	1323 (52.1)	1576 (62.0)	2863 (112.7)	3117 (122.7)	1326 (52.2)	2812 (110.7)
K30743	4536 (10,000)	J95	3904 (153.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1288 (50.7)	1542 (60.7)	2785 (109.6)	3039 (119.6)	1288 50.7)	2733 (107.6)
K30743	4899 (10,800)	J95	3904 (153.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1074 (42.3)	1286 (50.6)	2971 (117.0)	3182 (125.3)	1171 (46.1)	2928 (115.3)
K30743	5216 (11,500)	J95	3904 (153.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1074 (42.3)	1286 (50.6)	2971 (117.0)	3182 (125.3)	1171 (46.1)	2928 (115.3)
K30903	4536 (10,000)	J95	3395 (133.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1131 (44.5)	1385 (54.5)	2433 (95.8)	2687 (105.8)	1120 (44.1)	2377 (93.6)

SPECIAL APPLICATIONS – FULL SIZE K SERIES (4x4)

CMVSS 105 and FMVSS 105 ALLOWABLE CENTER OF GRAVITY CHARTS


Model	GVWR kg (lb)	Brake System	Wheel- Base mm (in)	Rear Wheel	Incomplete, Pickup Box Removal, or Snow Plow Prep Package Vehicles							
					Coordinates of Allowable C/G Variation at CMVSS/FMVSS Unladen, Curb Weight + 181.4 kg (400 lb) or 226.8 kg (500 lb) as defined by CMVSS 105 and FMVSS 105 mm (in)						Fwd C/G Limit mm (in)	RRwd C/G Limit mm (in)
					H ₁	H ₂	A	B	C	D	E	F
K30903	4853 (10,700)	J95	3395 (133.7)	SRW	304.8 (12.0)	1219.2 (48.0)	943 (37.1)	1155 (45.5)	2593 (102.1)	2804 (110.4)	1019 (40.1)	2547 (100.3)
K30903	5171 (11,400)	J95	3395 (133.7)	SRW	304.8 (12.0)	1219.2 (48.0)	943 (37.1)	1155 (45.5)	2593 (102.1)	2804 (110.4)	1019 (40.1)	2547 (100.3)
K30903	5806 (12,800)	J96	3395 (133.7)	DRW	304.8 (12.0)	1219.2 (48.0)	943 (37.1)	1155 (45.5)	2593 (102.1)	2804 (110.4)	1019 (40.1)	2547 (100.3)
K30903	5897 (13,000)	J96	3395 (133.7)	DRW	304.8 (12.0)	1219.2 (48.0)	943 (37.1)	1155 (45.5)	2593 (102.1)	2804 (110.4)	1019 (40.1)	2547 (100.3)
K30943	4989 (11,000)	J95	4259 (157.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1165 (45.9)	1377 (54.2)	3235 (127.4)	3446 (135.7)	1278 (50.3)	3195 (125.8)
K30943	5262 (11,600)	J95	4259 (157.7)	SRW	304.8 (12.0)	1219.2 (48.0)	1165 (45.9)	1377 (54.2)	3235 (127.4)	3446 (135.7)	1278 (50.3)	3195 (125.8)
K30943	5897 (13,000)	J96	4259 (157.7)	DRW	304.8 (12.0)	1219.2 (48.0)	1165 (45.9)	1377 (54.2)	3235 (127.4)	3446 (135.7)	1278 (50.3)	3195 (125.8)
K30953	4536 (10,000)	J95	4017 (158.2)	SRW	304.8 (12.0)	1219.2 (48.0)	1323 (52.1)	1576 (62.0)	2863 (112.7)	3117 (122.7)	1326 (52.2)	2812 (110.7)
K30953	4989 (11,000)	J95	4017 (158.2)	SRW	304.8 (12.0)	1219.2 (48.0)	1103 (43.4)	1315 (51.8)	3055 (120.3)	3266 (128.6)	1205 (47.4)	3013 (118.6)
K30953	5262 (11,600)	J95	4017 (158.2)	SRW	304.8 (12.0)	1219.2 (48.0)	1103 (43.4)	1315 (51.8)	3055 (120.3)	3266 (128.6)	1205 (47.4)	3013 (118.6)

SPECIAL APPLICATIONS – FULL SIZE K SERIES (4x4)

CMVSS 105 and FMVSS 105 ALLOWABLE CENTER OF GRAVITY CHARTS

Model	GVWR kg (lb)	Brake System	Wheel- Base mm (in)	Rear Wheel	Incomplete, Pickup Box Removal, or Snow Plow Prep Package Vehicles							
					Coordinates of Allowable C/G Variation at CMVSS/FMVSS Unladen, Curb Weight + 181.4 kg (400 lb) or 226.8 kg (500 lb) as defined by CMVSS 105 and FMVSS 105						Fwd C/G Limit mm (in)	RRwd C/G Limit mm (in)
					H ₁	H ₂	A	B	C	D	E	F
K30953	5897 (13,000)	J96	4017 (158.2)	DRW	304.8 (12.0)	1219.2 (48.0)	1103 (43.4)	1315 (51.8)	3055 (120.3)	3266 (128.6)	1205 (47.4)	3013 (118.6)
K31003	5987 (13,200)	J96	3493 (137.5)	DRW	304.8 (12.0)	1219.2 (48.0)	968 (38.1)	1180 (46.5)	2666 (105.0)	2877 (113.3)	1048 (41.3)	2619 (103.1)
K31043	5987 (13,200)	J96	4356 (171.5)	DRW	304.8 (12.0)	1219.2 (48.0)	1190 (46.9)	1402 (55.2)	3307 (130.2)	3518 (138.5)	1307 (51.5)	3267 (128.6)
K31403	5987 (13,200)	J96	4115 (162.0)	DRW	304.8 (12.0)	1219.2 (48.0)	1128 (44.4)	1340 (52.8)	3128 (123.1)	3339 (131.5)	1234 (48.6)	3086 (121.5)

SRW = Single Rear Wheel
 DRW = Dual Rear Wheel
 C/G = Center of Gravity
 Brake Systems: Hydraulic Powered Boosters – J90, J95, J96

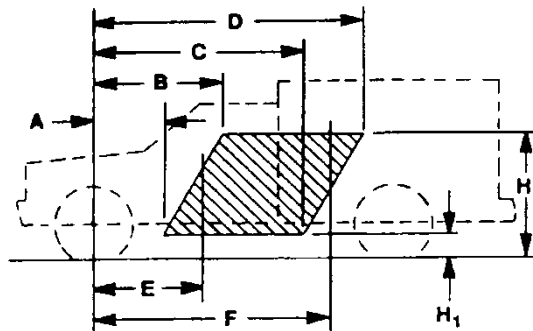

C/G of vehicle in CMVSS or FMVSS unladen condition [Curb + 181.4 kg. (400 lb) or Curb + 226.8 kg. (500 lb) as defined by CMVSS 105 and FMVSS 105] must be inside shaded area – that is, the C/G must be within the trapezoid formed by the coordinates A, B, C, D, H1, & H2, plus the C/G must be to the rear of vertical line E and forward of vertical line F.

CMVSS 126 and FMVSS 126 – ELECTRONIC STABILITY CONTROL SYSTEMS Applies to all types of Incomplete Vehicles Contained in this Document

TYPE 2 The following statement is applicable to all types of Incomplete Vehicles contained in this document (unless otherwise noted on the cover).

This incomplete vehicle when completed will conform to CMVSS 126 and FMVSS 126 provided it is completed in accordance with the following specific conditions by the (intermediate and) final stage manufacturer:

A. Providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below:

- | | |
|--|---|
| Anti-Lock Brake, Traction Control and Electronic Stability control system, including sensors and control module | Master cylinder-warning statement |
| Brake assemblies and components (service/parking) - (i.e. power boosters, master cylinder, wheel cylinder, calipers, rotors, wheel speed sensor, wheel speed sensor wiring, brake lining etc.) | Owner Manual instructions |
| Brake pedal, brake switch, parking brake hand lever or park brake switch and related mechanical components | Parking brake actuator and related mechanical components |
| Brake system electrical controls and logic | Power steering or vacuum lines and routing |
| Gauges and warning devices, and statements | Power steering or vacuum pump |
| Hydraulic brake fluid and reservoirs | Tires and Wheels |
| Hydraulic brake lines, fittings and routings | Stability control system, including control module, sensors and software calibrations |
| Hydraulic brake valves and components | Steering control system including related hardware |
| | Suspension components (i.e. bushings, control arms, shocks, springs, sway bars) |
| | Vacuum brake lines, fittings and routings |
| | Vehicle wiring harnesses |
| | Wheelbases |

- B. GVWR, GAWR front and rear weight ratings as listed on the Incomplete Vehicle Label affixed to the front cover of this document must not be exceeded.
- C. The Tire Pressures as listed on the Incomplete Vehicle Label affixed to the front cover of this document must be followed
- D. The Maximum Completed Vehicle Unloaded (Curb) restrictions as shown in CMVSS301 and FMVSS 301 Table A, must not be exceeded.
- E. The center of gravity of the total vehicle falls within the areas referenced on the FMVSS 126 Compliance Certification X = Longitudinal, Y = Lateral and Z = Vertical Center of Gravity Restrictions” charts that follow. Instructions for determining the allowable center of gravity variation are listed below:

(CMVSS 126 and FMVSS 126 — continued on next page)

SPECIAL APPLICATIONS – FULL SIZE K SERIES (4x4)

GMT900 C/K 20903 (Regular Cab) FMVSS 126 Maximum Height Restrictions

QXT Tire – LT265/70R17 Bridgestone Duravis M700 AT

QHQ Tire – LT245/75R17 Firestone Transforce HT ALS

X = Longitudinal, Y = Lateral and Z = Vertical Center of Gravity (CG) Restrictions

@ Maximum X Longitudinal CG Location from Front Axle ^C _L cm (in)	Model Identifi- cation	@ Y – Lateral CG Offset Location cm (in)								
		-20 (-7.9)	-15 (-5.9)	-10 (-3.9)	-5 (-2)	0	5 (2)	10 (3.9)	15 (5.9)	20 (7.9)
165 (65)	C20903	72.5 (28.5)	75.0 (29.5)	77.5 (30.5)	77.5 (30.5)	90.0 (35.4)	77.5 (30.5)	77.5 (30.5)	75.0 (29.5)	72.5 (28.5)
165 (65)	K20903	70.0 (27.6)	72.5 (28.5)	75.0 (29.5)	75.0 (29.5)	77.5 (30.5)	75.0 (29.5)	75.0 (29.5)	72.5 (28.5)	70.0 (27.6)
175 (68.9)	C20903	75.0 (29.5)	75.0 (29.5)	77.5 (30.5)	80.0 (31.5)	90.0 (35.4)	80.0 (31.5)	77.5 (30.5)	75.0 (29.5)	75.0 (29.5)
175 (68.9)	K20903	72.5 (28.5)	75.0 (29.5)	75.0 (29.5)	77.5 (30.5)	77.5 (30.5)	77.5 (30.5)	75.0 (29.5)	75.0 (29.5)	72.5 (28.5)
187.5 (73.8)	C20903	80.0 (31.5)	82.5 (32.5)	85.0 (33.5)	85.0 (33.5)	92.5 (36.4)	85.0 (33.5)	85.0 (33.5)	82.5 (32.5)	80.0 (31.5)
187.5 (73.8)	K20903	77.5 (30.5)	80.0 (31.5)	82.5 (32.5)	85.0 (33.5)	90.0 (35.4)	85.0 (33.5)	82.5 (32.5)	80.0 (31.5)	77.5 (30.5)
200 (78.7)	C20903	80.0 (31.5)	85.0 (33.5)	87.5 (34.4)	90.0 (35.4)	92.5 (36.4)	90.0 (35.4)	87.5 (34.4)	85.0 (33.5)	80.0 (31.5)
200 (78.7)	K20903	77.5 (30.5)	85.0 (33.5)	87.5 (34.4)	90.0 (35.4)	95.0 (37.4)	90.0 (35.4)	87.5 (34.4)	85.0 (33.5)	77.5 (30.5)
212.5 (83.7)	C20903	80.0 (31.5)	85.0 (33.5)	87.5 (34.4)	87.5 (34.4)	90.0 (35.4)	87.5 (34.4)	87.5 (34.4)	85.0 (33.5)	80.0 (31.5)
212.5 (83.7)	K20903	72.5 (28.5)	77.5 (30.5)	85.0 (33.5)	90.0 (35.4)	92.5 (36.4)	90.0 (35.4)	85.0 (33.5)	77.5 (30.5)	72.5 (28.5)
225 (88.6)	C20903	80.0 (31.5)	82.5 (32.5)	85.0 (33.5)	85.0 (33.5)	87.5 (34.4)	85.0 (33.5)	85.0 (33.5)	82.5 (32.5)	80.0 (31.5)
225 (88.6)	K20903	70.0 (27.6)	72.5 (28.5)	72.5 (28.5)	87.5 (34.4)	90.0 (35.4)	87.5 (34.4)	72.5 (28.5)	72.5 (28.5)	70.0 (27.6)
237.5 (93.5)	C20903	80.0 (31.5)	82.5 (32.5)	85.0 (33.5)	85.0 (33.5)	85.0 (33.5)	85.0 (33.5)	85.0 (33.5)	82.5 (32.5)	80.0 (31.5)
237.5 (93.5)	K20903	70.0 (27.6)	70.0 (27.6)	70.0 (27.6)	85.0 (33.5)	87.5 (34.4)	85.0 (33.5)	70.0 (27.6)	70.0 (27.6)	70.0 (27.6)

^^^ Maximum Z – Vertical CG Height Restriction Values ^^^

NOTE: Minimum Z – Vertical Height Restriction Value is 30.5 cm (12 in) for all models above

SPECIAL APPLICATIONS – FULL SIZE K SERIES (4x4)

**GMT900 C/K 20943 (Crew-Cab), FMVSS 126 Maximum Height Restrictions
 QXT Tire – LT265/70R17 Bridgestone Duravis M700 AT
 QHQ Tire – LT245/75R17 Firestone Transforce HT ALS
 X = Longitudinal, Y = Lateral and Z = Vertical Center of Gravity (CG) Restrictions**

@ Maximum X Longitudinal CG Location from Front Axle ^C _L cm (in)	Model Identification	@ Y – Lateral CG Offset Location cm (in)								
		-17.5 (-6.9)	-15 (-5.9)	-10 (-3.9)	-5 (-2)	0	5 (2)	10 (3.9)	15 (5.9)	17.5 (7.9)
205 (80.7)	C20943	70.0 (27.6)	70.0 (27.6)	75.0 (29.5)	80.0 (31.5)	80.0 (31.5)	80.0 (31.5)	75.0 (29.5)	70.0 (27.6)	70.0 (27.6)
	K20943	70.0 (27.6)	70.0 (27.6)	75.0 (29.5)	80.0 (31.5)	80.0 (31.5)	80.0 (31.5)	75.0 (29.5)	70.0 (27.6)	70.0 (27.6)
215 (84.6)	C20943	80.0 (31.5)	80.0 (31.5)	85.0 (33.5)	90.0 (35.4)	90.0 (35.4)	90.0 (35.4)	85.0 (33.5)	80.0 (31.5)	80.0 (31.5)
	K20943	80.0 (31.5)	80.0 (31.5)	85.0 (33.5)	90.0 (35.4)	90.0 (35.4)	90.0 (35.4)	85.0 (33.5)	80.0 (31.5)	80.0 (31.5)
225 (88.6)	C20943	80.0 (31.5)	80.0 (31.5)	85.0 (33.5)	90.0 (35.4)	92.5 (36.4)	90.0 (35.4)	85.0 (33.5)	80.0 (31.5)	80.0 (31.5)
	K20943	80.0 (31.5)	80.0 (31.5)	85.0 (33.5)	90.0 (35.4)	92.5 (36.4)	90.0 (35.4)	85.0 (33.5)	80.0 (31.5)	80.0 (31.5)
235 (92.5)	C20943	82.5 (32.5)	85.0 (33.5)	85.0 (33.5)	90.0 (35.4)	95.0 (37.4)	90.0 (35.4)	85.0 (33.5)	85.0 (33.5)	82.5 (32.5)
	K20943	82.5 (32.5)	85.0 (33.5)	85.0 (33.5)	90.0 (35.4)	95.0 (37.4)	90.0 (35.4)	85.0 (33.5)	85.0 (33.5)	82.5 (32.5)
245 (96.5)	C20943	82.5 (32.5)	85.0 (33.5)	87.5 (34.4)	90.0 (35.4)	95.0 (37.4)	90.0 (35.4)	87.5 (34.4)	85.0 (33.5)	82.5 (32.5)
	K20943	82.5 (32.5)	85.0 (33.5)	87.5 (34.4)	90.0 (35.4)	95.0 (37.4)	90.0 (35.4)	87.5 (34.4)	85.0 (33.5)	82.5 (32.5)
255 (100.4)	C20943	82.5 (32.5)	85.0 (33.5)	90.0 (35.4)	92.5 (36.4)	97.5 (38.4)	92.5 (36.4)	90.0 (35.4)	85.0 (33.5)	82.5 (32.5)
	K20943	82.5 (32.5)	85.0 (33.5)	90.0 (35.4)	92.5 (36.4)	97.5 (38.4)	92.5 (36.4)	90.0 (35.4)	85.0 (33.5)	82.5 (32.5)
265 (104.3)	C20943	82.5 (32.5)	85.0 (33.5)	90.0 (35.4)	95.0 (37.4)	97.5 (38.4)	95.0 (37.4)	90.0 (35.4)	85.0 (33.5)	82.5 (32.5)
	K20943	82.5 (32.5)	85.0 (33.5)	90.0 (35.4)	95.0 (37.4)	97.5 (38.4)	95.0 (37.4)	90.0 (35.4)	85.0 (33.5)	82.5 (32.5)

(CMVSS 126 and FMVSS 126 — continued on next page)

SPECIAL APPLICATIONS – FULL SIZE K SERIES (4x4)

GMT900 C/K 20943 (Crew-Cab), FMVSS 126 Maximum Height Restrictions
QXT Tire – LT265/70R17 Bridgestone Duravis M700 AT
QHJ Tire – LT245/75R17 Firestone Transforce HT ALS
X = Longitudinal, Y = Lateral and Z = Vertical Center of Gravity (CG) Restrictions

		@ Y – Lateral CG Offset Location cm (in)								
@ Maximum X Longitudinal CG Location from Front Axle ^C _L cm (in)	Model Identification	-17.5 (-6.9)	-15 (-5.9)	-10 (-3.9)	-5 (-2)	0	5 (2)	10 (3.9)	15 (5.9)	17.5 (7.9)
275 (108.3)	C20943	85.0 (33.5)	87.5 (34.4)	92.5 (36.4)	95.0 (37.4)	97.5 (38.4)	95.0 (37.4)	92.5 (36.4)	87.5 (34.4)	85.0 (33.5)
	K20943	85.0 (33.5)	87.5 (34.4)	92.5 (36.4)	95.0 (37.4)	97.5 (38.4)	95.0 (37.4)	92.5 (36.4)	87.5 (34.4)	85.0 (33.5)
^^^ Maximum Z – Vertical CG Height Restriction Values ^^^ NOTE: Minimum Z – Vertical Height Restriction Value is 30.5 cm (12 in) for all models above										

GMT900 C/K 20953 (Extended Cab), FMVSS 126 Maximum Height Restrictions
QXT Tire – LT265/70R17 Bridgestone Duravis M700 AT
QHJ Tire – LT245/75R17 Firestone Transforce HT ALS
X = Longitudinal, Y = Lateral and Z = Vertical Center of Gravity (CG) Restrictions

		@ Y – Lateral CG Offset Location cm (in)								
@ Maximum X Longitudinal CG Location from Front Axle ^C _L cm (in)	Model Identification	-17.5 (-6.9)	-15 (-5.9)	-10 (-3.9)	-5 (-2)	0	5 (2)	10 (3.9)	15 (5.9)	17.5 (7.9)
190 (74.8)	C20953	70.0 (27.6)	75.0 (29.5)	75.0 (29.5)	77.5 (30.5)	80.0 (31.5)	77.5 (30.5)	75.0 (29.5)	75.0 (29.5)	70.0 (27.6)
	K20953	70.0 (27.6)	75.0 (29.5)	75.0 (29.5)	77.5 (30.5)	80.0 (31.5)	77.5 (30.5)	75.0 (29.5)	75.0 (29.5)	70.0 (27.6)
200 (78.7)	C20953	72.5 (28.5)	77.5 (30.5)	80.0 (31.5)	80.0 (31.5)	95.0 (37.4)	80.0 (31.5)	80.0 (31.5)	77.5 (30.5)	72.5 (28.5)
	K20953	72.5 (28.5)	77.5 (30.5)	80.0 (31.5)	80.0 (31.5)	95.0 (37.4)	80.0 (31.5)	80.0 (31.5)	77.5 (30.5)	72.5 (28.5)

(CMVSS 126 and FMVSS 126 — continued on next page)

SPECIAL APPLICATIONS – FULL SIZE K SERIES (4x4)

GMT900 C/K 20953 (Extended Cab), FMVSS 126 Maximum Height Restrictions

QXT Tire – LT265/70R17 Bridgestone Duravis M700 AT

QHQ Tire – LT245/75R17 Firestone Transforce HT ALS

X = Longitudinal, Y = Lateral and Z = Vertical Center of Gravity (CG) Restrictions


210 (82.7)	C20953	80.0 (31.5)	85.0 (33.5)	87.5 (34.4)	90.0 (35.4)	95.0 (37.4)	90.0 (35.4)	87.5 (34.4)	85.0 (33.5)	80.0 (31.5)
	K20953	77.5 (30.5)	82.5 (32.5)	85.0 (33.5)	90.0 (35.4)	95.0 (37.4)	90.0 (35.4)	85.0 (33.5)	82.5 (32.5)	77.5 (30.5)
220 (86.6)	C20953	82.5 (32.5)	87.5 (34.4)	90.0 (35.4)	92.5 (36.4)	97.5 (38.4)	92.5 (36.4)	90.0 (35.4)	87.5 (34.4)	82.5 (32.5)
	K20953	80.0 (31.5)	85.0 (33.5)	87.5 (34.4)	92.5 (36.4)	97.5 (38.4)	92.5 (36.4)	87.5 (34.4)	85.0 (33.5)	80.0 (31.5)
230 (90.6)	C20953	82.5 (32.5)	87.5 (34.4)	92.5 (36.4)	95.0 (37.4)	97.5 (38.4)	95.0 (37.4)	92.5 (36.4)	87.5 (34.4)	82.5 (32.5)
	K20953	80.0 (31.5)	85.0 (33.5)	90.0 (35.4)	95.0 (37.4)	97.5 (38.4)	95.0 (37.4)	90.0 (35.4)	85.0 (33.5)	80.0 (31.5)
240 (94.5)	C20953	85.0 (33.5)	90.0 (35.4)	92.5 (36.4)	95.0 (37.4)	97.5 (38.4)	95.0 (37.4)	92.5 (36.4)	90.0 (35.4)	85.0 (33.5)
	K20953	77.5 (30.5)	82.5 (32.5)	87.5 (34.4)	95.0 (37.4)	97.5 (38.4)	95.0 (37.4)	87.5 (34.4)	82.5 (32.5)	77.5 (30.5)
250 (98.4)	C20953	85.0 (33.5)	90.0 (35.4)	92.5 (36.4)	95.0 (37.4)	95.0 (37.4)	95.0 (37.4)	92.5 (36.4)	90.0 (35.4)	85.0 (33.5)
	K20953	75.0 (29.5)	80.0 (31.5)	87.5 (34.4)	95.0 (37.4)	95.0 (37.4)	95.0 (37.4)	87.5 (34.4)	80.0 (31.5)	75.0 (29.5)
260 (102.4)	C20953	85.0 (33.5)	90.0 (35.4)	92.5 (36.4)	92.5 (36.4)	92.5 (36.4)	92.5 (36.4)	92.5 (36.4)	90.0 (35.4)	85.0 (33.5)
	K20953	75.0 (29.5)	80.0 (31.5)	85.0 (33.5)	92.5 (36.4)	92.5 (36.4)	92.5 (36.4)	85.0 (33.5)	80.0 (31.5)	75.0 (29.5)
270 (106.3)	C20953	85.0 (33.5)	90.0 (35.4)	92.5 (36.4)	92.5 (36.4)	92.5 (36.4)	92.5 (36.4)	92.5 (36.4)	90.0 (35.4)	85.0 (33.5)
	K20953	75.0 (29.5)	80.0 (31.5)	85.0 (33.5)	92.5 (36.4)	92.5 (36.4)	92.5 (36.4)	85.0 (33.5)	80.0 (31.5)	75.0 (29.5)
280 (110.2)	C20953	85.0 (33.5)	90.0 (35.4)	90.0 (35.4)	92.5 (36.4)	92.5 (36.4)	92.5 (36.4)	90.0 (35.4)	90.0 (35.4)	85.0 (33.5)
	K20953	75.0 (29.5)	80.0 (31.5)	85.0 (33.5)	92.5 (36.4)	92.5 (36.4)	92.5 (36.4)	85.0 (33.5)	80.0 (31.5)	75.0 (29.5)

^^^ Maximum Z – Vertical CG Height Restriction Values ^^^

NOTE: Minimum Z – Vertical Height Restriction Value is 30.5 cm (12 in) for all models above

(CMVSS 126 and FMVSS 126 — continued on next page)

FMVSS 126 Compliance Certification
Y = Lateral and Z = Vertical Center of Gravity Restriction
Visual Representation EXAMPLE shown in centimeters

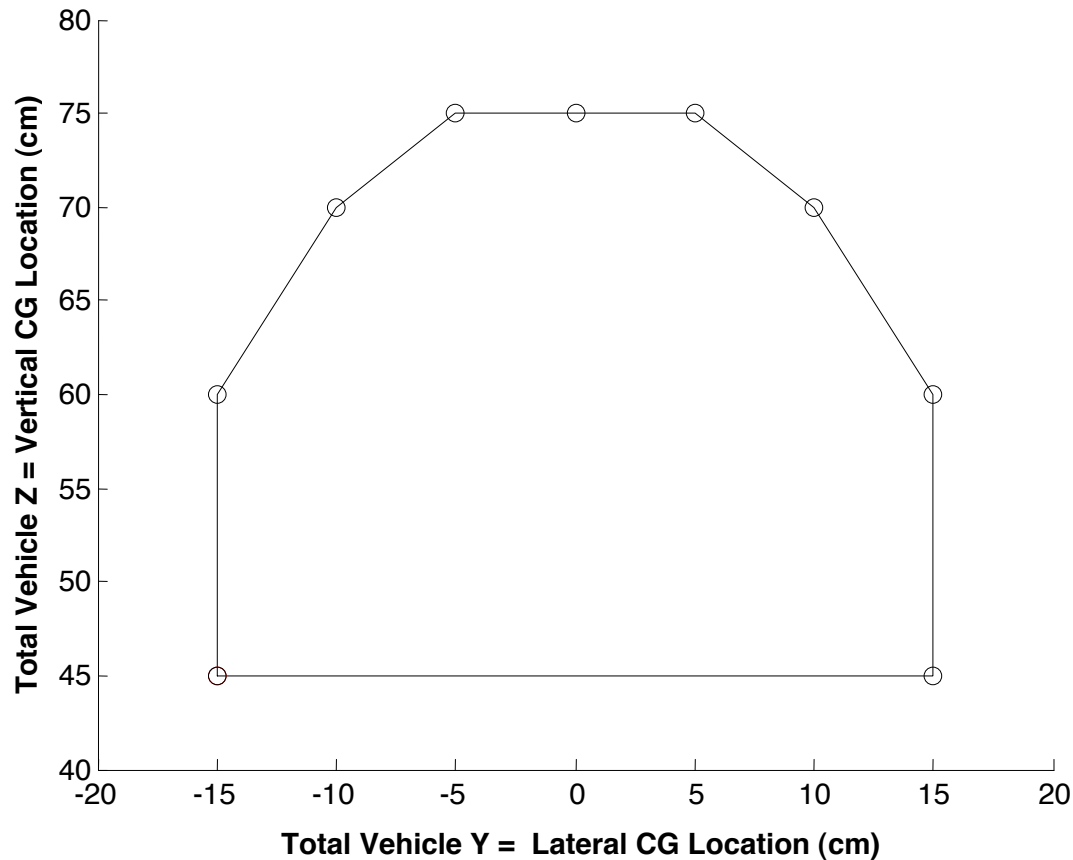

For Body Builder's use and applicable to CMVSS 126 and FMVSS 126, the longitudinal and vertical vehicle center of gravity location can be approximated by following the formula below and by referencing data elements within CMVSS 105 and FMVSS 105 – HYDRAULIC AND ELECTRIC BRAKE SYSTEMS or CMVSS 135 and FMVSS 135 LIGHT VEHICLE BRAKE SYSTEMS, ... ALLOWABLE CENTER OF GRAVITY CHARTS.

(CMVSS 126 and FMVSS 126 — continued on next page)

FMVSS 126 Compliance Certification
Y = Lateral and Z = Vertical Center of Gravity Restriction
Visual Representation EXAMPLE shown in centimeters

For Body Builder's use and applicable to CMVSS 126 and FMVSS 126, the longitudinal and vertical vehicle center of gravity location can be approximated by following the formula below and by referencing data elements within CMVSS 105 and FMVSS 105 – HYDRAULIC AND ELECTRIC BRAKE SYSTEMS or CMVSS 135 and FMVSS 135 LIGHT VEHICLE BRAKE SYSTEMS, ... ALLOWABLE CENTER OF GRAVITY CHARTS.

$$d = \frac{[Wrc + Wrb] WB}{Wt}$$

$$h = \frac{[h1*Wc + h2*Wb]}{Wt}$$

d	=	horizontal distance from front wheels to completed vehicle center of gravity cm (in)
h	=	vertical distance from ground to completed vehicle center of gravity cm (in)
Wrc	=	rear component of Chassis weight kg (lb)
Wrb	=	rear component of body weight kg (lb)
WB	=	vehicle wheelbase cm (in)
Wt	=	total weight of chassis and body kg (lb)
h1	=	center of gravity height from ground of the Bare Chassis: Based on model applicability, refer to the h1 values listed in this document within: CMVSS 105/FMVSS 105 - HYDRAULIC AND ELECTRIC BRAKE SYSTEMS, or CMVSS 135/FMVSS 135 - LIGHT VEHICLE BRAKE SYSTEMS.
Wc	=	total weight of vehicle as manufactured by General Motors kg (lb)
h2	=	center of gravity height of body from ground cm (in)
Wb	=	total weight of body kg (lb)

In addition, the equation to calculate the lateral vehicle center of gravity location from center of vehicle can be estimated by using the following formula:

$$\text{lateral offset from centerline of vehicle} = \frac{[(\text{RF corner weight kg (lb)} + \text{RR corner weight}) \text{ kg (lb)} / (\text{total vehicle weight kg (lb)})] - 0.5}{\text{vehicle track width of 152 cm (59.8 in)}}$$

If the lateral offset from centerline of vehicle calculation above results in a positive number, the lateral vehicle offset center of gravity is toward the right side (passenger) of the vehicle.

Alternatively, if the lateral offset from centerline of vehicle calculation above results in a negative number, the lateral vehicle offset center of gravity is toward the left side (driver) of the vehicle.

CMVSS 135 and FMVSS 135 – LIGHT VEHICLE BRAKE SYSTEMS
Applies to all types of Incomplete Vehicles Contained in this Document
3500 kg (7,716 lb) GVWR or less

TYPE 2 The following statement is applicable to all types of Incomplete Vehicles contained in this document with a 3500 kg (7,716 lb) GVWR or less, (unless otherwise noted on the cover).

This incomplete vehicle when completed will conform to CMVSS 135 and FMVSS 135 provided it is completed in accordance with the following specific conditions by the (intermediate and) final stage manufacturer:

- A. Providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below (if equipped):

Anti-Lock Brake System	Hydraulic brake lines, fittings and routings
Brake assemblies and components (service/ parking) - (i.e. power boosters, master cylinder, wheel cylinder, calipers, rotors, wheel speed sensor, wheel speed sensor wiring, brake lining etc.)	Hydraulic brake valves and components
Brake pedal, brake switch, parking brake hand lever or park brake switch and related mechanical components	Master cylinder-warning statement
Brake system electrical controls and logic	Owner Manual instructions
Gauges and warning devices, and statements	Parking brake actuator and related mechanical components
Hydraulic brake fluid and reservoirs	Power steering or vacuum lines and routing
	Power steering or vacuum pump
	Tires and Wheels
	Vacuum brake lines, fittings and routings
	Vehicle wiring harnesses
	Wheelbases

- B. GVWR, GAWR front and rear weight ratings as listed on the Incomplete Vehicle Label affixed to the front cover of this document must not be exceeded.
- C. The center of gravity of the total vehicle falls within the areas referenced on the “ALLOWABLE CENTER OF GRAVITY CHART” that follows. Instructions for determining the allowable center of gravity variation are listed below:

These charts detail the envelope of allowable center of gravity variation for completed vehicles. This is significant for the lightly loaded portion of CMVSS 135 and FMVSS 135, which is defined as curb plus 181.4 kg (400 lb) distributed in the driver-passenger area of the vehicle.

The lightly loaded center of gravity of complete vehicles needs to be restricted so it will meet CMVSS 135 and FMVSS 135 stopping distances. The laden center of gravity does not need to be specified as it is controlled within the CMVSS 135 and FMVSS 135 test procedure by specific instructions as to how ballast is to be placed (while height is not controlled, it is assumed that for test purposes it would be reasonable).

CMVSS 135 and FMVSS 135 – LIGHT VEHICLE BRAKE SYSTEMS
Applies to all types of Incomplete Vehicles Contained in this Document
3500 kg (7,716 lb) GVWR or less

For Body Builder's use, the center of gravity location can be approximated by the following formula:

$$d = \frac{[Wrc + Wrb + [(Hp)(Wp)/WB]] WB}{Wt}$$

$$h = \frac{[h1Wc + h2Wb + (h3)(Wp)]}{Wt}$$

- d = horizontal distance from front wheels to completed vehicle center of gravity mm (in)
h = vertical distance from ground to completed vehicle center of gravity mm (in)
Wrc = rear component of Chassis weight kg (lb)
Wrb = rear component of body weight kg (lb)
WB = vehicle wheelbase mm (in)
Wt = total weight of chassis and body kg (lb) plus 181.4 kg (400 lb)
h1 = center of gravity height from ground of the Bare Chassis = 711 mm (28 in)
Wc = total weight of Chassis kg (lb)
h2 = center of gravity height of body from ground mm (in)
Wb = total weight of body kg (lb)
Wp = 181.4 kg (400 lb) Amount from lightly loaded definition that is evenly distributed in driver-passenger area of vehicle.
Hp = 1467 mm (57.76 in) Horizontal distance from front axle to center of gravity of 181.4 kg (400 lb) evenly distributed in driver-passenger area of vehicle.
h3 = 948 mm (37.32 in) Vertical center of gravity height of 181.4 kg (400 lb) evenly distributed in driver-passenger area for vehicles with 3500 kg (7,716 lb) GVWR or less.

CMVSS 135 and FMVSS 135 ALLOWABLE CENTER OF GRAVITY CHARTS


Model	GVWR kg (lb)	Brake System	Wheel- Base mm (in)	Rear Wheel	Incomplete, Pickup Box Removal, or Snow Plow Prep Package Vehicles							
					Coordinates of Allowable C/G Variation at CMVSS/FMVSS Unladen, Curb Weight + 181.4 kg (400 lb) mm (in)						Fwd C/G Limit mm (in)	RRwd C/G Limit mm (in)
					H ₁	H ₂	A	B	C	D	E	F
C10703	2903 (6400)	JF7	3022.6 (119.0)	SRW	305 (12.0)	1219 (48.0)	1020 (40.2)	1280 (50.4)	1690 (66.5)	2289 (90.1)	1020 (40.2)	2289 (90.1)
C10903	2903 (6400)	JF7	3378.2 (133.0)	SRW	305 (12.0)	1219 (48.0)	1130 (44.5)	1385 (54.5)	1967 (77.4)	2507 (59.3)	1130 (44.5)	2507 (59.3)
C10753	2903 (6400)	JF7	3644.9 (143.5)	SRW	305 (12.0)	1219 (48.0)	1213 (47.7)	1467 (57.8)	2109 (83.0)	2648 (104.2)	1213 (47.7)	2648 (104.2)
K10703	2903 (6400)	JF7	3022.6 (119.0)	SRW	305 (12.0)	1219 (48.0)	1020 (40.2)	1280 (50.4)	1690 (66.5)	2289 (90.1)	1020 (40.2)	2289 (90.1)
K10903	2903 (6400)	JF7	3378.2 (133.0)	SRW	305 (12.0)	1219 (48.0)	1130 (44.5)	1385 (54.5)	1967 (77.4)	2507 (59.3)	1130 (44.5)	2507 (59.3)
C10703	3084 (6800)	JF3	3022.6 (119.0)	SRW	305 (12.0)	1219 (48.0)	1020 (40.2)	1449 (57.0)	1905 (75.0)	2427 (95.5)	1119 (44.0)	2372 (93.4)
C10903	3175 (7000)	JF3	3378.2 (133.0)	SRW	305 (12.0)	1219 (48.0)	1130 (44.5)	1536 (60.5)	2106 (82.9)	2646 (104.2)	1250 (49.2)	2646 (104.2)
C10543	3084 (6800)	JF3	3644.9 (143.5)	SRW	305 (12.0)	1219 (48.0)	1213 (47.8)	1736 (68.3)	2393 (94.2)	2933 (115.5)	1277 (50.3)	2738 (107.8)
C10753	3084 (6800)	JF3	3644.9 (143.5)	SRW	305 (12.0)	1219 (48.0)	1213 (47.8)	1736 (68.3)	2393 (94.2)	2933 (115.5)	1277 (50.3)	2738 (107.8)
C10953	3130 (6900)	JF3	4000.5 (157.5)	SRW	305 (12.0)	1219 (48.0)	1323 (52.1)	1835 (72.2)	2387 (94.0)	3064 (120.6)	1323 (52.1)	3005 (118.3)
K10903	3084 (6800)	JF3	3378.2 (133.0)	SRW	305 (12.0)	1219 (48.0)	1130 (44.5)	1661 (65.4)	2076 (81.7)	2753 (108.4)	1181 (46.5)	2538 (99.9)
K10543	3175 (7000)	JF3	3644.9 (143.5)	SRW	305 (12.0)	1219 (48.0)	1213 (47.8)	1760 (69.3)	2169 (85.4)	2846 (112.0)	1261 (49.6)	2738 (107.8)
K10753	3175 (7000)	JF3	3644.9 (143.5)	SRW	305 (12.0)	1219 (48.0)	1213 (47.8)	1760 (69.3)	2169 (85.4)	2846 (112.0)	1261 (49.6)	2738 (107.8)

CMVSS 135 and FMVSS 135 ALLOWABLE CENTER OF GRAVITY CHARTS

Model	GVWR kg (lb)	Brake System	Wheel- Base mm (in)	Rear Wheel	Incomplete, Pickup Box Removal, or Snow Plow Prep Package Vehicles							
					Coordinates of Allowable C/G Variation at CMVSS/FMVSS Unladen, Curb Weight + 181.4 kg (400 lb) mm (in)						Fwd C/G Limit mm (in)	RRwd C/G Limit mm (in)
					H ₁	H ₂	A	B	C	D	E	F
K10953	3175 (7000)	JF3	4000.5 (157.5)	SRW	305 (12.0)	1219 (48.0)	1323 (52.1)	1844 (72.6)	2358 (92.8)	3035 (119.5)	1383 (54.4)	3004 (118.3)
C10543	3084 (6800)	JD9	3644.9 (143.5)	SRW	305 (12.0)	1219 (48.0)	1213 (47.8)	1507 (59.3)	1879 (74.0)	2556 (100.6)	1213 (47.8)	2556 (100.6)
C10543	3220 (7100)	JD9	3644.9 (143.5)	SRW	305 (12.0)	1219 (48.0)	1213 (47.8)	1507 (59.3)	1814 (71.4)	2491 (98.1)	1213 (47.8)	2491 (98.1)
C10753	3084 (6800)	JD9	3644.9 (143.5)	SRW	305 (12.0)	1219 (48.0)	1213 (47.8)	1507 (59.3)	1879 (74.0)	2556 (100.6)	1213 (47.8)	2556 (100.6)
C10753	3175 (7000)	JD9	3644.9 (143.5)	SRW	305 (12.0)	1219 (48.0)	1213 (47.8)	1507 (59.3)	1835 (72.2)	2512 (98.9)	1213 (47.8)	2512 (98.9)
K10543	3175 (7000)	JD9	3644.9 (143.5)	SRW	305 (12.0)	1219 (48.0)	1213 (47.8)	1507 (59.3)	1835 (72.2)	2512 (98.9)	1213 (47.8)	2512 (98.9)
K10543	3311 (7300)	JD9	3644.9 (143.5)	SRW	305 (12.0)	1219 (48.0)	1213 (47.8)	1524 (60.0)	1774 (69.8)	2450 (96.4)	1213 (47.8)	2450 (96.4)
K10753	3175 (7000)	JD9	3644.9 (143.5)	SRW	305 (12.0)	1219 (48.0)	1213 (47.8)	1507 (59.3)	1835 (72.2)	2512 (98.9)	1213 (47.8)	2512 (98.9)
K10753	3266 (7200)	JD9	3644.9 (143.5)	SRW	305 (12.0)	1219 (48.0)	1213 (47.8)	1507 (59.3)	1794 (70.6)	2470 (97.2)	1213 (47.8)	2470 (97.2)

ABS = Antilock Braking System
 Brake Systems: Vacuum Powered Boosters - JF3, JF7 and JD9.
 C/G = Center of Gravity
 DRW = Dual Rear Wheel
 SRW = Single Rear Wheel
 VSES = Vehicle Stability Enhancement System

CMVSS 135 and FMVSS 135 ALLOWABLE CENTER OF GRAVITY CHARTS

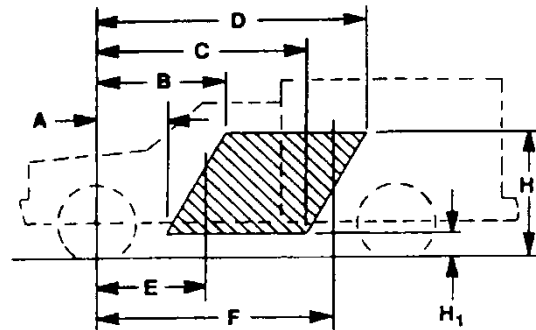

C/G of vehicle in CMVSS or FMVSS unladen condition [Curb + 181.4 kg. (400 lb)] must be inside shaded area – that is, the C/G must be within the trapezoid formed by the coordinates A, B, C, D, H1, & H2, plus the C/G must be to the rear of vertical line E and forward of vertical line F.

CMVSS 204 and FMVSS 204 – STEERING CONTROL REARWARD DISPLACEMENT

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document, 4536 kg (10,000 lb) GVWR or less and an unloaded vehicle weight of 2495 kg (5,500 lb) or less (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 204 and FMVSS 204 providing the “Maximum Unloaded Vehicle Weight” (found in Table A) is not exceeded, and no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems including but not limited to those listed below that would affect the steering control system displacement in a 48 k.p.h. (30 m.p.h.) fixed barrier impact:

Frame assembly and mounting system
Front impact bar assembly and mounting system
Hood and hinge assemblies
Powertrain and powertrain mounting system
Steering control system including related hardware

Steering wheel, column, and shaft assembly
Tires and wheels
Vehicle/body front-end sheet metal components
Vehicle/body front-end structural components
Vehicle/body roof structure and components

TYPE 3 The following statement is applicable to any type of incomplete vehicle contained in this document, 4536 kg (10,000 lb) GVWR or less, with any bumper delete option (unless otherwise noted on the cover.)

Conformity with CMVSS 204 and FMVSS 204 cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard.

CMVSS 208 and FMVSS 208 – OCCUPANT CRASH PROTECTION

TYPE 1 The following statement is applicable to all types of vehicles contained in this document (unless otherwise noted on the cover) having an unloaded vehicle weight of 2495 kg (5,500 lb) or less and a GVWR of 3856 kg (8,500 lb) or less (except for chassis cab models with KL6 or KL8 alternative fuels option), and built by General Motors with complete seats and seat belt assemblies. For vehicles GVWR of 3856 kg (8,500 lb) or less, the vehicle model number as shown on the label on the cover must be included on the final state manufacturer’s certification label.

- A. The front seating positions provided by General Motors will conform to the requirements of CMVSS 208 and FMVSS 208, providing the “Maximum Unloaded Vehicle Weight” (found in Table A) is not exceeded, and no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the Owner Manual instructions and components, assemblies or systems including but not limited to those listed below:
1. The number, location or configuration of the designated seating positions; and
 2. The number, placement, installation or model number of the seat belt assemblies provided; and

(CMVSS 208 and FMVSS 208 – continued on next page)

(CMVSS 208 and FMVSS 208 – continued from previous page)

3. The instrument panel or its mounting, the steering column/shaft or its mounting, the knee bolster or its mounting, the steering wheel, horn pad, driver air bag module or its mounting and covering, passenger air bag module or its mounting or covering (if equipped), air bag crash sensors. Note: For the “Passenger Sensing System” (if equipped), modifying or putting a padded cover on the passenger seat can affect the performance of this system.
 4. Sensor Diagnostic Module (SDM), and all air bag system wiring. Do not relocate or move the SDM, or air bag crash sensors. Do not obstruct the path of air bag deployment. Do not mount any components that produce more than a 20 Gauss magnetic field as measured at the SDM. Speakers/magnets must be located at least 12.7 cm (5 in) from the SDM. You must disconnect the SDM before doing any welding on the vehicle, otherwise do not disconnect the SDM. **Caution: To help avoid Personal Injury due to unwanted air bag inflation, observe the following precautions!** Do not weld, solder, braze, hammer, machine, drill, heat, electrical splice, add onto, remove, relocate, test, paint, loosen or in any way alter air bag components or wiring or fuses. Carpet may be put over the SDM if an appropriate moisture barrier (such as rubber matted backing) is supplied. When performing any operation around air bag components or wiring including but not limited to any operations around the instrument panel, electrical wiring and fuse block, steering column/wheel, and the engine compartment you must disable the air bag system prior to the operation. If the vehicle is equipped with an SDM, you must disable the air bag system prior to installing intermediate or final stage manufacturer components. *Note: Striking or dropping a powered SDM may cause air bag deployment.* The air bag system must be enabled after operation completion. This must be verified before shipping the vehicle. Instructions for disabling and enabling the air bag system can be found in the GM service manual. **Note: All connectors that have wiring routed between the SDM and an air bag inflator module have yellow connectors.**
 5. If the sunshade is removed or altered, or if the intermediate or final stage manufacturer installs the sunshade, a new Inflatable Restraints System Caution label must be installed per CMVSS 208 and FMVSS 208 requirements. In order to be in compliance with CMVSS 208 and FMVSS 208 no other label shall be installed on the same side of the sunvisor as the Air Bag Caution label. The instrument panel temporary label must not be removed.
 6. The vehicle frame, front bumper system, front sheet metal or other front structure, roof structure, doors, floor pan, dash panel, cowl structure, driveline or contents of the engine compartment by any incomplete or final state manufacturer which would result in any difference from the modified vehicle’s deceleration if the modified vehicle were to be subjected to barrier impact tests conducted per CMVSS 208 and FMVSS 208.
- B. The rear seating positions by General Motors will conform to CMVSS 208 and FMVSS 208 providing no alterations are made to the number, location or configuration of the designated seats/seating positions or to the number, placement, installation or model number of the seat belt assemblies of this incomplete vehicle.
- C. Intermediate or final stage manufacturers are advised that mounting hardware ahead of the bumper/radiator, such as, but not limited to, plows, winches, brush guards, etc., may affect air bag sensing and resultant performance.

SPECIAL APPLICATIONS – FULL SIZE K SERIES (4x4)

(CMVSS 208 and FMVSS 208 – continued from previous page)

TYPE 1 The following statement is applicable to all types of vehicles contained in this document (unless otherwise noted on the cover) having either an unloaded vehicle weight greater than 2495 kg (5,500 lb) or a GVWR greater than 3856 kg (8,500 lb), and built by General Motors with complete seats and seat belt assemblies.

This incomplete vehicle, when completed, will conform to CMVSS 204 and FMVSS 204 providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems including but not limited to those listed below:

Owner Manual instructions
Seat anchorages
Seat assemblies

Seat belt anchorages
Seat belt assemblies
Seat belt warning system

For vehicles equipped with an optional Inflatable Restraint System, refer to additional information in the TYPE 1 statement immediately preceding.

TYPE 3 The following statement is applicable to all types of incomplete vehicles contained in this document with respect to second- or third-row seats installed by the intermediate or final state manufacturer, and all chassis cab models with a GVWR of 3856 kg (8,500 lb) or less with options KL6 or KL8 alternative fuel (unless otherwise noted on the cover).

Conformity with CMVSS 208 and FMVSS 208 cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard.

CMVSS 212 and FMVSS 212 – WINDSHIELD MOUNTING

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover) with a 4536 kg (10,000 lb) GVWR or less, when completed will conform to CMVSS 212 and FMVSS 212 if:

- A. No alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems including but not limited to those listed below:

Air bag crash sensors	Seat belt anchorages
Air bag system including covers and module	Seat belt assemblies
Air bag system wiring harnesses, connectors, and fuses/relays	Sensor Diagnostic Module (SDM) and retainers/brackets
Dash panel and cowl assembly	Steering control system including related hardware
Doors and hinge assemblies	Steering wheel, column, and shaft assembly
Frame assembly and mounting system	Sun visor assemblies
Front impact bar assembly and mounting system	Vehicle/body front sheet metal – components/reinforcements
Hood and hinge assemblies	Vehicle/body front structural – components/reinforcements
Powertrain and powertrain mounting system	Vehicle/body roof structure and components
Seat anchorages	Windshield and windshield mounting system
Seat assemblies	Windshield frame/frame reinforcement

- B. The body and/or equipment installed must not exceed the completed vehicle's unloaded vehicle weight, maximum body weight, maximum center of gravity height, and maximum body height required values specified Table A.
- C. The clearance between the rear most part of the cab and the front of the body is not less than the minimum cab to body clearance specified in Table A.
- D. The minimum vertical clearance between the cab roof and any portion of the installed body or accessories that extends over the cab roof must not be less than 20 cm (8 in).
- E. During a 48 k.p.h. (30 m.p.h.) frontal barrier impact test, no component installed by any intermediate or final state manufacturer shall move forward from its permanently mounted position.

SPECIAL APPLICATIONS – FULL SIZE K SERIES (4x4)

CMVSS 219 and FMVSS 219 – WINDSHIELD ZONE INTRUSION

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document a 4536 kg (10,000 lb) GVWR or less, but not applicable to walk-in vans, motor homes, tow-trucks, ambulance, or other emergency/rescue/medical vehicles equipped for wheelchairs (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 219 and FMVSS 219 providing:

A. No alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems including but not limited to those listed below:

Antennae	Hood assembly
Body roof structure and components/reinforcements	Hood mounts
Body sheet metal components/reinforcements	Motor compartment structure and components
Body structural components/reinforcements	Windshield wiper
Dash panel and cowl structure	Windshield wiper motor

B. The vehicle does not exceed the unloaded vehicle weight specified in Table A.

C. During a 48 k.p.h. (30 m.p.h.) frontal barrier impact test:

1. No component installed by any intermediate or final stage manufacturer shall prevent the hood from folding differently than its designed folding pattern; and
2. No component installed by any intermediate or final stage manufacturer shall penetrate the windshield or protected zone.

CMVSS 301 and FMVSS 301 – FUEL SYSTEM INTEGRITY
Refer to Vehicle Types, GVWRs, and Applicable Statements that follow

TYPE 2 The following statement is applicable to all types of incomplete vehicles contained in this document 4536 kg (10,000 lb) GVWR or less with any Incomplete Option (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 301 and FMVSS 301 providing it is completed in accordance with the following specific conditions by the (intermediate and) final stage manufacturer:

- A. The following items when installed by General Motors will conform providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below:

Fuel filler door assembly	Fuel tank filler neck/pipe assembly
Fuel filter	Fuel tank filler neck/pipe fasteners
Fuel hose shields	Fuel tank filler neck/pipe hose clamp/clamp assembly
Fuel pipes and hose assemblies	Fuel tank filler neck/pipe housing assembly
Fuel system	Fuel tank filler neck/pipe plate
Fuel system attaching or protective structure	Fuel tank filler neck/pipe vent hose
Fuel system control module	Fuel tank filler neck/pipe vent hose clamp/strap
Fuel system fasteners and retainers	Fuel tank meter assembly
Fuel tank assembly	Fuel tank shields
Fuel tank cap assembly	Fuel vapor lines and canister assembly
Fuel tank filler neck hose	

- B. The (intermediate and) final stage manufacturer conforms to the following:
1. a box, platform, or other rear structural assembly must be installed on the back of the vehicle.
 2. the rear assembly structure must provide comparable stiffness to the pickup box sold as original equipment as part of the complete vehicle version of this product.
 3. the method of rear assembly structure mounting and mount properties (material and structural) are similar to the those used to attach the pickup box sold as original equipment as part of the complete vehicle version of this product.
 4. The dimension and mass as well as other restrictions (excluding the Maximum Frontal Area) found in MVSS 301 Table A, are not exceeded.

CMVSS 301 and FMVSS 301 – FUEL SYSTEM INTEGRITY
Refer to Vehicle Types, GVWRs, and Applicable Statements that follow

- C. This incomplete vehicle, when completed, will conform to CMVSS 301 and FMVSS 301 Fuel System Integrity if:
1. No alterations are made to the fuel system and attaching or protective structure, the contents or arrangement of the engine compartment, the powertrain and driveline, the cab structure, the chassis structure, the bumper system, door structure, or tires and wheels.
 2. The dimension and mass as well as other restrictions (excluding the Maximum Frontal Area) found in MVSS 301 Table A, are not exceeded.
 3. The final stage manufacturer completes the fuel filler neck and fuel level sender installation(s) according to “Best Practices” or “Special Applications (if applicable)” sections within the **Body Builders Manual on the www.gmupfitter.com website**. **If there are additional questions, contact the Upfitter Integration Hotline at 1-800-875-4742.**
 4. During all barrier impact tests:
 - a. No component installed by any intermediate or final stage manufacturer impinges or causes distortion to the fuel system with sufficient energy to puncture or separate the fuel system.
 - b. No vehicle modification by any intermediate or final stage manufacturer results in any portion of the vehicle impinging upon or causing distortion to the fuel system with sufficient energy to puncture or separate the fuel system. Care should be taken that the structural integrity of the vehicle is restored following any modification of the structure.
 - c. Any body installed by an intermediate or final stage manufacturer is mounted securely to absorb loads and prevent movement relative to the frame which could cause any fuel system component to be punctured, separated or otherwise damaged when tested to applicable procedures of CMVSS 301 or FMVSS 301.

CMVSS 301 and FMVSS 301 – FUEL SYSTEM INTEGRITY **Refer to Vehicle Types, GVWRs, and Applicable Statements that follow**

Notes:

- On page 2 within this document, before each vehicle illustration and after the word TYPE, is a list of types of vehicles into which the incomplete vehicle is designed to be manufactured. For the allowable vehicle TYPE(s), CMVSS 301 and FMVSS 301 only applies to vehicles with a 4536 kg (10,000 lb) GVWR or less. As a result, Table A does not include data for GVWRs exceeding 4536 kg (10,000 lb) GVWR.
- For all included models, the maximum cab to body clearance is 7.6 cm (3.0 in)
- CA (back of cab sheet metal to centerline of rear axle dimensions) are located within the Body Builder website, “General Arrangement” section, at www.gmupfitter.com or contact the Upfitter Integration Hotline at 1-800-875-4742.
- * The Maximum Frontal Area column applies to: PART II, U.S. EPA, CALIFORNIA, AND CANADIAN EXHAUST & EVAPORATIVE EMISSION REQUIREMENTS AND EPA FUEL ECONOMY REGULATIONS.
- The completed vehicle Maximum Unloaded Vehicle (Curb) Weight, and/or GVWR, should not be exceeded. If any of these restrictions are exceeded, re-certification by the final stage manufacturer will be required.
- The Maximum Body Weight equals the Maximum Unloaded Vehicle (curb) Weight minus the incomplete Cab & Chassis (curb) weight as manufactured by GM. The actual vehicle (curb) weight must be determined by weighing the vehicle with fuel and fluids filled, minus occupants and cargo. The Maximum Body Weight in Table A is based on the maximum possible incomplete Cab & Chassis (curb) weight as manufactured by GM. It may be permissible to exceed the Maximum Body Weight (as stated in Table A), provided the Maximum Unloaded Vehicle (curb) Weight (as stated in Table A) is not exceeded at final stage manufacturer completion.
- Also see the Vehicle Emission Control Information Label in the vehicle engine compartment for maximum completed vehicle curb weight, GVWR, and frontal area restrictions, if applicable.
- Note: WB refers to wheelbase; GVWR refers to Gross Vehicle Weight Rating.

U.S. EPA, California, and Canadian Exhaust and Evaporative Emission Requirements and EPA Fuel Economy Regulations

Incomplete vehicles come in three major classifications: (1) Light Duty trucks (Light and Medium Duty in California) are certified by the primary manufacturer and the vehicle is labeled as being in compliance with emission and fuel economy requirements. (2) Heavy Duty Vehicles are required to have an engine certified by the engine manufacturer and the engine is labeled as being in compliance with emission requirements. (3) Light Duty Vehicles certified and labeled by the final stage manufacturer as being in compliance with emission and fuel economy requirements.

In addition, all gasoline-powered Federal/California Light Duty, Medium Duty and Heavy Duty Vehicles are required to have an approved fuel evaporative emission control system. Vehicles certified to Heavy Duty emission standards also require special evaporative emission labeling. In order to assure that Environmental Protection Agency (EPA), National Highway Traffic Safety Administration (NHTSA), California and Canada Emission Certification and/or Fuel Economy regulations are met, this vehicle must be completed in strict accordance with all instructions contained in this manual, especially the following instructions which relate to:

EMISSION RELATED COMPONENTS

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

- A. This vehicle, when completed, will conform to U.S. EPA, CALIFORNIA, AND CANADIAN EXHAUST AND EVAPORATIVE EMISSION REQUIREMENTS AND EPA FUEL ECONOMY REGULATIONS providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems including but not limited to those listed below (if equipped), and installed by General Motors:

Air Injection Reaction (AIR) System	Exhaust emission control system
Axle	Exhaust oxygen sensors
Brake system	Exhaust system
Catalytic converter	Fuel injection system
Components for AWD system (axle, propshaft, PTU)	Fuel system
Coolant temperature sensor	Ignition system
Crankcase emission control system	Intake system – Air Induction System (i.e. Air filter, Mass Air Flow (MAF) sensor, ducts)
Diesel fuel injection components/controls	Oxygen sensor
EGR system	Positive Crankcase Ventilation System (PCV)
Engine assembly	Tires and wheels
Engine electronics (ecm/pcm/vcm)	Transaxle/transmission assembly
Engine fan and drive	Turbocharger and associated equipment/controls
Engine speed sensor	
Evaporative emission control system	

(Continued on next page)

SPECIAL APPLICATIONS – FULLSIZE K SERIES (4x4)

- C. GVWR, GAWR front and rear weight ratings as listed on the Incomplete Vehicle Label affixed to the front cover of this document must not be exceeded.

NOTE: All Federal/California gasoline powered heavy duty vehicles (except those equipped with option NJ2 – Temporary Fuel Tank) will have an evaporative emission control system that is certified for a fuel tank capacity not to exceed the amount shown on the Vehicle Emission Control Information Label located on the fan shroud (C/K 1500/2500/3500). Intermediate or Final State Manufacturers wishing to add fuel tank capacity beyond the original equipment fuel tank capacity must contact California Air Resources Board and/or submit a written statement to the EPA Administrator that the Hydrocarbon Storage System has been upgraded according to the requirements of 40 CFR 86.088-35 (g) (2).

Vehicles equipped with option NJ2 – Temporary Fuel Tank do not have an evaporative emission control system.

LABELS

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to U.S EPA, CALIFORNIA, AND CANADIAN EXHAUST AND EVAPORATIVE EMISSION REQUIREMENTS AND EPA FUEL ECONOMY REGULATION labeling requirements providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the Emission Control related Information Labels that are permanently affixed. The labels are required by government regulation and must not be obstructed from view or defaced so as to impair their visibility or legibility.



Pickup Box Removal Fuel Fill System Modifications for Gasoline Vehicles

Certain guidelines must be adhered to in modifying the fuel fill and vent system to ensure that the completed product meets the manufacturer's requirements.

1. The fuel fill and vent system must be installed such that there is adequate clearance between the fuel fill vent system and the tires under all operating conditions. Body attachment brackets must also be located such that there is adequate clearance to all fuel system components, such as the fuel lines and the fuel level sending unit, under all operating conditions.
2. The fuel fill/vent pipe system available from the dealer includes a number of additional hose retaining beads. The pipe can be trimmed at the hose retaining beads to adjust for the various chassis lengths and body widths. The pipes must be trimmed only at locations where a hose retaining bead is present. A hose retaining bead must be present at each pipe to hose interface in a modified fuel fill and vent system. Pipe ends must be free of burrs which may be detrimental to satisfactory assembly and/or function.
3. A minimum of 8.0 inches of fill hose must be maintained between the filler neck and the fuel tank as measured in an outboard direction from the tank surface (at the fill hose nipple) to the outlet end of the filler neck.
4. Both the fill and the vent hoses must be routed (and supported, if needed) such that there are no sags or kinks. Excess hose length may be removed as required provided hose does not kink. As viewed from the filler neck, pipes and hoses must have a downward slope toward the tank. There should be a minimum of 4° of downward slope in the fill and vent pipes at any location.
5. The fuel fill and vent system should be restrained in the upfit vehicle. This is necessary to avoid chaffing, fretting, rubbing, etc. which may cause wear to the pipes or hoses.
6. Fuel fill hose clamps are to be tightened to 22 lb.-in. torque.
7. Fuel vent hose clamps are to be tightened to 16 lb.-in. torque.
8. Route the rear axle vent hose using the clips on the frame and the bracket on the fuel filler neck assembly.

SPECIAL APPLICATIONS – FULL SIZE K SERIES (4x4)

2011 C/K HDCS Cab Chassis Service Body Attachment Provisions

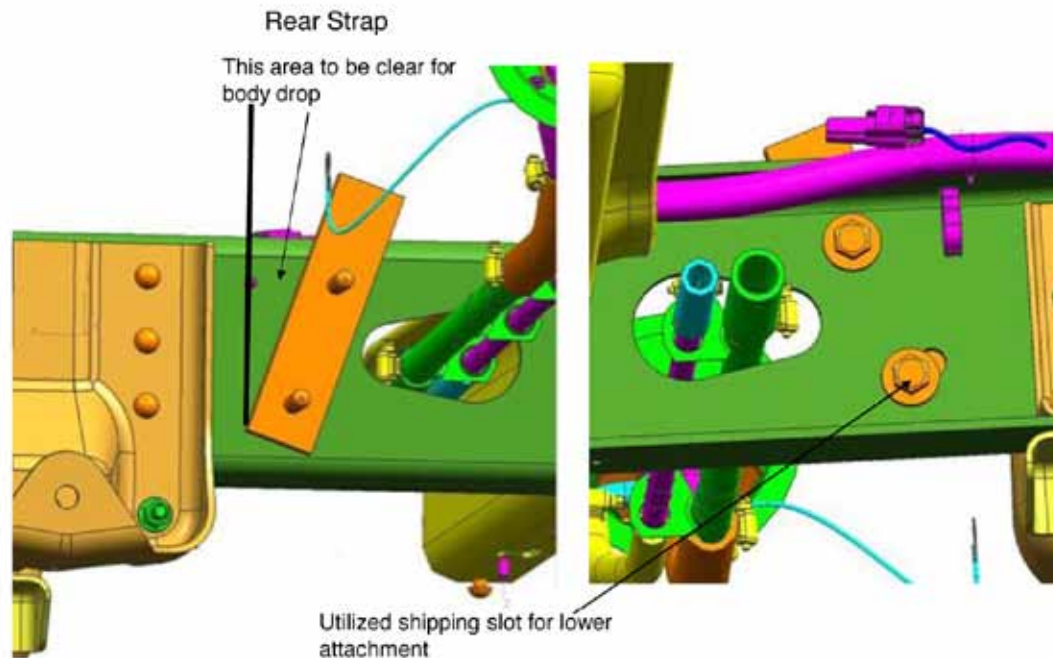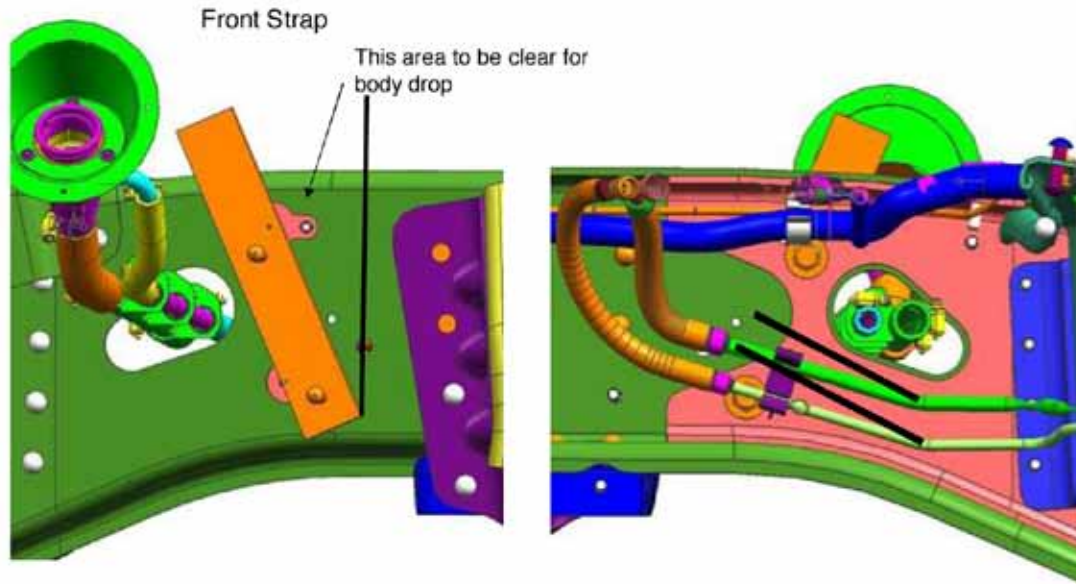

SPECIAL APPLICATIONS – FULL SIZE K SERIES (4x4)

2011 C/K Fuel Filler Assembly Service Part #'s

Part No.	FNA Description	Series	Body Style	Options
20933028	PIPE ASM-TNK FIL	200903	034353	&FHO&ZW9
20945941	PIPE ASM-TNK FIL	200903	03	&FHX&ZW9
20955283	PIPE ASM-TNK FIL	310314	0343	&FHO&N2M/N2N
20945942	PIPE ASM-TNK FIL	310314	0343	&FHX&N2M/N2N
20945943	PIPE ASM-TNK FIL	310314	0343	&FHX&N2L
20955282	PIPE ASM-TNK FIL	310314	0343	&FHO&N2L

Option Key:

FHO – Gasoline (E5)
FHS – E85
FHX – Diesel B20
ZW9 – Box Deleted
N2N – Dual Tank CC
N2L – Rear Tank Only CC
N2M – Front Tank Only CC


Torque Recommendation:

Fuel Filler Hose 22 lb. in.
Fuel Filler Vent Hose 16 lb. in.

SPECIAL APPLICATIONS – FULLSIZE K SERIES (4x4)

PAGE **SP-39**


2011 HDCS ‘Gas Vapor Sensor’ (shipped loose on ZW/9 Cab Chassis)

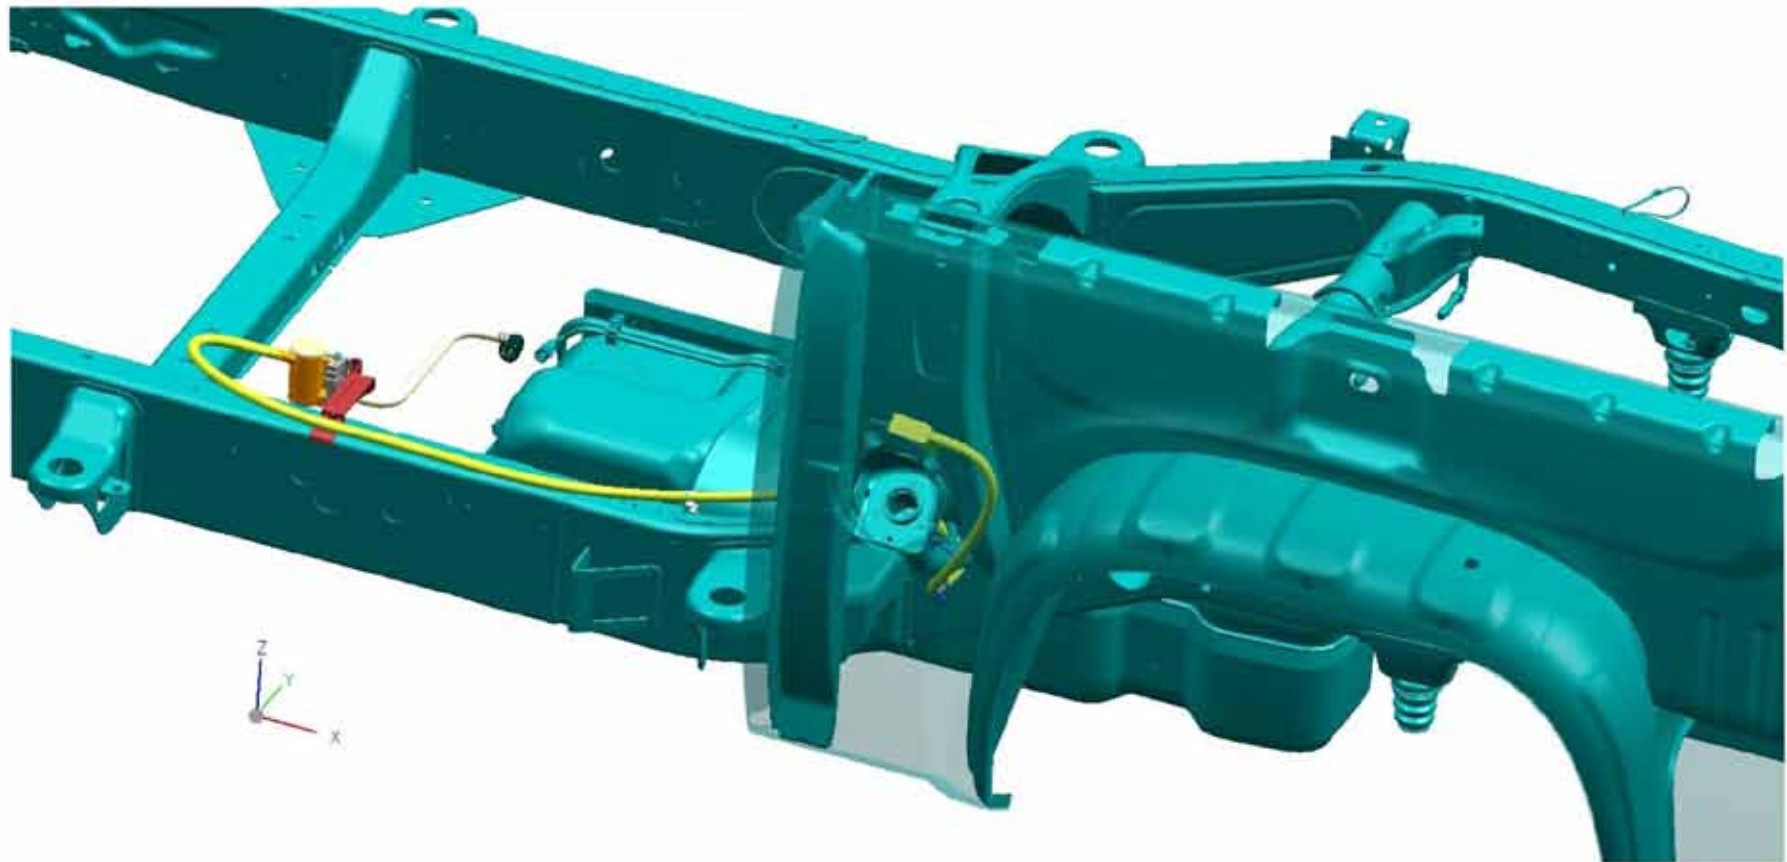

Note: Gas Models require Upfitter to permanently mount Vapor Pressure Sensor Unit in a sheltered environment. Sensor wire harness should also be secured properly. Harness and Sensor should be clear of moving and or heat generating chassis components.

'K' Series Snow Plow Best Practices

- 1) OEM Steering gear, Suspension and Powertrain Component mounting holes & associated OEM fasteners should not be used to attach Snow Plow Mounting equipment.
- 2) A suggested allowance of 10 mm minimum clearance to stationary OEM components example: Bumper Asm, Steering Box, Cooling System components is highly recommended. Note these components have varying positional tolerances.
- 3) A suggested allowance of 20 mm minimum clearance to OEM components subject to movement example: Steering Gear, Suspension (A-Arm, Axle, Strut, & Stab Bar asms) at full jounce is highly recommended. Note these components have varying positional tolerances.
- 4) Snow Plow & Associated Mounting Equipment should not exceed front axle available payload rating of vehicle as optioned. Plow Blade height, width & mass should be in accordance with Snow Plow Manufacturers recommended requirements for specific vehicle.

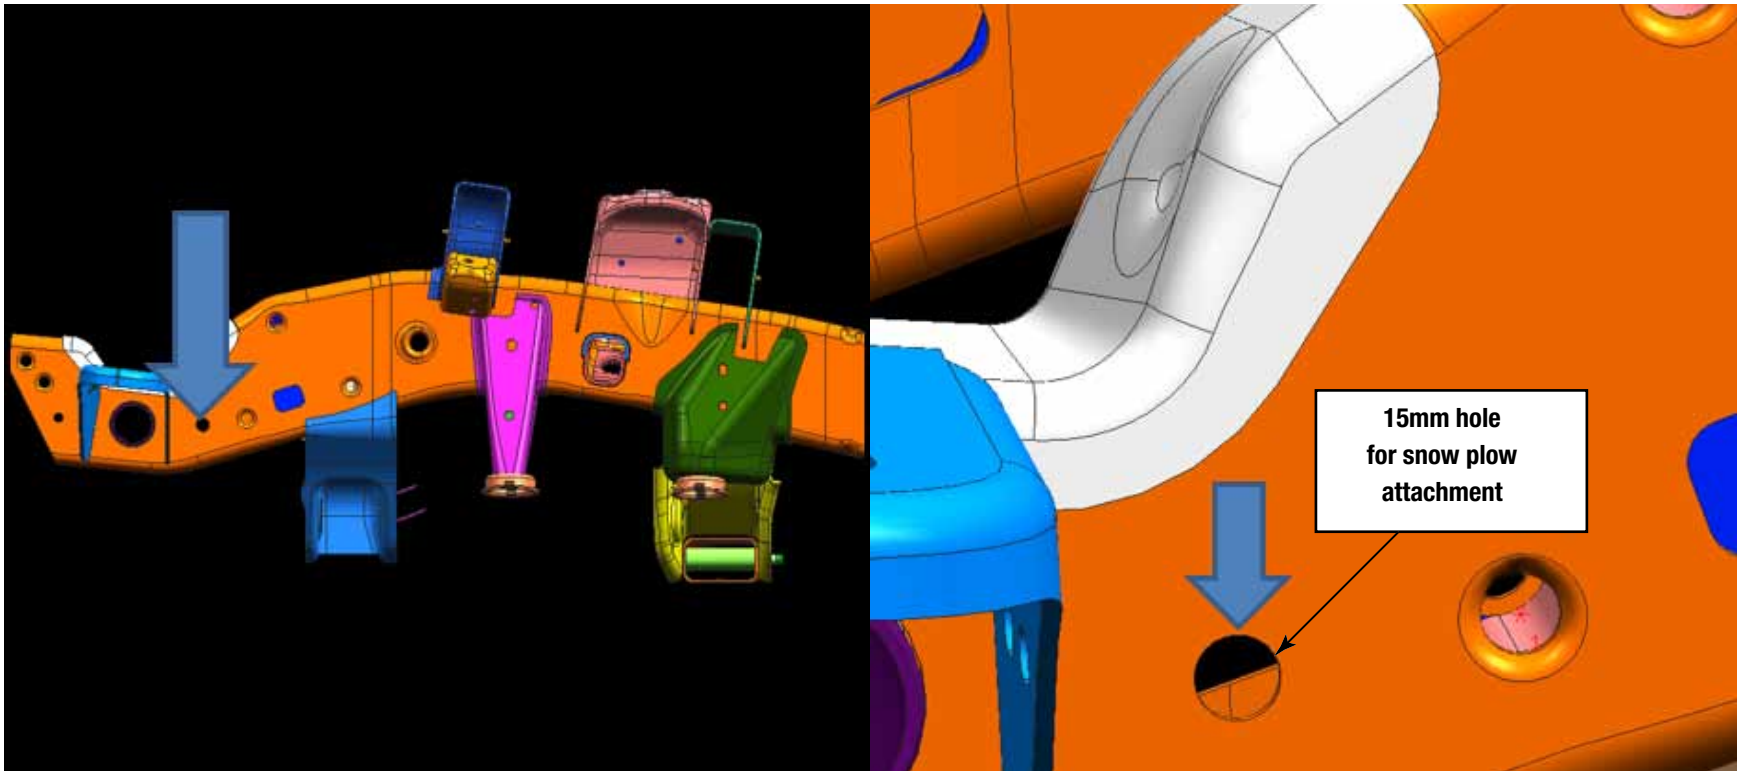

SPECIAL APPLICATIONS – FULL SIZE K SERIES (4x4)

'K' Series Snow Plow Applications – Max. Plow/Hardware Weights

Body	Engine RPO	Eng type	20	30 SRW	30 DRW
			FGAWR with VYU		
903	L96	Gas	5200	5600	5600
	LML	Diesel	6000	6000	6000
753	L96	Gas	5200	-	-
	LML	Diesel	6000	-	-
953	L96	Gas	5600	5600	5600
	LML	Diesel	6000	6000	6000
743	L96	Gas	5200	5600	-
	LML	Diesel	6000	6000	-
943	L96	Gas	5600	5600	5600
	LML	Diesel	6000	6000	6000

Body	Engine RPO	Eng type	20	30 SRW	30 DRW
903	L96	Gas	100/925	100/1000	100/1000
	LML	Diesel	100/1000	100/975	100/875
753	L96	Gas	100/875	-	-
	LML	Diesel	100/925	-	-
953	L96	Gas	100/1000	100/1000	100/950
	LML	Diesel	100/875	100/825	100/725
743	L96	Gas	100/850	100/1000	-
	LML	Diesel	100/1000	100/875	-
943	L96	Gas	100/1000	100/1000	100/925
	LML	Diesel	100/825	100/775	100/700

Notes 100/xxx = 100Lbs maximum of permanently attached snow plow mounting hardware / xxx Lbs. maximum of removable snow plow blade and blade hardware. Unused hardware weight can be applied to Plow.

Maximum plow weights based on a vehicle with average manufacturer option content and 150Lbs each for driver and one additional front seat occupant. Additional equipment and occupants can reduce maximum plow weight.

Rear compensating weight may be required to maintain front axle weight below 65% of total vehicle weight when equipped with snow plow, consult your snow plow manufacturer for specific compensating weight recommendation

VYU is offered on incomplete vehicles please consult Upfitter for recommended maximum plow weights