



2 0 1 8

# SILVERADO SPECIAL SERVICE



LS Model shown with aftermarket equipment



## About This Publication

This catalog is not updated during the model year and should not be used for ordering purposes. It is intended as a source of basic information. All illustrations and specifications in this literature are based on the latest product information available at the time of publication. General Motors reserves the right to make changes at any time without notice. For further details, consult your local dealer.

Care must be taken during customer installation of equipment and wiring to ensure that all holes drilled in the body are corrosion protected, properly sealed and that vehicle wiring harnesses, piping or other components have not been displaced or damaged. Aftermarket equipment installers must be mindful of applicable Federal Motor Vehicle Safety Standards. This information can be obtained directly from the National Highway Traffic Safety Administration.

Adding non-dealer accessories or making modifications to the vehicle can affect vehicle performance, aerodynamics, and overall top speed.

These vehicles are equipped with an air bag system. The air bag system in your police vehicle includes frontal driver and passenger air bags, front seat back side impact air bags, front knee air bags or knee bolsters and side curtain air bags. Customer installed equipment such as security barriers behind the front seats should not be mounted so that the barrier ends are within the side air bag deployment zones. The sensors and other components for the air bag system must not be relocated to accommodate the installation of customer furnished equipment; please refer to the service manual for sensor and other component locations. For information concerning instrument panel top pad mounted equipment and air bag system deployment zones, see the air bag information section in this catalog and the vehicle owners manual.

A note about vehicle alterations by independent suppliers: This catalog shows pictures of vehicles that have been altered or upfitted with equipment or components supplied to Chevrolet or its dealers by independent suppliers. Chevrolet is not responsible for the safety or quality of design features, materials or workmanship of any alterations by a supplier.


# INDEX

- **UPDATES FOR 2018 SILVERADO SPECIAL SERVICE CREW CAB**
- **STANDARD FEATURES**
- **POWERTRAIN & EMISSIONS**
- **COLORS & INTERIOR TRIM**
- **OPTIONAL EQUIPMENT**
- **SPECIFICATIONS**
- **ILLUSTRATION HIGHLIGHTS**
- **ONSTAR® 4G LTE Wi-Fi AND SATELLITE RADIO SERVICE PLANS**
- **WIRING DIAGRAMS**
- **AIRBAG DIMENSIONS**
- **AIRBAGS FAQ**
- **STABILITRAK**
- **MAINTENANCE AND WARRANTY**

# 2018 SILVERADO SPECIAL SERVICE 5W4



Shown with aftermarket equipment and Kerr-installed Push-To-Talk steering wheel controls

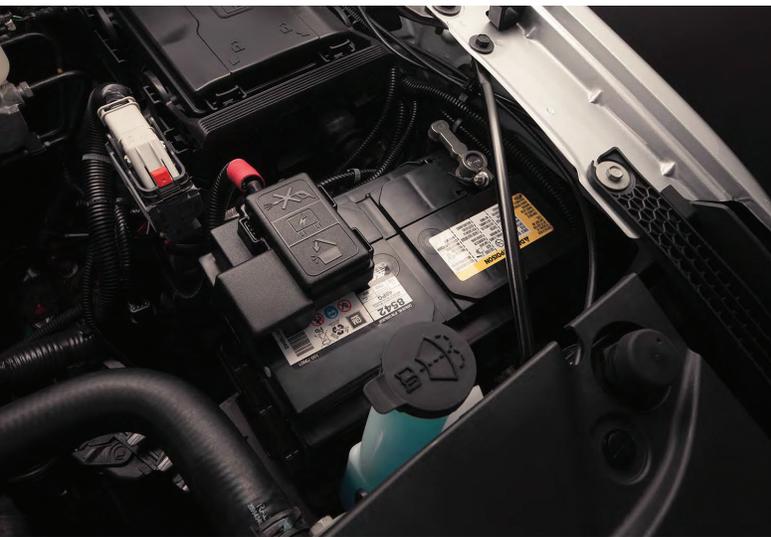

Under-hood auxiliary battery



Vinyl 60/40 fold-up rear seating

# UPDATES FOR 2018

## NEW FEATURES

- (IOB) Chevrolet MyLink Radio with 7" Diagonal Color Touch Screen
- (UVC) Rear Vision Camera
- (UJM) Tire Pressure Monitor now includes Tire Fill Alert
- (Q5U) 17" bright machined aluminum wheels (Standard on "LS" not available on "WT")



**(IOB) Chevrolet MyLink Radio with  
7" Diagonal Color Touch Screen**

## DISCONTINUED

- (IO3) AM/FM stereo with CD player
- (GMU) Pepperdust Metallic
- SEO Paint (7159) Blue Metallic
- SEO Paint (334D) Dark Toreador Red
- (RD7) 17" x 8" (43.2 cm x 20.3 cm) stainless steel clad wheels

# 2018 SILVERADO 1500 SPECIAL SERVICE 5W4 CREW

NOTE: This vehicle is not designed nor intended for use in high speed emergency vehicle operations. Model CC15543 2WD and CK15543 4WD come with 1/2 ton fleetside short box (5.7 ft) crew cab. Model CC15743 2WD and CK15743 4WD come with 1/2 ton fleetside standard box (6.5 feet) crew cab. Content, Options and Specifications shown are for Police and Special Service Vehicles only which differ from retail civilian model.

<b>INTERIOR FEATURES on WT and LS MODELS</b>	
<b>AIR CONDITIONING</b>	Single-zone
<b>ASSIST HANDLES</b>	Mounted for all outboard occupants. A-pillar handle deleted when 7X7 is ordered.
<b>AUDIO SYSTEM</b>	Chevrolet MyLink Radio with 7" diagonal color touch-screen, AM/FM stereo with seek-and-scan and digital clock, includes Bluetooth® streaming audio for music and select phones. Includes 6-speaker audio system. USB ports and auxiliary jack not available with center seat delete. Bluetooth® 1, USB ports <sup>4</sup> , auxiliary jack located in center seat. Full functionality requires compatible Bluetooth®, Smartphone and USB4 connectivity for some devices.
<b>BLUETOOTH® 1</b>	Personal cell phone connectivity to vehicle audio system.
<b>CRUISE CONTROL</b>	Electronic with set and resume speed, Steering wheel-mounted
<b>DOOR LOCKS</b>	Power
<b>DRIVER INFO. CENTER</b>	3.5-inch diagonal monochromatic display, provides warning messages and basic vehicle information
<b>FLOOR COVERING</b>	Graphite-colored rubberized-vinyl, floor mats not included
<b>LIGHTING</b>	Interior with dome and reading lights, illuminated entry feature and backlit instrument panel switches
<b>MIRROR</b>	Inside rearview day night
<b>ONSTAR®</b>	ONSTAR® Basic Plan <sup>3</sup> , ONSTAR® Guidance <sup>4</sup> and ONSTAR® 4G LTE with Wi-Fi See ONSTAR® section for Availability and Available Plans
<b>POWER OUTLET</b>	12 volt DC outlet and 110 volt, 150 watt AC outlet in lower center instrument panel. 12 volt DC outlet is configurable to be Battery powered at all times or Ignition Control powered. See the Owners Manual for information about DC Outlet power configuration.
<b>REMOTE KEYLESS ENTRY</b>	Standard on LS model, includes 2 transmitters (Available on WT model with PCR fleet package) When PCR Fleet Package is ordered it deletes the passenger side key lock cylinder.
<b>RESTRAINT SYSTEM<sup>2</sup></b>	Safety belts, driver and front passenger with pretensioners, dual stage driver and passenger frontal airbags, passenger sensing system and frontal airbag ON/OFF indicator, rollover sensor, dual head curtain airbags <sup>5</sup> for first and second row outboard occupants and front seat back mounted thorax-pelvic airbags
<b>SEAT, FRONT</b>	Front 40/20/40 split-bench, 3-passenger, driver and front passenger manual recline with outboard head restraints and center fold-down armrest with storage. Vinyl has fixed lumbar (standard on WT model). Cloth with manual adjustable driver lumbar (standard on LS model, optional on WT).
<b>SEAT, REAR</b>	60/40 vinyl bench (folds up), 3-passenger (includes child seat top tether anchor)
<b>SPEEDOMETER/CLUSTER</b>	6-gauge cluster featuring speedometer, fuel level, engine temperature, tachometer, voltage and oil pressure
<b>STEERING COLUMN</b>	Tilt-wheel with theft deterrent locking feature
<b>TEEN DRIVER MODE</b>	A configurable feature that can be programmed through your radio that lets you activate customizable vehicle settings associated with a key fob, to encourage safe driving behavior. It can limit certain vehicle features, and it prevents certain safety systems from being turned off. An in-vehicle report gives you information on your driving habits.
<b>VISORS</b>	Driver and front passenger, sliding with clip and illuminated passenger vanity mirror
<b>WARNING TONES</b>	Headlamp on, key-in-ignition, driver and passenger buckle up reminder and turn signal on
<b>WINDOWS</b>	Power front and rear with (driver express up and down) and express down on all others windows
<b>EXTERIOR FEATURES on WT and LS MODELS</b>	
<b>BUMPER FRONT</b>	Black (Chrome standard on LS model). Chrome available on WT model with PCX package.
<b>BUMPER REAR</b>	Black with corner step (Chrome standard on LS model). Chrome available on WT model with PCX package.
<b>CAPLESS FUEL FILL</b>	The vehicle has a capless refueling system and does not have a fuel cap. The filling nozzle must be fully inserted and latched prior to starting fuel flow. <b>NOTE: Overfilling the fuel tank by more than three clicks of a standard fill nozzle may cause; vehicle performance issue, including engine stalling and damage to the fuel system, fuel spills, potential fuel fires</b>
<b>DOOR HANDLES</b>	Black
<b>GLASS</b>	Solar absorbing (Deep-tinted rear glass standard on LS model) available on WT model.
	<ol style="list-style-type: none"> <li>1. The Bluetooth® word mark is a registered trademark owned by Bluetooth® SIG, Inc. and any use of such mark by GM is under license. Go to <a href="http://gm.com/Bluetooth®">gm.com/Bluetooth®</a> to find out which Bluetooth® phones are compatible with the vehicle.</li> <li>2. Always use safety belts and the correct child restraint for your child's age and size, even in vehicles equipped with airbags. Even in vehicles equipped with Passenger Sensing System, children are safer when properly secured in a rear seat in an appropriate infant, child or booster seat. Never place a rear-facing infant restraint in the front seat of any vehicle equipped with an active frontal airbag. See your vehicle Owner Manual and child safety seat instructions for more information.</li> <li>3. Does not include emergency or security services. Visit <a href="http://onstar.com">onstar.com</a> for coverage map, details and system limitations</li> <li>4. Visit <a href="http://onstar.com">onstar.com</a> for coverage map, details and system limitations</li> </ol>


## 2018 SILVERADO 1500 SPECIAL SERVICE 5W4 CREW

<b>HEADLAMPS</b>	High intensity discharge (HID) projector-beam with LED signature DRL. Altering headlamp assembly is not recommended, General Motors is not responsible for the effects of any modifications.
<b>LAMPS</b>	Cargo area, cab mounted with separate switch on center switch bank
<b>MIRRORS, OUTSIDE</b>	Manual, Black (Heated power- adjustable includes driver's side spotter mirror standard on LS model, available on WT model)
<b>RADIO ANTENNA</b>	Mast type located on passenger side front fender
<b>REAR VISION CAMERA</b>	Dynamic guiding lines allows the driver to view objects directly behind the vehicle via the available screen in the center stack.
<b>RECOVERY HOOKS</b>	Two black front frame-mounted. Standard on 4 wheel drive. Optional on 2 wheel drive, see Option equipment section for description
<b>TAILGATE</b>	Locking, utilizes same key as ignition and door, includes tailgate and bed rail protection cap. Remote locking tailgate standard on LS model. Available on WT model with PCR Convenience package. (see available options page for description).
<b>TIRES</b>	P255/70R17 all-season, blackwall (includes P255/70R17 All-season blackwall spare tire)
<b>TIRE PRESSURE MONITOR WITH TIRE FILL ALERT</b>	Tire Pressure Monitoring System. Standard spare wheel not equipped with TPM sensor. Includes Tire Fill Alert in addition to the DIC warning when a tire has low pressure, this feature provides audible and visual indication when air is being added to the low tire to aid in achieving optimal tire pressure.
<b>TIRE, SPARE CARRIER</b>	Keyed cylinder lock utilizes same key as ignition and door
<b>WHEELS</b>	17" x 8" Painted steel Standard on WT model available on LS model. (17" x 8" Bright machined aluminum standard on LS model not available on WT model)
<b>WHEEL, SPARE</b>	Full-size 17" black steel
<b>WINDSHIELD WIPERS</b>	Intermittent wet-arm with pulse washers
<b>CHASSIS FEATURES on WT and LS MODELS</b>	
<b>AERO SHUTTERS</b>	Aero shutters are designed to close when operating conditions permit. The shutters are located on the front of the A/C condenser under hood to divert airflow around the front of the truck reducing wind drag and improves fuel economy. When the cooling system requires more air flow the shutters automatically reopen, ensuring proper air flow through the radiator
<b>AIR CLEANER</b>	High capacity
<b>ALTERNATOR</b>	170-amp, high-output
<b>BATTERIES</b>	Heavy-duty 720-CCA primary (80-amp hour) and isolated heavy-duty 730-CCA auxiliary (70-amp hour)
<b>BRAKES</b>	4-wheel disc with DURALIFE rotors, 4-wheel antilock
<b>ENGINE</b>	5.3L EcoTec3 V8 with Active Fuel Management, Direct Injection and Variable Valve timing, includes aluminum block construction
<b>EXHAUST</b>	Aluminized stainless-steel muffler and tailpipe
<b>FRAME</b>	Fully-boxed, hydroformed front section
<b>FUEL TANK</b>	Approximately 26 gallon (98 liter)
<b>OIL COOLING</b>	External engine oil cooler and auxiliary transmission oil cooler
<b>REAR AXLE</b>	3.08 ratio
<b>STABILITRAK</b>	Stability control system with Proactive Roll Avoidance and traction control includes electronic trailer sway control and hill start assist (see standard equipment illustrations section)
<b>STEERING</b>	Electric Power Steering (EPS) assist, rack-and-pinion
<b>SUSPENSION, FRONT</b>	Independent, coil over shock, includes 35mm twin tube shock absorbers and 36mm front stabilizer bar
<b>SUSPENSION, REAR</b>	2-Stage multi-leaf springs, semi-elliptic
<b>TRANSFER CASE</b>	4WD model only, manual transfer case (floor mounted). See optional equipment section for description of dash mounted Autotrac (NQH).
<b>TRANSMISSION</b>	6-speed automatic electronically controlled with overdrive and tow/haul mode. Includes Cruise Grade Braking and Powertrain Grade Braking
<b>WARRANTY</b>	See Maintenance and Warranty section for description

**FRONT SEATS AND INTERIOR TRIM**

**STANDARD - Vinyl Split-Bench (AE7) on WT Model (Vinyl not available on LS model)**

**40/20/40 split-bench**, 3-passenger, driver and front passenger manual recline with outboard head restraints, center fold-down armrest with storage, and fixed lumbar. Seats are manual (power not available).

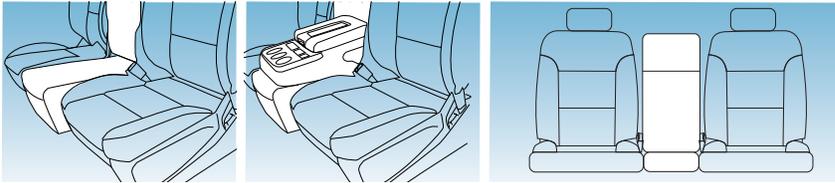


Seat Code	Seat Trim	Color	Color Code
AE7	Vinyl	Dark Ash w/ Jet Black Accents	H2Q

- Center seat can be unbolted for removal


**OPTIONAL - CENTER SEAT DELETE SEO (9S1), VINYL TRIM DRIVER AND FRONT PASSENGER.** Driver and passenger front, individual seats in vinyl trim. Driver and passenger front individual seats in base vinyl trim.

Derived from a RPO (AE7) 40-20-40 split bench seat with the 20% section removed which also removes the USB port and input jack for audio system. Seats are manual, not power. Does not include a floor console. All exposed floor area will remain untrimmed. Includes (A68) 60-40 Vinyl rear seat with trim matching front seats and (BG9) Graphite-colored rubberized-vinyl flooring (floor mats not included)

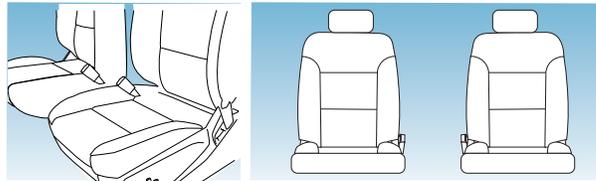

Seat Code	Seat Trim	Color	Color Code
AE7	Vinyl	Dark Ash w/ Jet Black Accents	H2Q


**OPTIONAL - CLOTH MANUAL SPLIT BENCH (AE7) Front 40/20/40 Split-Bench 3-passenger.** Driver and front passenger manual recline with outboard head restraints and center fold-down armrest with storage and manual adjustable driver lumbar. Seats are manual (power not available).

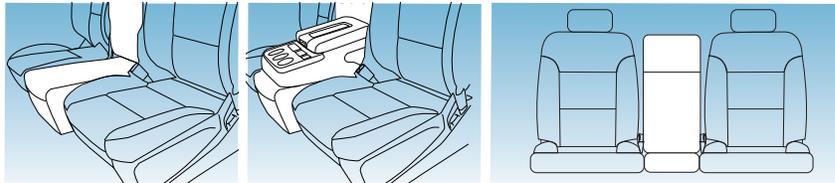

Seat Code	Seat Trim	Color	Color Code
AE7	Vinyl	Dark Ash w/ Jet Black Accents	H2Q

- Center seat can be unbolted and removed
- Front cloth and vinyl rear seat combination is available by ordering option (5T5).


**OPTIONAL - 9U3 CLOTH Seats, Driver and passenger front individual seats in cloth trim.** Power driver and passenger bucket seats in base cloth trim. Derived from RPO (AZ3) 40-20-40 split bench seat with the 20% section removed. Does not include a floor console. All exposed floor area will remain untrimmed. Requires (AZ3) 40/20/40 split bench seat, trim code and (HOU) Jet Black cloth.

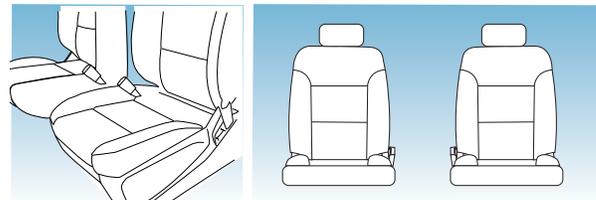

Seat Code	Seat Trim	Color	Color Code
AE7	Vinyl	Dark Ash w/ Jet Black Accents	H2Q

- Front cloth and vinyl rear seat combination is available by ordering option (5T5).

**OPTIONAL - CLOTH SPLIT-BENCH (AZ3) WITH POWER DRIVER SEAT Seats, front 40/20/40 split-bench, with Premium Cloth, 3-passenger.** Includes 6-way power driver and 2 way front passenger seat adjuster, driver and front passenger power lumbar control and power reclining, center fold-down armrest with storage, storage compartments in seat cushion, adjustable outboard head restraints and storage pockets

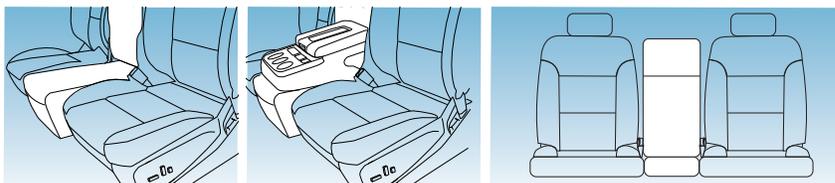


Seat Code	Seat Trim	Color	Color Code
AZ3	Cloth	Dark Ash w/ Jet Black Accents	H2R
AZ3	Cloth	Jet Black	HOU

- Center seat can be unbolted and removed
- Front cloth and vinyl rear seat combination is available by ordering option (5T5).

## REAR SEATS AND INTERIOR TRIM

### STANDARD - A68 VINYL REAR SEAT

**Vinyl rear bench 60/40 split-folding seat.** Includes folding center armrest with cup holders

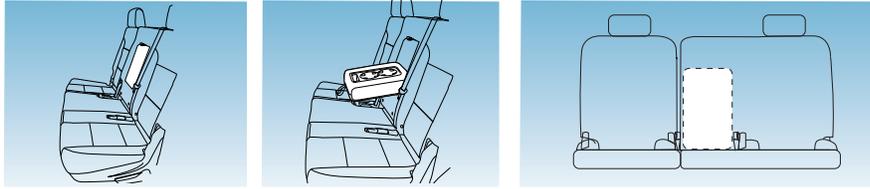


Seat Code	Seat Trim	Color	Color Code
A68	Vinyl	Dark Ash w/ Jet Black Accents	H2Q

- Cloth rear seat available in Dark Ash with Jet Black Accents by ordering (H2R) trim

### OPTIONAL- SEO (5T5) CLOTH FRONT SEATS WITH VINYL REAR SEATS

**Vinyl Rear 60/40 Split-folding Bench Seat.** Requires (AE7) or (AZ3) cloth front 40/20/40 split-bench seat and (H2R) Dark Ash

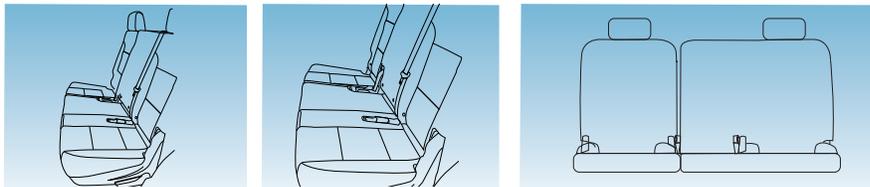

Seat Code	Seat Trim	Color	Color Code
5T5	Vinyl	Dark Ash w/ Jet Black Accents	H2Q

- Front cloth and vinyl rear seat combination is available by ordering option 5T5 in Dark Ash with Jet Black Accents

## AVAILABLE INTERIOR COLOR Actual colors may vary



H2R  
Dark Ash  
Cloth with  
Jet Black  
Accents



H2Q  
Dark Ash  
Vinyl with  
Jet Black  
Accents




HOU  
Jet Black  
cloth with  
AZ3 only

## AVAILABLE EXTERIOR COLORS Actual colors may vary



G7C  
Red Hot



GPA  
Graphite  
Metallic



GAN  
Silver Ice  
Metallic



GAZ  
Summit  
White



GBA  
Black



G1K  
Deep  
Ocean Blue  
Metallic\*

\*Additional charge

## SEO PAINT AVAILABLE

### COLOR DESCRIPTION SEO CODE WA#

Woodland Green	9V5	9015
Doeskin Tan	NONE	9403
Wheatland Yellow (86U)	9W3	253A
Tangier Orange	9W4	9417
Unripened Green Metallic	NONE	136X
Indigo Blue	NONE	9792
Lt. Autumnwood Metallic	NONE	228A
Pewter	NONE	382E

**Actual Color May Vary**

**POWERTRAIN**

ENGINE				TRANSMISSION		AXLE	
OPTION CODE	TYPE	DISPLACEMENT LITERS/CU. IN.	FUEL SYSTEM	OPTION CODE	TYPE	OPTION CODE	RATIO
L83	V8	5.3/325	Active fuel management FlexFuel <sup>1</sup> (gas or E85 ethanol)	MXO/MYC	6L80 6-speed auto. with OD	GU4	3.08

**EMISSIONS - MUST BE SPECIFIED**

<b>FE9</b>	<b>EMISSIONS</b> , Federal requirements
<b>YF5</b>	<b>CALIFORNIA EMISSIONS</b> , California state requirements
<b>NE1</b>	<b>EMISSIONS</b> , Connecticut, Delaware, Maine, Maryland, Massachusetts, New Jersey, New York, Oregon, Pennsylvania, Rhode Island, Vermont and Washington state requirements
<b>NB8</b>	<b>EMISSIONS OVERRIDE</b> , California (allows a dealer in states that require California emissions - California, Connecticut, Delaware, Maryland, Massachusetts, New Jersey, New York, Oregon, Pennsylvania, Rhode Island or Washington - to order Federal emissions for a vehicle that will be registered in a state that has Federal emission requirements). Do not use for vehicles that will be registered in California, Connecticut, Delaware, Maryland, Massachusetts, New Jersey, New York, Oregon, Pennsylvania, Rhode Island or Washington. <b>Requires (FE9) Federal emissions requirements. Not available in Maine or Vermont.</b>
<b>NB9</b>	<b>EMISSIONS OVERRIDE</b> , State-specific (for dealers ordering vehicles in (YF5) or (NE1) emission states - California, Connecticut, Delaware, Maine, Maryland, Massachusetts, New Jersey, New York, Oregon, Pennsylvania, Rhode Island, Vermont and Washington). <b>Allows a California dealer (YF5 emissions) to order (NE1) emissions with (NB9) emissions override code for registration in (NE1) states; or, a Connecticut, Delaware, Maine, Massachusetts, New Jersey, New York, Oregon, Pennsylvania, Rhode Island, Vermont and Washington dealer (NE1 emissions) to order (YF5) emissions with (NB9) emissions override code for registration in California.</b>
<b>NC7</b>	<b>EMISSIONS OVERRIDE</b> , Federal (for vehicles ordered by dealers in Federal emission states with (YF5) or (NE1) emissions - Not required for vehicles being shipped to California, Connecticut, Delaware, Maine, Maryland, Massachusetts, New Jersey, New York, Oregon, Pennsylvania, Rhode Island, Vermont or Washington) <b>Requires (YF5) California state emissions requirements or (NE1) Connecticut, Delaware, Maine, Massachusetts, New York, Pennsylvania, Rhode Island or Vermont state emissions requirements</b>

**SPEEDOMETER CERTIFICATION IS NOT DISPLAYED ON VEHICLE**

Silverado Special Service Vehicle speedometer calibration. Specifications at temperatures of -10 to 120 degrees F ( -23 to 49 Celsius). Inaccuracies due to vehicle speed sensing are included. This vehicle is equipped with an electronically controlled speedometer which is designed to be accurate to +/- 2 mph through its range of function.

## OPTIONAL EQUIPMENT & FEATURES

### INTERIOR

<b>IOB</b>	<b>CHEVROLET MYLINK AUDIO SYSTEM</b> - 7" diagonal color touch-screen, AM/FM stereo with seek-and-scan and digital clock, includes Bluetooth® streaming audio for music and select phones. Includes (UQ3) 6-speaker audio system. (Available on WT Model, Standard on LS Model).
<b>B30</b>	<b>FLOOR COVERING</b> - Color-keyed carpeting with rubberized vinyl floor mats (includes second row floor mats)
<b>VAV</b>	<b>FLOOR MATS</b> - All-weather, front and rear. Requires (B30) color-keyed carpeting
<b>6C7</b>	<b>LIGHTING</b> - Red and White LED auxiliary dome lamp is located on headliner between front row seats. The auxiliary lamp is wired independently from standard dome lamp. Includes (GEZ) Ship/Thru to Kerr Industries. Not available with (TRW) Provision for cab roof-mounted lamp/beacon.
<b>VBJ</b>	<b>REAR UNDERSEAT STORAGE</b> - Composite storage bin dealer-installed Included with (PDL) Cargo Convenience Package
<b>AQQ</b>	<b>REMOTE KEYLESS ENTRY</b> - Includes 2 transmitters (Included and only available with (PCR) WT Fleet Convenience Package. Includes (A91) remote locking tailgate). Standard on 'LS' Model.
<b>AG1</b>	<b>SEAT ADJUSTER</b> - Driver 10-way power, Included and only available with (AZ3) front 40/20/40 split-bench cloth seat. Requires (H2R) Dark Ash or (HOU) Jet Black seat trim.
<b>9S1</b>	<b>SEATS</b> - driver and passenger front, individual seats in vinyl trim. Driver and passenger front individual seats in base vinyl trim. Derived from a RPO (AE7) 40-20-40 split bench seat with the 20% section removed. Seats are manual, not power. Deletes USB and auxiliary power outlet. Does not include a floor console. All exposed floor area will remain untrimmed. Standard vinyl rear seat with trim matching front seats will be provided.
<b>9U3</b>	<b>SEAT DELETE FRONT CENTER</b> - Driver and Passenger front individual seats in base cloth trim. Derived from RPO (AE7) 40/20/40 split bench seat with 20% center section removed. Seats are manual and power is not available with center seat delete option. Also deletes USB, auxiliary input, and power outlet normally found in center seat. Rear seats trimmed in matching cloth; see option (5T5) for vinyl. Center seat delete exposes floor area and will remain untrimmed.
<b>AZ3</b>	<b>SEATS</b> - Cloth front 40/20/40 split-bench. Includes 6-way power driver and 2 way front passenger seat adjuster, driver and front passenger power lumbar control and power reclining, center fold-down armrest with storage, storage compartments in seat cushion, adjustable outboard head restraints and storage pockets
<b>5T5</b>	<b>SEATS</b> - Second Row Vinyl with Cloth Front 40/20/40 split-bench seat (AE7) or (AZ3) and (H2R) Dark Ash Cloth.
<b>U2K</b>	<b>SIRIUS XM SATELLITE RADIO</b> - Enjoy a 3-month All Access trial subscription with over 150 channels including commercial-free music, plus sports, news and entertainment. Plus listening on the app and online is included, so you'll hear the best Sirius XM has to offer, anywhere life takes you. Available on 1WT Models, Requires (IOB) 7" diagonal color display radio with Chevrolet MyLink and (UE1) OnStar. IMPORTANT: Fees and taxes apply. To cancel you must call us at 1-866-635-2349. See our Customer Agreement for complete terms at <a href="http://www.siriusxm.com">www.siriusxm.com</a> . All fees and programming subject to change.
<b>5L5</b>	<b>THEFT DETERRENT SYSTEM</b> - In the absence of master key, fleet immobilizer modification reduces roadside key relearn process to (3) two-minute cycles in place of the standard (3) ten-minute cycles. In the absence of master key, reduces roadside key relearn process to (3) two-minute cycles in place of the standard (3) ten-minute cycles. This option will also allow for only one learned key to be needed when adding additional keys instead of 2 learned keys.

### EXTERIOR

<b>BVQ</b>	<b>ASSIST STEPS</b> - Chromed tubular, 6" rectangular (factory installed) Not available with any dealer-installed assist steps (RVQ), (RVS) or (VXJ).
<b>RVS</b>	<b>ASSIST STEPS</b> - Black tubular assist steps, 4" round, Not available with (BVQ) Chrome tubular assist steps.
<b>VZX</b>	<b>BED LINER</b> - Included with (PDM) Bed protection package
<b>CGN</b>	<b>BED LINER</b> - Spray-on, Pickup box bed liner with bowtie logo. Liner is permanently bonded to the truck bed providing a water tight seal. The textured, non-skid surface is black in color and robotically applied. Spray-on liner covers entire bed interior surface below side rails, including tailgate, front box top rail, gage hole plugs and lower tie down loops. Included with (PDL) Cargo Convenience Package. Not available with (VZX) bed liner
<b>SFZ</b>	<b>BLACK BOW-TIE EMBLEMS</b> - Front and rear
<b>CTD</b>	<b>CARGO TIE DOWNS</b> - Four, movable upper. Included with (PDM) Bed protection package or (PDL) Cargo convenience package.
<b>PCX</b>	<b>CHROME BUMPER PACKAGE</b> - includes (VJH) rear chrome bumper with (BWN) CornerSteps and (V46) chrome front bumper
<b>PDV</b>	<b>CHROME ESSENTIALS PACKAGE</b> - Includes (VQY) chrome recovery hooks and (VQZ) polished exhaust tip, LPO
<b>9G8</b>	<b>DAYTIME RUNNING LAMPS DELETE</b> - Daytime Running Lamps and automatic headlamp control delete, deletes standard Daytime Running Lamps and automatic headlamp control features from the vehicle for police stealth surveillance.
<b>9M4</b>	<b>DECAL AND NAME PLATE DELETE</b> - tailgate. Deletes all nameplates and decals on the pickup box tailgate. Not available with SEO (8F2) ornamentation delete.
<b>9R1</b>	<b>DECAL DELETE</b> - Pickup box Deletes the "4x4" decal from the side of the pickup box. Requires 4WD models only. Not available with SEO (8F2) ornamentation delete
<b>AKO</b>	<b>GLASS</b> - Deep-tinted (all windows, except light-tinted glass on windshield and driver- and front passenger-side glass)

1. Visit [onstar.com](http://onstar.com) for coverage map, details and system limitations
2. Does not include emergency or security services. Visit [onstar.com](http://onstar.com) for coverage map, details and system limitations
3. 4G LTE service available in select markets. Visit [onstar.com](http://onstar.com) for coverage map, details and system limitations.

## 2018 SILVERADO 1500 SPECIAL SERVICE 5W4 CREW

<b>6E2</b>	<b>KEY COMMON</b> - Complete vehicle fleet. Provides a single key with a specific code that is common to the door locks and ignition of all the vehicles in the vehicle fleet. Key code is an alternate to SEO(6E8) complete vehicle fleet common key.
<b>6E8</b>	<b>KEY COMMON</b> - Complete vehicle fleet. Provides a single key with a specific code that is common to the door locks and ignition of all the vehicles in the vehicle fleet. Key code is an alternate to SEO(6E2) complete vehicle fleet common key.
<b>5H1</b>	<b>KEY EQUIPMENT</b> - Two additional keys for single key system. Provides two additional spare keys for a total of (4). (Keys will be cut but not programmed). Programming of keys is at customer's expense. Programming keys is not a warranty claim.
<b>8X1</b>	<b>LABEL</b> - Fasten safety belts. "Fasten Safety Belts" reminder label on right hand and left hand front side door glass
<b>UF2</b>	<b>LED LIGHTING</b> - Cargo box with switch on center switch bank
<b>VK3</b>	<b>LICENSE PLATE KIT</b> - Front (will be shipped to orders with ship-to states that require front license plate)
<b>DPN</b>	<b>MIRRORS</b> - Outside heated power-adjustable vertical camper, upper glass, manual-folding and extending, black. Includes integrated turn signal indicators consisting of 51 square inch flat mirror surface positioned over a 24.5 square inch convex mirror surface with a common head and lower convex spotter glass (convex glass is not heated and not power adjustable) and addition of Auxiliary cargo lamp for backing up (helps to see trailer when backing up with a trailer) and amber auxiliary clearance lamp Requires (PCR) WT Fleet Convenience Package. Includes (DD8) auto-dimming inside rearview mirror. Includes (DD8) auto-dimming inside rearview mirror. Includes (DD8) auto-dimming inside rearview mirror. Not available with (PDA) Texas Edition or (PEB) Custom Sport.
<b>DF2</b>	<b>MIRRORS</b> - Outside high-visibility vertical camper-style, Black with manual folding and extension and lower convex spotter glass
<b>8F2</b>	<b>ORNAMENTATION, DELETE</b> - Deletes decals and nameplates on truck exterior
<b>TGK</b>	<b>PAINT SPECIAL</b> - Solid, one color. All normally body colored non-sheet metal parts will be Black. May require extended lead time. Door handles and mirrors will be grain Black. Deletes standard/package body side moldings.
<b>9V5</b>	<b>PAINTS</b> - Solid, Woodland Green All normally body colored non-sheet metal parts will be Black. May require extended lead time. Door handles and mirrors will be grain Black. Deletes standard/package body side moldings. Requires (TGK) Special Paint and (01U) Special Paint.
<b>9W3</b>	<b>PAINTS</b> - Solid, Wheatland Yellow. All normally body colored non-sheet metal parts will be Black. May require extended lead time. Door handles and mirrors will be grain Black. Deletes standard/package body side moldings. Requires (TGK) Special Paint and (01U) Special Paint.
<b>9W4</b>	<b>PAINTS</b> - Solid, Tangier Orange. All normally body colored non-sheet metal parts will be Black. May require extended lead time. Door handles and mirrors will be grain Black. Deletes standard/package body side moldings. Requires (TGK) Special Paint and (01U) Special Paint.
<b>TRW</b>	<b>PROVISION FOR CAB ROOF-MOUNTED LAMP/BEACON</b> - Provides an instrument panel-mounted switch and electrical wiring tucked beneath the headliner for a body upfitter to connect a body-mounted warning or emergency lamp. Not available with (6C7) Lighting
<b>GU6</b>	<b>REAR AXLE</b> - 3.42 ratio.
<b>SFW</b>	<b>REAR BACKUP ALARM CALIBRATION</b> - This calibration will allow installation of an aftermarket backup alarm. Not available with SEO (8S3) backup alarm.
<b>8S3</b>	<b>REAR BACKUP ALARM</b> - Rear frame mounted 97 decibel back-up alarm. Not available with SEO (SFW) backup alarm calibration.
<b>V76</b>	<b>RECOVERY HOOKS</b> - Front, frame-mounted, black. Standard with 4WD models. Available with 2WD models.
<b>VQK</b>	<b>SPLASH GUARDS, MOLDED</b> - Black.
<b>7X6</b>	<b>SPOTLAMP</b> - Left-hand (see optional equipment illustration section). Includes (GEZ) Ship/Thru to Kerr Industries. Not available with (7X7) left-and right-hand spot lamps. (See wiring diagram section)
<b>7X7</b>	<b>SPOTLAMPS</b> - Left- and right-hand (see optional equipment illustration section). Includes (GEZ) Ship/Thru to Kerr Industries. Not available with (7X6) left-hand spot lamp. (See wiring diagram section)
<b>A91</b>	<b>TAILGATE</b> - Remote locking, Included and only available with (AQQ) Remote Keyless Entry (Standard on 'LS' Model)
<b>4JQ</b>	<b>TIRE</b> - Spare P265/70R17 all terrain blackwall. Replaces the standard blackwall all season spare tire with all terrain tread spare matching road tires. Requires 4WD models and (RC3) P265/70R17BW all terrain tires. Not available with SEO (5Z4) spare wheel, carrier and lock delete
<b>RC3</b>	<b>TIRES</b> - P265/70R17 all-terrain, blackwall (includes spare RC4 all-season blackwall).
<b>RC5</b>	<b>TIRES</b> - LT265/70R17C Light Truck (Load Range C) all-terrain, blackwall. Includes (RHM) spare
<b>9L3</b>	<b>TIRE, SPARE, DELETE</b> - Deletes the spare tire only. Spare wheel and carrier remain. Not available with (RC3) Tires, P265/70R17 all-terrain, blackwall.
<b>R18</b>	<b>TIRES</b> - 265/65R18SL MT 114S blackwall Goodyear Wrangler DuraTrac. Aggressive tread may result in a higher level of noise while driving. Routine tire rotations are strongly recommended. Requires 4WD model and (9G3) Suspension Package, off-road, for base decor vehicles and (PZX) 18" x 8.5" (45.7 cm x 21.6 cm) bright-machined aluminum wheels. Includes (RC4) 17" all-season spare tire.
<b>VQT</b>	<b>TONNEAU COVER</b> - Hard tri-folding with vinyl cover, Requires (UF2) LED Lighting, cargo box.
<b>PZX</b>	<b>WHEELS</b> - 18" x 8.5" (45.7 cm x 21.6 cm) bright-machined aluminum. Requires (R18) 265/65R18SL blackwall tires.
<b>RD6</b>	<b>WHEELS</b> - 17" x 8" (43.2 cm x 20.3 cm) Painted steel. Standard on 1WT, Available on 1LS
<b>SFE</b>	<b>WHEEL LOCKS</b> - Set of 4

## 2018 SILVERADO 1500 SPECIAL SERVICE 5W4 CREW

- 5Z4 WHEEL, SPARE** - Carrier and lock delete. Deletes the base spare wheel, carrier and lock. Does not delete jack or tools. Requires SEO (9L3) spare tire delete. Not available with (RC3). Tires, P265/70R17 all-terrain, blackwall.
- 00A WHEEL, SPARE** - Upgrade. Replaces Black standard spare wheel and upgrades to a matching Silver steel road wheel. Includes tire pressure monitoring sensor. Requires (RD6) painted steel wheels. Not available with SEO. (5Z4) spare wheel, carrier and lock delete.
- PCR WT FLEET CONVENIENCE PACKAGE** - includes (DL8) outside heated power-adjustable mirrors, (A91) remote locking tailgate and (AQQ) remote keyless entry (available on WT model)

### ELECTRICAL

- 9L7 UPFITTER SWITCHES** - 4 switches provide 4-30 amp circuits, (primary battery) to facilitate installation of aftermarket electrical accessories (See wiring diagram section)
- 6J3 WIRING** - For grille lamps and siren speakers (see optional equipment illustration section). Includes (GEZ) Ship/Thru to Kerr Industries. (See wiring diagram section)
- 6J4 WIRING** - For horn and siren circuit (see optional equipment illustration section). Includes (GEZ) Ship/Thru to Kerr Industries. (See wiring diagram section)

### CHASSIS

- G80 DIFFERENTIAL** - Heavy-duty locking rear. Required with (9G3) suspension package
- FHS E85 FLEXFUEL** - Capable of running on unleaded or up to 85% ethanol.
- K05 ENGINE BLOCK HEATER**
- R9Y FLEET FREE MAINTENANCE CREDIT** - This option code provides a credit in lieu of the free oil changes, tire rotations and inspections (2 maximum), changes during the first 24 months and 24,000 miles period for this ordered vehicle. The invoice will detail the applicable credit. The customer will be responsible for all oil change, tire rotations and inspections costs for this vehicle. Requires one of the following Fleet or Government order types: FBC, FBN, FCA, FCN, FLS, FNR or FGO. Not available with FDR order type.
- GU6 REAR AXLE** - 3.42 ratio.
- 9G3 SUSPENSION PACKAGE** - Off-road, for base decor vehicles, Requires 4WD. Includes Z71 Off Road Suspension components, recovery hooks. Does not include any "Z71" appearance features or (JHD) Hill Descent Control. Requires (G80) heavy-duty automatic locking rear differential, (RC3) P265/70R17 all-terrain, blackwall tires or (R18) 18" Goodyear Wrangler DuraTrac 265/65R18 SL 114S blackwall MT tires with aggressive tire tread or (RC5) LT265/70R17C all-terrain, blackwall tires."
- JL1 TRAILER BRAKE CONTROLLER** - integrated (requires Z82 trailering package)
- Z82 TRAILERING PACKAGE** - includes trailer hitch, 7-pin and 4-pin connectors. (Trailer Hitch is Class IV with 11,000 pound capacity)
- NGH TRANSFER CASE** - Active, 2-speed electronic Autotrac with dash mounted rotary controls (requires 4WD model)
- NZZ UNDERBODY SHIELD** - transfer case protection. Requires 4WD models.
- SAM UNDERBODY SHIELD PACKAGE** - Transfer case protection. Available on 2WD models. On 4WD models, not available with (NZZ) underbody shield, transfer case protection.

**NOTE:** See dealer for additional dealer installed accessories.



**ONSTAR®, 4G LTE WITH Wi-Fi and SIRIUS XM RADIO AVAILABILITY**

**Impala 1FL      Tahoe 9C1      Tahoe SSV      Suburban 1FL      Suburban 3500HD      Silverado SSV      Cargo Van      Passenger Van**

**ONSTAR® SERVICE PLANS**

Basic Plan	S	S	S	S	S	O*	S	S
UE1	S	S	S	S	S	O	S	S
PQF	O	O	O	O	O	O	O	O
PQG	O	O	O	O	O	O	O	O
PQH	O	O	O	O	O	O	O	O
PQI	O	O	O	O	O	O	O	O
PQL	O	O	O	O	O	O	O	O
PQM	O	O	O	O	O	O	O	O
PQP	O	O	O	O	O	O	O	O
PQQ	O	O	O	O	O	O	O	O
PQT	O	O	O	O	O	O	O	O
UEO - ONSTAR® Delete	N/A	O	O	O	N/A	N/A	N/A	O

\* Included when UE1 is ordered

**ONSTAR® 4G LTE WITH Wi-Fi SERVICE PLANS**

ROV	O	O	O	O	O	O	O	O
ROW	O	O	O	O	O	O	O	O

**SIRIUS XM SATELLITE RADIO**

U2K	S	N/A	N/A	N/A	S	S	O	O
PR6	O	N/A	N/A	N/A	O	O	O	O
PR7	O	N/A	N/A	N/A	O	O	O	O
PR8	O	N/A	N/A	N/A	O	O	O	O

**S = Standard**

**O = Optional**

**N/A = Not Available**

**Description of option codes attached or spinning the wheels with chains on will damage the vehicle.**



## ONSTAR® SERVICE PLANS

### **ONSTAR® BASIC PLAN FOR 5 YEARS**

Includes limited vehicle mobile app features, Monthly Diagnostics Report and Dealer Maintenance Notification. Basic Plan available for 5 years from the date of vehicle delivery and is transferable. Does not include Emergency, Security or Navigation services.

### **UE1 - ONSTAR® GUIDANCE PLAN FOR 6 MONTHS**

Including Automatic Crash Response, Stolen Vehicle Assistance, Roadside Assistance, Turn-by-Turn Navigation, Advanced Diagnostics and more (trial excludes Hands-Free Calling). Retail orders receive a 6 month Trial of Guidance. Visit [www.onstar.com](http://www.onstar.com) for coverage map, details and system limitations. Services vary by model. ONSTAR® acts as a link to existing emergency service providers. Not all vehicles may transmit all crash data.

\*Impala 1FL, Cargo Van and Passenger Van are for only 3 months

### **PQF - ONSTAR® 6 MONTHS OF ONSTAR® PROTECTION SERVICE**

Provides 6 months of Protection service in addition to the 6 months of standard Guidance Plan trial service that is included in the price of the vehicle (trial excludes Hands-Free Calling minutes). Total service duration is 12 months. Requires UE1 OnStar. Requires one of the following Fleet or Government order types: FLS, FNR, FRC, FBC, FGO or FEF. Not available with PQI, PQL, PQM, PQP, PQQ and PQT. Available to order in addition to PQG or PQH. Not available with a ship-to of Puerto Rico or the Virgin Islands.

### **PQG - ONSTAR® 18 MONTHS OF ONSTAR® PROTECTION SERVICE**

Provides 18 months of Protection service in addition to the 6 months of standard Guidance Plan trial service that is included in the price of the vehicle (trial excludes Hands-Free Calling minutes). Total service duration is 24 months. Requires UE1 OnStar. Requires one of the following Fleet or Government order types: FLS, FNR, FRC, FBC, FGO or FEF. Not available with PQI, PQL, PQM, PQP, PQQ and PQT. Available to order in addition to PQF or PQH. Not available with a ship-to of Puerto Rico or the Virgin Islands.

### **PQH - ONSTAR® 30 MONTHS OF ONSTAR® PROTECTION SERVICE**

Provides 30 months of Protection service in addition to the 6 months of standard Guidance Plan trial service that is included in the price of the vehicle (trial excludes Hands-Free Calling minutes). Total service duration is 36 months. Requires UE1 OnStar. Requires one of the following Fleet or Government order types: FLS, FNR, FRC, FBC, FGO or FEF. Not available with PQI, PQL, PQM, PQP, PQQ and PQT. Available to order in addition to PQF or PQG. Not available with a ship-to of Puerto Rico or the Virgin Islands.

### **PRD - ONSTAR® 42 MONTHS OF ONSTAR® PROTECTION SERVICE**

Provides 42 months of Protection service in addition to the 6 months of standard Guidance Plan trial service that is included in the price of the vehicle (trial excludes Hands-Free Calling minutes). Total service duration is 36 months. Requires UE1 OnStar. Requires one of the following Fleet or Government order types: FLS, FNR, FRC, FBC, FGO or FEF. Not available with PQI, PQL, PQM, PQP, PQQ and PQT. Available to order in addition to PQF or PQG. Not available with a ship-to of Puerto Rico or the Virgin Islands.

### **PQI - ONSTAR® 6 MONTHS OF ONSTAR® SECURITY SERVICE**

Provides 6 months of Security service in addition to the 6 months of standard Guidance Plan trial service that is included in the price of the vehicle (trial excludes Hands-Free Calling minutes). Total service duration is 12 months. Requires UE1 OnStar. Requires one of the following Fleet or Government order types: FLS, FNR, FRC, FBC, FGO or FEF. Not available with PQF, PQG, PQH, PQP, PQQ and PQT. Available to order in addition to PQL or PQM. Not available with a ship-to of Puerto Rico or the Virgin Islands.

### **PQL - ONSTAR® 18 MONTHS OF ONSTAR® SECURITY SERVICE**

Provides 18 months of Security service in addition to the 6 months of standard Guidance Plan trial service that is included in the price of the vehicle (trial excludes Hands-Free Calling minutes). Total service duration is 24 months. Requires UE1 OnStar. Requires one of the following Fleet or Government order types: FLS, FNR, FRC, FBC, FGO or FEF. Not available with PQF, PQG, PQH, PQP, PQQ and PQT. Available to order in addition to PQI or PQM. Not available with a ship-to of Puerto Rico or the Virgin Islands.

### **PQM - ONSTAR® 30 MONTHS OF ONSTAR® SECURITY SERVICE**

Provides 30 months of Security service in addition to the 6 months of standard Guidance Plan trial service (12 months for Cadillac) that is included in the price of the vehicle (trial excludes Hands-Free Calling minutes). Total service duration is 36 months. Requires UE1 OnStar. Requires one of the following Fleet or Government order types: FLS, FNR, FRC, FBC, FGO or FEF. Not available with PQF, PQG, PQH, PQP, PQQ and PQT. Available to order in addition to PQI or PQL. Not available with a ship-to of Puerto Rico or the Virgin Islands.



## OPTIONAL WIRELESS SERVICE PLANS (CONTINUED)

### **PRE - ONSTAR® 42 MONTHS OF ONSTAR® SECURITY SERVICE**

Provides 30 months of Security service in addition to the 6 months of standard Guidance Plan trial service (12 months for Cadillac) that is included in the price of the vehicle (trial excludes Hands-Free Calling minutes). Total service duration is 42 months. Requires UE1 OnStar. Requires one of the following Fleet or Government order types: FLS, FNR, FRC, FBC, FGO or FEF. Not available with PQF, PQG, PQH, PQP, PQQ and PQT. Available to order in addition to PQI or PQL. Not available with a ship-to of Puerto Rico or the Virgin Islands.

### **PQP - ONSTAR® ADDITIONAL 6 MONTHS OF ONSTAR® FLEET GUIDANCE SERVICE**

Provides 6 months of Fleet Guidance service in addition to the 6 months of standard Guidance Plan trial service that is included in the price of the vehicle (plan excludes Hands-Free Calling minutes). Total service duration is 12 months. Requires UE1 OnStar. Requires one of the following Fleet or Government order types: FLS, FNR, FRC, FBC, FGO or FEF. Not available with PQF, PQG, PQH, PQI, PQL and PQM. Available to order in addition to PQQ or PQT. Not available with a ship-to of Puerto Rico or the Virgin Islands.

### **PQG - ONSTAR® ADDITIONAL 18 MONTHS OF ONSTAR® FLEET GUIDANCE SERVICE**

Provides 18 months of Fleet Guidance service in addition to the 6 months of standard Guidance Plan trial service (12 months for Cadillac) that is included in the price of the vehicle (plan excludes Hands-Free Calling minutes). Total service duration is 24 months. Requires UE1 OnStar. Requires one of the following Fleet or Government order types: FLS, FNR, FRC, FBC, FGO or FEF. Not available with PQF, PQG, PQH, PQI, PQL and PQM. Available to order in addition to PQP or PQT. Not available with a ship-to of Puerto Rico or the Virgin Islands.

### **PQT - ONSTAR® ADDITIONAL 30 MONTHS OF ONSTAR® FLEET GUIDANCE SERVICE**

Provides 30 months of Guidance service in addition to the 6 months of standard Guidance Plan trial service (12 months for Cadillac) that is included in the price of the vehicle (plan excludes Hands-Free Calling minutes). Total service duration is 36 months. Requires UE1 OnStar. Requires one of the following Fleet or Government order types: FLS, FNR, FRC, FBC, FGO or FEF. Not available with PQF, PQG, PQH, PQI, PQL and PQM. Available to order in addition to PQP or PQQ. Not available with a ship-to of Puerto Rico or the Virgin Islands.

### **PRF - ONSTAR® ADDITIONAL 42 MONTHS OF ONSTAR® FLEET GUIDANCE SERVICE**

Provides 42 months of Guidance service in addition to the 6 months of standard Guidance Plan trial service (12 months for Cadillac) that is included in the price of the vehicle (plan excludes Hands-Free Calling minutes). Total service duration is 36 months. Requires UE1 OnStar. Requires one of the following Fleet or Government order types: FLS, FNR, FRC, FBC, FGO or FEF. Not available with PQF, PQG, PQH, PQI, PQL and PQM. Available to order in addition to PQP or PQQ. Not available with a ship-to of Puerto Rico or the Virgin Islands.

### **UE0 - ONSTAR®, DELETE**

## Wi-Fi SERVICE PLANS

### **ROV - ONSTAR® WITH 4G LTE FOR FLEET (20GB/12 MONTHS)**

ONSTAR® With 4G LTE For Fleet (20GB/12 MONTHS) Provides A Built-In Wi-Fi Hotspot To Connect To The Internet At 4G LTE Speeds, Includes ATandT 20GB Data Plan Good For 12 Months. Requires (UE1) ONSTAR® and (VV4) ONSTAR® with 4G LTE and one of the following order types FLS, FNR, FRC, FBC, FGO or FEF. Not available with ROW. Visit [www.onstar.com](http://www.onstar.com) for vehicle availability, details and system limitations. Services and connectivity may vary by model and conditions. 4G LTE service available in select markets. 4G LTE performance based on industry averages and vehicle systems design. Some services require data plan.

### **ROW - ONSTAR® WITH 4G LTE FOR FLEET (36GB/24 MONTHS)**

ONSTAR® With 4G LTE For Fleet (36GB/24 Months) Provides A Built-In Wi-Fi Hotspot To Connect To The Internet At 4G LTE Speeds, Includes ATandT 36GB Data Plan Good For 24 Months. Requires (UE1) ONSTAR® and (VV4) ONSTAR® with 4G LTE and one of the following order types FLS, FNR, FRC, FBC, FGO or FEF. Not available with ROW. Visit [www.onstar.com](http://www.onstar.com) for vehicle availability, details and system limitations. Services and connectivity may vary by model and conditions. 4G LTE service available in select markets. 4G LTE performance based on industry averages and vehicle systems design. Some services require data plan.

# SIRIUS XM SATELLITE RADIO

## **U2K SIRIUSXM® SATELLITE RADIO IS STANDARD ON NEARLY ALL 2017 GM MODELS**

Enjoy a 3-month All Access trial subscription with over 150 channels including commercial-free music, plus sports, news and entertainment. Plus listening on the app and online is included, so you'll hear the best SiriusXM® has to offer, anywhere life takes you. Welcome to the world of SiriusXM.

IMPORTANT: The SiriusXM® Satellite Radio trial package is not provided on vehicles that are ordered for Fleet Daily Rental ("FDR") use. If you decide to continue service after your trial, the subscription plan you choose will automatically renew thereafter and you will be charged according to your chosen payment method at then-current rates. Fees and taxes apply. To cancel you must call us at 1-866-635-2349. See our Customer Agreement for complete terms at [www.siriusxm.com](http://www.siriusxm.com). All fees and programming subject to change.

## **PR6 - SIRIUSXM® SATELLITE RADIO ADDITIONAL 9 MONTHS OF THE SIRIUSXM® ALL ACCESS PACKAGE**

Includes 150 channels of commercial-free music plus every major sport and the biggest names in entertainment, news and comedy in vehicle plus 9 months of listening on the SiriusXM® app or online in addition to the 3 months of All Access trial service that is included in the price of the vehicle. Total service duration is 12 months. Non-Transferrable. Non-Refundable. Requires (U2K) SiriusXM® Satellite Radio and a Fleet or Government order type. Not available with FDR order types, PR7 or PR8. Not available in AK, HI, PR and VI.



## **PR7 - SIRIUSXM® SATELLITE RADIO ADDITIONAL 21 MONTHS OF THE SIRIUSXM® ALL ACCESS PACKAGE**

Includes 150 channels of commercial-free music plus every major sport and the biggest names in entertainment, news and comedy in vehicle plus 21 months of listening on the SiriusXM® app or online in addition to the 3 months of All Access trial service that is included in the price of the vehicle. Total service duration is 24 months. Non-Transferrable. Non-Refundable. Requires (U2K) SiriusXM® Satellite Radio and a Fleet or Government order type. Not available with FDR order types, PR6 or PR8. Not available in AK, HI, PR and VI.

## **PR8 - SIRIUSXM® SATELLITE RADIO ADDITIONAL 33 MONTHS OF THE SIRIUSXM® ALL ACCESS PACKAGE**

Includes 150 channels of commercial-free music plus every major sport and the biggest names in entertainment, news and comedy in vehicle plus 33 months of listening on the SiriusXM® app or online in addition to the 3 months of All Access trial service that is included in the price of the vehicle. Total service duration is 36 months. Non-Transferrable. Non-Refundable. Requires (U2K) SiriusXM® Satellite Radio and a Fleet or Government order type. Not available with FDR order types, PR6 or PR7. Not available in AK, HI, PR and VI.

**DIMENSIONS SSV REGULAR BOX**

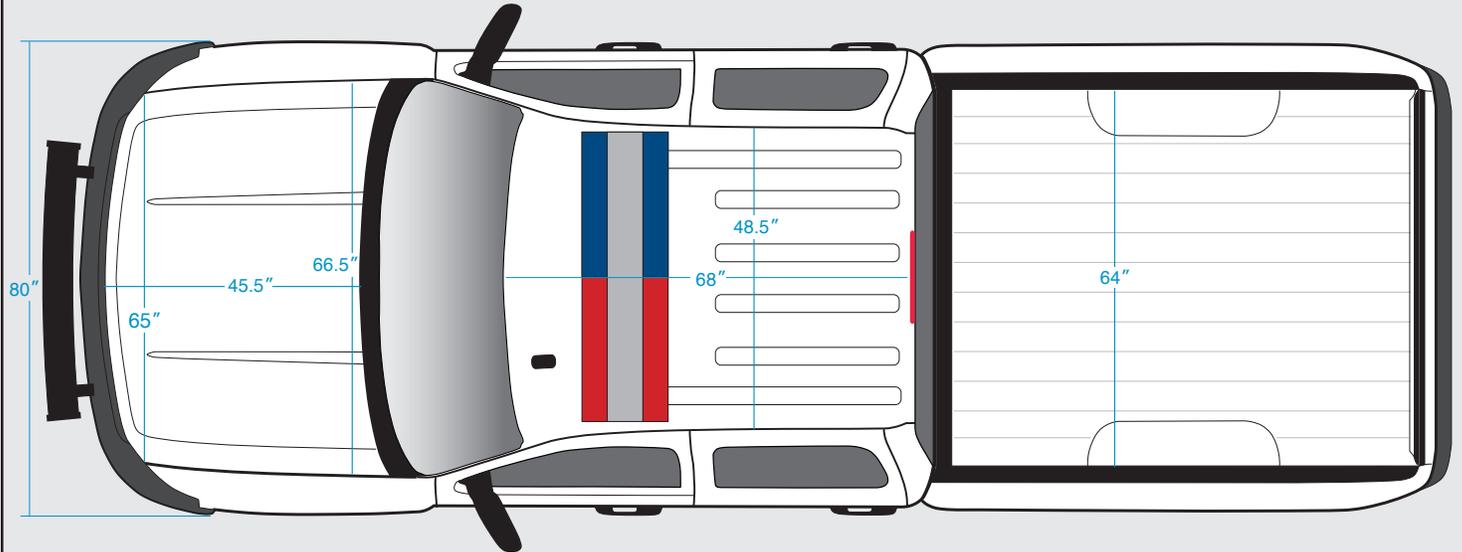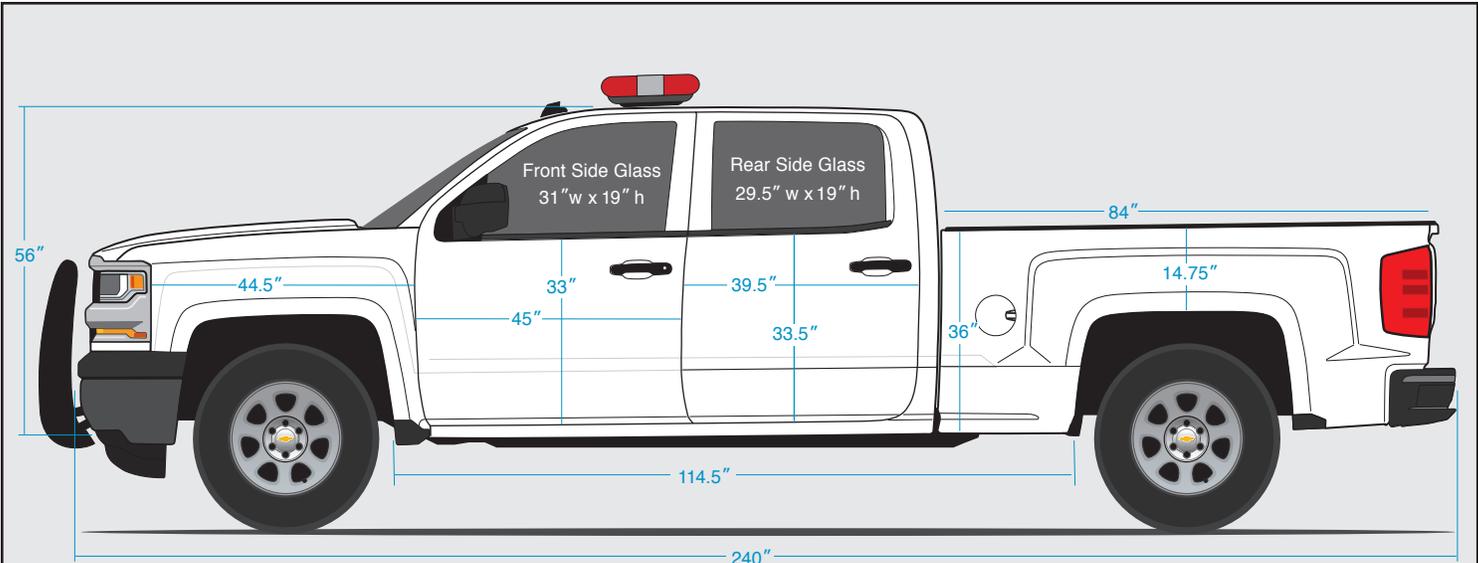



WT Model shown

**Estimated material sizes to wrap:**

- Hood – 70" x 52"
- Front Doors – 48" x 36"
- Rear Doors – 42" x 36"
- Roof – 72" x 52"
- Tailgate – 64" x 26"



**DIMENSIONS SSV SHORT BOX**

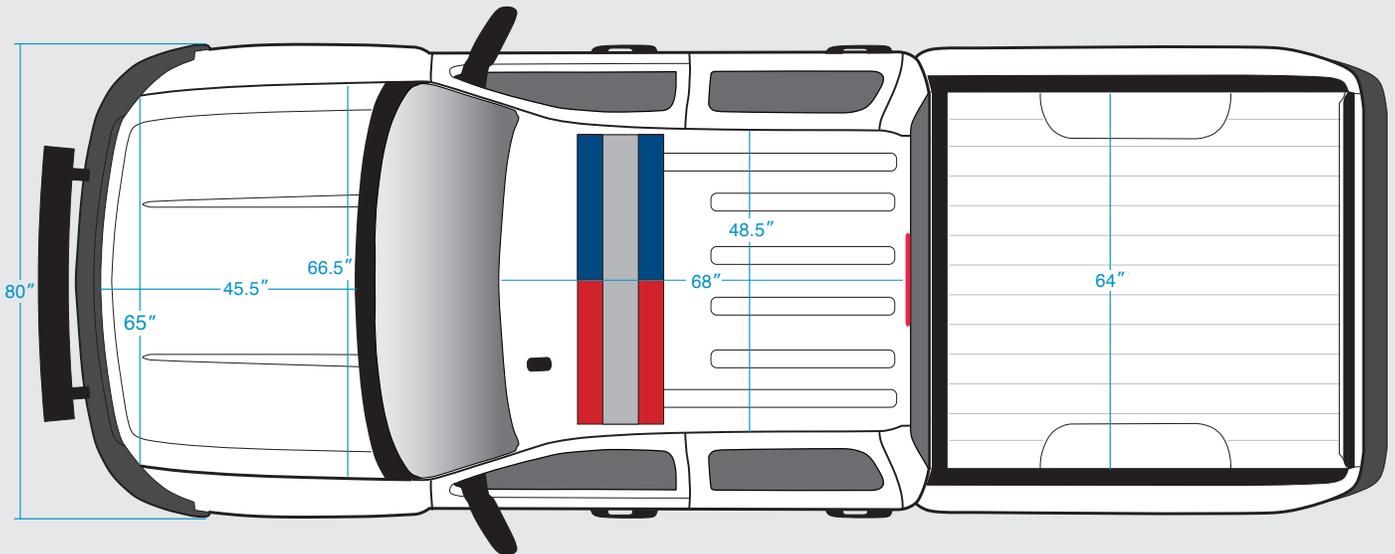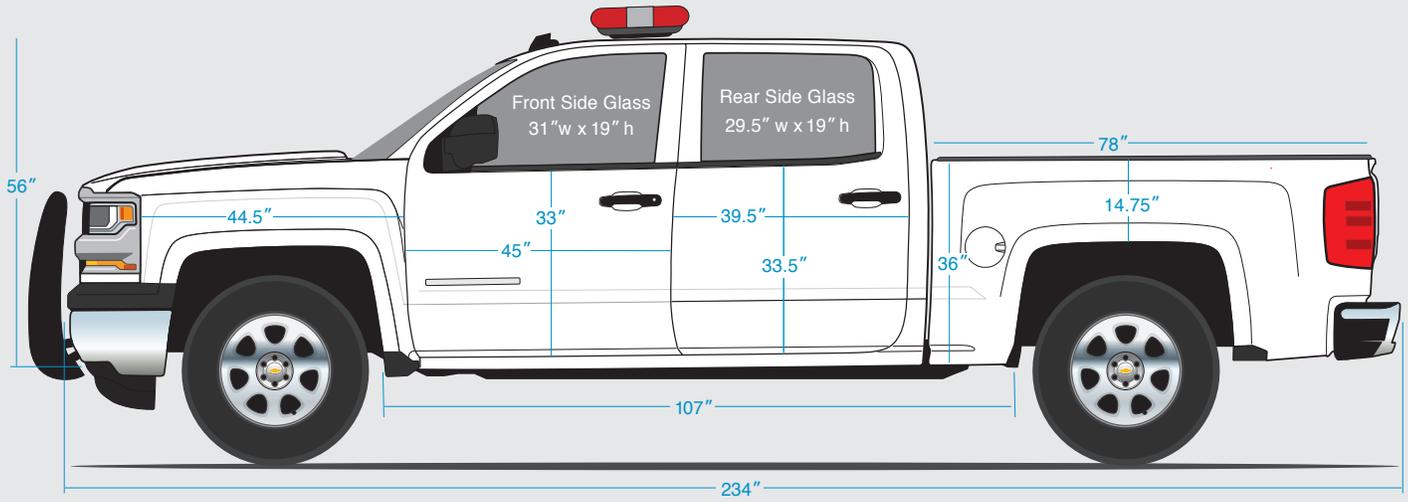

LS Model shown

**Estimated material sizes to wrap:**

- Hood – 70" x 52"
- Front Doors – 48" x 36"
- Rear Doors – 42" x 36"
- Roof – 72" x 52"
- Tailgate – 64" x 26"



## SPECIFICATIONS

Specifications shown are for Police and Special Service Vehicles only which differ from retail civilian models

<b>GENERAL</b>					<b>PASSENGER COMPARTMENT</b>				
Model	CC15543	CK15543	CC15743	CK15743	<b>VOLUME INDEX (cu.ft./liters)</b>				
Drive	2WD Short Box	4WD Short Box	2WD STD Box	4WD STD Box	Interior pass.	105/2973	105/2973	105/2973	105/2973
Cab Style	Crew Cab	Crew Cab	Crew Cab	Crew Cab	Interior cargo	18.6/527	18.6/527	18.6/527	18.6/527
Seating capacity	5/6	5/6	5/6	5/6	<b>PRELIMINARY FUEL ECONOMY RATINGS (CITY/HIGHWAY/COMBINED)</b>				
<b>NOTE: For projected top speed see PROJECTED TOP SPEED WITH STANDARD AND OPTIONAL TIRES Chart</b>					5.3L engine	16/23/19	16/22/18	16/23/19	16/22/18
<b>NOTE: 5 Passenger seating available by ordering 9S1 Center Seat Delete</b>					<b>NOTE: EPA estimated MPG label values. Actual mileage will vary with options, driving conditions, driving habits and vehicle condition.</b>				
<b>EXTERIOR (in./mm)</b>					1. Cargo and load capacity limited by weight and distribution.				
Wheelbase	143.5/3645	143.5/3645	153.0/3886	153.0/3886	3. Gross Vehicle Weight Rating (GVWR). When properly equipped, includes vehicle, passengers, cargo and equipment.				
Overall length	230.0/5842	230.0/5842	239.57/6085	239.57/6085	4. Vehicle weight in operational status with 100% fuel, fluids to factory fill, and standard base equipment. Does not include driver, passenger or optional content.				
Overall width	80.0/2032	80.0/2032	80.0/2032	80.0/2032	5. These maximum payload ratings are intended for comparison purposes only. Before you buy a vehicle or use it to haul people or cargo, carefully review the vehicle loading section of the Owner's Manual and check the carrying capacity of your specific vehicle on the label on the inside of the driver's door jamb.				
Overall height*	74.0/1884	74.0/1879	74.0/1873	74.0/1875	7. GCWR - Maximum combined weight of truck with passengers plus cargo and trailer with cargo.				
Front bumper to back of cab	150.9/3833	150.9/3833	150.9/3833	150.9/3833					
Inside length of box at floor	69.3/1761	69.3/1761	78.9/2003	78.9/2003					
Inside width, between wheelhousing, Fleetside	51.0/1296	51.0/1296	51.0/1296	51.0/1296					
Turning diameter, curb-to-curb, ft. (m)	47.2/14.4	47.2/14.4	48.6/14.8	48.6/14.8					
Ground clearance,*	8.7/222	8.9/226	8.5/216	8.9/227					
*Published dimensions indicated are at Base Curb Weight.									
<b>FRONT COMPARTMENT (in./mm)</b>									
Head room	42.8/1087	42.8/1087	42.8/1087	42.8/1087					
Shoulder room	66.0/1677	66.0/1677	66.0/1677	66.0/1677					
Hip room	60.7/1543	60.7/1543	60.7/1543	60.7/1543					
Leg room	45.3/1150	45.3/1150	45.3/1150	45.3/1150					
<b>REAR COMPARTMENT (in./mm)</b>									
Head room	40.5/1029	40.5/1029	40.5/1029	40.5/1029					
Shoulder room	65.7/1670	65.7/1670	65.7/1670	65.7/1670					
Hip room	60.3/1531	60.3/1531	60.3/1531	60.3/1531					
Leg room	40.9/1040	40.9/1040	40.9/1040	40.9/1040					
<b>CARGO</b>									
Cargo volume <sup>1</sup> , cargo box, cu. ft./liters	53.4/1,512.3	53.4/1,512.3	61.0/1,727.5	61.0/1,727.5					
<b>VEHICLE WEIGHT (lbs./kg.)</b>									
Payload <sup>5</sup>	1810/821	1760/798	1730/785	1710/776					
Payload (w/Optional Front Center Seat Delete 9S1/9U3)	1848/838	1798/816	1768/802	1748/793					
Base curb weight <sup>4</sup>	5162/2341	5415/2456	5246/2380	5460/2477					
GVWR <sup>3</sup>	7000/3175	7200/3266	7000/3175	7200/3266					
Gross Vehicle Weight Rating									
FGAWR	3850/1746	3950/1792	3850/1746	3950/1792					
Front Gross Axle Weight Rating									
RGAWR	3950/1792	3950/1792	3950/1792	3950/1792					
Rear Gross Axle Weight Rating									

**For Max. Trailer Towing see Standard Tires page**

## SPECIFICATIONS

Specifications shown are for Police and Special Service Vehicles only which differ from retail civilian models

ENGINE	STANDARD
Type	EcoTec3 V8
Displacement: liters/cu. in.	5.3/325
Horsepower/rpm	355 @ 5600
Torque lb.-ft./rpm	383 @ 4100
Induction system	Direct Injection
Compression ratio	11.0:1
Exhaust	Single
Minimum recommended fuel octane	87
Fuel capacity, approximate, gallon/liters	26/98
Oil with filter (quarts/liters)	8.5/8
Cooling capacity (quarts/liters)	17.4/16.5

TRANSMISSION	
Automatic electronic with overdrive	6-Speed
Fluid pan removed and filter replaced (quarts/liters)	6.0/5.7

AXLE	
Ratio	3.08

BRAKES	
ABS with vacuum-boost	Disc/Disc
Front-swept area (sq. in./sq. cm)	250/1612
Rear-swept area (sq. in./sq. cm)	252/1628
Total front and rear swept area (sq. in./sq. cm)	504.6/3255
Front rotor diameter (in./mm)	13.0/330
Rear rotor diameter (in./mm)	13.5/345
Front rotor thickness (in./mm)	1.2/30
Rear rotor thickness (in./mm)	.79/20

TIRES	
Type	All Season, Blackwall
Size	P255/70R17


WHEELS	
Type	Steel
Size	17"x 8"

CHASSIS	
Frame	Full perimeter steel
Front suspension	Coil over shock and stabilizer bar
Rear suspension	Multi-link, coil springs
Steering type	Rack and pinion
Steering ratio	16.3:1

BATTERIES	PRIMARY	AUXILIARY
Type	Maintenance free	Maintenance free
BCI group size	LN4	LN3
Volts	12	12
Amp hour rating	80	70
Cold cranking-amps @ 0°F (-18°C)	720	730

ALTERNATOR	
Type	Denso SC3
Amps	77°F (25°C) 170

### SILVERADO SSV ALTERNATOR OUTPUT

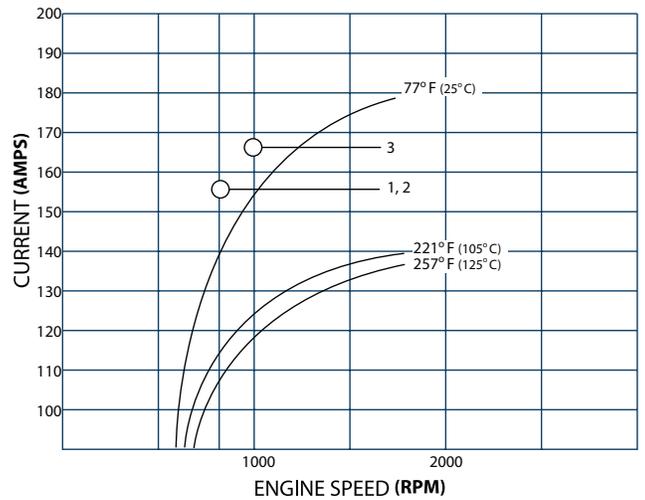

BOOST LEVEL	PARK/NEUTRAL	DRIVE
Normal Idle	550	500
1	800	650
2	800	725
3	1000	800

# 2018 SILVERADO 1500 SPECIAL SERVICE 5W4 CREW

## STANDARD TIRES - SPEED RATED

MANUFACTURER	QUANTITY	SIZE	SPEED RATING	TYPE
Random	5	P255/70R17	S	All-season, BW

## PROJECTED TOP SPEED WITH STANDARD AND OPTIONAL TIRES

NOTE. Adding accessories or making modifications to the vehicle can affect vehicle performance, aerodynamics, and overall top speed.

TIRE SIZE	VEHICLE DESCRIPTION	3.08 RATIO	3.42 RATIO
P225/70R17 (Standard)	2WD Short Box	106 mph	98 mph
P265/70R17 (Optional)	2WD Short Box	106 mph	98 mph
LT265/70R17C (Optional)	2WD Short Box	98 mph	98 mph
P225/70R17 (Standard)	2WD Long Box	112 mph	112 mph
P265/70R17 (Optional)	2WD Long Box	112 mph	112 mph
LT265/70R17C (Optional)	2WD Long Box	98 mph	98 mph
P225/70R17 (Standard)	4WD Short Box	98 mph	98 mph
P265/70R17 (Optional)	4WD Short Box	98 mph	98 mph
LT265/70R17C (Optional)	4WD Short Box	98 mph	98 mph
P225/70R17 (Standard)	4WD Long Box	112 mph	98 mph
P265/70R17 (Optional)	4WD Long Box	112 mph	98 mph
LT265/70R17C (Optional)	4WD Long Box	96 mph	96 mph

## TRAILERING SPECS - Automatic Transmission Ratings with Ball Hitch (L83) 5.3L EcoTec3 V8 AFM DI VVT aluminum block

MODEL	AXLE RATIO	MAXIMUM TRAILER TOWING LBS. (KG)	AXLE RATIO	MAXIMUM TRAILER TOWING LBS. (KG)
CC15543	3.08	6400 (2903)	3.42	9400 (4264)
CK15543	3.08	6100 (2767)	3.42	9100 (4128)
CC15743	3.08	6300 (2858)	3.42	9300 (4218)
CK15743	3.08	6100 (2767)	3.42	9100 (4128)

Maximum Trailer Towing Rating is calculated based on SAE J2807 (Base vehicle plus one driver plus one passenger plus options). The weight of other optional equipment, passengers and cargo will reduce the Maximum Trailer Towing your vehicle can tow.

## GCWR For Engine/Rear Axle Ratio Combination - Automatic Transmission

ENGINE	(GCWR) GROSS COMBINATION WEIGHT RATINGS LBS. (KG)					
(L83) 5.3L EcoTec3	3.08	12000 (5443)	3.42	14000 (6350)	3.42	15000 (6804)

## TRAILERING SPECS - Automatic Transmission Ratings with 5th Wheel (L83) 5.3L EcoTec3 V8 AFM DI VVT aluminum block

MODEL	AXLE RATIO	MAXIMUM TRAILER TOWING LBS. (KG)	AXLE RATIO	MAXIMUM TRAILER TOWING LBS. (KG)
CC15743	3.08	6300 (2858)	3.42	8600 (3901)
CK15743	3.08	6000 (2722)	3.42	8100 (3674)

Maximum Trailer Towing Rating is calculated based on SAE J2807 (Base vehicle plus one driver plus one passenger plus options). The weight of other optional equipment, passengers and cargo will reduce the Maximum Trailer Towing your vehicle can tow.

## GCWR For Engine/Rear Axle Ratio Combination - Automatic Transmission

ENGINE	(GCWR) GROSS COMBINATION WEIGHT RATINGS LBS. (KG)			
(L83) 5.3L EcoTec3	3.08	12000 (5443)	3.42	14000 (6350)



# STANDARD EQUIPMENT

## WIRING PROVISIONS

The vehicle has standard and may have optional wiring provisions for connecting 12 volt battery power to customer installed equipment.

### STANDARD

The standard upfitter provisions are terminated in the Instrument panel Electrical Center (ICEM) connector X7. The ICEM is located in the lower instrument panel to the left of the brake pedal assembly. The following circuits are terminated in ICEM connector X7.

**Terminal 8** - Battery power, hot in ignition RUN/ACCESSORY

**Terminal 11** - Battery power, hot in ignition RUN/CRANK

**Terminals 7 and 17** - Primary battery power.  
Maximum load for each circuit must not exceed 15 amps.

**Terminal 10** - Ground

**Terminal 19** - Vehicle Speed Signal (VSS) provides 4000 pulses per mile

The vehicle Electronic Brake Control Module (EBCM) VSS output circuitry does not include a logic pull-up resistance. If a pull-up resistance is not part of the customer equipment VSS input connection circuitry, a 5000 ohm resistor can be connected between the vehicle VSS circuit wire and vehicle battery power.

A 12 volt auxiliary battery is included a standard equipment and is located at the left front of the engine compartment. Customer connection to the auxiliary battery must be made at the fuse assembly located on the battery positive post.

### OPTIONAL 9L7 UPFITTER SWITCHES


Four 12 volt, 30 amp, relay controlled battery power circuits may be present in the vehicle. The relays are operated via instrument panel switches located on the lower center instrument panel, below the heating and air conditioning controls. The following relay load circuits are terminated in ICEM connector X7 as listed.

**Terminal 20** - Controlled by instrument panel Switch 1

**Terminal 14** - Controlled by instrument panel Switch 2.


**Terminal 4** - Controlled by instrument panel Switch 3

**Terminal 1** - Controlled by instrument panel Switch 4

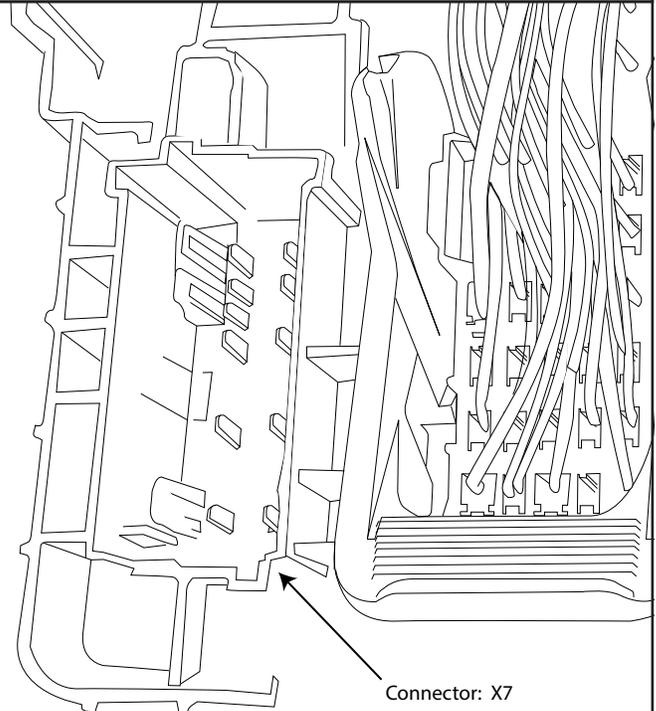

Connection to the circuits located in ICEM X7 must be made by a customer-provided jumper harness consisting of a connector and appropriately sized wires. The mating connector for ICEM cavity X7 is GM service part 19328970 (OEM 19324036). Refer to the wiring diagrams in this Specification for more information and to GM Upfitter Bulletin 115. A complete harness for connection to ICEM X7 is available from the GM police vehicle Second Stage Manufacturer, Kerr Industries (905 725 6561).

## REAR VISION CAMERA

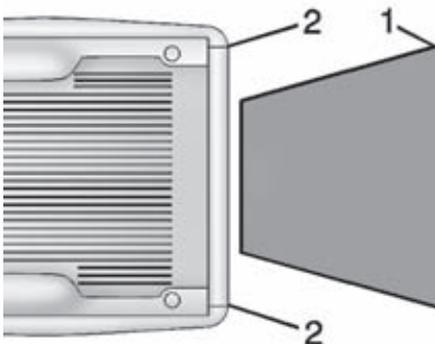

1. View Displayed by the Camera in Radio Screen

2. Corners of the Rear Bumper

Displayed images may be farther or closer than they appear. The area displayed is limited and objects that are close to either corner of the bumper or under the bumper do not display.


When the vehicle is shifted into R (Reverse), the RVC displays an image of the area behind the vehicle in the center stack display. The previous screen displays when the vehicle is shifted out of R (Reverse) after a short delay. To return to the previous screen sooner, press a button on the infotainment system, shift into P (Park), or reach a vehicle speed of 8 km/h (5 mph).

**NOTE: The Rear Vision Camera will not work properly if the tailgate is down. If the tailgate is down, do not use this systems.**

# OPTIONAL EQUIPMENT

6J3

## WIRING PROVISIONS FOR VEHICLE GRILLE LAMPS AND SPEAKER/SIREN

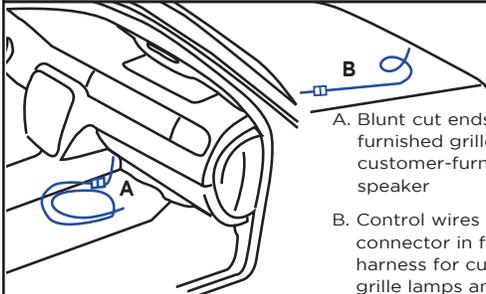

- A. Blunt cut ends for the customer-furnished grille lamps and customer-furnished siren/speaker
- B. Control wires from in-line connector in forward lamp harness for customer-furnished grille lamps and speaker

The SEO 6J3 wiring provision has a 5-foot (1.5 m) harness coiled underneath the instrument panel on the passenger side. The wiring circuits are routed from under the instrument panel to a 1-foot (30 cm) coil secured in the area behind the grille. There are four 16-gauge (1.0 mm<sup>2</sup>) wires for connecting to the grille lamps (GRY, TAN) and siren speaker (LT BU, LT GN)


The SEO 6J3 wiring provision also includes one 18-gauge (0.8 mm<sup>2</sup>) control wire for the SEO 6J7 Exterior Lamps Emergency Flashing System.

When Option 6J7 is installed without Option 6J3, only the green control wire and the blue/green Separation of Function wires are provided for customer furnished switching to operate the Emergency Flashing System.

**Note:** For wiring diagram see Wiring Section

6J4

## WIRING PROVISION FOR HORN SIREN CIRCUIT

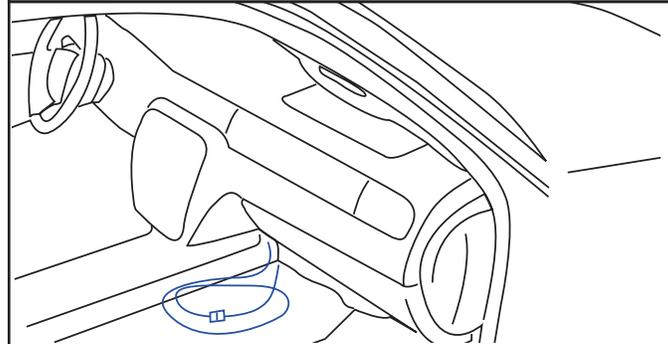

This provision permits customer connection of a switch to select either horn of siren operation when the horn pad is pressed.


A 22-gauge (0.35 mm<sup>2</sup>) wire is connected to an in-line connector in the horn circuit of the instrument panel harness under the instrument panel. The end of this harness extension is a 5-foot (1.5 m) loop of wire coiled under the center of the instrument panel.

**NOTE:** For wiring diagram see Wiring Section

7X6

## SPOTLAMPS

7X7

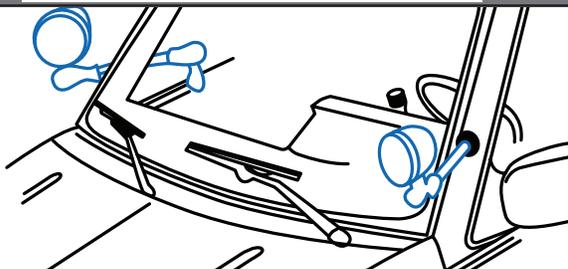

7X6 Spotlamp left hand, pillar-mounted unity, 6-inch with replaceable H3 halogen bulb; independently fused



7X7 Spotlamps left and right hand, pillar-mounted unity, 6-inch with replaceable H3 halogen bulb; independently fused

**NOTE:** • Lamp bulbs are halogen 12 volt 100 watt H-3 rated at 245,000 candle power

- For fuse location see Wiring Section
- Factory installation of spotlamps is recommended. Special tooling is used to locate and drill the spotlamp shaft hole in the windshield pillars. Field installation of spotlamps must not interfere with proper deployment of the roof rail airbag in the event of a crash.
- Customer furnished spotlamp assembly must be installed to avoid interference with proper deployment of roof rail and passenger side airbags

DF2

## CAMPER-STYLE MIRRORS

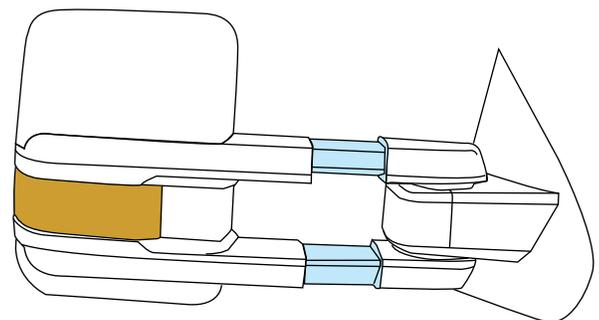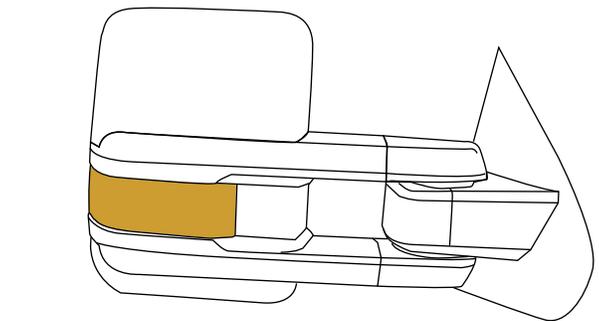

Extra-large high-visibility vertical camper-style mirrors, manual extending with integrated turn signals and lower convex spotter glass.

# OPTIONAL EQUIPMENT


## VBJ REAR UNDERSEAT STORAGE

Composite storage bin




## VQK SPLASH GUARDS, MOLDED

Black finish

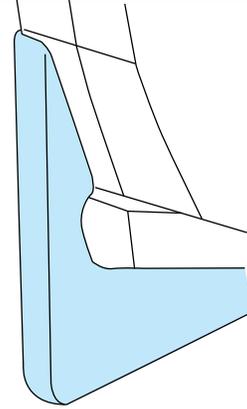


## NQH AUTOMATIC TRANSFER CASE

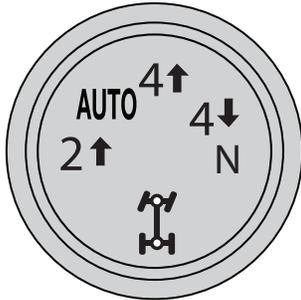

Active, 2-speed electronic Autotrac with rotary controls, includes neutral position for dingy towing. Use the transfer case knob next to the steering wheel to shift into and out of four-wheel drive.


## 6C7 AUXILIARY DOME LAMP

Auxiliary dome lamp is located on the headliner to the rear of the overhead console and is switched at the rear lamp base. Lamp is wired separately standard dome lamps with red and white LED bulbs.

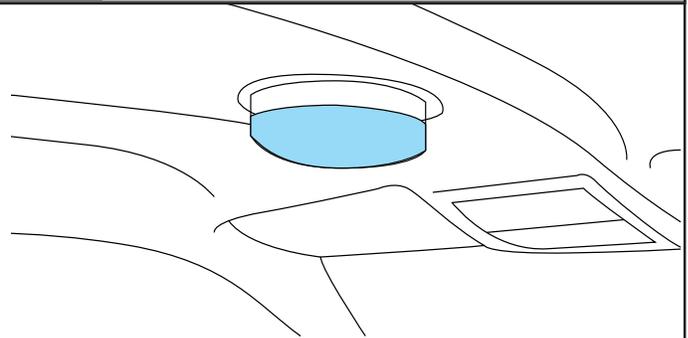


# WIRING

## STANDARD - WIRING PROVISIONS FOR IGNITION POWER AND SIGNAL CIRCUITS

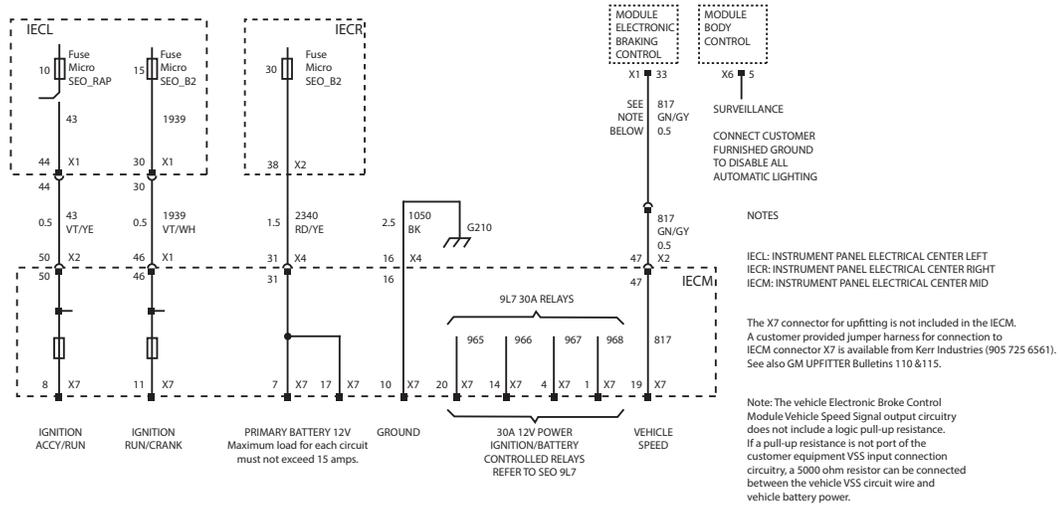


## OPTIONAL - 9L7 UPFITTER SWITCHES FOR RELAY CONTROLLED 12 VOLT POWER

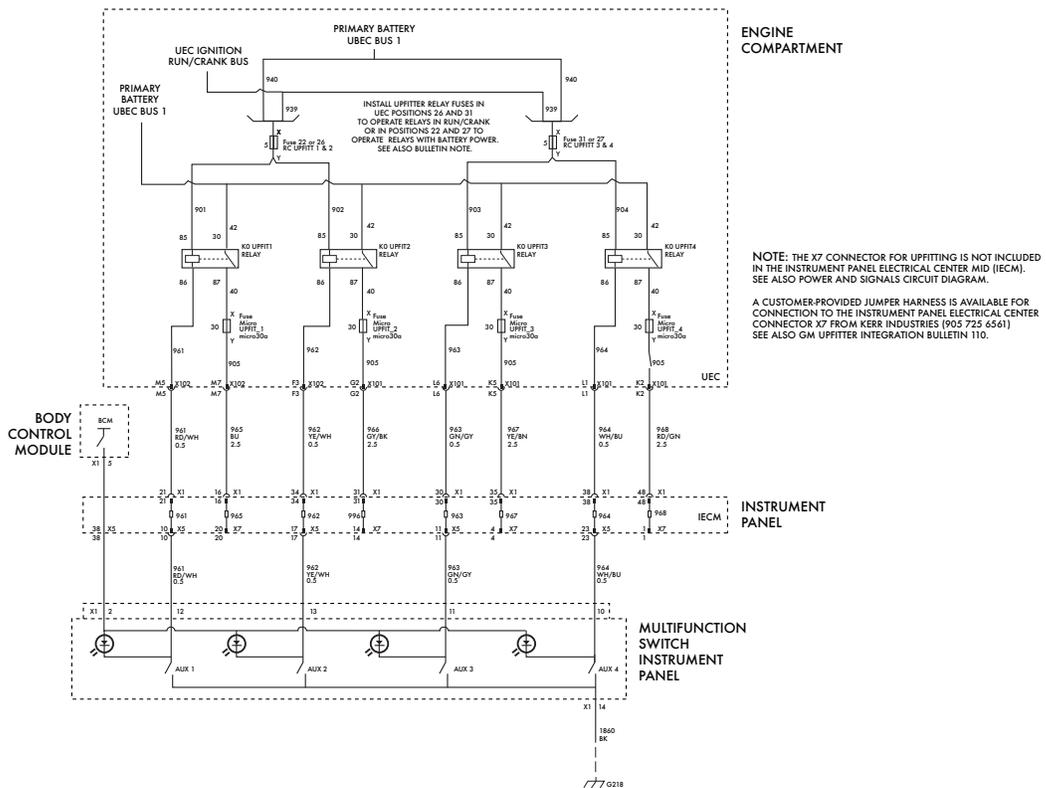

# WIRING


## WIRING PROVISIONS FOR GRILLE LAMPS AND SPEAKER/SIREN

WIRING PROVISION FOR GRILLE LAMPS AND SPEAKER/SIREN  
OPTION 6J3

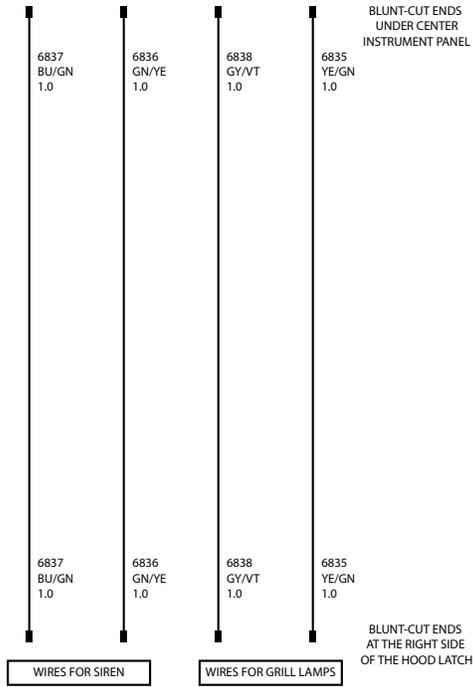

## WINDSHIELD PILLAR MOUNTED SPOTLAMPS


WINDSHIELD PILLAR-MOUNTED SPOTLAMPS  
OPTION 7X6 LH ONLY / OPTION 7X7 LH AND RH

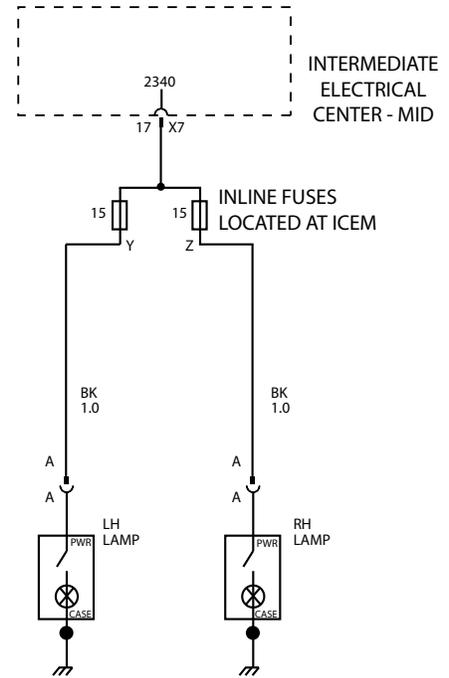

LAMP BULBS - HALOGEN H7635


## WIRING PROVISION FOR HORN-SIREN CIRCUIT

WIRING PROVISION FOR HORN-SIREN CIRCUIT  
OPTION 6J4

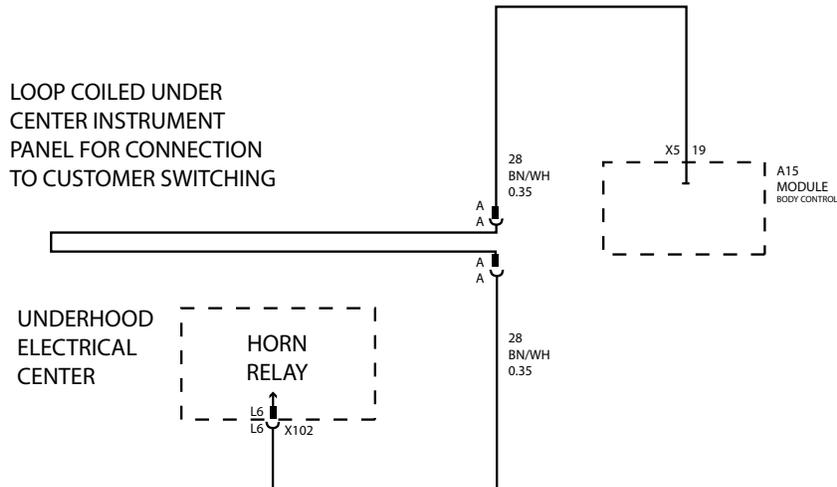

# AIRBAGS

## TOP VIEW OF INSTRUMENT PANEL AND APPROXIMATE DEPLOYMENT AREA OF THE AIRBAG ZONE

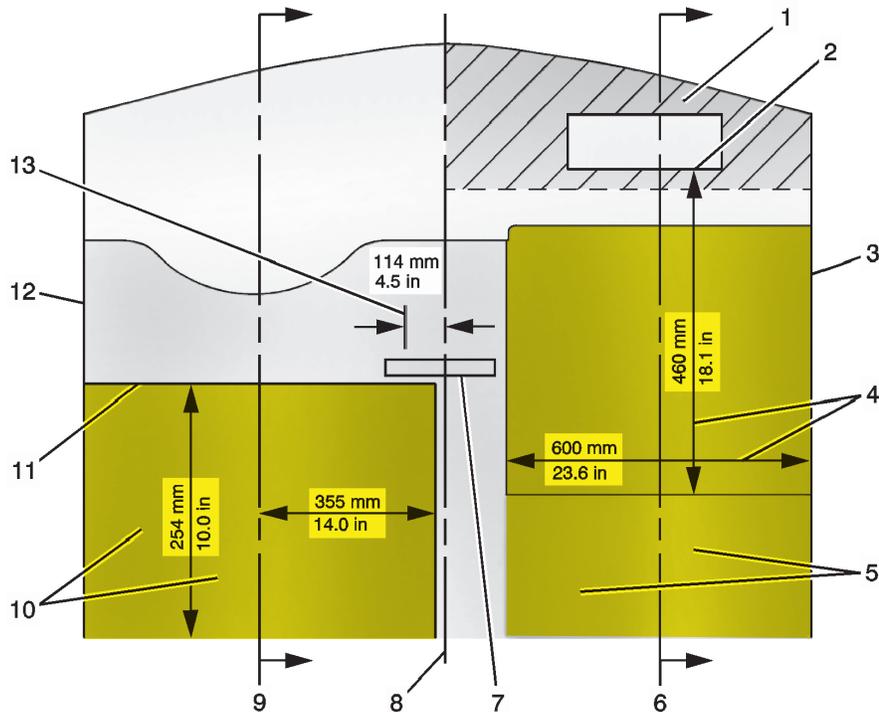


1. Passenger Side Instrument Panel Top Surface Zone
2. Passenger Frontal Airbag Module Trim Panel - Rear Edge
3. Passenger Side Door
4. Approximate Dimensions of Inflated Airbag
5. Passenger Frontal Airbag Deployment Zone
6. Passenger Centerline
7. Inside Rearview Mirror
8. Vehicle Centerline
9. Driver Centerline
10. Driver Frontal Airbag Deployment Zone
11. Front of Steering Wheel
12. Driver Side Door
13. Shift Selector Arc

Airbag inflation can cause severe injury or death to anyone too close to the bag when it deploys. Be sure every occupant is properly restrained.


# AIRBAGS

## SIDE VIEW OF DRIVER FRONTAL AIRBAG DEPLOYMENT ZONE

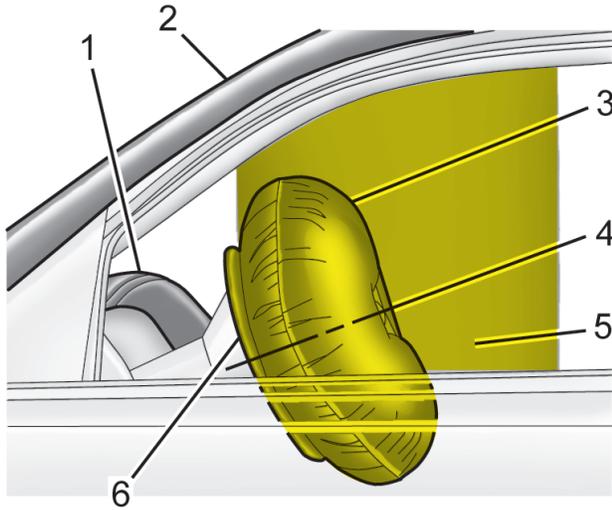

1. Top of Instrument Panel
2. Top Edge of Windshield
3. Inflated Airbag - Steering Wheel
4. Centerline of Steering Column at Mid-Tilt
5. Driver Frontal Airbag Deployment Zone
6. Front of Steering Wheel

## SIDE VIEW OF PASSENGER FRONTAL AIRBAG DEPLOYMENT ZONE

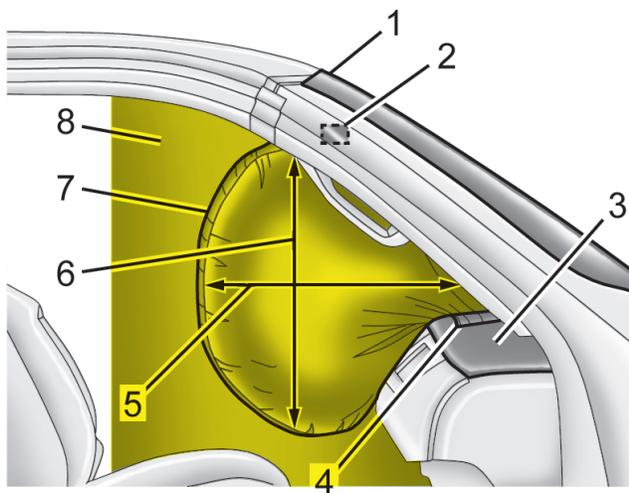


1. Top Edge of Windshield
2. Inside Rearview Mirror
3. Instrument Panel Top Surface Zone
4. Passenger Frontal Airbag Module Trim Panel - Rear Edge
5. Inflated Airbag - Horizontal Dimension, approximately 18.1 in (460 mm)
6. Inflated Airbag - Vertical Dimension (from Top of Occupant's Lap to Headliner)
7. Inflated Airbag - Instrument Panel
8. Passenger Frontal Airbag Deployment Zone

Airbag inflation can cause severe injury or death to anyone too close to the bag when it deploys. Be sure every occupant is properly restrained.


# AIRBAGS

ROOF-RAIL AND SEAT-MOUNTED SIDE IMPACT AIRBAG DEPLOYMENT ZONES - PASSENGER SIDE SHOWN, DRIVER SIDE SIMILAR

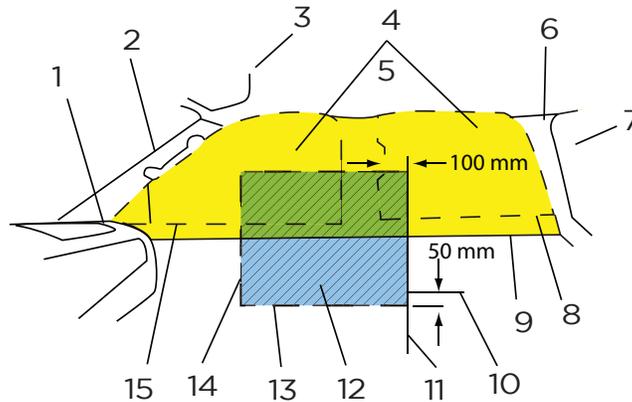

- |   |   |
|---|---|
| <ol style="list-style-type: none"> <li>1. Front of Deployment Zone at Bottom of Windshield Pillar Trim</li> <li>2. A-Pillar Trim with Grab Handle (Passenger Side)</li> <li>3. Sun Visor</li> <li>4. Deployment Zone - Seat Rows 1 and 2 and Cargo Area</li> <li>5. Top of Deployment Zone - Along Roof-rail at Edge of Headliner</li> <li>6. C-Pillar Upper Trim</li> <li>7. Rear Window</li> <li>8. Top Edge of Rear Door Trim</li> <li>9. Bottom of Deployment Zone at Top of Side Door Armrest</li> </ol> | <ol style="list-style-type: none"> <li>10. Top Surface of Front Seat Cushion (with Seal Fully Lowered)</li> <li>11. Seat-Mounted Side Impact Airbag Deployment Zone (3.9 in/100mm to Rearward of Back Edge of B-Pillar Trim Grab Handle)</li> <li>12. Lower Part of Front Seat Deployment Zone (With Sear Fully Lowered)</li> <li>13. Bottom of Seat-Mounted Side Impact Airbag Zone (2.0in/50mm Below Top of Seat Cushion with Seat Fully Lowered)</li> <li>14. Rear of Front Door Trim Armrest Handle</li> <li>15. Top Edge of Front Door Trim</li> </ol> |
|---|---|

ROOF-RAIL AND SEAT-MOUNTED SIDE IMPACT AIRBAG DRIVER AND PASSENGER DEPLOYMENT ZONES - VIEW FROM REAR CARGO AREA

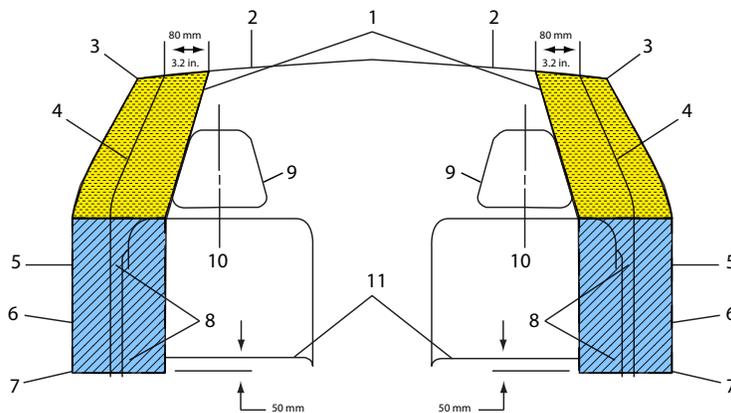

- |   |   |
|---|---|
| <ol style="list-style-type: none"> <li>1. Roof-rail Airbag Deployment Zone</li> <li>2. Underside of Headliner</li> <li>3. Edge of Headliner</li> <li>4. Inner Center and Rear Pillar Trim</li> <li>5. Inner Front and Rear Door</li> <li>6. Side Door Upper Armrests and Rear Quarter Trim Armrests</li> <li>7. Bottom of seat-mounted side impact airbag zone (2.0 in/50 mm) below top of seat cushion with seat fully lowered.</li> <li>8. Front Seatback Side Deployment Zone</li> </ol> | <ol style="list-style-type: none"> <li>9. Front Seat Head Restraint</li> <li>10. Seat Centerline</li> <li>11. Top of Seat Cushion</li> </ol> <p>The driver and passenger seat-mounted side impact airbag deployment zones move up, down, fore, aft, as the seat is adjusted by the occupant. The deployment zones also move as the seatback is reclined and raised.</p> |
|---|---|

Airbag inflation can cause severe injury or death to anyone too close to the bag when it deploys. Be sure every occupant is properly restrained.

# AIRBAGS FAQ

## **Can specialty vehicle equipment (e.g. radar devices, video cameras, computers, meters, radio trees, shotguns, etc.) still be mounted in cars with passenger side airbags?**

Yes, but care must be taken to mount the equipment outside of the deployment zone. Airbags inflate with great force and will interact with any object in the deployment zone. Therefore, to reduce the risk of injury to vehicle occupants, GM recommends that the air deployment zone be kept free of any equipment. If a piece of equipment were to become dislodged it could strike an occupant in the vehicle and result in injury. The likelihood of an object becoming dislodged is influenced by many factors, including the proximity of the object to the inflatable restraint, the size and shape of the object and the means by which the object is secured to the vehicle. In addition to these factors, the trajectory and velocity of the dislodged object can be influenced by the type and severity of vehicle crash.

Objects that are in the deployment zone, but do not become dislodged by an inflating airbag can still affect the performance of the airbag. For example, such objects could tear the fabric or affect the shape of the airbag, thus reducing the ability of the bag to provide restraint.

## **Is it possible to shield equipment that is installed in the passenger side frontal airbag deployment zone in a manner that will allow full and safe airbag deployment?**

Due to the complexity of the influencing variables, GM is unable to evaluate the potential for shielding expected equipment configurations in all accident scenarios in order to assure that the airbag performance would be unaffected. While shielding may protect certain equipment from being damaged or dislodged, it may also negatively affect the inflation characteristics of the airbag. The airbag's shape, inflation angle, fold pattern, and inflation rate and pressure are developed to maximize the protection capability of the inflatable restraint system. Therefore, GM cannot recommend the placement of any equipment in the deployment zone, even if it is shielded to protect it from damage.

## **Front airbag systems and instrument panel mounted equipment.**

Passenger airbags in GM vehicles deploy in different ways depending upon the type of vehicle and the particular instrument panel design.

In some vehicles, the passenger airbag deploys through a discrete door located on the top surface of the instrument panel (top-mount airbag systems). In other vehicles, the passenger airbag deploys through a discrete door mounted on the vertical rearward surface of the instrument panel, above the glove box door (mid-mount airbag system). With these types of top mount and mid-mount passenger airbag systems, the top pad of the instrument panel remains in place during deployment.

Some GM passenger airbag systems deploy from beneath the instrument panel top pad. These are considered 3/4-mount airbag systems with a "deployable top pad." The entire instrument panel top pad is the "deployment door" from under which the inflation airbag emerges. When an airbag deployment is commanded, the forces from the inflating passenger airbag push up on the instrument panel top pad, releasing special fasteners across the rearward edge of the top pad. This allows the top pad to rotate upward so that the passenger airbag may emerge. The top pad rotates upward to open widest at the right hand side, and is usually forced upward into contact with the windshield on the right hand

side of the vehicle during a deployment.

Instrument panel top mounted special equipment, such as a radar antenna and control unit or video camera must be positioned to the left of the vehicle center line. This equipment must be mounted as low as possible and securely fastened to the top pad to avoid being dislodged in the event of a crash and possible airbag deployment. In the process of securely fastening special equipment to the top, DO NOT fasten down the top pad itself to any other vehicle component such as the cluster trim plate. As described above, the top pad rotates upward during a deployment. In order to enable the proper deployment of the passenger airbag, specialty equipment installation MUST NOT PREVENT the top pad from rotating upward during deployment. Location and attachment of special equipment should minimize added resistance or interference to upward rotation of the top pad during deployment.

On the right half of the top pad closest to the passenger airbag module, GM recommends that no equipment be mounted. When mounting equipment not on the driver side of the top pad, GM recommends that the total mass of the top pad mounted special equipment not exceed 8 pounds (3.6 Kilograms), since some top pads tend to rotate about the left end.

Fasteners used to secure special equipment to the instrument panel top pad, the windshield glass, or to the windshield upper frame (header), should be selected to ensure that these devices will remain attached during a vehicle crash and possible airbag deployment.

## **Side-Impact Airbags for crashes to the vehicle sides.**

The airbag system in your police vehicle includes roof rail mounted Head Curtain side airbags. The vehicle is also equipped with seat back mounted upper body airbags located on the outboard side of the driver and front passenger seat backs. Together the Head Curtain and seat-mounted side airbags are intended to protect the head and upper body in the event of a side crash. The Head Curtain and seat-mounted side airbags also may be commanded to deploy in the event that the vehicle sensing system detects an impending or underway rollover of the vehicle. Some vehicles may also be equipped with an optional airbag, mounted on the inboard side of the driver seat back.

## **Can Specialty Vehicle Security Barriers be mounted within the side airbag deployment zones?**

No. The Side airbags inflate extremely fast because of the nature of side crashes to the vehicle. Mounting a security barrier behind the front seats with the ends placed within the side airbag deployment zones will result in unintended interaction between the barrier and the inflated side airbags. To reduce the risk of injury to the vehicle occupants, GM recommends that the side airbag zones be kept free of any customer installed equipment.

## **Customer furnished equipment installed to the vehicle roof.**

The roof system may also include side airbag head curtain components. Inflation devices and cushion components may be mounted on the vehicle roof side from the base of the windshield along the roof rail above the door openings to the base of the rear window pillar. Care must be taken to avoid damage to these components or interference with their operation when installing roof mounted equipment such as emergency lamps and communication antennas.

Always use safety belts and the correct restraint for your child's age and size, even with air bags. Even in vehicles equipped with the Passenger Sensing System, children are safer when properly secured in a rear seat in the appropriate infant, child or booster seat. Never place a rear-facing infant restraint in the front seat of any vehicle equipped with an active frontal air bag. See the Owner's Manual and the child safety seat instructions for more safety information.

# AIRBAGS FAQ

## **Can the installation of push bumpers on the front end of the vehicle affect the deployment of the airbag?**

General Motors is not aware of adverse effects during crash events from the many push bumpers that have been installed on GM police vehicles. Because there are many styles of push bumpers available with varying crash characteristics, installation of push bumpers may or may not effect deployment timing of the airbags. Push bumpers should be mounted to avoid modifying the vehicle structure and interfering with the front airbag sensors mounted on the upper radiator support cross member.

Two front impact sensors are installed in General Motors vehicles. Do not relocate or disconnect the front sensors. The location and orientation of the front sensors are critical for correct operation of the airbag system. Avoid mounting components on or near the sensors. Push bumper styles with vertical pushing members that are in foreaft alignment with the front airbag sensors are not recommended.

## **When should an airbag inflate?**

The driver's and right-front passenger's frontal airbags are designed to inflate in moderate to severe frontal or near-frontal crashes. But they are designed to inflate only if the impact speed is above the system's designed "threshold level."

In addition, your vehicle has "dual stage" frontal airbags which tailor the amount of restraint according to crash severity. For moderate frontal impacts, the airbags inflate at a level less than full deployment. For more severe frontal impacts, "dual stage" frontal airbags deploy at full levels.

If the front of your vehicle goes straight into a wall that doesn't move or deform, the threshold level of the reduced deployment is about 12 to 16mph (19 to 15 km/h), and the threshold level for a full deployment is about 18 to 24 mph (29 to 28.5 km/h). The threshold level can vary, however, with specific vehicle design, so that it can be somewhat above or below this range.

If your vehicle strikes something that will move or deform such as a parked car, the threshold level will be higher. The driver's and right-front passenger's frontal airbags are not designed to inflate in rollover, side impacts, or rear impacts, because inflation would not help the occupant.

Seat mounted side impact airbags are designed to inflate in moderate to severe side crashes. The side impact airbags will inflate if the crash severity is above the designed "threshold level." The threshold level can vary with specific vehicles design. The side impact airbags are not designed to inflate on frontal or near frontal impacts or rear impacts, because inflation would not help the occupant.

Roof rail mounted head-curtain airbags are designed to inflate in moderate to severe side crashes. In addition, certain vehicles have head-curtain airbags which are also designed to inflate in situations where an impending rollover condition is identified by the vehicle's rollover sensing system and/or frontal or near-frontal impacts if the crash severity is above the designed "threshold level." Safety belt pretensioners at the driver and front passenger seat positions are designed to deploy in frontal, near-frontal, side, and rear crashes that exceed the "threshold level" of crash severity to help reduce slack in the safety belt. Safety belt pretensioners will also deploy in impending rollover situations.

## **How long will the airbag remain inflated?**

It takes approximately 1/20th of a second to fully inflate the frontal airbags. This is faster than the blink of an eye. The airbags begin to deflate immediately, helping to stop the occupants more gradually. Unlike frontal airbags, head curtain side airbags can remain inflated for more than 5 seconds before they start to deflate.

## **I've heard that a deployed airbag produces what appears to be smoke, is the airbag hot?**

After the bag has deployed in a crash, the airbag itself will not be hot to touch. Some components within the airbag module will be hot for a short time. A small amount of smoke coming from a deployed airbag module is normal and should not be cause for concern. Also, when the nitrogen gas is vented out of the airbag, small particles from inside the bag are also vented into passenger compartment. These airborne particles look like smoke and some particles are deposited as residue on and around the airbag.

I've heard that the dusts that are released into the passenger compartment from the airbag are harmful, is this true?

For most people, the only effect the dusts will produce is some irritation of the throat and eyes, and that is only if the occupant remains in the vehicle for many minutes after the airbag deployment with no ventilation and windows closed. However, some people with asthma may develop an asthmatic attack from inhaling the dusts. If this happens, they should first treat themselves the same way their doctor has advised them to treat any other asthma attack, and then immediately seek medical treatment.

## **Can the airbag system be re-used?**

No. The airbags are designed to inflate only once. After inflation, some new parts will be required. These will include the airbag module and possibly other parts. (A competent service technician with access to the vehicle's service manual and the required tools should replace the required components after a deployment crash.)

## **If my vehicle has airbags, why should I have to wear my safety belt?**

Yes, safety belts are the primary safety restraint in the vehicle. Airbags are in many vehicles today and will be in most of them in the future. But they are supplemental systems only; so they work with safety belts, not instead of them. Every airbag system ever offered for sale has required the use of safety belts. Even if you're in a vehicle that has airbags, you still have to buckle up to get the most protection. That's true not only in frontal collisions but especially in side and other collisions.

# ELECTRONIC STABILITY CONTROL SYSTEMS (STABILITRAK)

**StabiliTrak systems help drivers maintain control of their vehicles, especially during emergency lane changes or avoidance maneuvers. StabiliTrak uses various sensors, such as steering wheel angle, wheel speed, yaw velocity, etc., to detect any difference between the path requested by the steering wheel position and vehicle's actual path. When appropriate, the system selectively controls brakes, engine power, and even suspension settings to enhance control of the vehicle's direction and help keep it on course.**

**Independent studies conducted by the National Highway Traffic Safety Administration, the Insurance Institute for Highway Safety, and others have found StabiliTrak to be highly reactive in reducing vehicle crashes. General Motors offers StabiliTrak systems on many of its passenger car and light truck models.**

*See your owner's manual for additional information about the operation of StabiliTrak.*

## **Q. How do I use StabiliTrak?**

### **A. StabiliTrak operates independently of the driver.**

You should continue to drive your StabiliTrak equipped vehicle with caution and care. GM's StabiliTrak system, StabiliTrak is designed to be as seamless as possible in operation, and part of the overall vehicle response to make a good vehicle better

## **Q. How does StabiliTrak work?**

**A. StabiliTrak has the ability to apply control forces to the vehicle independent of the driver.** StabiliTrak uses sensors to continuously compare the path indicated by the steering wheel position to the vehicle's actual path. If a discrepancy is detected, StabiliTrak selectively controls vehicle brakes and engine torque to create a yaw moment that helps restore the vehicle's actual path to the path indicated by the steering wheel position. StabiliTrak has the ability to help correct both understeer (where the vehicle is not turning as much as the steering wheel position indicates) and oversteer (where the vehicle is turning more than the steering wheel position indicates).

## **Q. Will a tire change affect StabiliTrak?**

**A. Use of tires other than original equipment may affect StabiliTrak performance.** StabiliTrak is designed to make the best use of available traction. The performance characteristics of the original equipment tires are part of the overall system effectiveness. When you replace tires check the recommendations in your owner's manual. On GM vehicles, the original equipment tires have a "TPC" (Tire Performance Criteria) code on the sidewall. Replacing the tires with the same "TPC" code will help assure proper StabiliTrak performance.

# DRIVER OPERATED TRACTION CONTROL BUTTON

**An advanced computer controlled stability** enhancement system assists the driver with directional control of the vehicle in difficult driving conditions. Each time the vehicle is started, the StabiliTrak system is fully on. StabiliTrak can be controlled by a Traction Control Button. The condition system is displayed by a StabiliTrak indicator light and Driver Information

Center (DIC) Message. Push once to disable Traction Control. Push and hold to disable both Traction Control and StabiliTrak. In this condition, StabiliTrak will automatically turn ON when the vehicle speed exceeds 35 mph (56km/hr) while the Traction Control remains OFF. Push again to enable Traction Control and StabiliTrak.

# MAINTENANCE / WARRANTY

## MAINTENANCE

Two maintenance visits within 2 years/24,000 miles (whichever comes first) includes:

- ACDelco dexos1®Oil and ACDelco Oil Filter Change (excludes Bolt EV)
- 4-wheel Tire Rotation
- 27-Point Vehicle Inspection (MPVI)

Maintenance visits must occur within two years or 24,000 miles of vehicle delivery, whichever comes first. All 2017 Corvette models are eligible for three service visits under the Chevrolet Complete Care program. Does not include air filters. See participating dealer for other restrictions and complete details.

All vehicles require periodic maintenance. Maintenance services, such as those detailed in the Owner's Manual are the owner's expense. Vehicle lubrication, cleaning, or polishing are not covered. Failure of or damage to components requiring replacement or repair due to vehicle use, wear, exposure, or lack of maintenance is not covered.

Items such as audio system cleaning, brake pads/linings, clutch linings, coolants and fluids, filters, keyless entry (or other remote transmitter/receiver batteries),<sup>†</sup> limited slip rear axle service, tire rotation, wheel alignment/balance,<sup>†</sup> wiper inserts are covered up to the first maintenance inspection period outlined in the Owner's Manual. Any replacement at the time of, or beyond the maintenance inspection period is considered maintenance, and is not covered as part of the New Vehicle Limited Warranty. The New Vehicle Limited Warranty only covered components when replacement or repair of these components is the result of a defect in material or workmanship.

## BUMPER TO BUMPER WARRANTY (including tires)

Coverage is for the first 3 years or 36,000 miles, whichever comes first.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state. GM does not authorize any person to create for it any other obligation or liability in connection with these vehicles. Any implied warranty of merchantability or fitness for a particular purpose applicable to this vehicle is limited in duration to the duration of this written warranty. Performance of repairs and needed adjustments is the exclusive remedy under this written warranty or any implied warranty. GM shall not be liable for incidental or consequential damages, such as, but not limited to, lost wages or vehicle rental expenses, resulting from breach of this written warranty or any implied warranty.

## ENGINE

Coverage includes all internally lubricated parts, engine oil cooling hoses, and lines. Also included are all actuators and electrical components internal to the engine (e.g., Active Fuel Management valve, lifter and oil manifold) cylinder head, block, timing gears, timing chain, timing cover, oil pump/oil pump housing, OHC carriers, valve covers, oil pan, seals, gaskets, manifolds, flywheel, water pump, harmonic balancer, engine mount, turbocharger, and supercharger. Timing belts are covered until the first scheduled maintenance interval. Exclusions: Excluded from the powertrain coverage are sensors, wiring, connectors, engine radiator, coolant hoses, coolant, and heater core. Coverage on the engine cooling system begins at the inlet to the water pump and ends with the thermostat housing and/or outlet that attaches to the return hose. Also excluded is the starter motor, entire pressurized fuel system (in-tank fuel pump, pressure lines, fuel rail(s), regulator, injectors, and return line), as well as the Engine/ Powertrain Control Module and/or module programming.

## DIESEL ENGINE COMPONENTS

Cylinder block and heads and all internal parts, intake and exhaust manifolds, timing gears, timing gear chain or belt and cover, flywheel, harmonic balancer, valve covers, oil pan, oil pump, water pump, fuel pump, engine mounts, seals, and gaskets. Parts of the Emissions Reduction System such as the emissions reduction fluid tank, injectors, sensors including NOx and exhaust, and the Exhaust Particulate Filter. Glow Plug Control System: Control/glow plug assembly, glow plugs, cold advance relay, and engine control module. The fuel injection control module, integral oil cooler, transmission adapter plate, common fuel rails, fuel filter assembly, fuel temperature sensor, and function block.

# MAINTENANCE / WARRANTY

## **POWERTRAIN LIMITED WARRANTY**

Coverage is for the first 5 years or 60,000 miles, whichever comes first.

Certain commercial fleet and/or government fleet vehicles purchased under a qualifying fleet account number are covered for 5 years or 100,000 miles, whichever comes first. A Qualified Fleet User is defined as a company that has purchased and registered or leased five (5) or more new cars/or trucks solely for use in its operation during the current or preceding calendar year, model year, preceding twelve (12) month period, or that owns or leases fifteen (15) or more cars and trucks. Excludes rental customers. See dealer for details.

Diesel Engine/Components: Cylinder block and heads and all internal parts, intake and exhaust manifolds, timing gears, timing gear chain or belt and cover, flywheel, harmonic balancer, valve covers, oil pan, oil pump, water pump, fuel pump, engine mounts, seals, and gaskets. Parts of the Emissions Reduction System such as the emissions reduction fluid tank, injectors, sensors including NOx and exhaust, and the Exhaust Particulate Filter. Glow Plug Control System: Control/glow plug assembly, glow plugs, cold advance relay, and engine control module. The fuel injection control module, integral oil cooler, transmission adapter plate, common fuel rails, fuel filter assembly, fuel temperature sensor, and function block.

Refer to the Limited Warranty and Owner Assistance Information or a Chevrolet dealership for additional details.

## **TRANSMISSION AND TRANSAXLE**

Coverage includes all internally lubricated parts, case, torque converter, mounts, seals and gaskets, as well as any electrical components internal to the transmission/transaxle. Also covered are any actuators directly connected to the transmission (slave cylinder, etc.). Exclusions: Exclusions from the powertrain coverage include cooling lines, hoses, radiator, sensors, wiring, and electrical connectors. Also excluded are the clutch and pressure plate, as well as any Transmission Control Module and/or module programming.

## **TRANSFER CASE**

Coverage includes all internally lubricated parts, case, mounts, seals and gaskets, as well as any electrical components internal to the transfer case. Also covered are any actuators directly connected to the transfer case, as well as the encoder motor. Exclusions: Excluded from the powertrain coverage are transfer case cooling lines, hoses, radiator, sensors, wiring, and electrical connectors, as well as the transfer case control module and/or module programming.

## **DRIVE SYSTEMS**

Coverage includes all internally lubricated parts, final drive housings, axle shafts and bearings, constant velocity joints, propeller shafts and universal joints. All mounts, supports, seals, and gaskets, as well as any electrical components internal to the drive axle. Also covered are any actuators directly connected to the drive axle (e.g., front differential actuator). Exclusions: Excluded from the powertrain coverage are all wheel bearings, drive wheel front and rear hub bearings, locking hubs, drive system cooling, lines, hoses, radiator, sensors, wiring, and electrical connectors related to drive systems, as well as any drive system control module and/or module programming.

## **SHEET METAL**

All body and sheet metal components are warranted against corrosion for 3 years or 36,000 miles, whichever comes first. Plus you're protected even further from rust-through corrosion for a minimum of 6 years/100,000 miles (whichever comes first). Application of additional rust-inhibiting materials is not required under the corrosion coverage and none is recommended. See your GM dealer for terms of this limited warranty.

## **EMISSION CONTROL SYSTEM**

For light duty trucks, see "How to Determine the Applicable Emissions Control Systems Warranty" under Emission Control System Warranty on pg. 21 for more information. Defects and performance for car and light-duty truck emission control systems are covered for the first 2 years or 24,000 miles, whichever comes first. From the first 2 years or 24,000 miles to 3 years or 36,000 miles defects in material or workmanship continue to be covered under the New Vehicle Limited Bumper-to-Bumper Warranty coverage. Specified major components are covered for the first 8 years or 80,000 miles, whichever comes first. Defects and performance for heavy duty truck emission control systems including those found in 6.6L Duramax® Diesel Engines are covered for the first 5 years or 50,000 miles, whichever comes first.

California: Defects and performance for cars and trucks with light duty or medium duty emission control systems are covered for the first 3 years or 50,000 miles, whichever comes first. Specified components for cars or light duty trucks equipped with light duty or medium duty truck emission control systems are covered for the first 7 years or 70,000 miles, whichever comes first. See "California Emission Control System Warranty" on pg. 21 of your Chevrolet Limited Warranty and Owner Assistance Information booklet.

# MAINTENANCE / WARRANTY

## **TIRES**

The tires supplied with your vehicle are covered by General Motors against defects in material or workmanship under the Bumper-to-Bumper Limited Warranty coverage. Wear-out is not considered a defect, and it may occur before the vehicle warranty expires. In this case, the owner is responsible for purchasing replacement tires, or seeking coverage solely from the tire manufacturer. For vehicles within the Bumper-to-Bumper Limited Warranty coverage, defective tires will be replaced on a prorated adjustment basis according to the mileage-based schedule in your Warranty and Owner Assistance Information booklet. After your New-Vehicle Limited Warranty expires, you may still have prorated warranty coverage on your original equipment tires by the tire manufacturer.

## **ACCESSORY COVERAGE**

Most GM parts and accessories sold and permanently installed on a GM vehicle by a GM Dealer or GM approved Accessory Distributor/Installer (ADI) prior to delivery will be covered under the applicable portion (Bumper-to-Bumper, Powertrain, etc.) of the New Vehicle Limited Warranty. In the event GM accessories are installed after vehicle delivery, or are replaced under the New Vehicle Limited Warranty, they will be covered, parts and labor, for the balance of the applicable portion of the New Vehicle Limited Warranty, but in no event less than 12 months/unlimited miles. GM Accessories sold over the counter, or those not requiring installation, will continue to receive the standard GM Dealer Parts Warranty of 12 months from the date of purchase, parts only. GM Licensed and Integrated Business Partner (IBP) Accessories are covered under the accessory-specific manufacturer's warranty and are not warranted by GM or its dealers.

## **TOWING**

Towing is covered to the nearest Chevrolet dealer if your vehicle cannot be driven because of a warranted defect.

## **COURTESY TRANSPORTATION PROGRAM**

Offers response, security and convenience of the 24-Hour Roadside Assistance Program. Roadside Assistance is provided with all purchased or leased GM vehicles that are within the Powertrain Limited Warranty.

- Emergency Towing (from a public road or highway to nearest Chevrolet dealer)
- Lockout Service (keys locked inside vehicle)
- Flat Tire Changes (service to change a flat tire with the spare tire (if equipped))
- Fuel Delivery (enough fuel for vehicle to get to the nearest service station)
- Jump-Starts (service to jumpstart a dead battery) During the 8 year or 100,000 miles
- Electric Propulsion warranty period, towing is covered to the nearest Chevrolet servicing dealer if your vehicle cannot be driven because of a warranted Electric Propulsion specific defect. Refer to your Owner's Manual for details, including reservation of rights, or consult your dealer/retailer. --For specific terms and conditions, please contact your Chevrolet Roadside Assistance Program advisor at 1-800-243-8872.

## **WHAT IS NOT COVERED**

Tire and Wheel Damage or Wear Normal tire wear and tear or wear-out is not covered. Tire wear is influenced by many variables such as road conditions, driving styles, vehicle weight, and tire construction. Uniform tire wear is a normal condition, and it not considered a defect. Road hazard damage such as punctures, cuts, snags, and breaks resulting from pothole impact, curb impact, or from other objects is not covered. Tire wear due to misalignment beyond the warranty period is not covered. Also, damage from improper mounting or dismounting, misuse, negligence, alteration, improper repair, accident, collision, fire, vandalism, or misapplication is not covered. Damage to sidewalls caused by automatic car washes or cleaning agents is not covered.

Damage Due to Bedliners Owners of trucks with a bedliner, whether after-market or factory installed, should expect that with normal operation the bedliner will move. This movement may cause finish damage. Therefore, any damage caused by the bedliner is not covered under the terms of the New Vehicle Limited Warranty. The factory spray in bedliner (RPO CGN) is not covered for a loss of shine and luster or fading. Refer to the Owner's Manual for more information on spray in bedliner maintenance.

Damage Due to Accident, Misuse, or Alteration. The New Vehicle Limited Warranty does not cover damage caused as a result of the following: Collision, fire, theft, freezing, vandalism, riot, explosion, or objects striking the vehicle.

Misuse of the vehicle such as driving over curbs, overloading, racing, or other competition. Proper Vehicle use is discussed in the Owner's Manual. Alteration, modification, or tampering to the vehicle, including, but not limited to the body, chassis, powertrain, driveline, software, or other components after final assembly by GM. Coverages do not apply if the odometer has been disconnected, its reading has been altered, or mileage cannot be determined. Installation of non-GM (General Motors) parts. Water or fluid contamination.

# MAINTENANCE / WARRANTY

Damage resulting from hail, floods, windstorms, lightning, and other environmental conditions. Alteration of glass parts by application of tinting films.

Damage caused by failure to follow the recommended maintenance schedule intervals and/or failure to use or maintain proper fluids, or maintain fluids between recommended maintenance intervals, fuel, lubricants, or refrigerants recommended in the Owner's Manual is not covered.

Damage Due to Impact, Use, or the Environment Windshield or glass cracks, chips, or scratches due to impact are not covered, Windshield cracks will be covered for the first 12 months, regardless of mileage if caused by defects in material or workmanship. Lights, lenses, mirrors, paint, grille, moldings, and trim are not covered for cracks, chips, scratches, dents, dings, and punctures or tears as a result of impact with others objects or road hazards. In addition, cracks, chips, scratches, or other damage to the face of a radio or instrument cluster from impact or foreign objects are not covered.

#### Damage Due to Contaminated, Improper, or Poor Quality Fuel

Poor fuel quality or incorrect fuel may cause drivability problems, such as hesitation, lack of power, stalling, or failure to start. They may also degrade functionality of critical exhaust emissions components such as spark plugs, oxygen sensors, and the catalytic converter. Damage from poor fuel quality, water contamination, or if the vehicle requires premium fuel, operating the vehicle on gasoline with a Pump Octane less than 91 (R+M)/2, may not be covered. Prohibited fuels are: Gasolines containing any methanol, MMT, an organometallic octane enhancing additive, and/or fuels containing more than 15% ethanol in non-Flex Fuel Vehicles (FFV). Please refer to your Owner's Manual under "Fuel," for additional recommendations, including the use of TOP TIER Detergent Gasoline. Additional information can also be found at <http://www.toptiergas.com>

#### Third Party Externally Connected Electrical Products

This warranty does not apply to hardware or software of a third party device that is connected to the vehicle or its components, even if integrated or delivered with the vehicle. GM is not responsible for the quality or accuracy of any information, or service accessed through or from any third party device or platform. Software distributed by GM inside or outside the vehicle (including, but not limited to system software or applications) is not covered by this Warranty. GM does not warrant that connections to, from or through the vehicle will be uninterrupted or error-free. Also, the user should back-up their data and user information frequently. GM is not responsible for any loss or damage to data or information made available in connection with the use of the vehicle.

In addition, this Warranty does not apply to:

- consumable parts that are designed to diminish over time, unless failure has occurred due to a defect in materials or workmanship;
- damage caused by a third party device or service (including upgrades and expansions), or (d) to obsolescence or lack of utility with future versions of external hardware or software, including, but not limited to mobile devices.

**ALTERATIONS AND WARRANTIES:** The Chevrolet New Vehicle Limited Warranty does not cover any damage or failure resulting from modifications, installations, or alterations to the original equipment as manufactured or assembled by General Motors. The special body company, assembler, equipment installer or upfitter is solely responsible for warranties on the body or equipment and any alterations (or any effect of the alterations) to any of the parts, components, systems or assemblies installed by GM. General Motors is not responsible for the safety or quality of design features, materials or workmanship of any alterations by such suppliers.

**IMPORTANT:** This warranty is void on vehicles currently or previously titled as salvage scrapped, junked, or otherwise considered a total loss. Damage or Corrosion Due to Environment, Chemical Treatments, or Aftermarket Products

Damage Caused by airborne fallout, rail dust, salt from sea air, salt or other materials used to control road conditions, chemicals, tree sap, stones, hail, earthquake, water or flood, windstorm, lightning, the application of chemicals or sealants subsequent to manufacture, etc., is not covered. See "Chemical Paint Spotting" under Things to Know About the New Vehicle Limited Warranty on pg. 16. Damage Due to Insufficient or Improper Maintenance.



LS Model shown with after-market equipment

GM reserves the right to make changes at any time, without notice, in prices, colors, materials, equipment, specifications, models, and availability. Specifications, dimensions, measurements, ratings, and other numbers in this catalog and other printed materials provided at the dealership or affixed to vehicles are approximates based upon design and engineering drawings and prototypes and laboratory tests. Your vehicle may differ due to variations in manufacture and equipment. Since some information may have been updated since the time of printing, please check with your GM dealer for complete details. Some of the equipment shown or described throughout this publication may be available at extra cost, and/or is supplied by an independent supplier.

Copyright 2018 General Motors. All rights reserved. All text, images, graphics, and other materials in this publication are subject to the copyright and other intellectual property rights of General Motors. These materials may not be reproduced, distributed, or modified without the express written permission of General Motors. The marks appearing in this publication including, but not limited to: GM and the GM logo; Chevrolet and their respective logos, emblems, slogans, and vehicle model names and body designs; and other marks such as GM Fleet and Commercial are trademarks and/or service marks of General Motors, its subsidiaries, affiliates, or licensors.

For more detailed information, contact your District Sales Manager or see the online order guide at [gmfleet.com](http://gmfleet.com).



For more information, visit [gmfleet.com/police](https://gmfleet.com/police)

