

FULL SIZE C/K LD PICKUPS

Model Symbol Chart.....	1
General Information.....	See Light Duty BBM “General Information” section
General Instructions	See Light Duty BBM “General Instruction” section
Camper Loading.....	See Online Order/Ref. Guide – “GM Consumer Info. Truck-Camper Loading”
Pickup Box Removal	See Light Duty BBM “Special Applications – Pickup Box Removal Program” section
Snow Plow Prep. Pkg.....	See Light Duty BBM “Special Applications – Snow Plow Prep Package” section
Trailer Information	See Light Duty Online Order/Ref. Guide – “Light Duty Trailering Specs”
Model and Option Weights	See Light Duty Online Order/Ref. Guide – “Model and Opt. Weights” & “Weight Calculator”

VEHICLE

GENERAL ARRANGEMENT

Regular Cab.....	2
Extended Cab.....	3
Crew Cab	4
Body/Cargo Weight Distribution – 6' 6".....	5
Body/Cargo Weight Distribution – 5' 8".....	6
Body/Cargo Weight Distribution – 8'	7

BODY – EXTERIOR

GENERAL ARRANGEMENT

Regular Cab, 6' 6" Box – C/K 15703.....	8
Regular Cab, 8' Box – C/K 15903.....	9
Extended Cab, 6' 6" Box – C/K 15753.....	10
Crew Cab, 6' 6" Box – C/K 15743.....	11
Crew Cab, 5' 8" Box – C/K 15543	12

FRONT END CLIPS

C/K 100 (03/53/43)	13
--------------------------	----

HOOD OPENINGS

C/K 100 (03/53/43)	14
--------------------------	----

FULL SIZE C/K LD PICKUPS

BODY – EXTERIOR – *Continued*

HOOD PROFILES

Chevy X88 – C/K 100 (03/53/43)	15
GMC Z88 – C/K 100/200/300 (03/53/43)	16

REAR BACK OF CAB SILHOUETTE

Pickup	17
--------------	----

SIGN AREA

Regular Cab – C/K 100/200/300 (03)	18
Extended Cab – C/K 100/200/300 (53)	19
Crew Cab – C/K 100/200/300 (43)	20

CAB STEP IN HEIGHTS

Regular Cab (03)	21
Extended Cab (53)	22
Crew Cab (43)	23

MIRRORS, OUTSIDE REARVIEW

C/K 1000, Option DL8 and C/K 2000, Option DE 2	24
--	----

CAB CLEARANCE LAMPS, CHMSL AND REAR CAB WINDOW

Fixed and Sliding	25
-------------------------	----

CAB PRESSURE VALVE ASSEMBLY

Rear Quarter Body Panel	26
-------------------------------	----

PICKUP BOX

Side Rail Load Points/Paths – Structural Members	27
Side Rail Load Points/Paths – Primary/Secondary Load Points	28
Side Rail Load Points/Paths – Stake Pocket Openings & Front Structure	29
Side Rail Load Points/Paths – Stake Pocket Openings & Rear Structure	30
Length and Width Dimension for 5' 8", 6' 6" and 8'	31
Inside Panel, 5' 8" Box	32

FULL SIZE C/K LD PICKUPS

BODY – EXTERIOR – PICKUP BOX – *Continued*

Cross Sills Location, 5' 8" Box.....	33
Inside Panel, 6' 6" Box	34
Cross Sills Location, 6' 6" Box.....	35
Inside Panel, 8' Box	36

CAB – INTERIOR

SEATING ARRANGEMENT

Seating Positions and H Points 1st Row Front View, Pickups – C/K 100/200/300 (03/53/43)	37
Seating Positions and H Points 2nd Row Front View, Pickups – C/K 100/200/300 (03/53/43)	38
Seating Positions and H Points Side View, Pickups – C/K 100/200/300 (03/53/43)	39

SEAT MOUNTING HOLES LOCATIONS – FLOOR

C/K 100/200/300 (03/53/43)	40
C/K 15743	41

CHASSIS

DATUM HOLE LOCATION – FRAME

C/K 100 (00) and C/K 200 (00) (00).....	42
---	----

FRAME RAIL AND CROSSMEMBER LOCATION

C/K 15703	43
C/K 15903	44
C/K 15753	45
C/K 15743	46
C/K 15543	47

SPARE TIRE LOCATION

C/K 1000 Series Pickups	48
-------------------------------	----

FULL SIZE C/K LD PICKUPS

CHASSIS – Continued

PLATFORM HITCH

Pickups C/K 100 (03/53/43)	49
----------------------------------	----

FRONT AXLE/TIRE DATA

Front Axle Tire Data Drawing – C/K 10000 Pickups.....	50
---	----

Front Axle Tire Data Chart – C/K 10000 Pickups	51
--	----

REAR AXLE/TIRE DATA

Rear Axle Tire Data Drawing – C/K 10000 Pickups.....	53
--	----

Rear Axle Tire Data Chart – C/K 10000 Pickups	54
---	----

FUEL SYSTEMS

C/K 15703	56
-----------------	----

C/K 15903 Pickup.....	57
-----------------------	----

C/K 15743, 15753 and C/K 15543 Pickups.....	58
---	----

EXHAUST SYSTEMS

C/K 100 (00) w/LV3 (4.3L V6)	59
------------------------------------	----

C/K 100 (00) w/L83 (5.3L V6)	60
------------------------------------	----

C/K 100 (00) L86 (6.2L V8).....	61
---------------------------------	----

FULL SIZE C/K LD PICKUPS

Model Symbol Chart

MARKETS (Optional)	ENGINEERING MODEL	REGULAR CABS (03) 2 DOOR CHEVROLET / GMC			EXTENDED CABS (53) 4 DOOR CHEVROLET / GMC			CREW CABS (43) 4 DOOR CHEVROLET / GMC		GVWR (kg/lbs)	WHEELBASE (mm/in)	CAB-TO-AXLE (mm/in)
	C155							+ E63 5' 8" Box		3130/6900 3175/7000 3356/7400	3645/143.5	825.5/32.5
	C157	+ E63 6' 6" Box								2948/6500 2994/6600 3039/6700	3023/119.0	1067/42
					+ E63 6' 6" Box					3130/6900 3175/7000 3356/7400	3645/143.5	1067/42
								+ E63 6' 6" Box		3130/6900 3175/7000 3356/7400	3886/153.0	1067/42
	C159	+ E63 8' Box								3039/6700 3084/6800	3378/133.0	1422/56
	K155							+ E63 5' 8" Box		3220/7100 3266/7200 3447/7600	3647/143.5	825.5/32.5
	K157	+ E63 6' 6" Box								3039/6700 3084/6800	3023/119.0	1067/42
					+ E63 6' 6" Box					3220/7100 3266/7200 3447/7600	3647/143.5	1067/42
								+ E63 6' 6" Box		3220/7100 3266/7200 3447/7600	3886/153.0	1067/42
	K159	+ E63 8' Box								3130/6900 3175/7000	3378/133.0	1422/56

E63 – Fleetside / Wideside Box (5' 8", 6' 6" and 8' Boxes)


ZW9 – Chassis Cab

EXAMPLE: C15903 = 2 DOOR REGULAR CAB / FLEETSIDE/WIDESIDE / 8' BOX

FULL SIZE C/K LD PICKUPS

PAGE 2


Regular Cab – General Arrangement

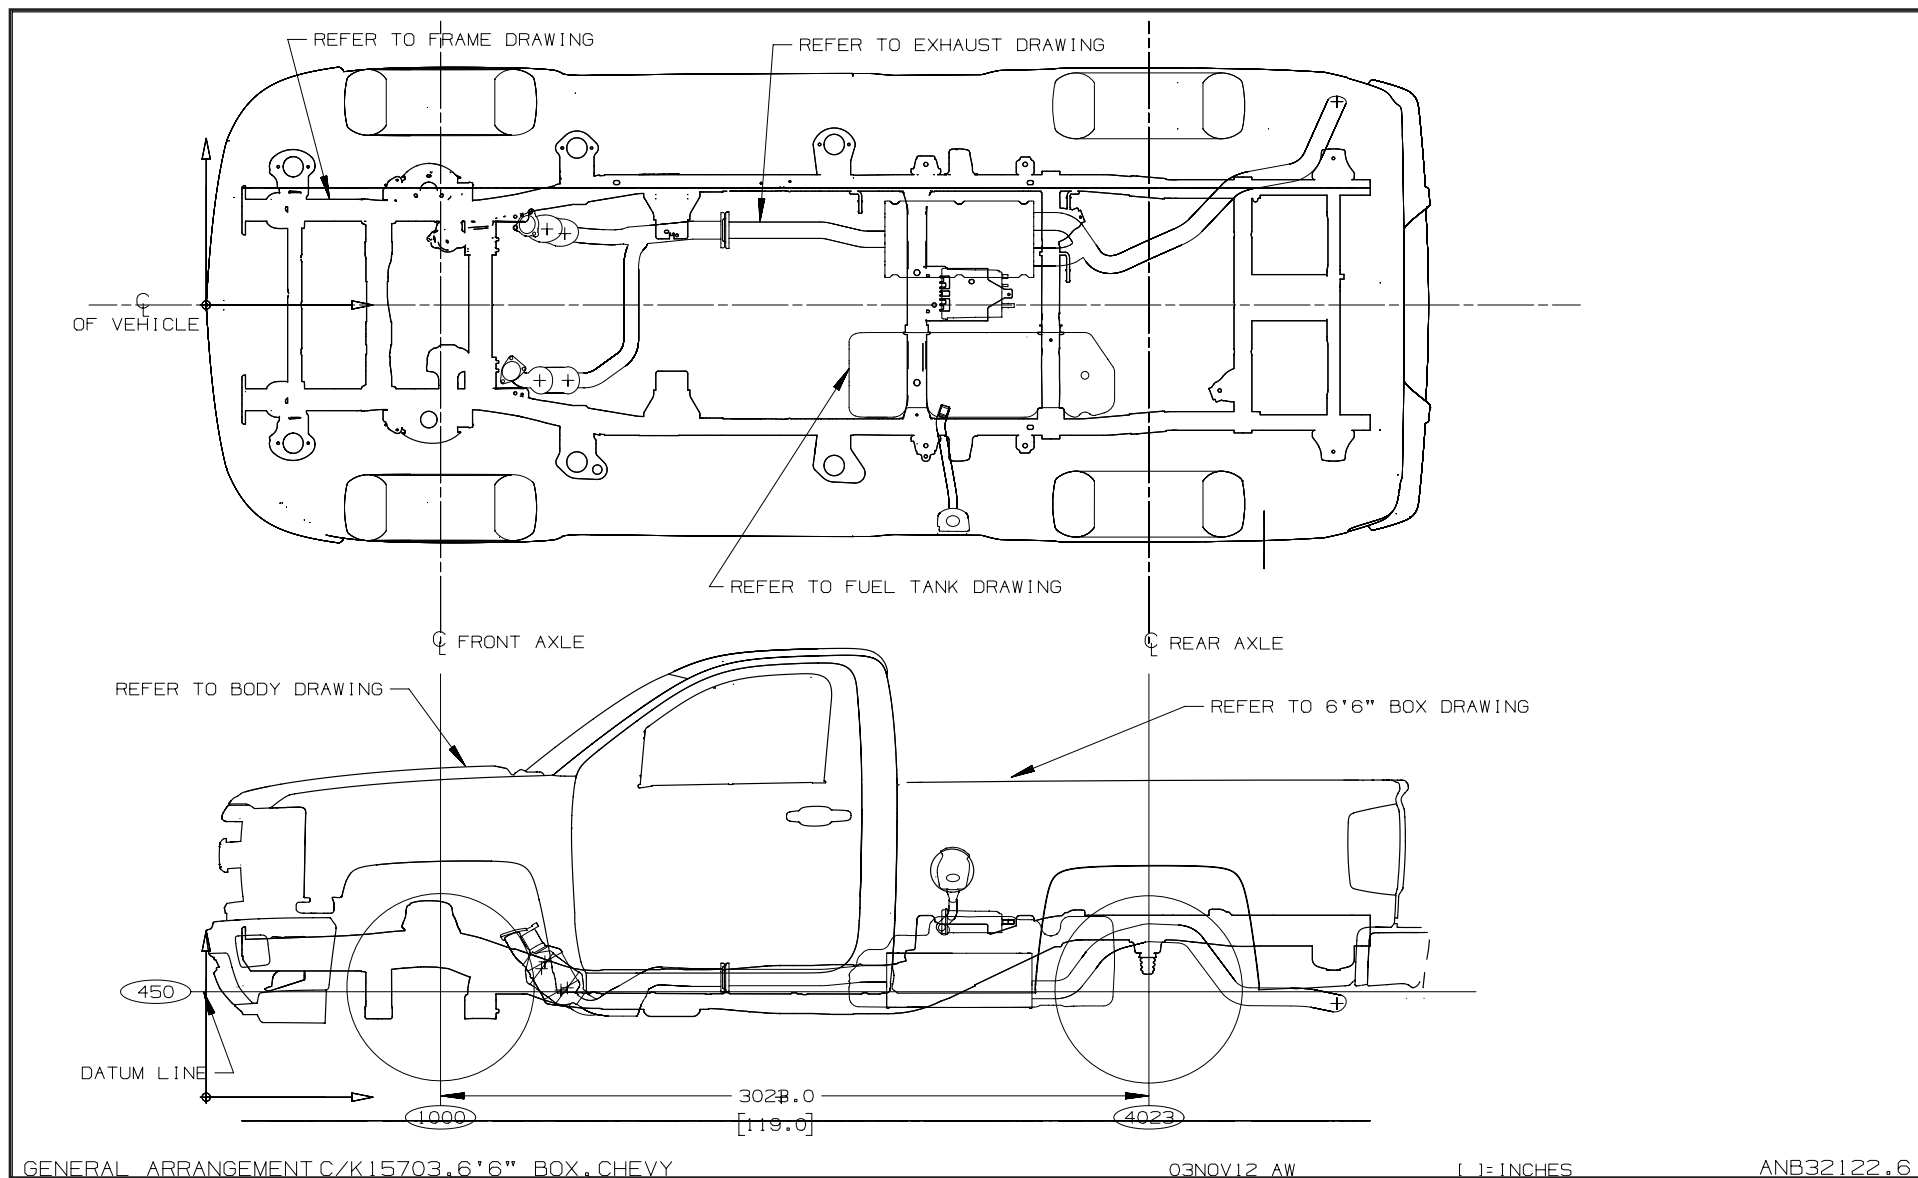

FULL SIZE C/K LD PICKUPS

PAGE 3

Extended Cab – General Arrangement

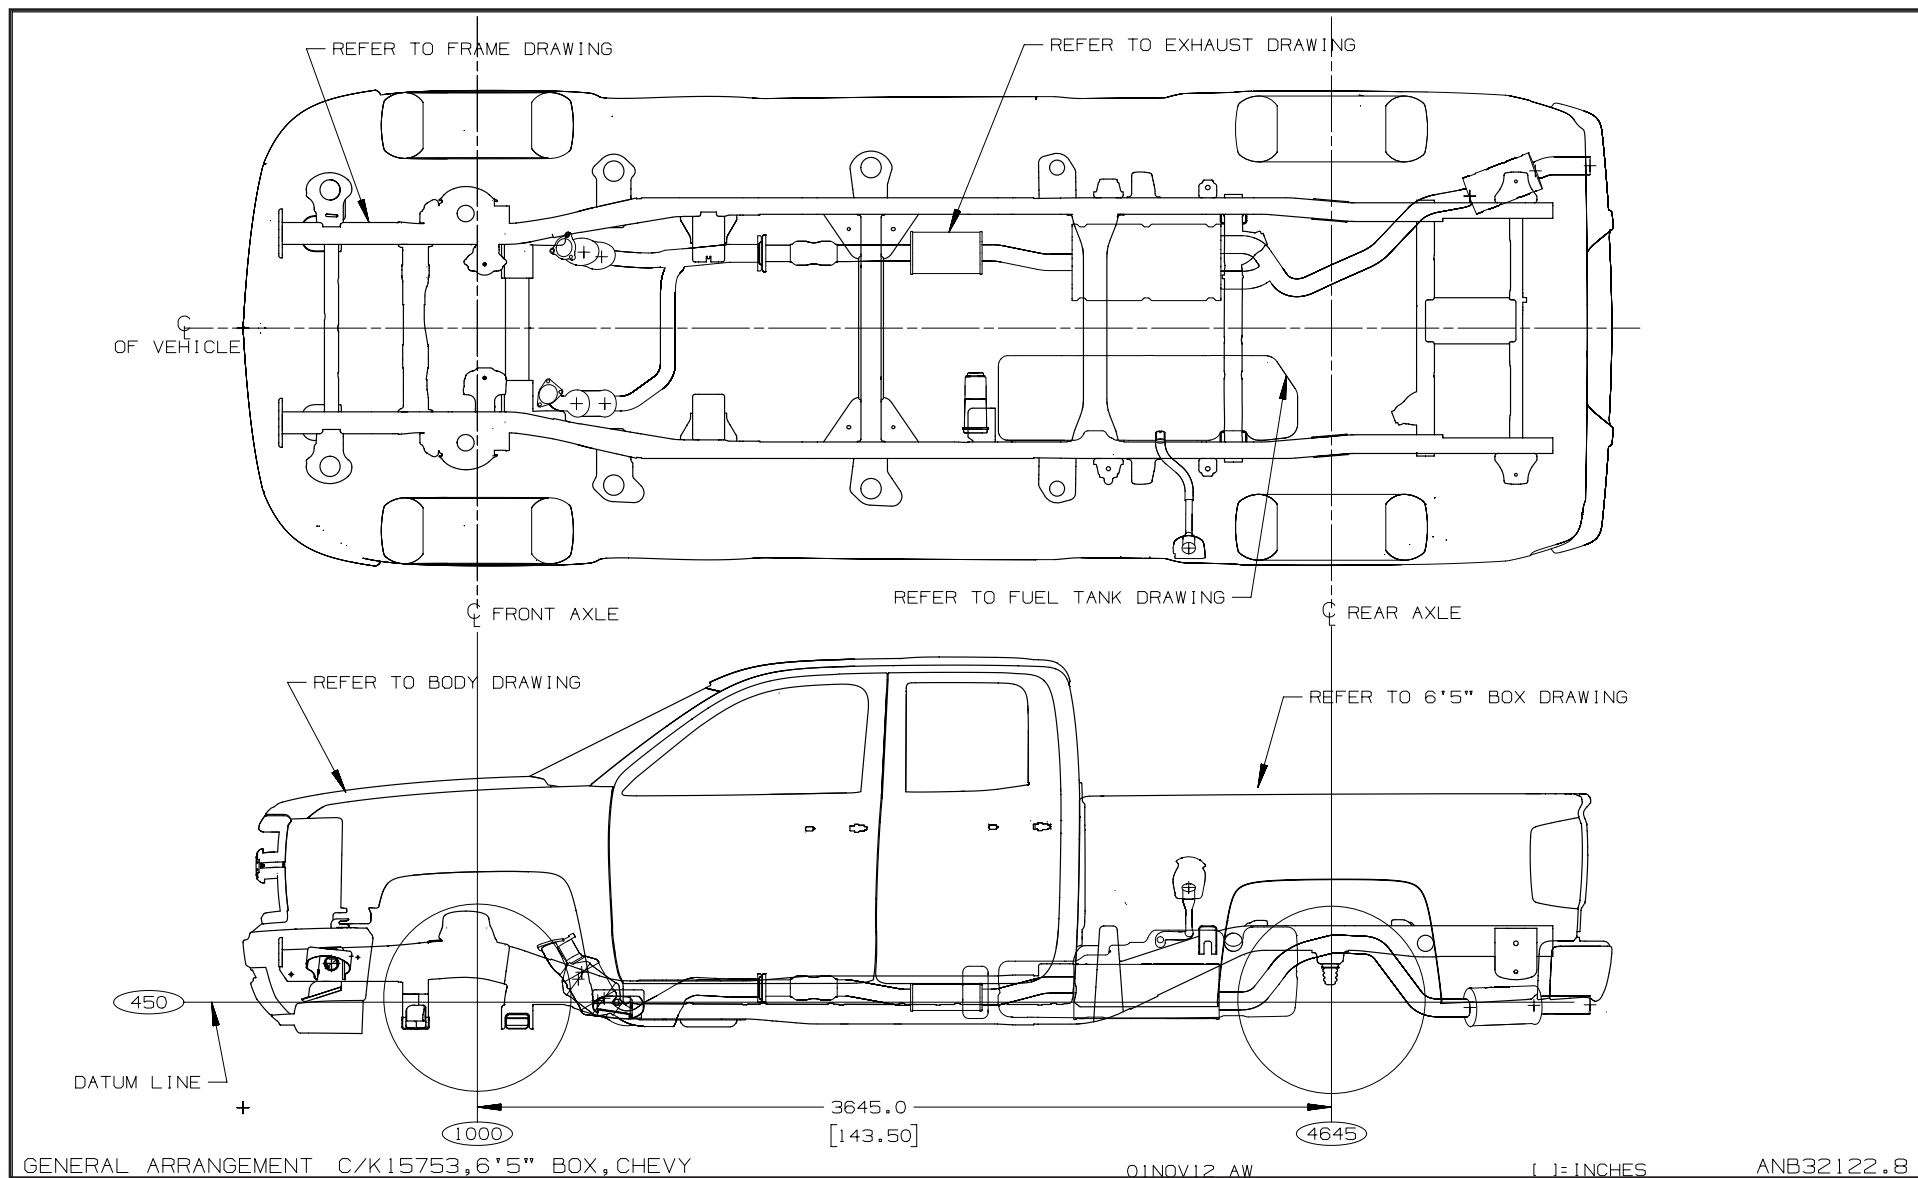


FULL SIZE C/K LD PICKUPS

PAGE


4

Crew Cab – General Arrangement

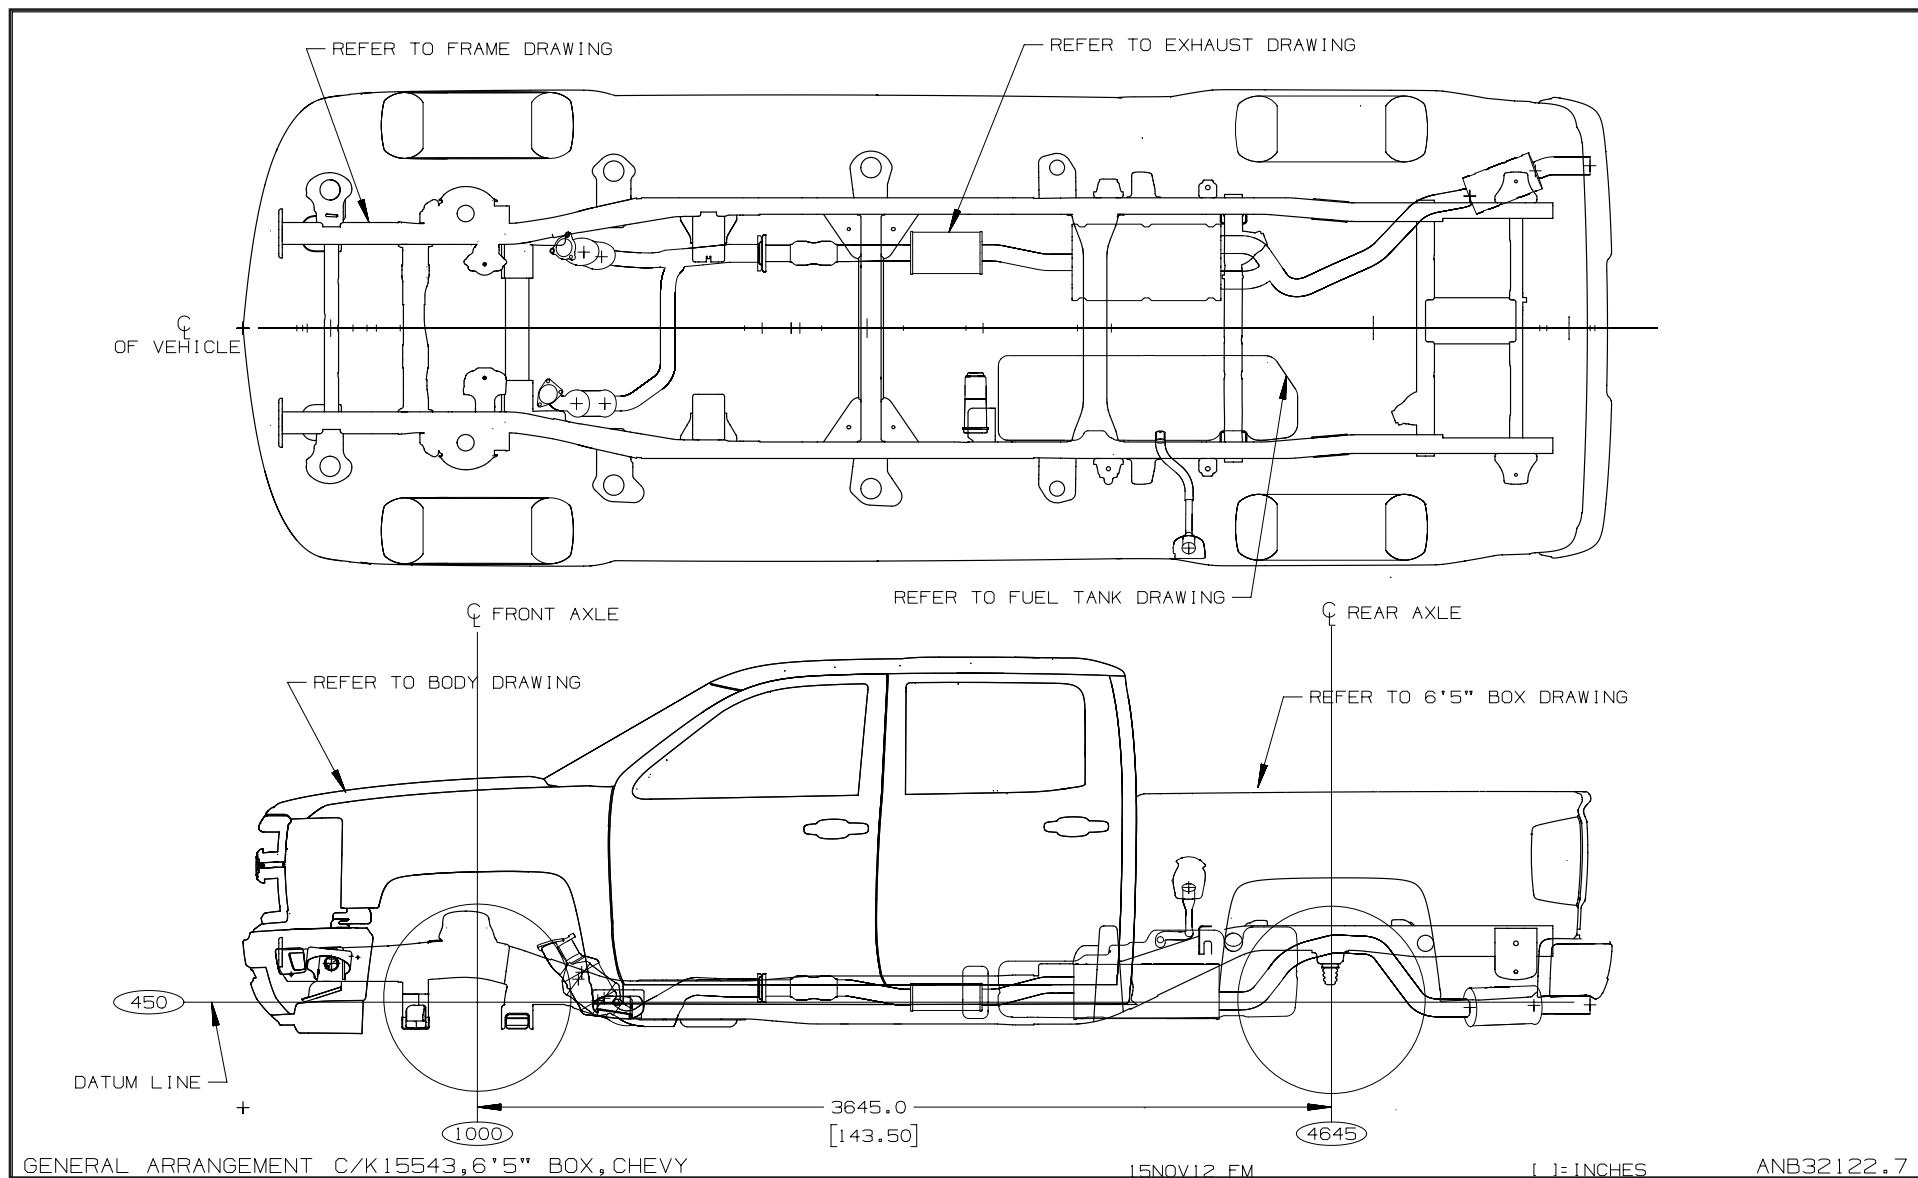

FULL SIZE C/K LD PICKUPS

Body/Cargo Weight Distribution – Pickups – 6' 6"

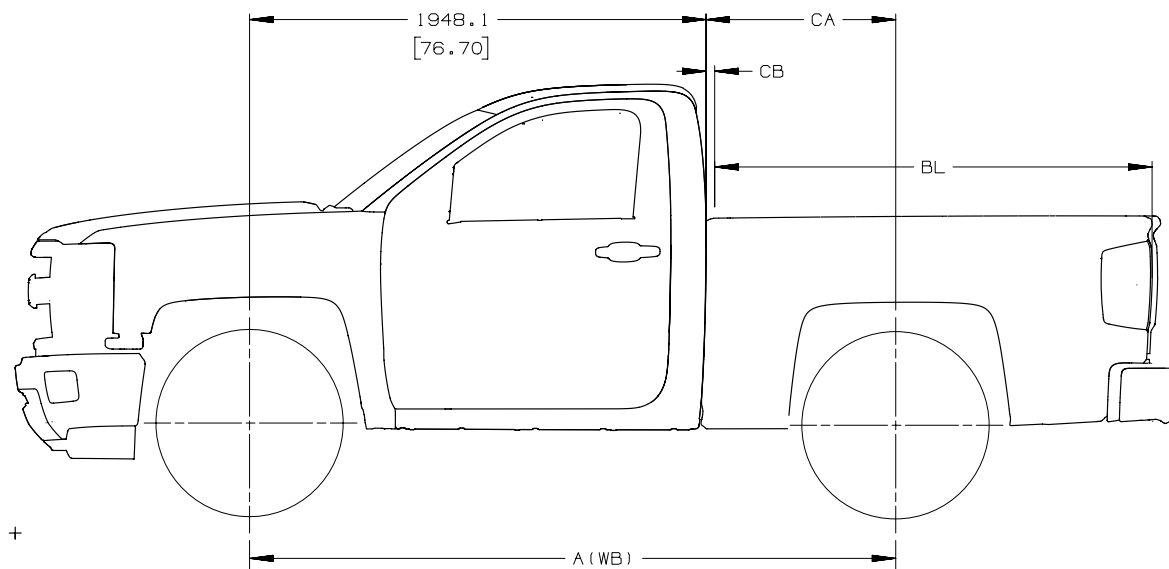

BODY/CARGO WEIGHT DISTRIBUTION						
MODEL	A (WB)	CA	CB	BL	% FRONT AXLE	% REAR AXLE
CK15703	3023.0 [119.0]	1075.3 [42.33]	25.4 [1.0]	2062.3 [81.2]	1	99
CK15753	3645.0 [143.5]	1063.4 [41.86]	25.4 [1.0]	2062.3 [81.2]	1	99

NOTE: DIMENSIONS SHOWN ARE NOMINAL.
 CA = CAB TO REAR AXLE DIMENSION
 CB = BODY CLEARANCE BETWEEN BODY AND CAB
 BL = BOX LENGTH
 A (WB) = WHEELBASE

$\frac{\text{CENTER OF GRAVITY OF PAYLOAD TO REAR AXLE}}{\text{WHEELBASE}} \times 100 = \% \text{ BODY PAYLOAD AT FRONT AXLE}$

$\frac{\text{CA} - \text{CB} - (\text{BL}/2)}{\text{A (WB)}} \times 100 = \% \text{ BODY PAYLOAD AT FRONT AXLE}$


BODY/CARGO WEIGHT DISTRIBUTION CK15703 53,6'5" BOX,2014

03NOV12 AW []=INCHES

ANC07766.3

FULL SIZE C/K LD PICKUPS

Body/Cargo Weight Distribution – Pickups – 5' 8"

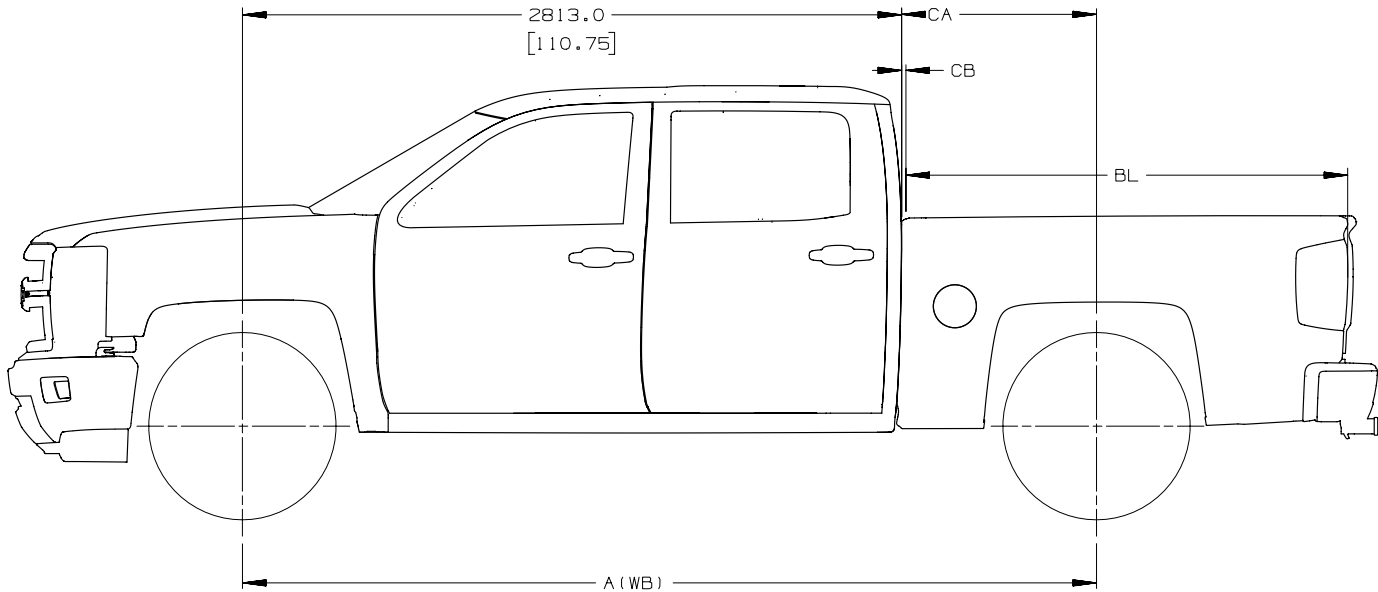

					BODY/CARGO WEIGHT DISTRIBUTION	
MODEL	A (WB)	CA	CB	BL	% FRONT AXLE	% REAR AXLE
CK15543	3645.0 [143.5]	831.4 [32.73]	25.4 [1.0]	1885.4 [74.23]	- 4	104

NOTE: DIMENSIONS SHOWN ARE NOMINAL.
CA=CAB TO REAR AXLE DIMENSION
CB=BODY CLEARANCE BETWEEN BODY AND CAB
BL=BODY (BOX) LENGTH
A(WB)=WHEELBASE

CENTER OF GRAVITY OF PAYLOAD TO REAR AXLE
WHEELBASE X100 =% BODY PAYLOAD AT FRONT AXLE

CA-CB-(BL/2)
A(WB) X100=% BODY PAYLOAD AT FRONT AXLE

BODY/CARGO WEIGHT DISTRIBUTION CK15543,5'8" BOX,2014


17NOV12 FM

[]=INCHES

ANC07766.4

FULL SIZE C/K LD PICKUPS

Body/Cargo Weight Distribution – Pickups – 8'

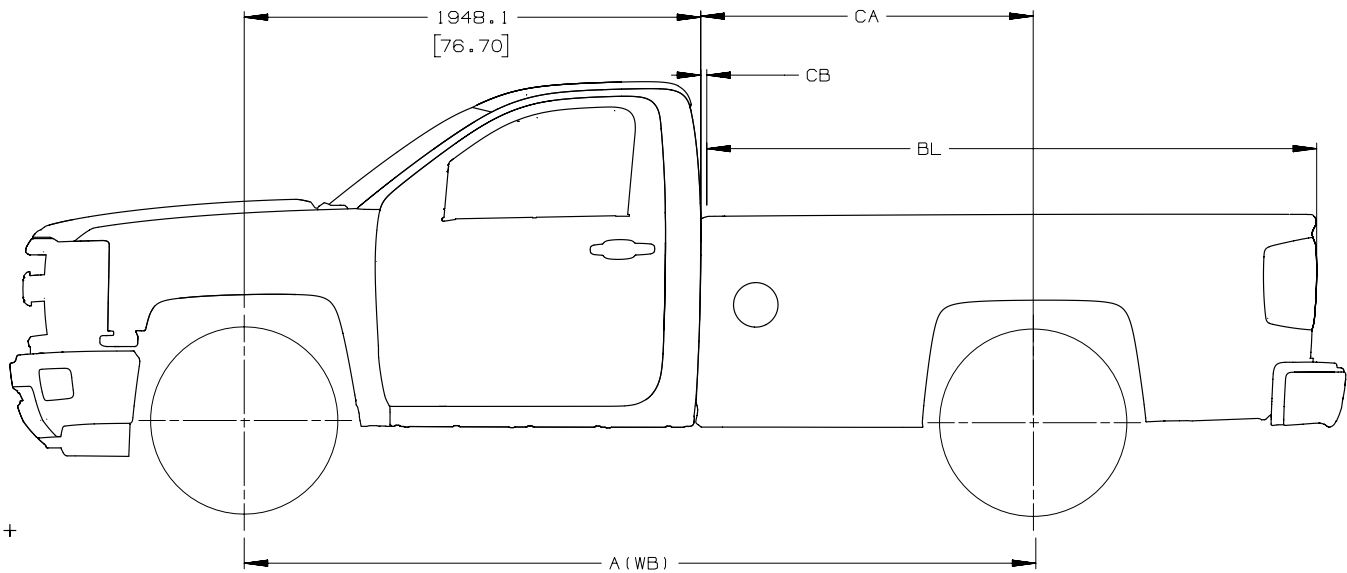

BODY/CARGO WEIGHT DISTRIBUTION						
MODEL	A (WB)	CA	CB	BL	% FRONT AXLE	% REAR AXLE
CK15903	3367.91 [132.6]	1422.83 [56.02]	25.4 [1.0]	2627.01 [103.42]	3	97

NOTE: DIMENSIONS SHOWN ARE NOMINAL.
CA=CAB TO REAR AXLE DIMENSION
CB=BODY CLEARANCE BETWEEN BODY AND CAB
BL=BOX LENGTH
A (WB) =WHEELBASE

$\frac{\text{CENTER OF GRAVITY OF PAYLOAD TO REAR AXLE}}{\text{WHEELBASE}} \times 100 = \% \text{ BODY PAYLOAD AT FRONT AXLE}$

$\frac{\text{CA}-\text{CB}-(\text{BL}/2)}{\text{A (WB)}} \times 100 = \% \text{ BODY PAYLOAD AT FRONT AXLE}$

BODY/CARGO WEIGHT DISTRIBUTION CK15903 ,8'.6' BOX,2014

17NOV12 FM

[1]=INCHES

ANC07766.5

PAGE	8
-------------	----------

Technical drawings of a Chevrolet truck showing rear, front, top, and side views with dimensions in inches and millimeters.

REAR VIEW: Dimensions include 1634.6 [64.35] (width), 815.7 [32.11] (width), 425.4 [16.75] (height), 1476.3 [58.12] (height), 1376.1 [54.18] (height), and 450 (datum line).

FRONT VIEW: Dimensions include 2427.0 [95.55] (width), 1538.0 [60.55] (height), and 450 (datum line).

TOP VIEW: Dimensions include 3965.3 [156.11] (width), 1970.0 [77.56] (width), 1696.7 [66.80] (width), 794.3 [31.27] (width), 1581.6 [62.27] (width), 848.4 [33.40] (width), 827.8 [32.59] (width), 1013.2 [39.89] (width), 2030.9 [79.96] (width), 1655.6 [65.18] (width), 2025.7 [79.75] (width), 868.8 [34.20] (width), 1715.4 [67.54] (width), 2040.8 [80.35] (width), and 450 (datum line).

SIDE VIEW: Dimensions include 5657.9 [222.75] (length), 5218.3 [205.44] (length), 4219.4 [166.12] (length), 2946.3 [116.00] (length), 1066.6 [41.99] (length), 315.1 [12.41] (height), 952.0 [37.48] (height), 475.6 [18.73] (height), 1115.2 [43.91] (height), 1205.3 [47.45] (height), 998.9 [39.33] (height), 3014.2 [118.67] (height), 1000 (front axle), 4014 (rear axle), and 450 (datum line).

Notes:

- ALL STAKE POCKET OPENINGS ARE APPROX 74.8 X 52.0 6 PLACES [2.94] X [2.05]
- ALL DIMENSIONS SHOWN FOR CHEVY BASED MODEL UNLESS OTHERWISE NOTED
- SEE FRT END SHEET METAL DRAWING (CHEVY SHOWN)

GMT900--GENERAL ARRANGEMENT CHEVY (REG CAB 6'6" PUBX) CK15703 118.67" WHEELBASE 2016

21NOV2012 AW


[]= INCHES

ANB70929.3

FULL SIZE C/K LD PICKUPS

PAGE 9


C/K 15903, Regular Cab 8' Box – Body General Arrangement

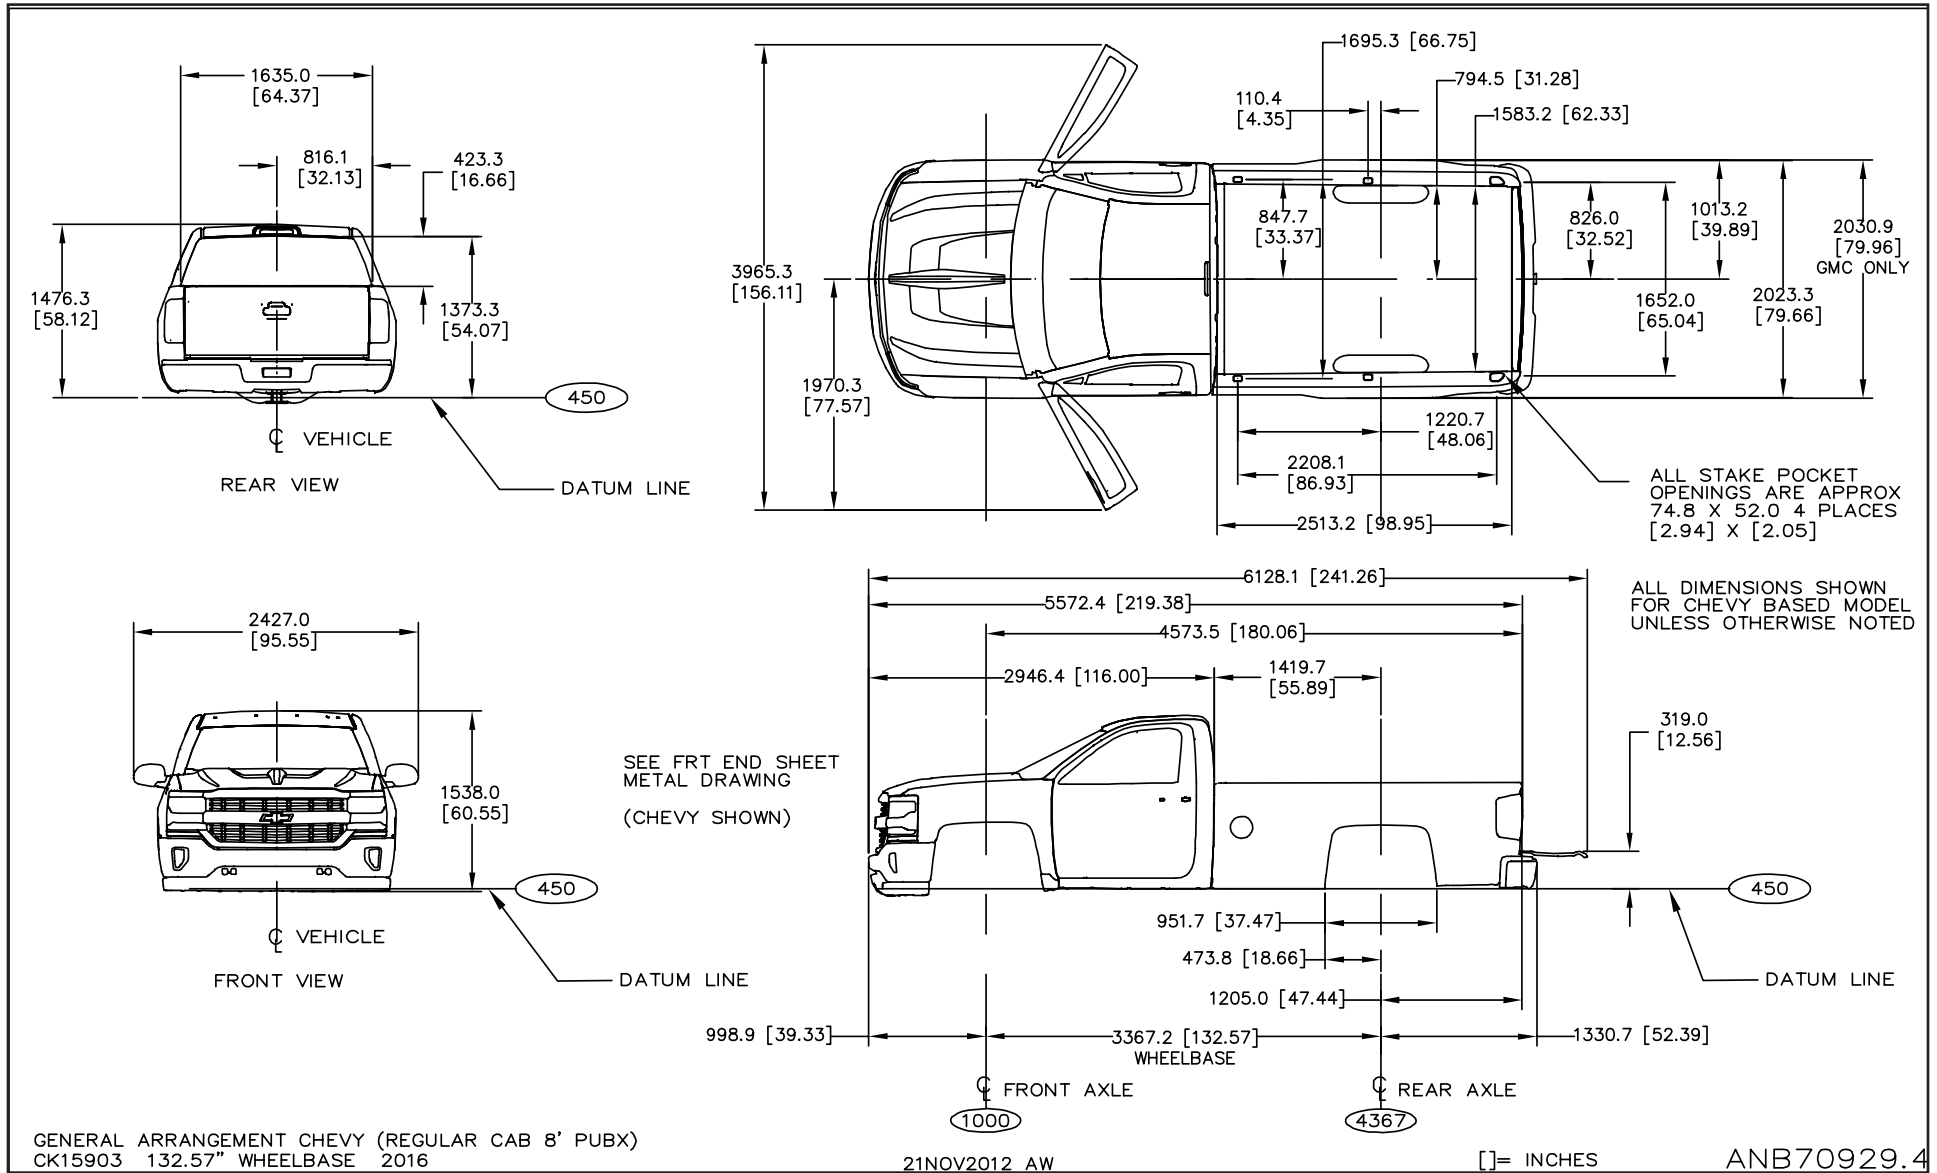

FULL SIZE C/K LD PICKUPS

PAGE 10


C/K 15753, Extended Cab 6' 6" Box – Body General Arrangement

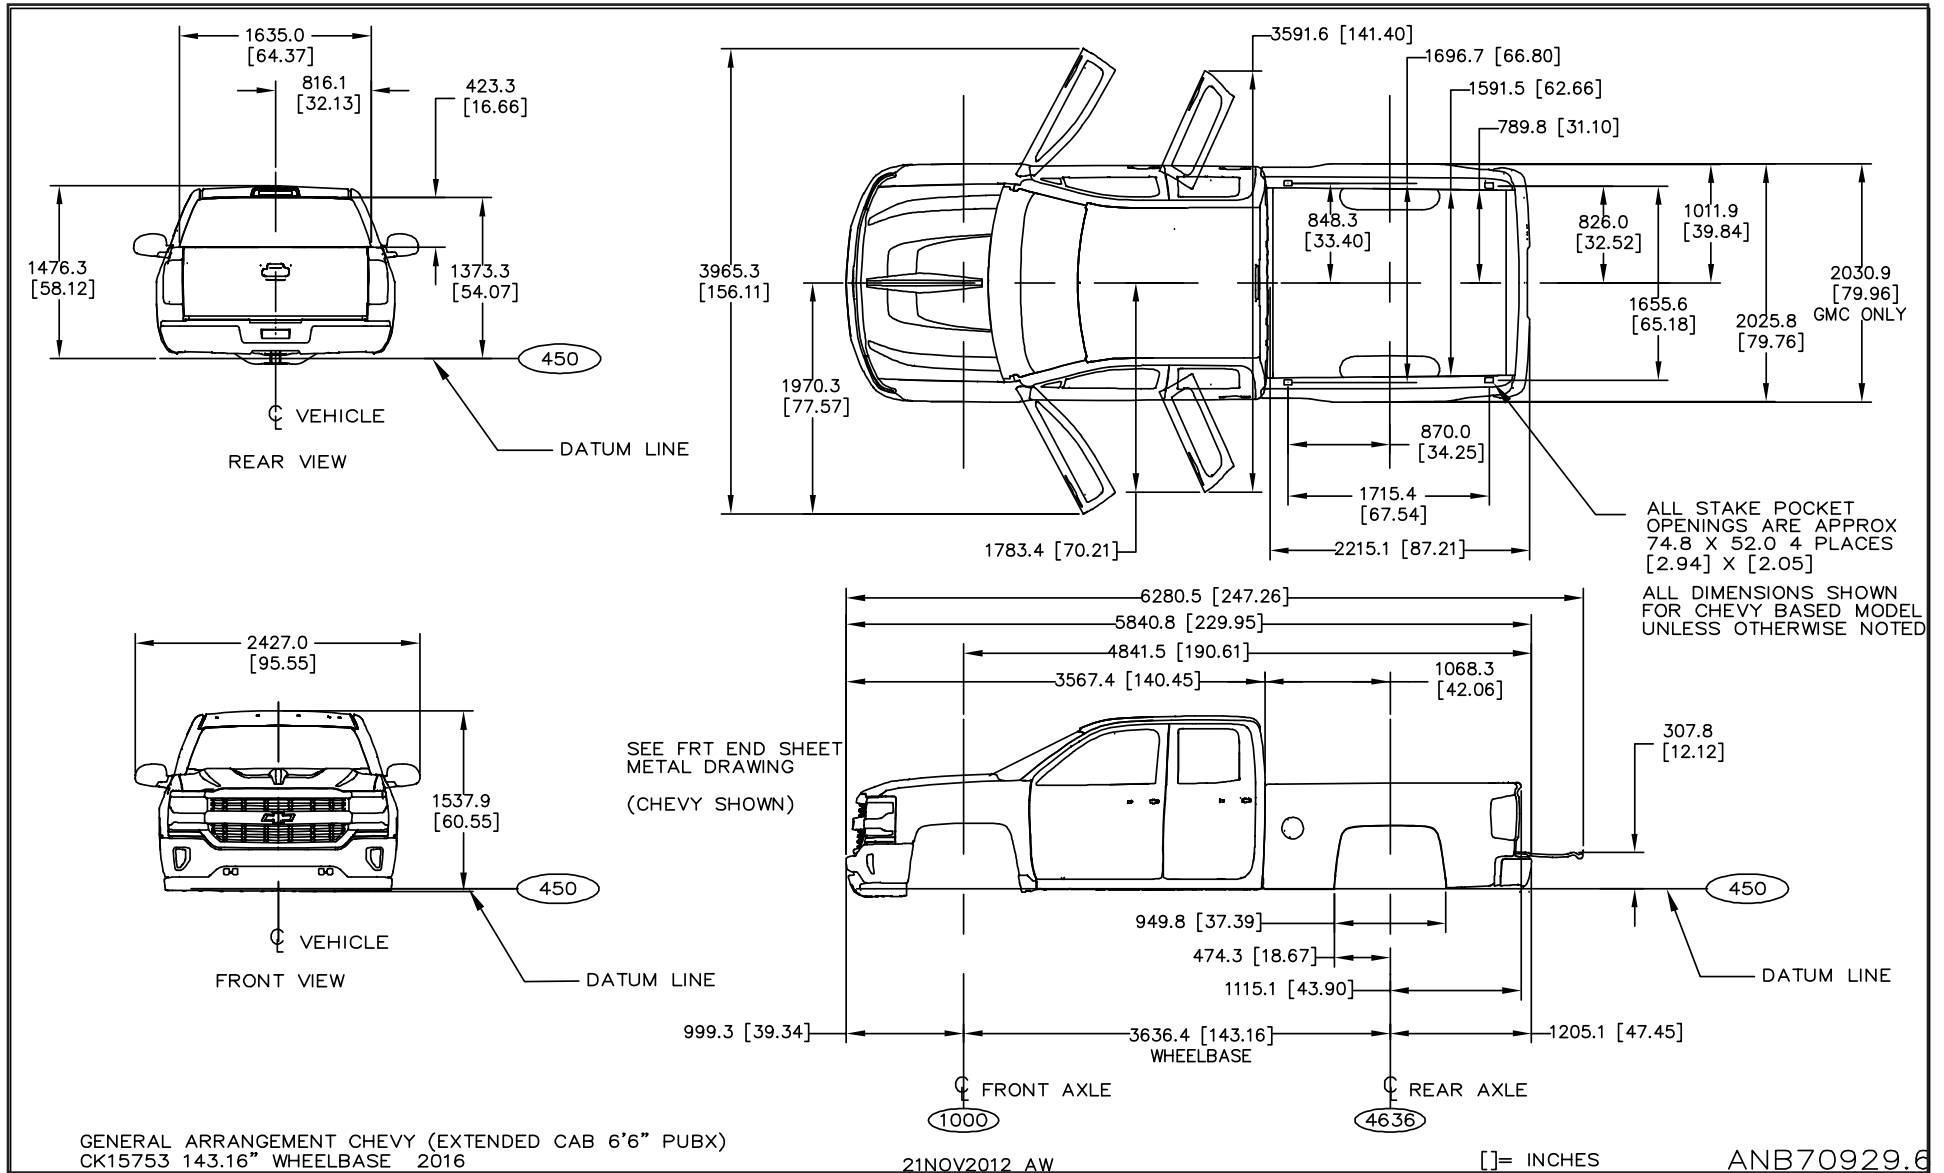

FULL SIZE C/K LD PICKUPS

PAGE 11


C/K 15743, Crew Cab 6'6" Box – Body General Arrangement

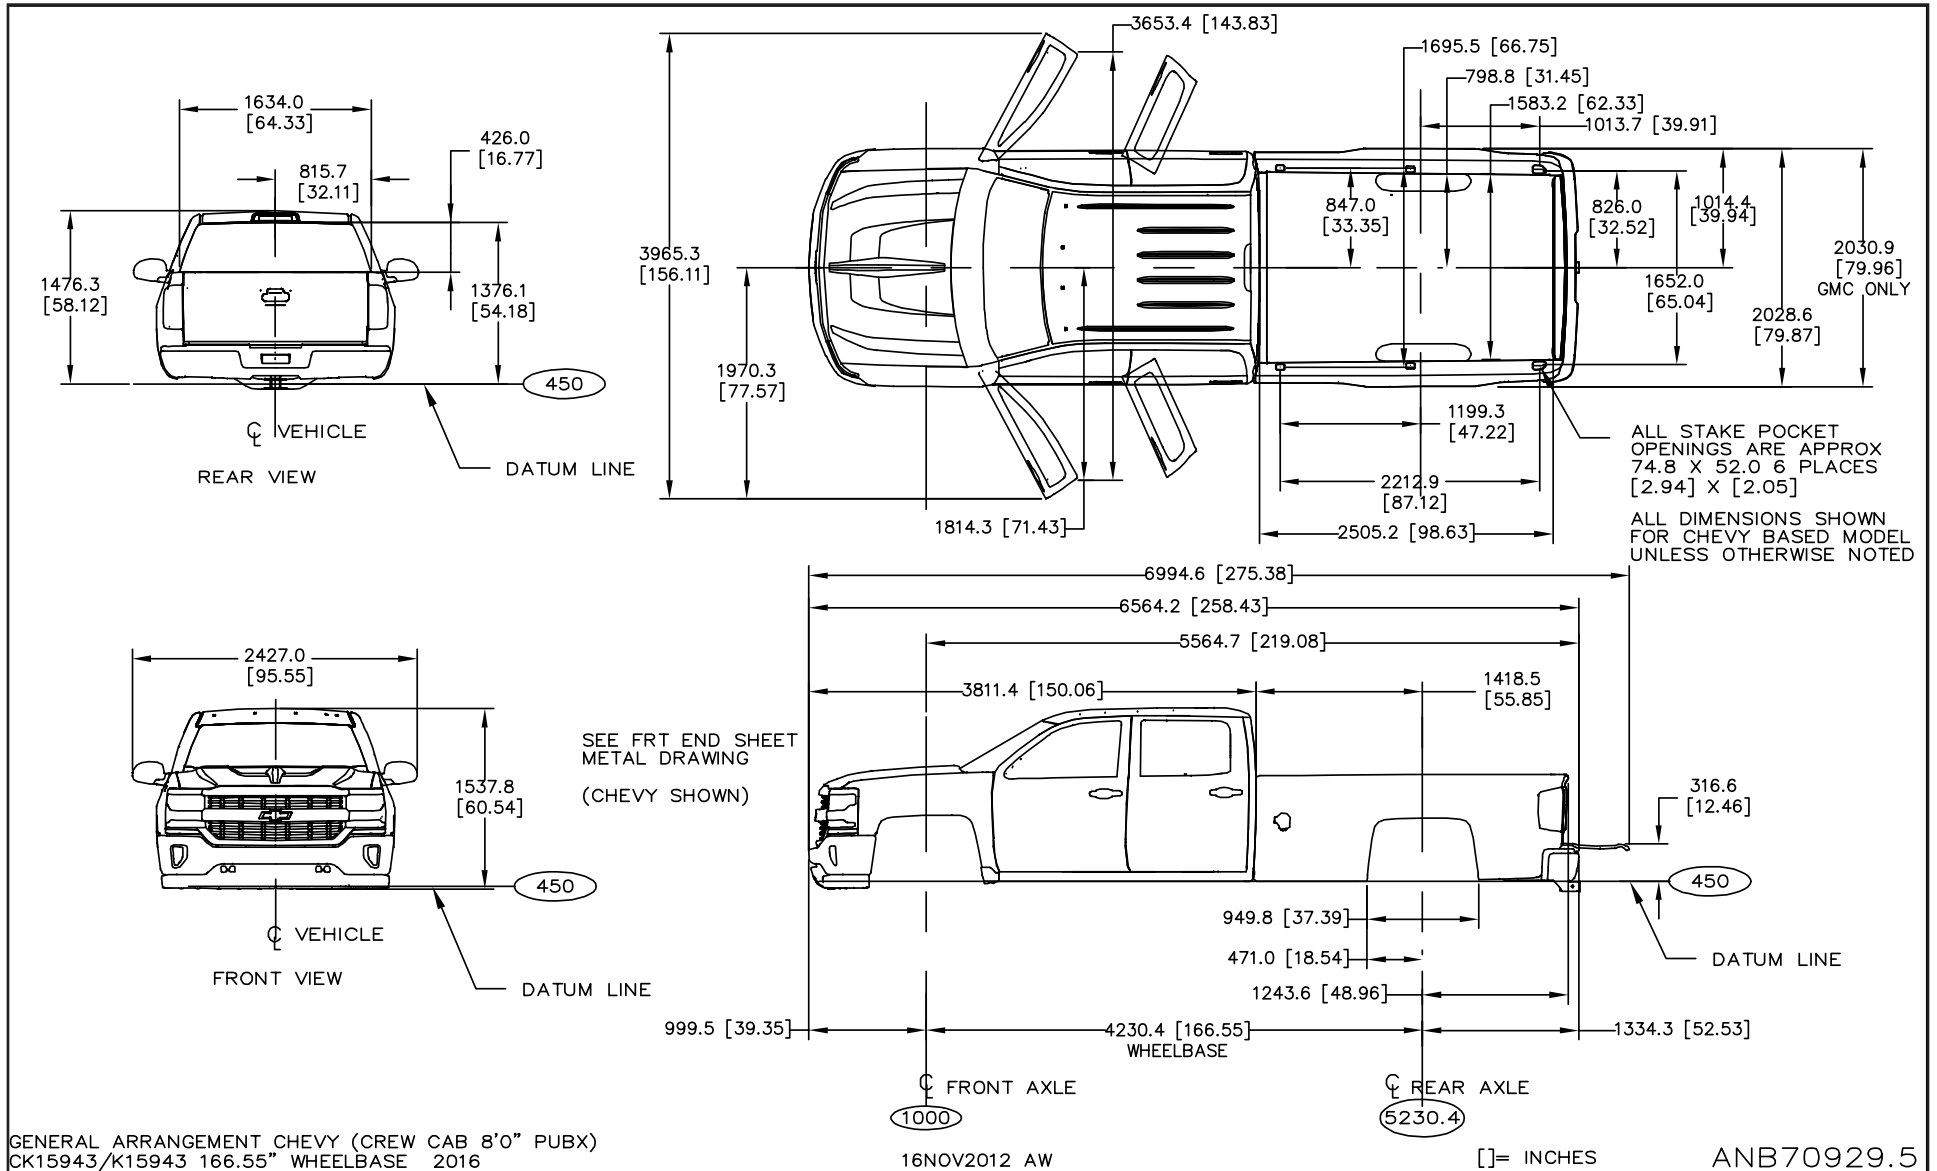

FULL SIZE C/K LD PICKUPS


PAGE 12

C/K 15543, Crew Cab 5' 8" Box – Body General Arrangement

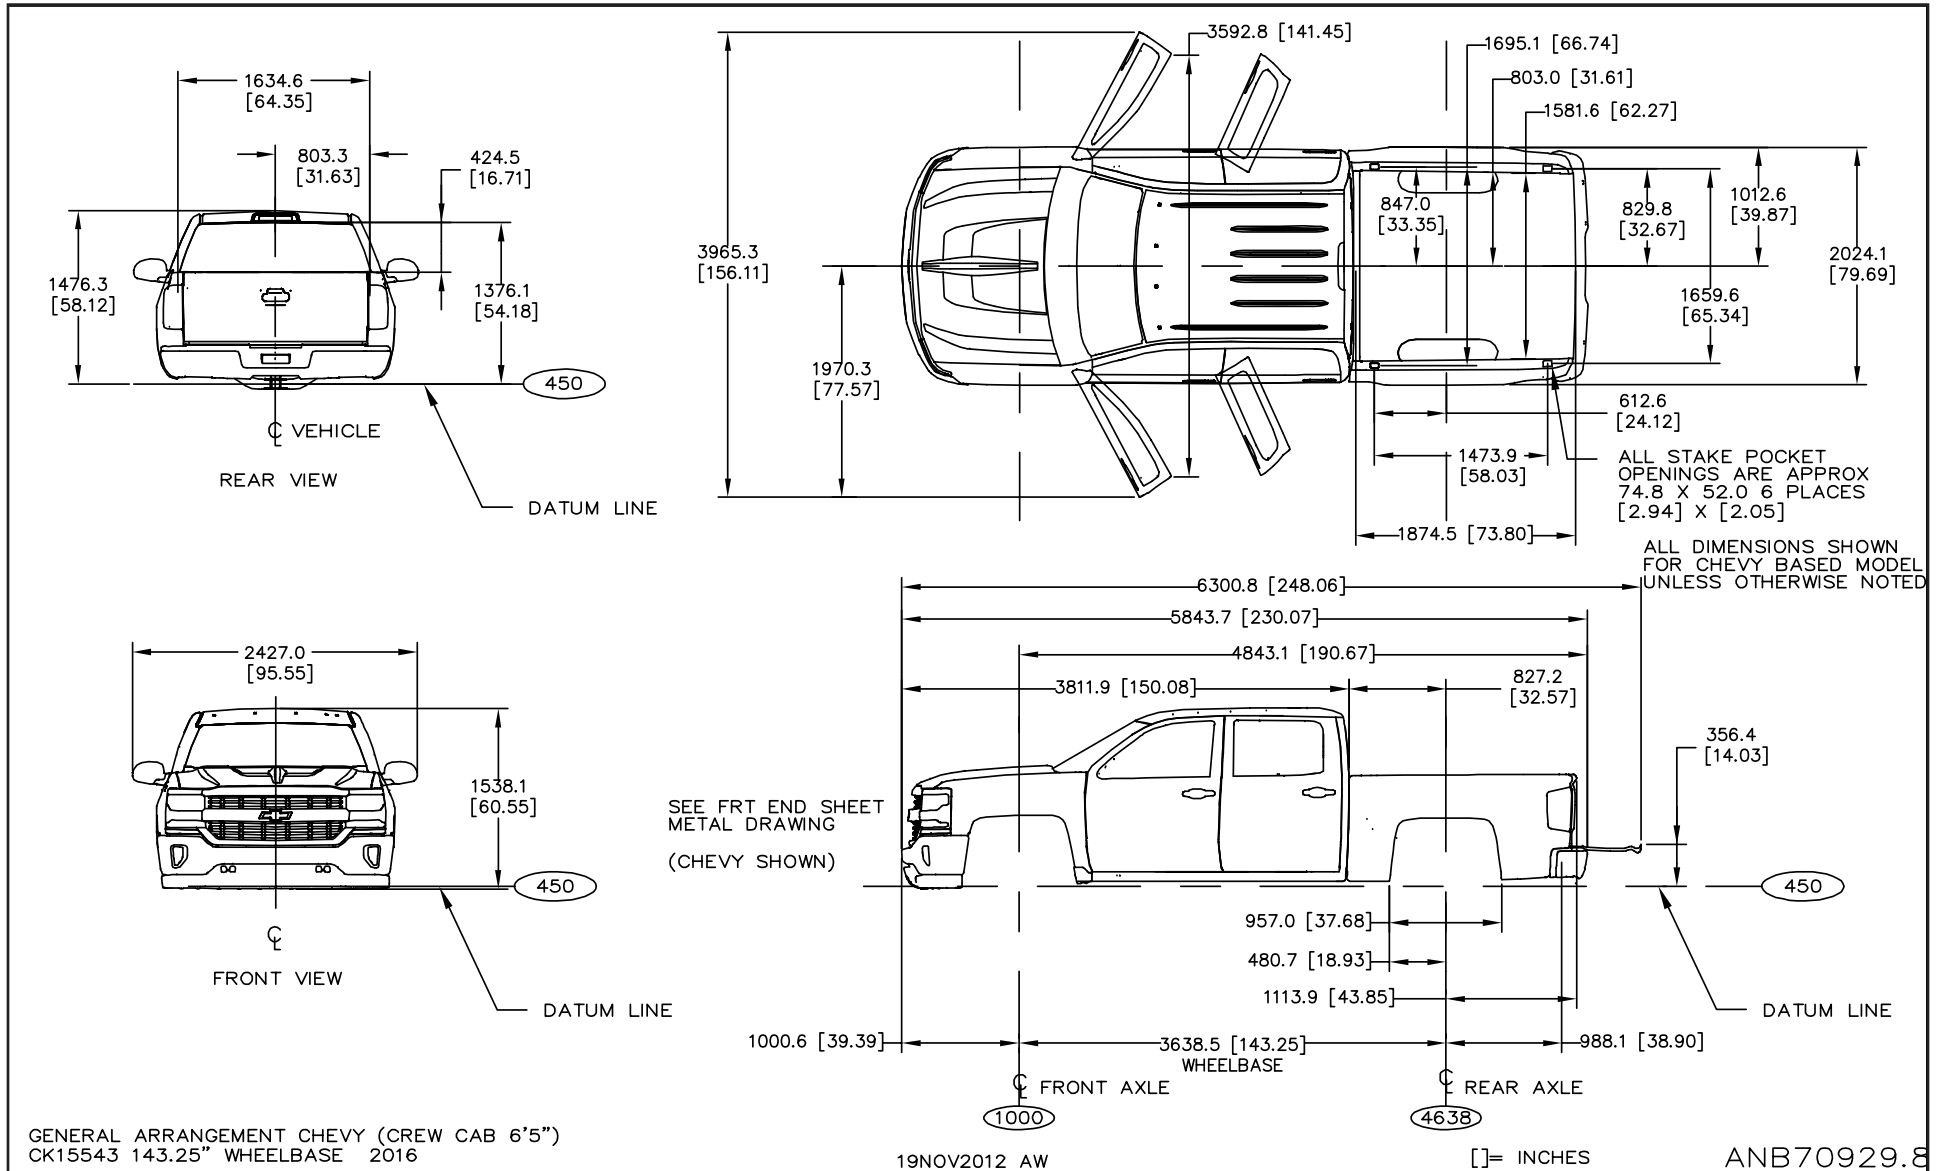

FULL SIZE C/K LD PICKUPS


C/K 100 (03/53/43) – Front End Clips

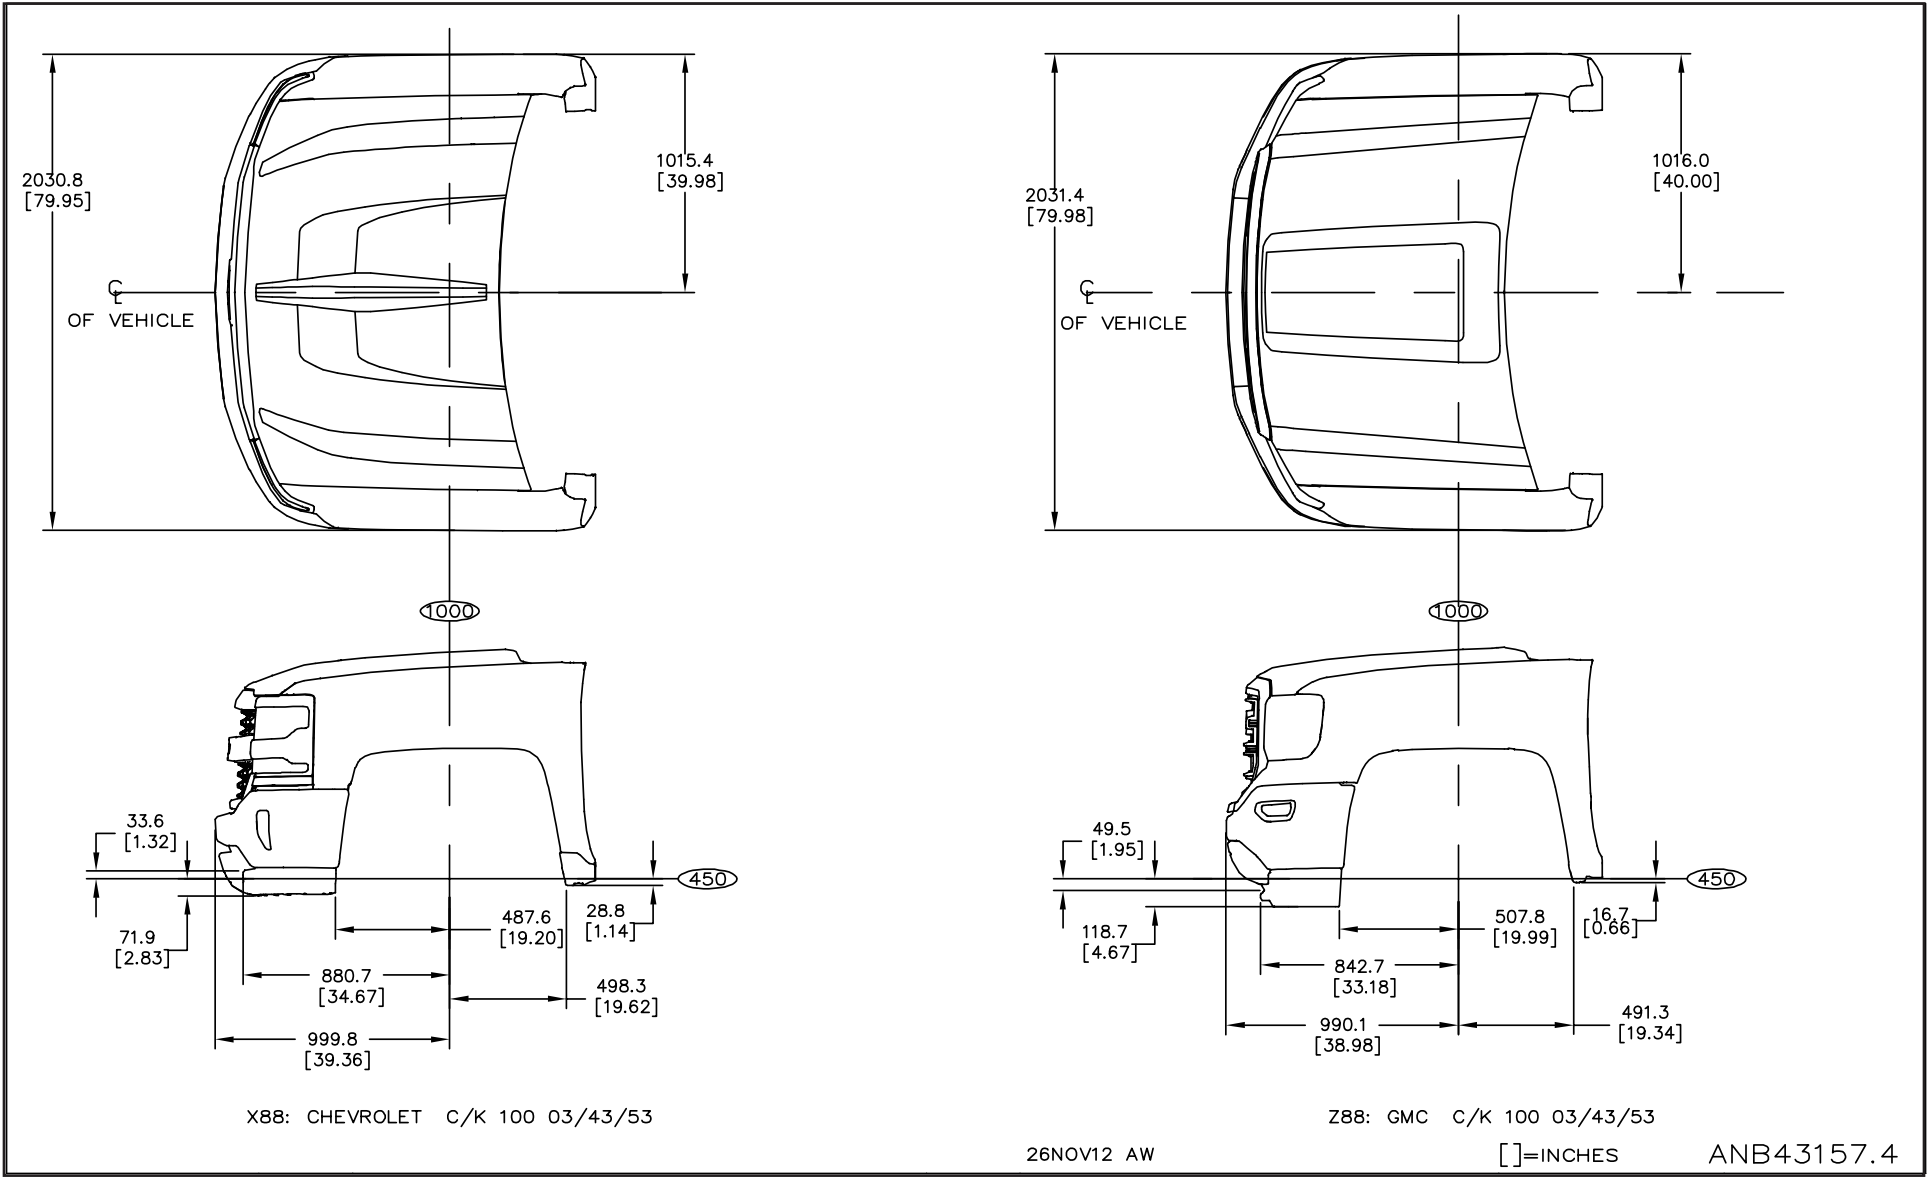

FULL SIZE C/K LD PICKUPS


PAGE 14

C/K 100 (03/53/43) – Hood Openings

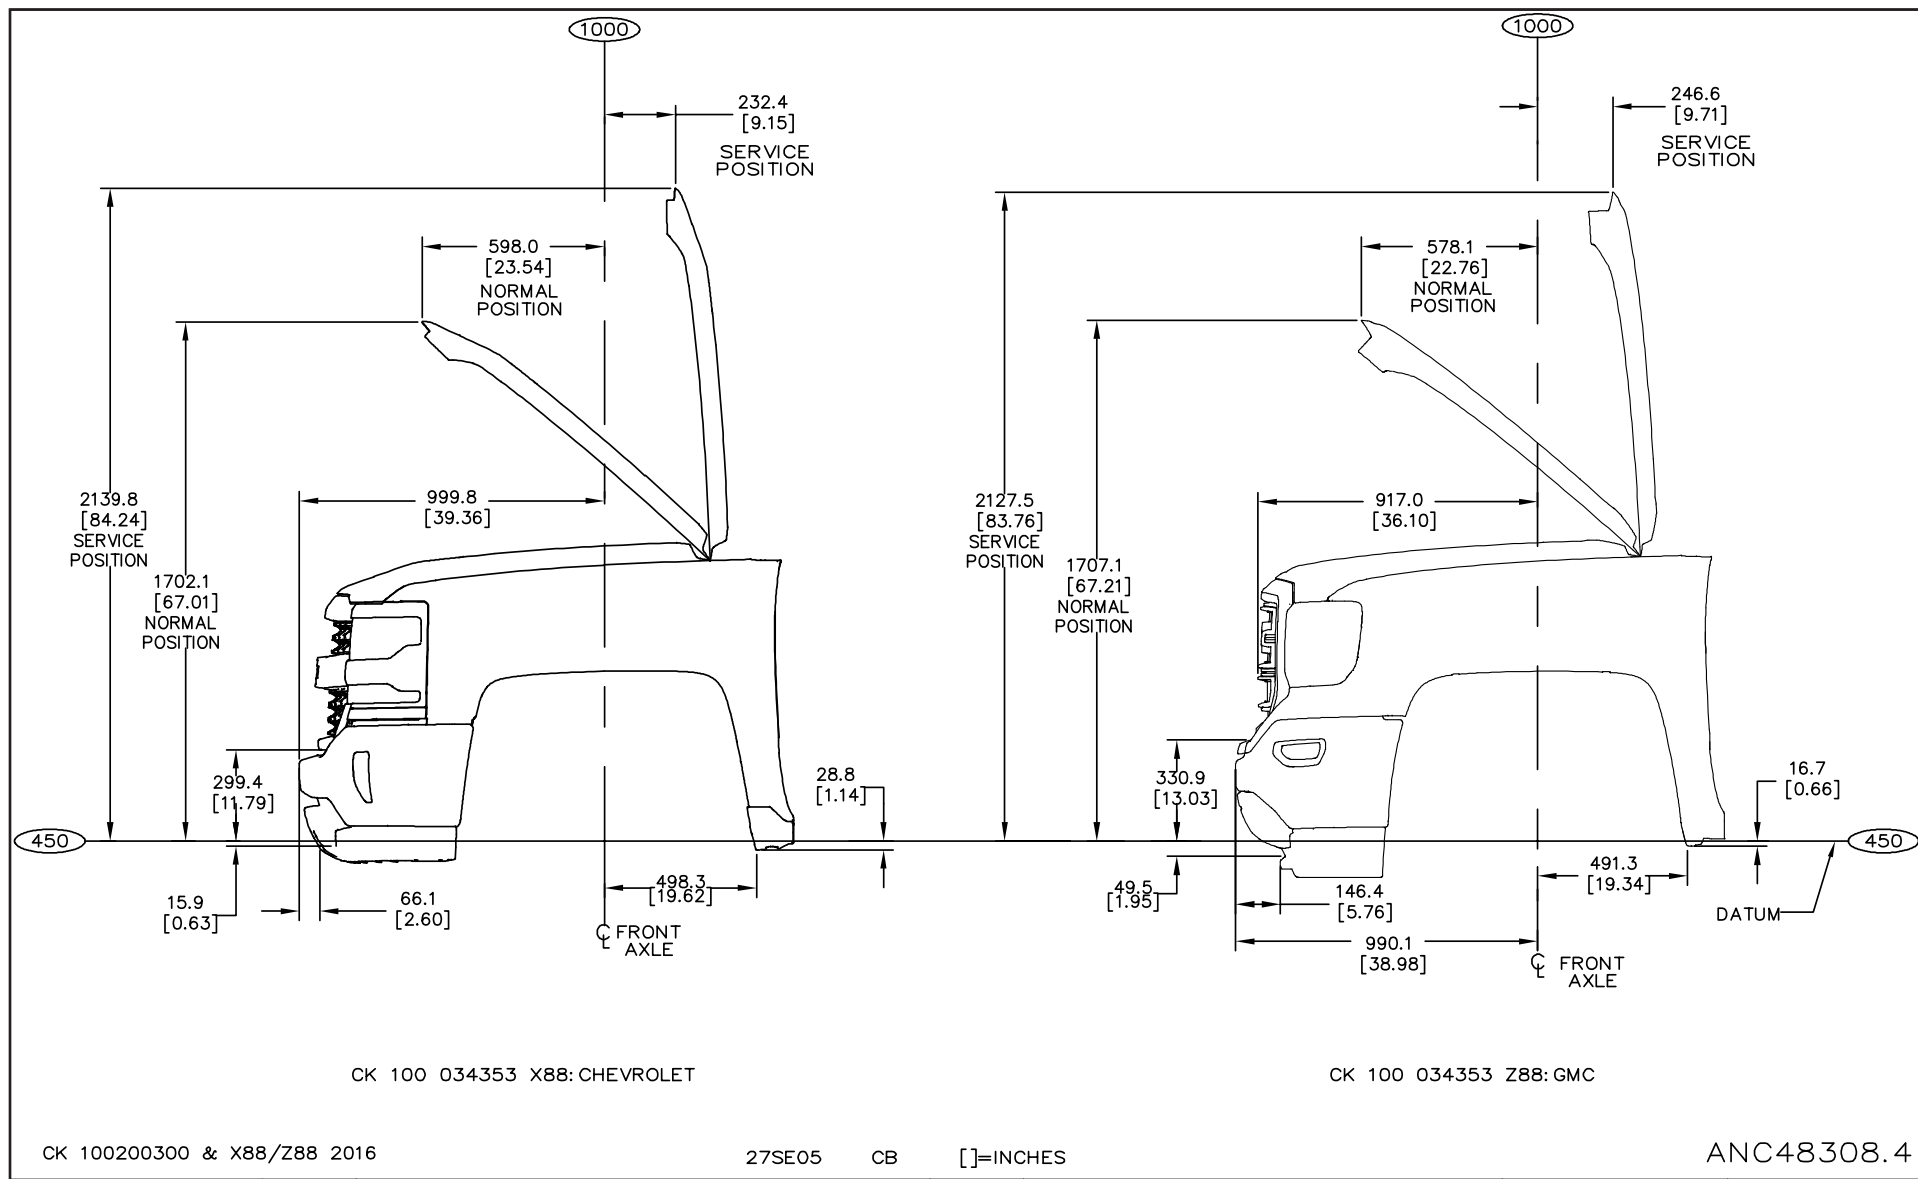

FULL SIZE C/K LD PICKUPS

Chevy X88 – C/K 100 (03/53/43) – Hood Profiles

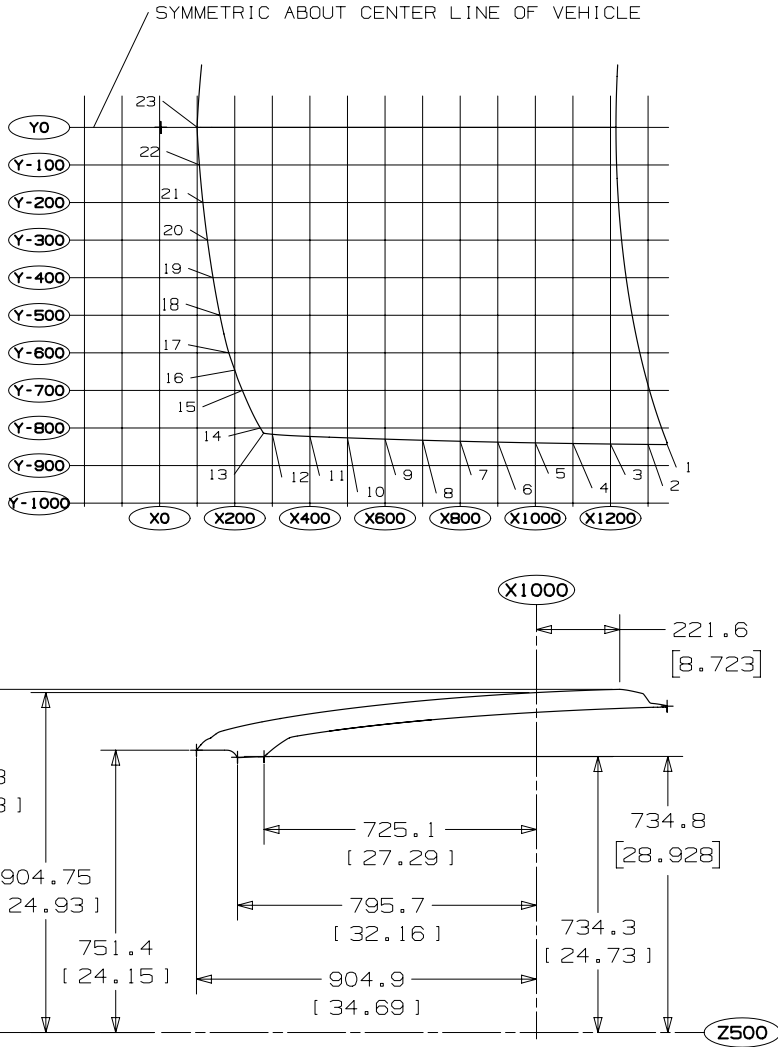


PT. #	LENGTH	WIDTH
1	1350.0	-842.4
2	1300.0	-843.8
3	1200.0	-842.7
4	1100.0	-841.3
5	1000.0	-839.6
6	900.0	-837.6
7	800.0	-835.3
8	700.0	-832.6
9	600.0	-829.6
10	500.0	-826.3
11	400.0	-822.5
12	300.0	-816.7
13	277.0	-813.6
14	268.1	-800.0
15	220.3	-700.0
16	200.0	-644.6
17	184.2	-600.0
18	160.5	-500.0
19	142.2	-400.0
20	127.3	-300.0
21	115.2	-200.0
22	105.9	-100.0
23	99.7	0.00

DRIVER SIDE COORDINATES

FULL SIZE C/K LD PICKUPS

GMC Z88 – C/K 100/200 (03/53/43) – Hood Profiles

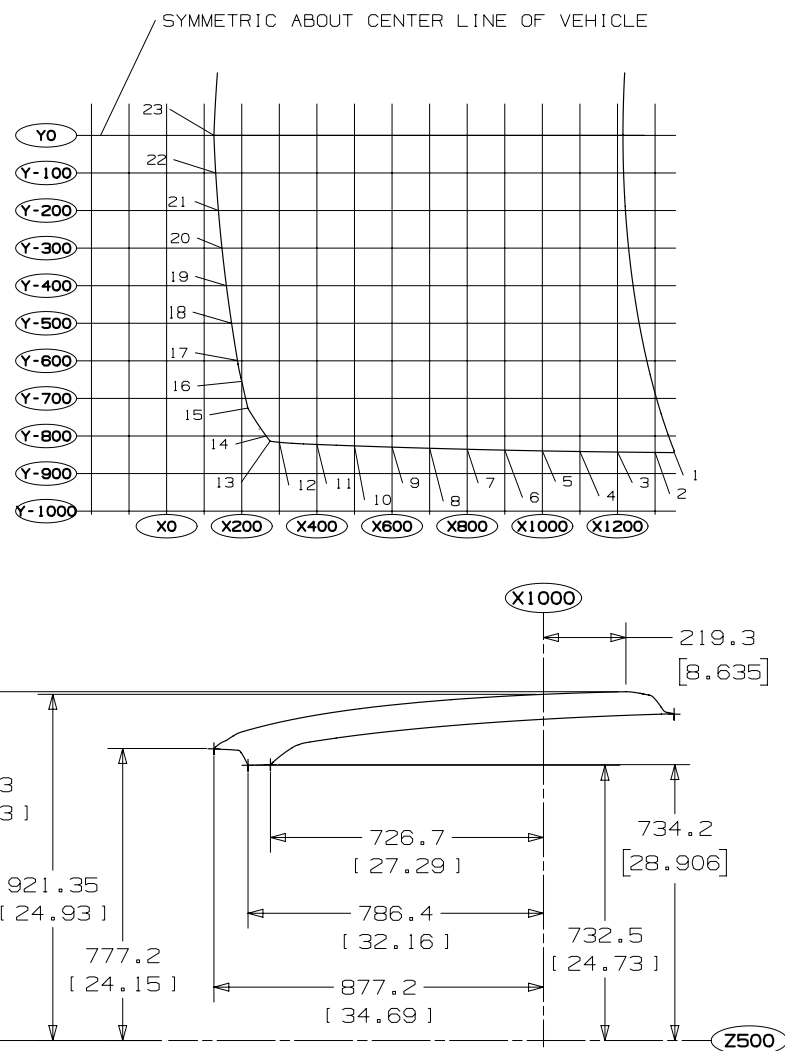


PT. #	LENGTH	WIDTH
1	1351.0	-844.2
2	1300.0	-843.8
3	1200.0	-842.7
4	1100.0	-841.4
5	1000.0	-839.6
6	900.0	-837.6
7	800.0	-835.3
8	700.0	-832.7
9	600.0	-829.7
10	500.0	-826.3
11	400.0	-822.6
12	300.0	-816.8
13	275.5	-813.1
14	264.9	-800.0
15	216.2	-725.6
16	200.0	-654.7
17	188.8	-600.0
18	172.9	-500.0
19	159.1	-400.0
20	147.4	-300.0
21	137.9	-200.0
22	130.7	-100.0
23	125.9	0.00

DRIVER SIDE COORDINATES

FULL SIZE C/K LD PICKUPS

PAGE 17

Rear Back of Cab Silhouette – Pickups

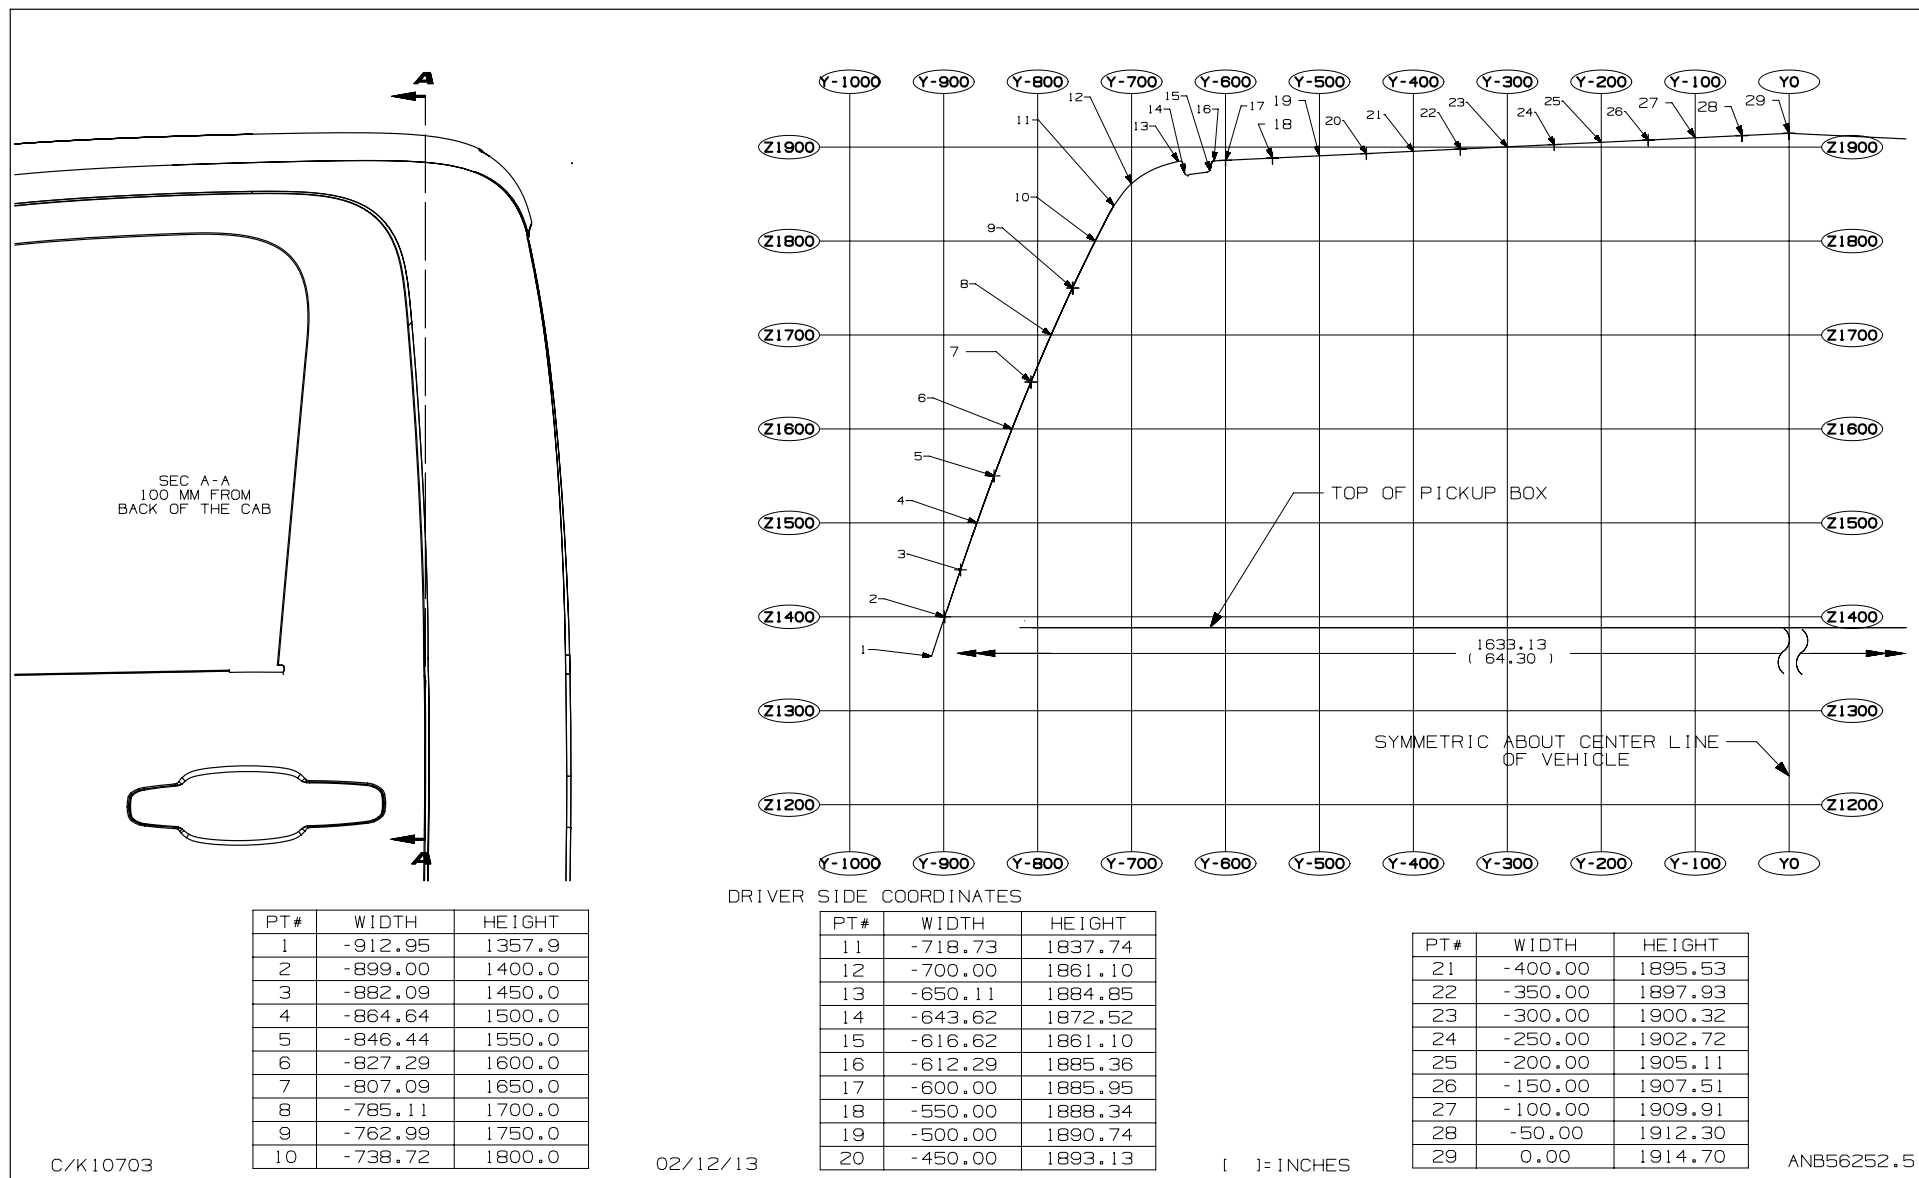

PAGE	18
-------------	-----------

558.8
[22.00]

899.3
[35.41]

538.1
[21.19]

405.1
[15.95]

1230.5
[48.44]

273.4
[10.76]

450

DATUM LINE

FRT AXLE

1000

RR AXLE

4023


REGULAR CAB SIGN AREA X88 SHOWN

27NOV2012 AW []= INCHES ANC41481.6

FULL SIZE C/K LD PICKUPS

PAGE 19


Extended Cab Pickup – C/K 100/200/300 (53) – Sign Area

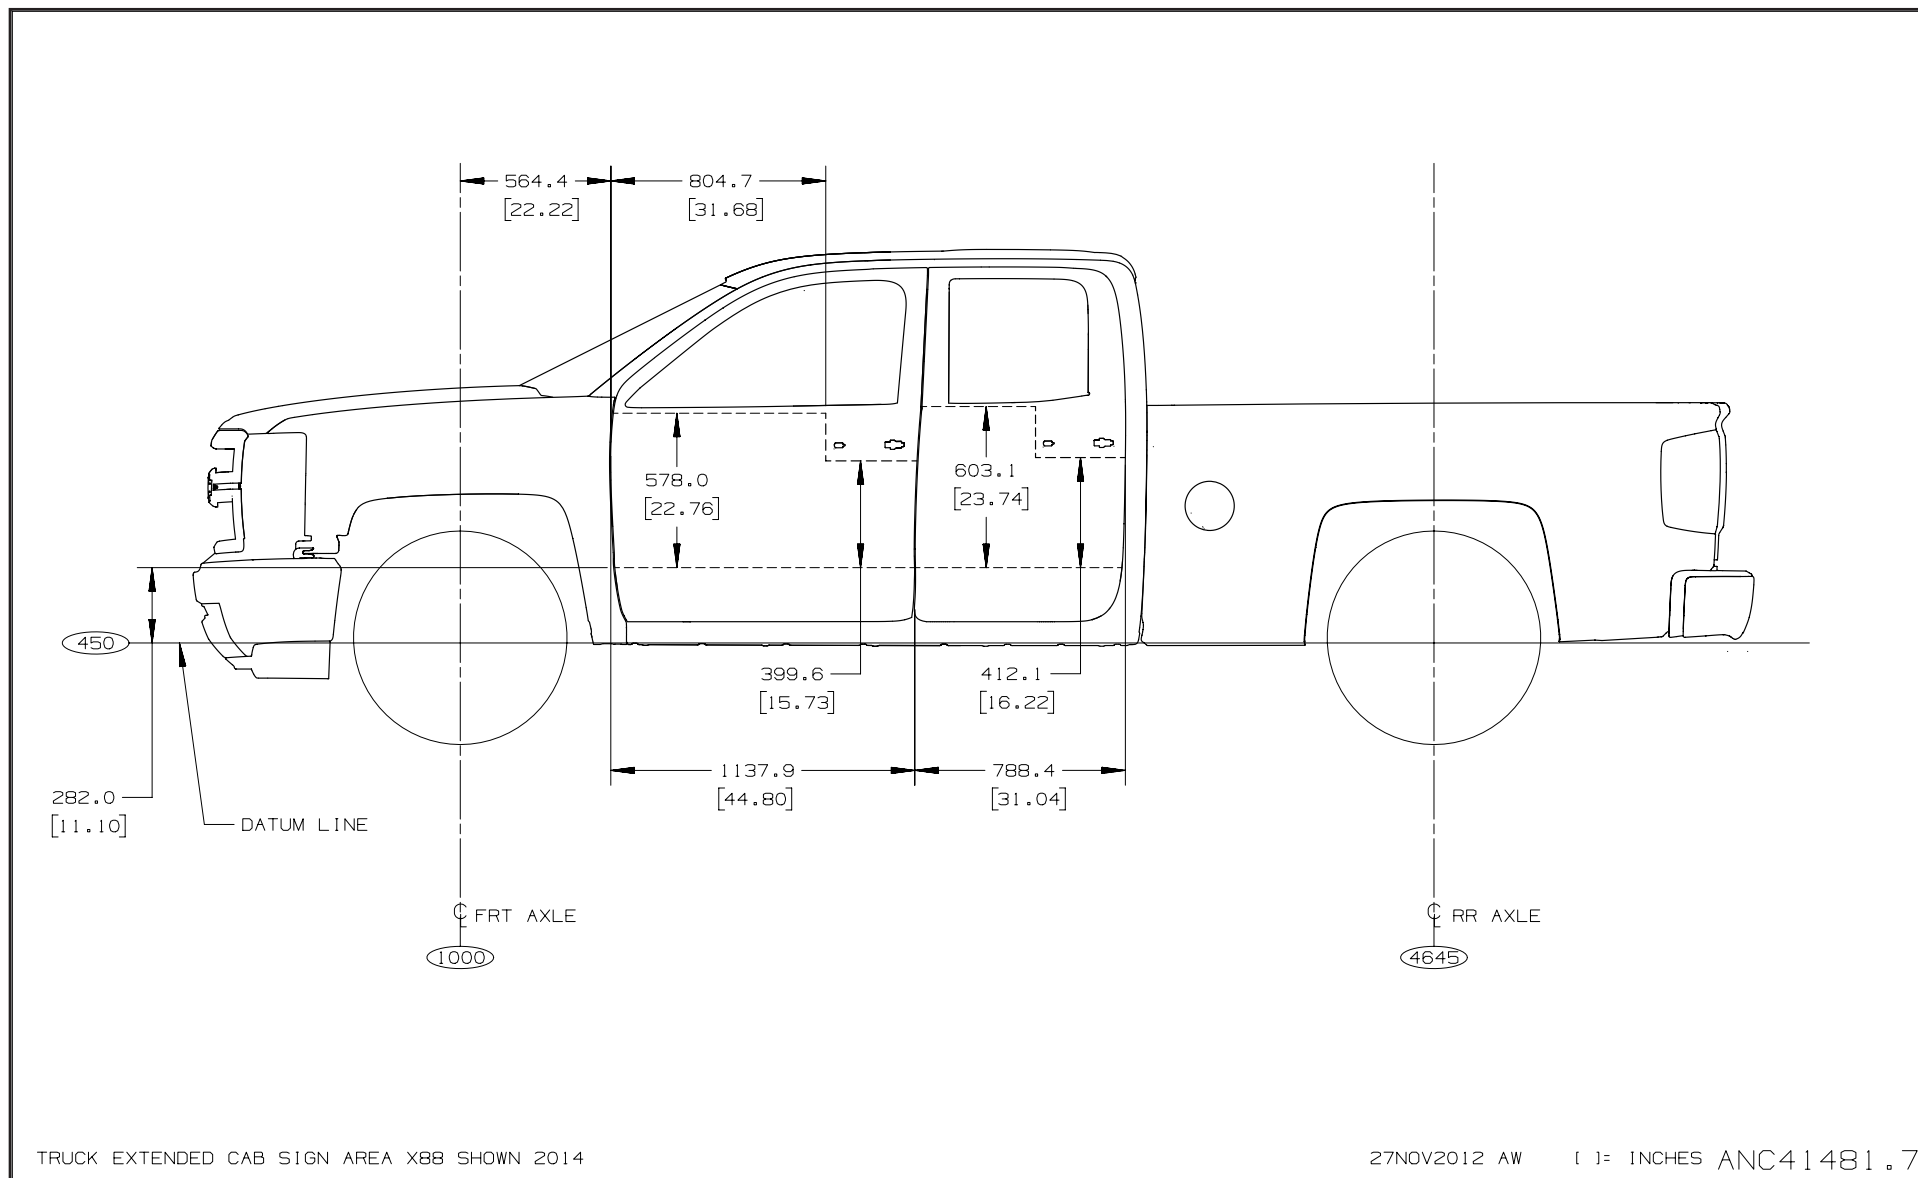

FULL SIZE C/K LD PICKUPS

PAGE 20

Crew Cab Pickup – C/K 100/200/300 (43) – Sign Area

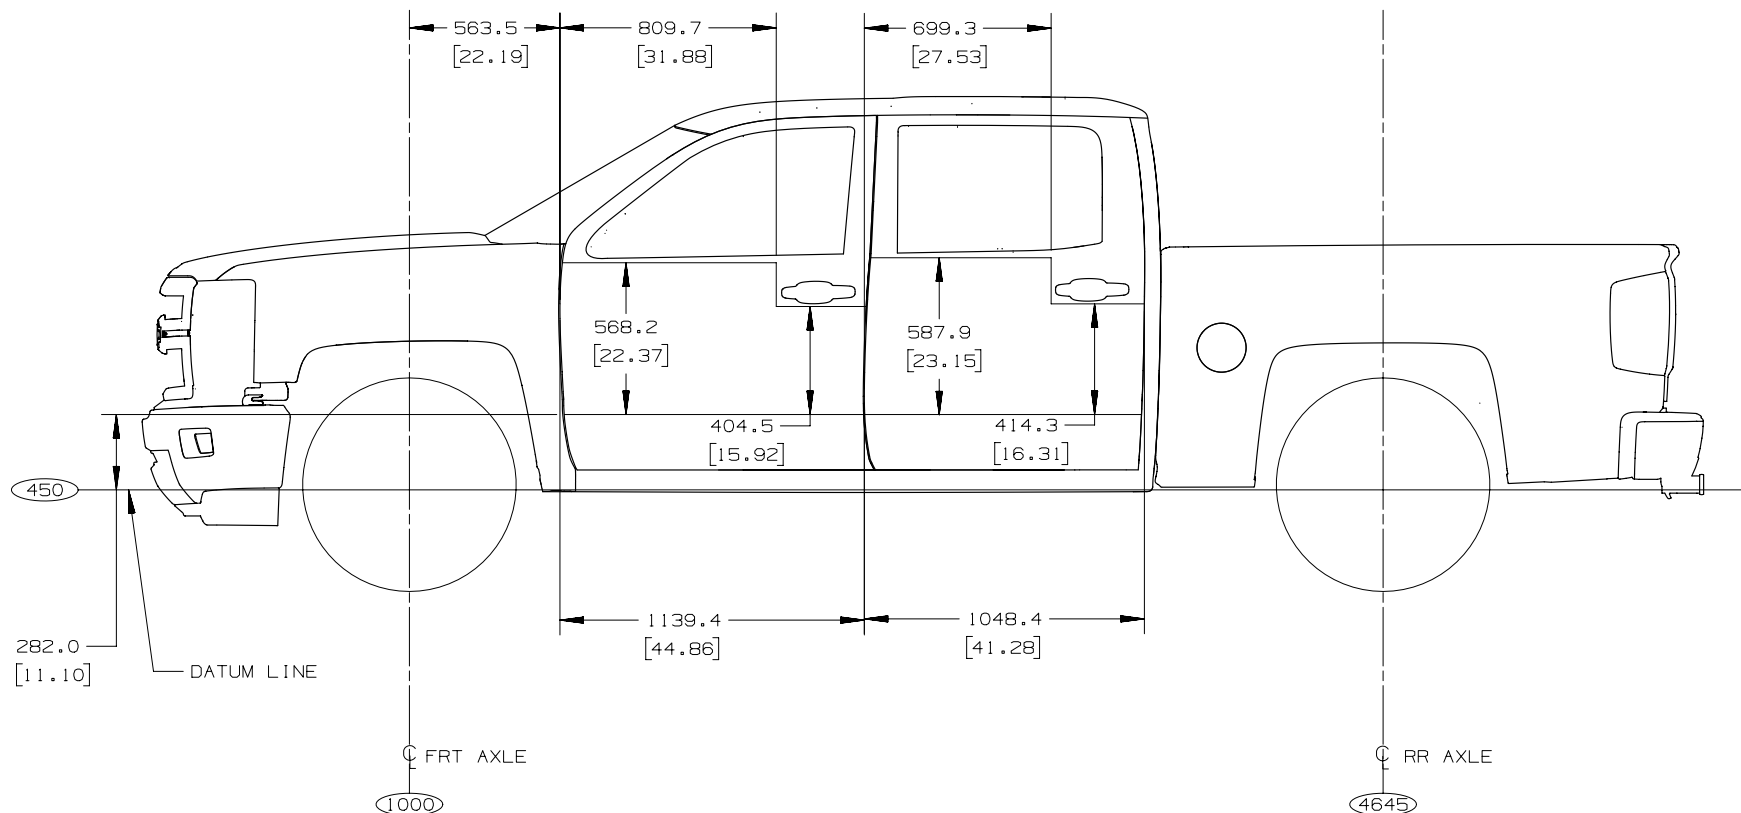


CREW CAB SIGN AREA X88 SHOWN 2014

27NOV2012 AW 1:1 INCHES ANC41481.5

FULL SIZE C/K LD PICKUPS

PAGE 21

Regular Cab (03) – Cab Step in Heights

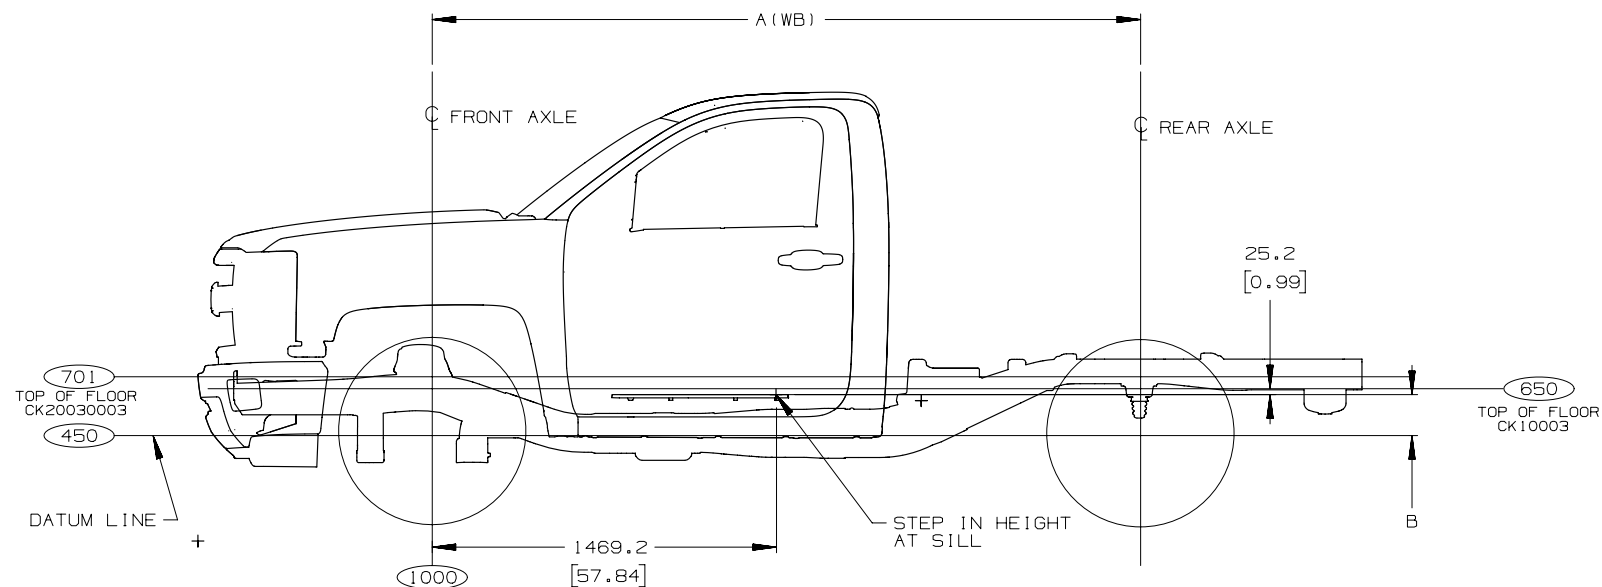

ALL MATH DATA FOR CK100 03, ABOVE THE FRAME ARE MOVED UP 51 MM TO OBTAIN THE DATA FOR CK200300 03 MODELS.

MODEL	A (WB)	B
CK15703	3023.0 [119.0]	174.8 [6.88]
CK15903	3378.0 [133.0]	174.8 [6.88]


STEP IN HEIGHTS FOR CK100200300 03 2014

28NOV2012 AW

[] = INCHES

ANC10189.3


Extended Cab (53) – Cab Step in Heights

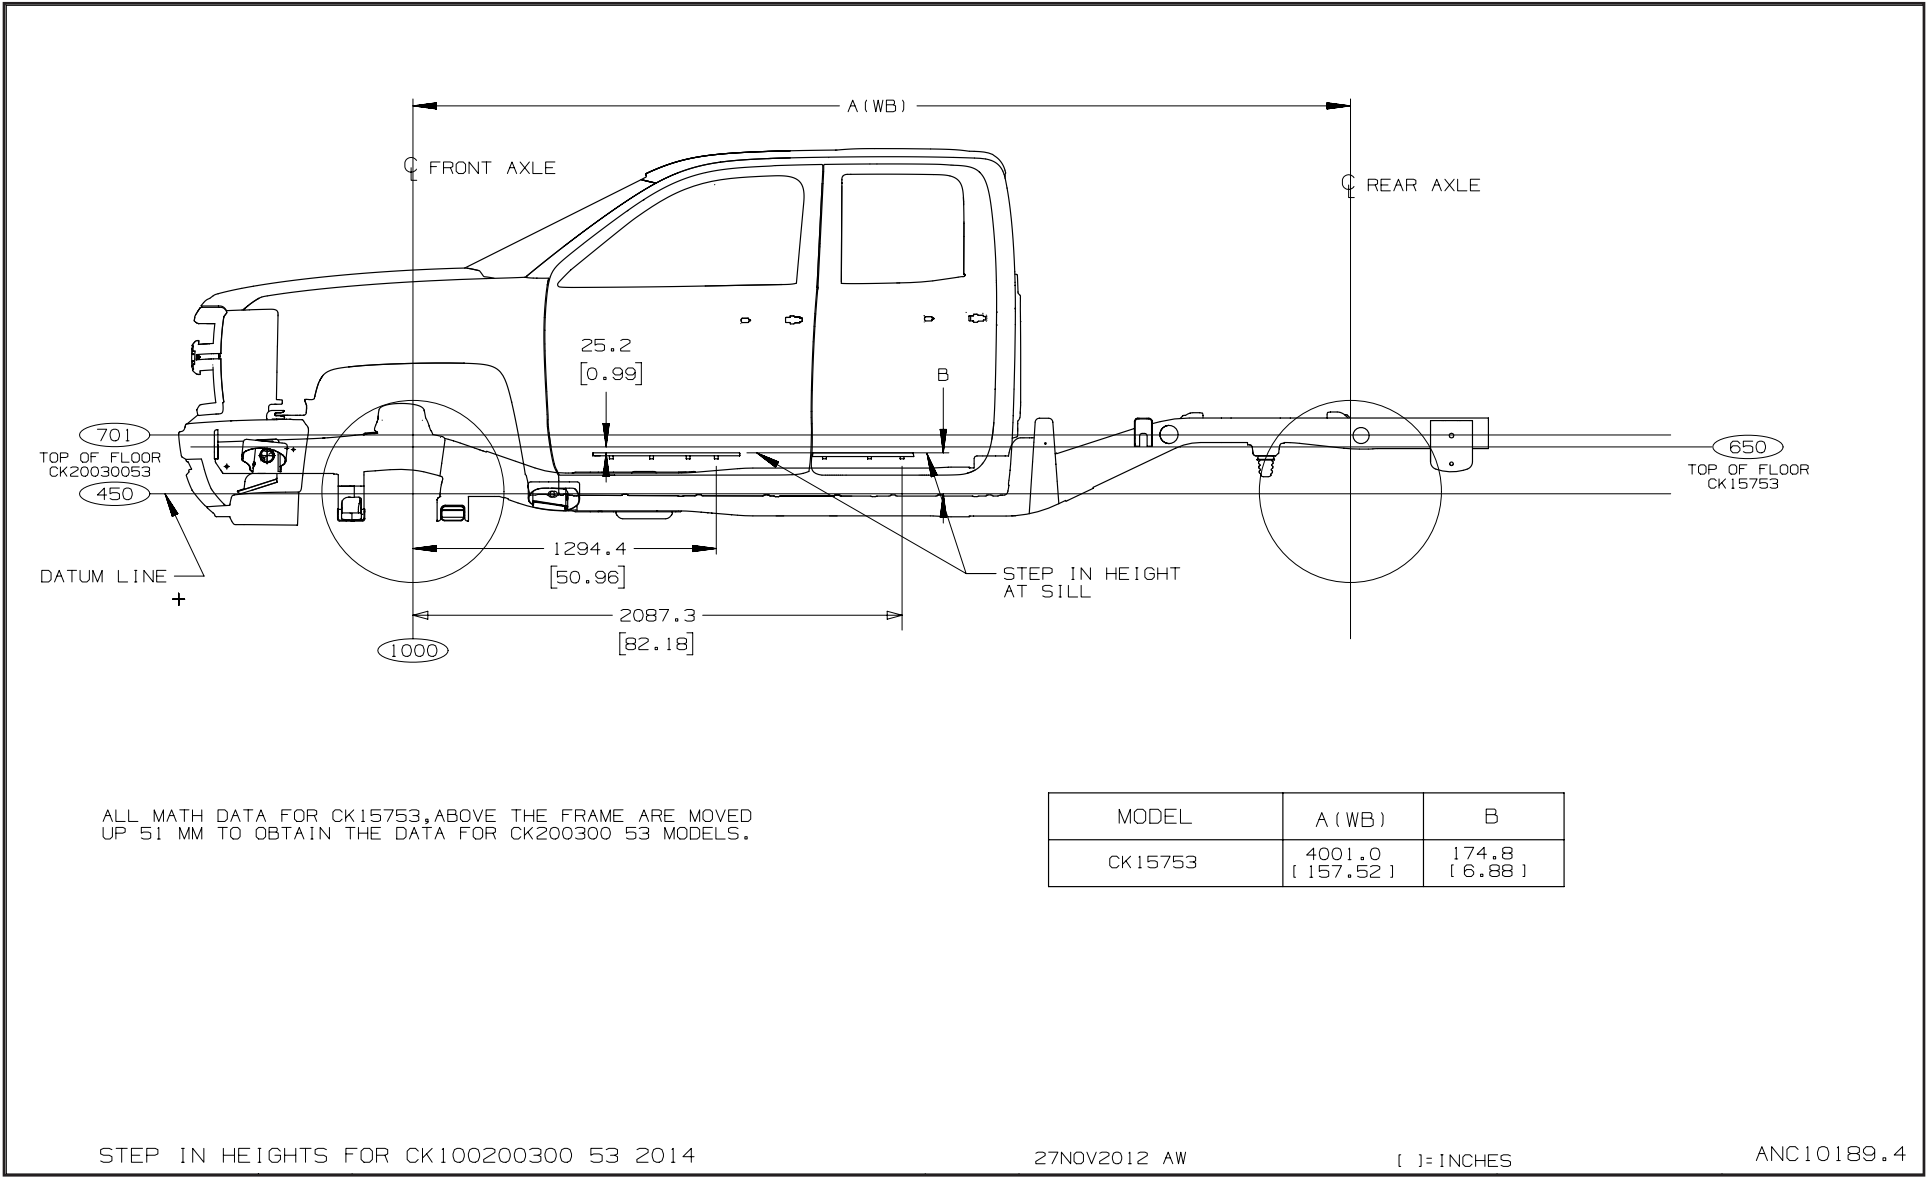

FULL SIZE C/K LD PICKUPS

PAGE 23

Crew Cab (43) – Cab Step in Heights

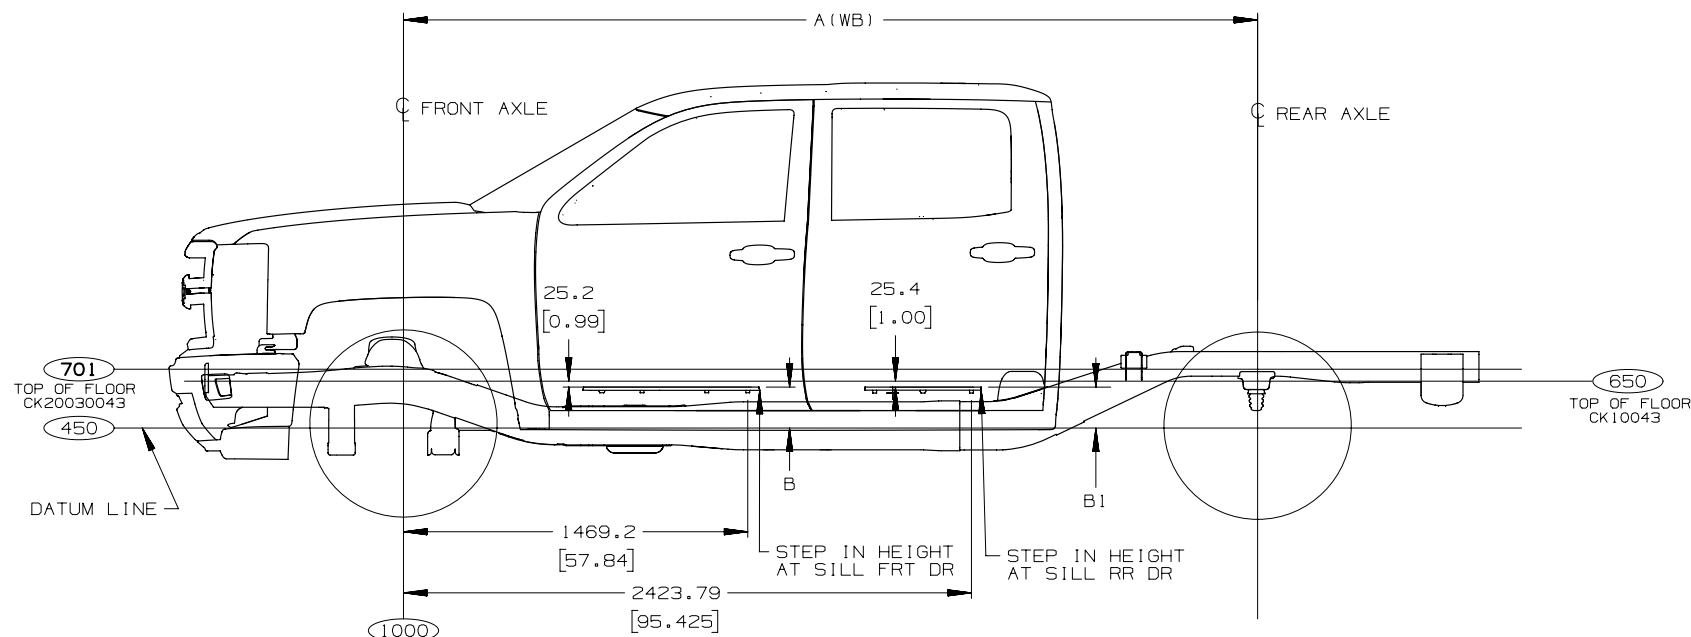

ALL MATH DATA FOR CK100 43, ABOVE THE FRAME ARE MOVED
UP 51 MM TO OBTAIN THE DATA FOR CK200300 43 MODELS.

MODEL	A (WB)	B	B1
CK15543	3645.0 [143.5]	174.8 [6.88]	174.6 [6.88]
CK15743	3886.0 [153.0]	225.8 [8.90]	225.6 [8.90]

STEP IN HEIGHTS FOR CK100200300 43 2014


28NOV2012 AW

[1]=INCHES


ANC10189.5

FULL SIZE C/K LD PICKUPS

C/K 1000, Option DL8 and C/K 2000, Option DE2 – Mirrors, Outside Rearview

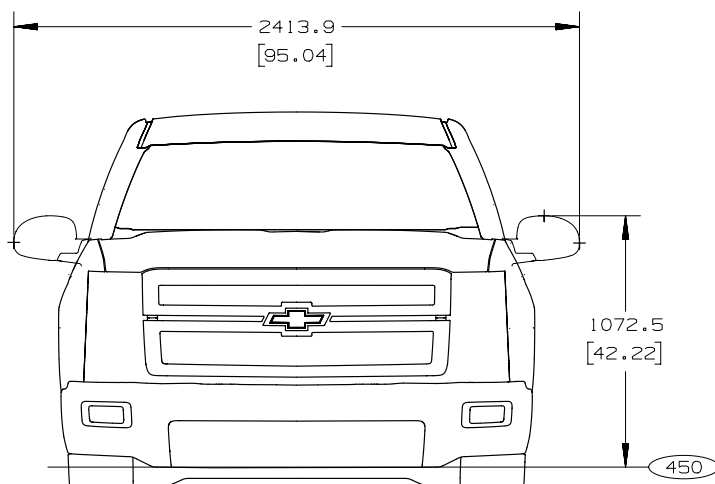

*CL8 CHEVY TRUCK 1500 SERIES

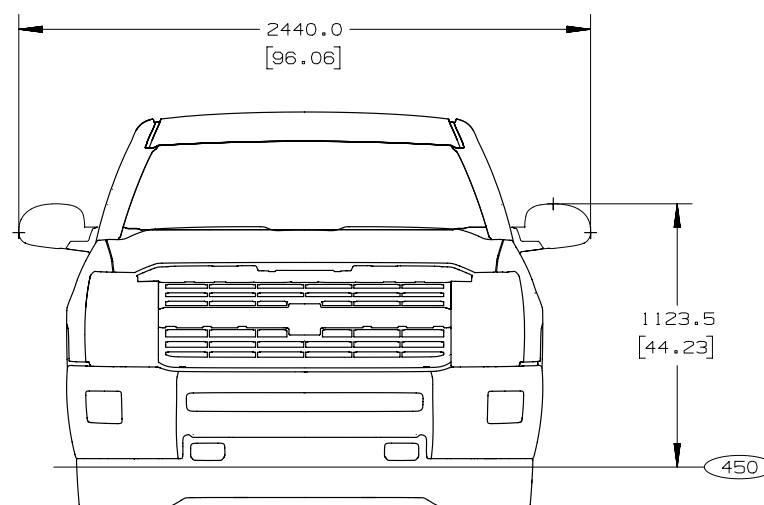

*CL8 GMC TRUCK 1500 SERIES

ALL DIMENSIONS SHOWN FOR CHEVY
BASE MODEL UNLESS OTHERWISE NOTED

1000 2000 3000 SERIES TRUCK

28NOV2012 AW


() = INCHES

ANC22057.5

FULL SIZE C/K LD PICKUPS

PAGE 25

Cab Clearance Lamps, CHMSL and Rear Cab Window – Fixed and Sliding

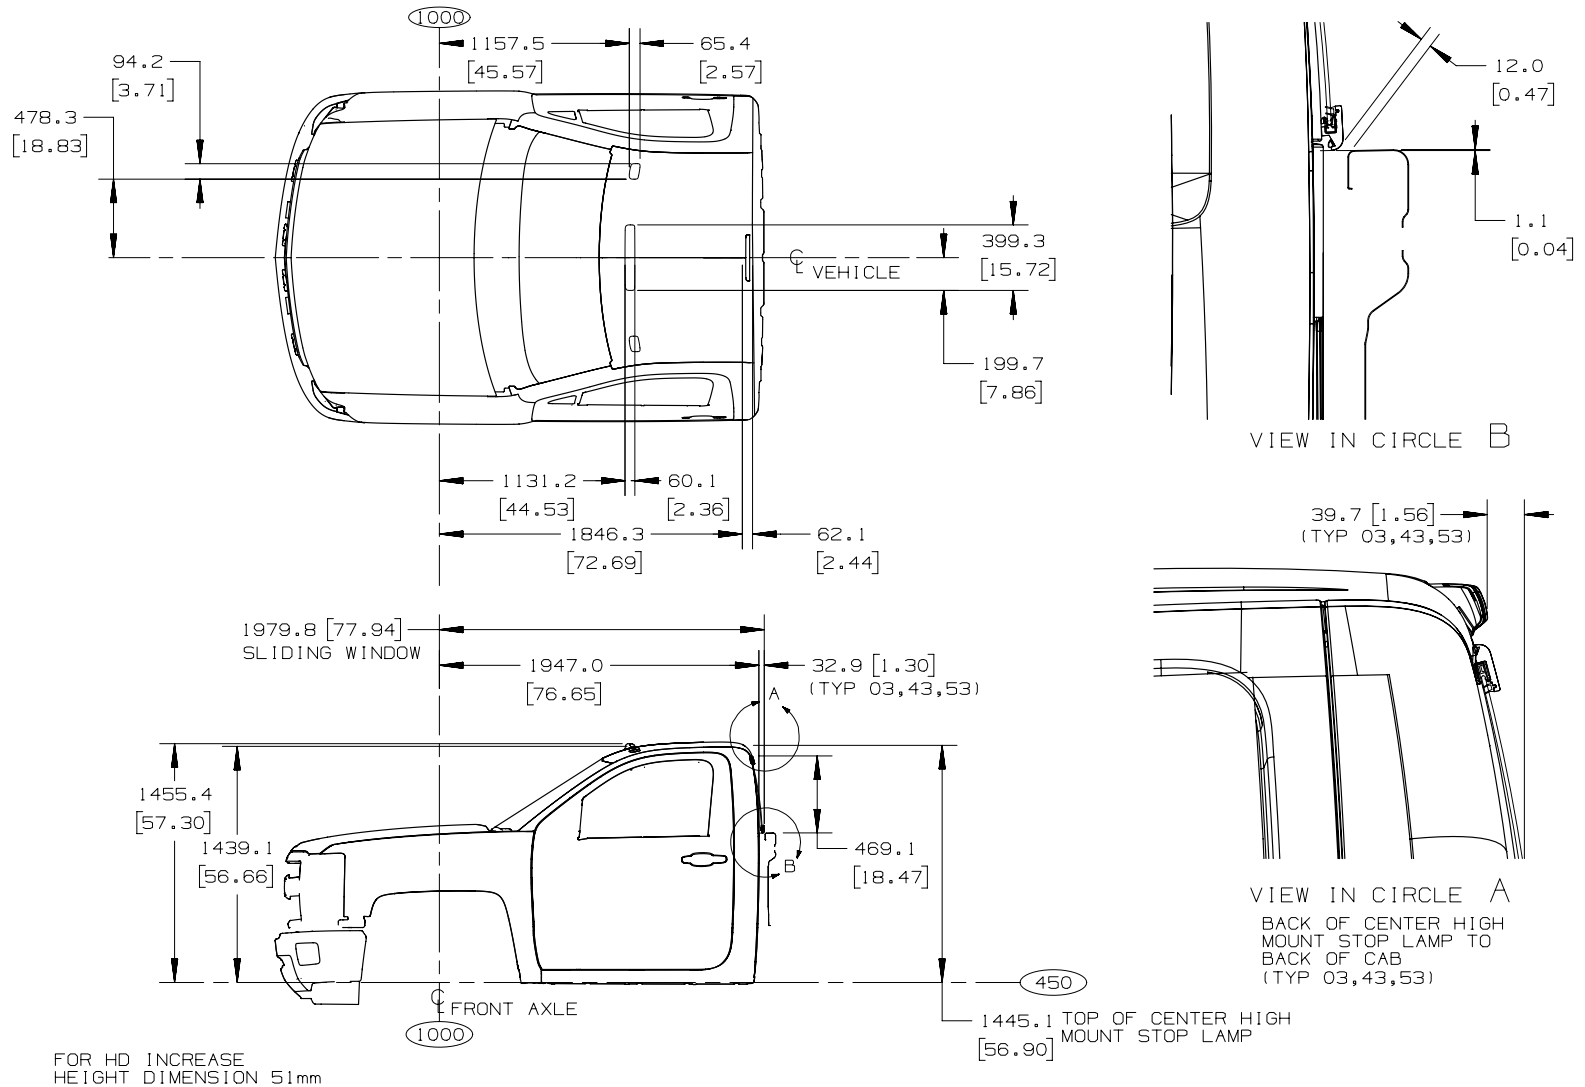

1000/2000/3000/ SERIES CHEVY CK

28NOV2012 AW


[] = INCHES

ANC26550.3

FULL SIZE C/K LD PICKUPS

PAGE 26

Rear Quarter Body Panel – Cab Pressure Valve Assembly

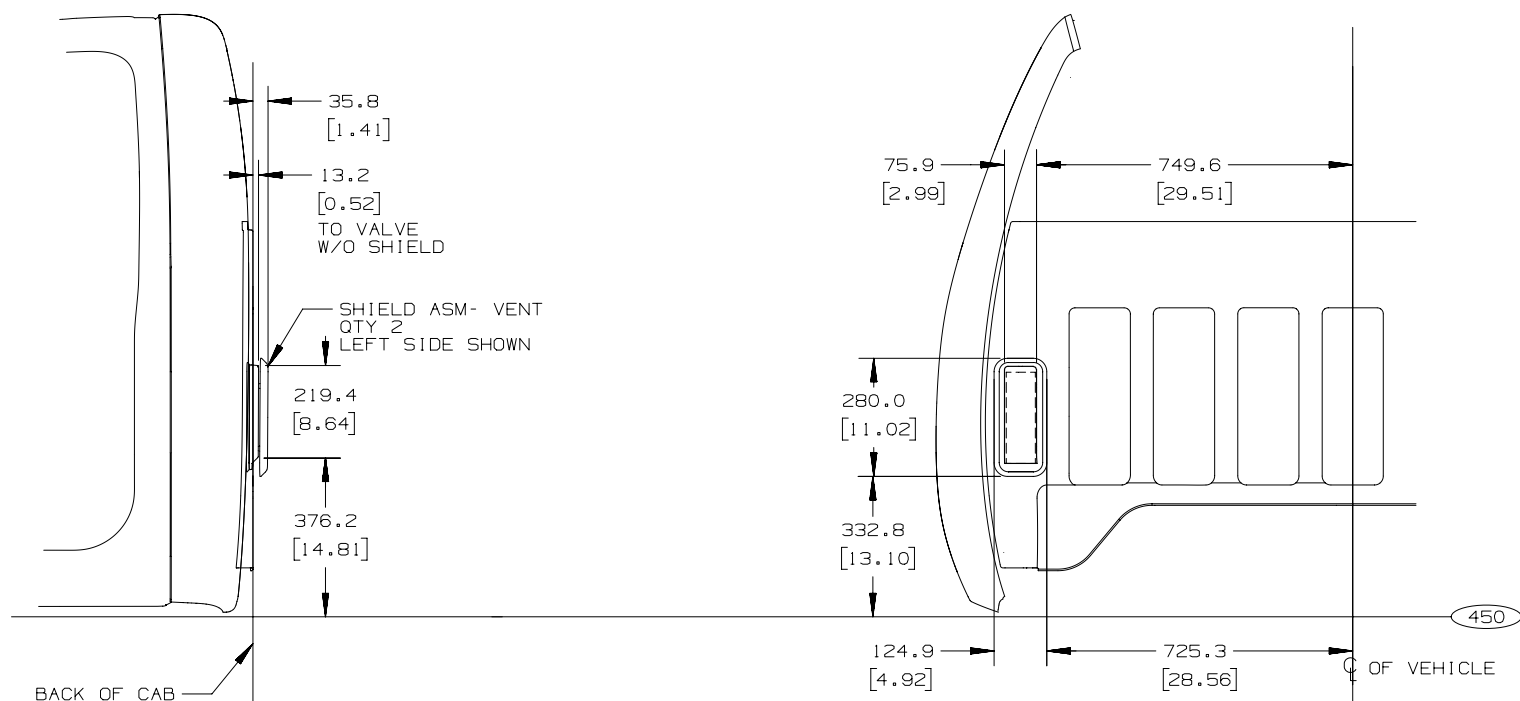


CK 100200300 034353

28NOV2012 AW

[]= INCHES

ANC27961.3


GMT900 Pickup Box Side Rail Load Points/Paths

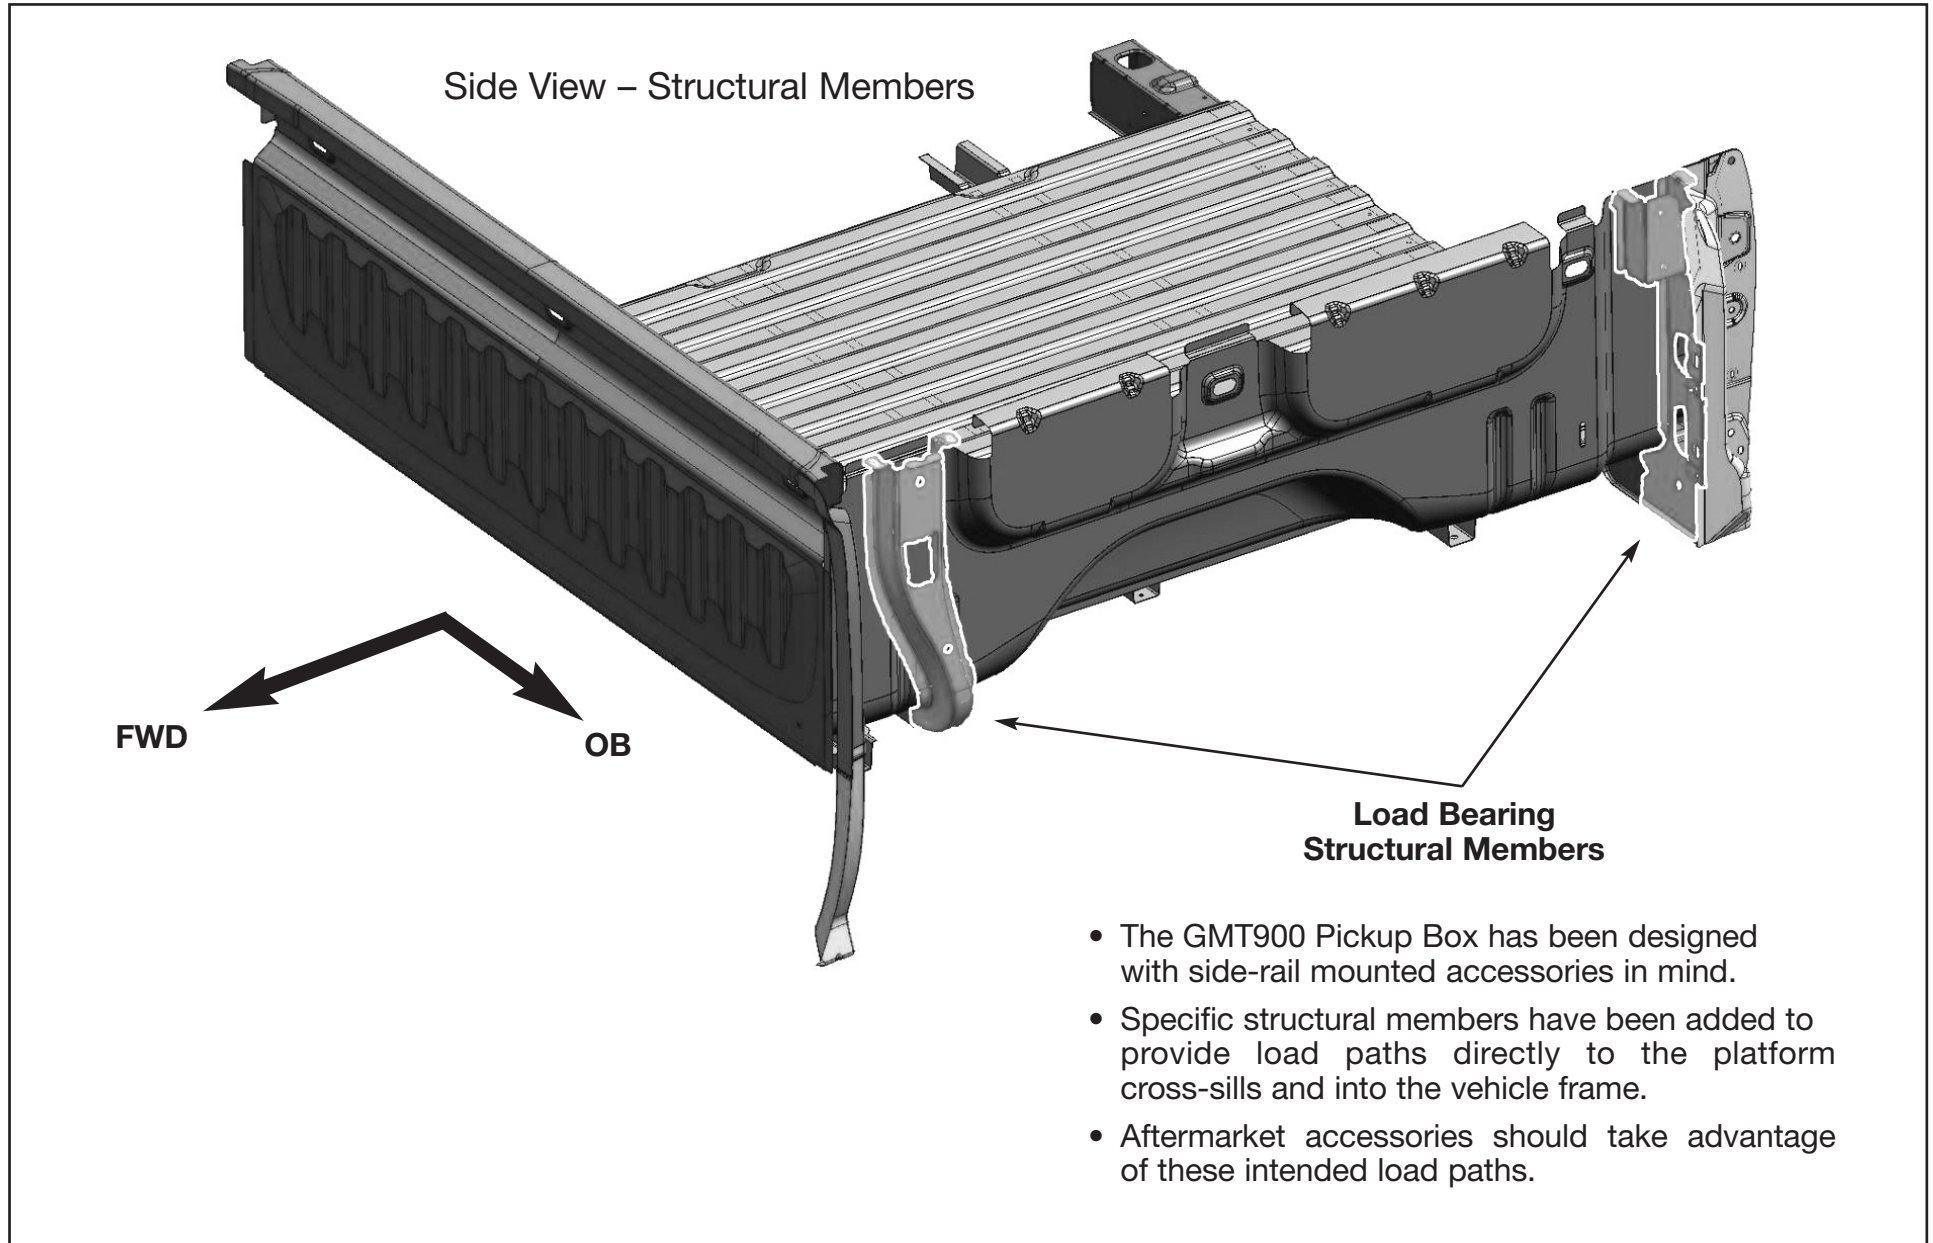

GMT900 Pickup Box Side Rail Load Points/Paths

Top View – Structural Members

Primary Load Points

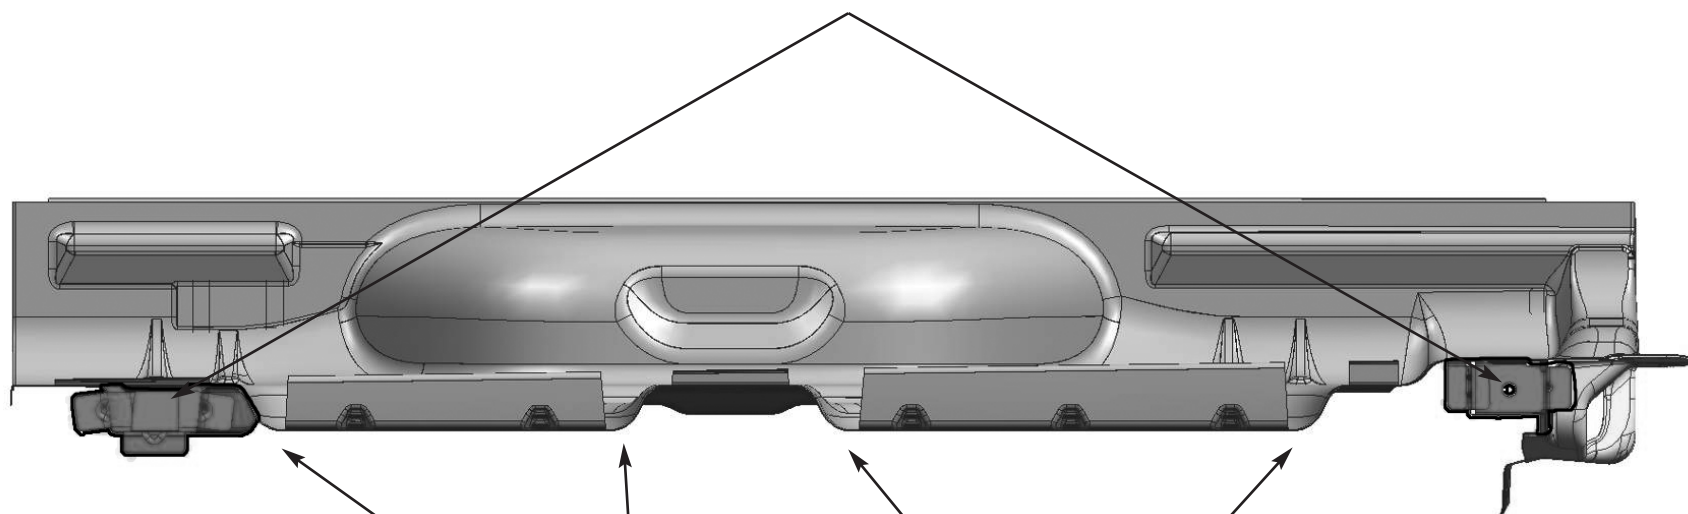


Secondary Load Areas




GMT900 Pickup Box Side Rail Load Points/Paths

Top View – Front Structure

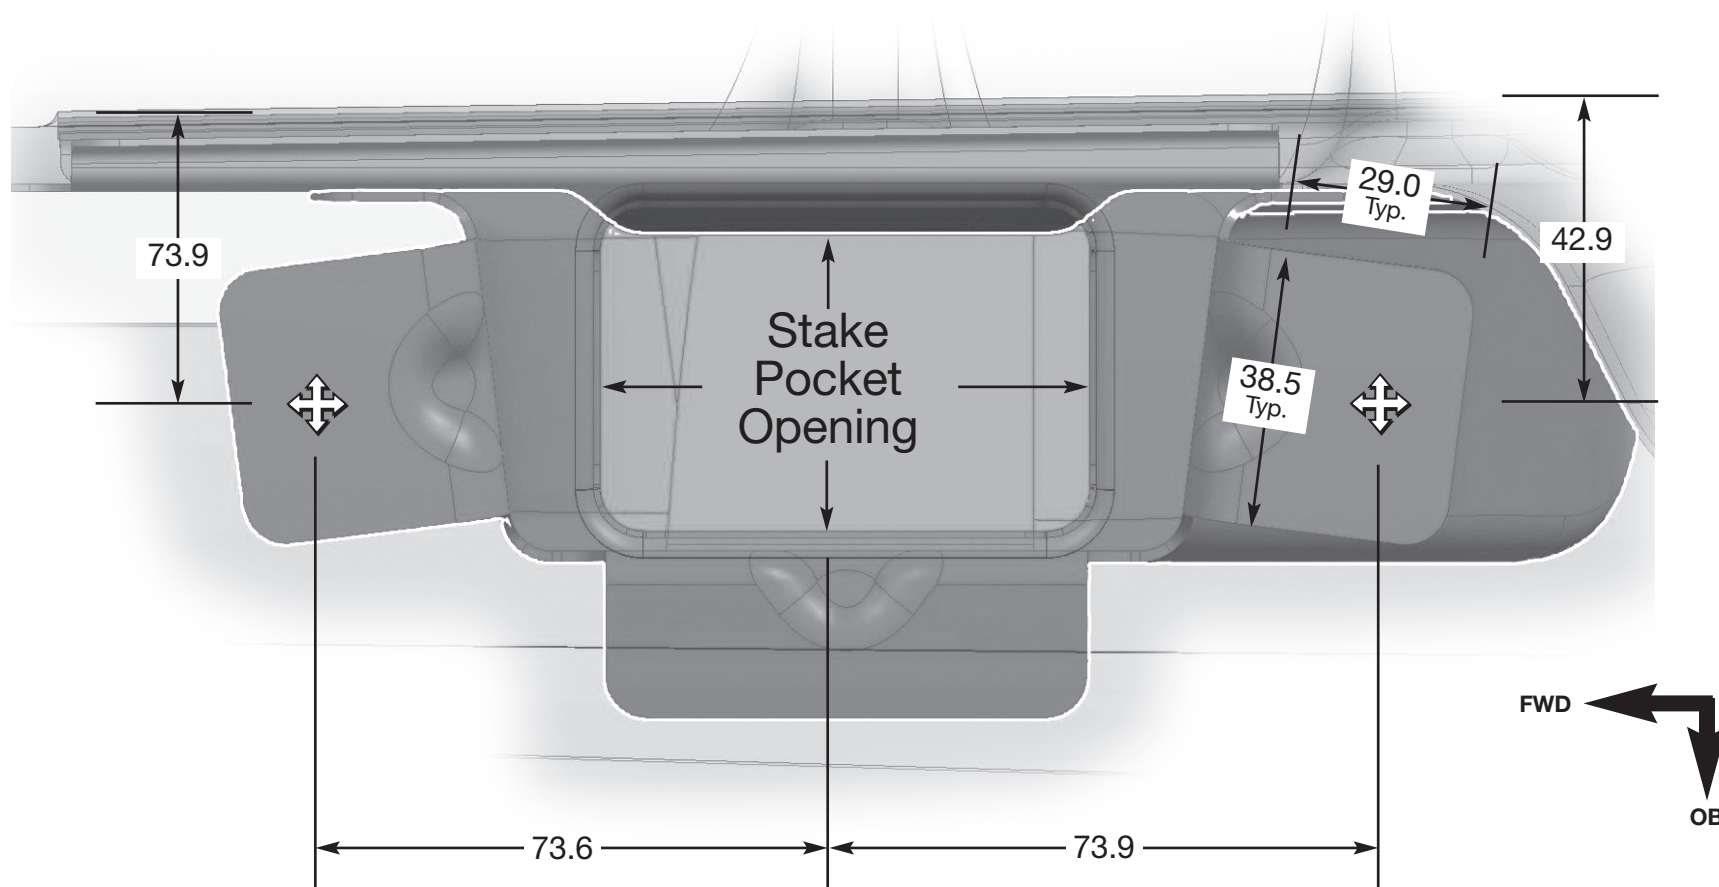

GMT900 Pickup Box Side Rail Load Points/Paths


Top View – Rear Structure

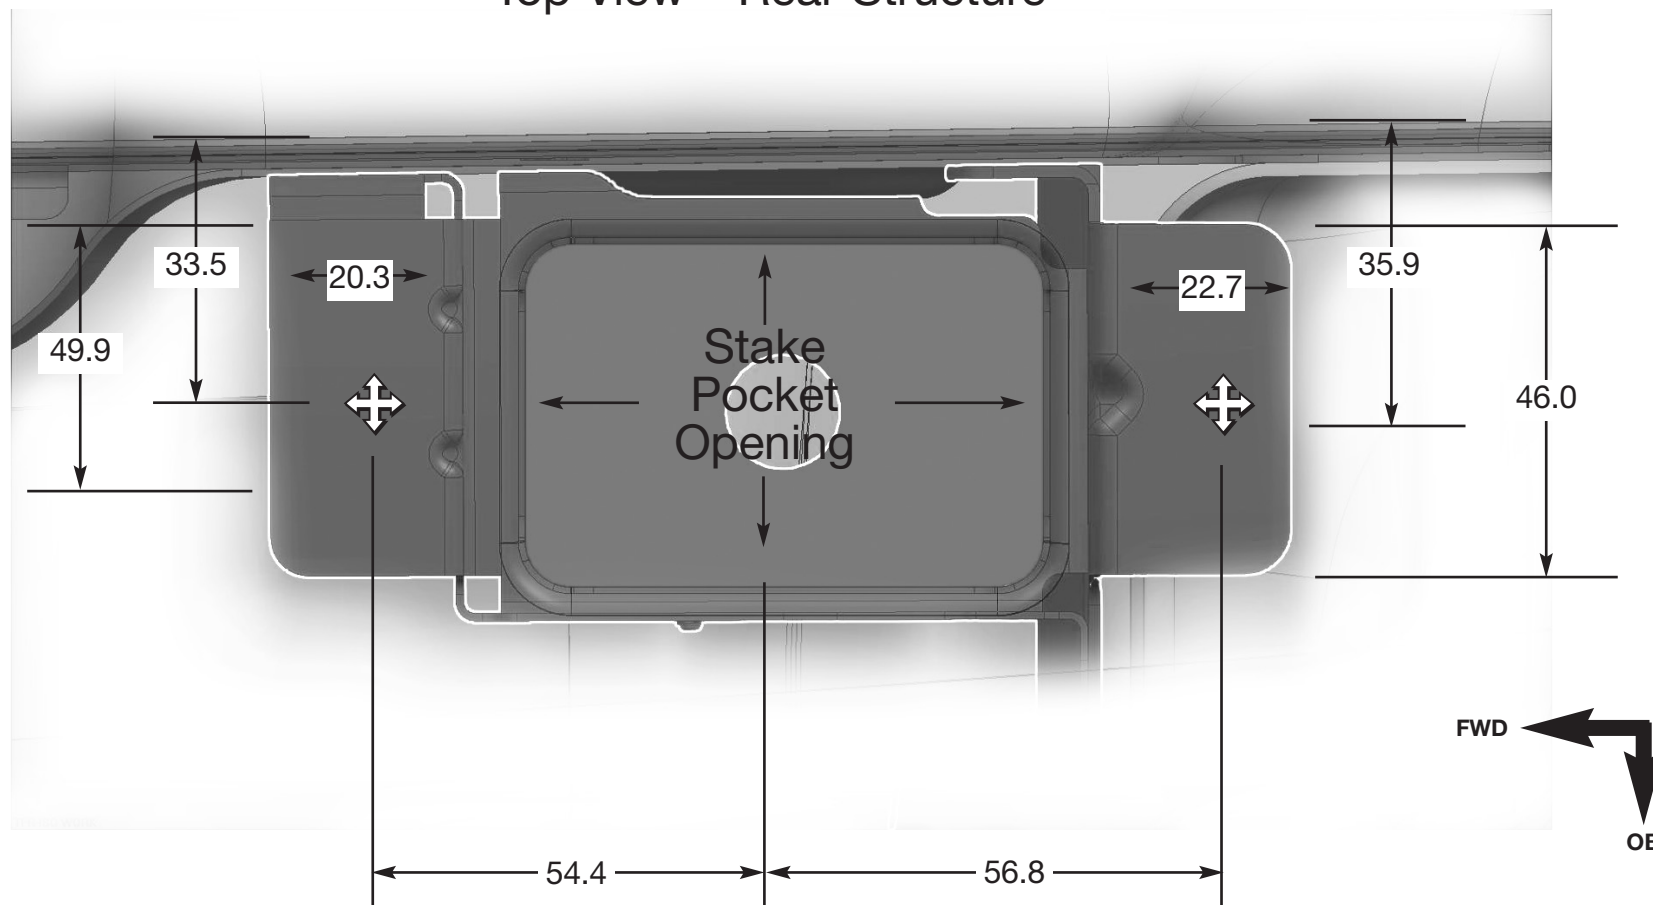

FULL SIZE C/K LD PICKUPS

PAGE 31

Length and Width Dimension for 5' 8", 6' 6" and 8' – Pickup Box

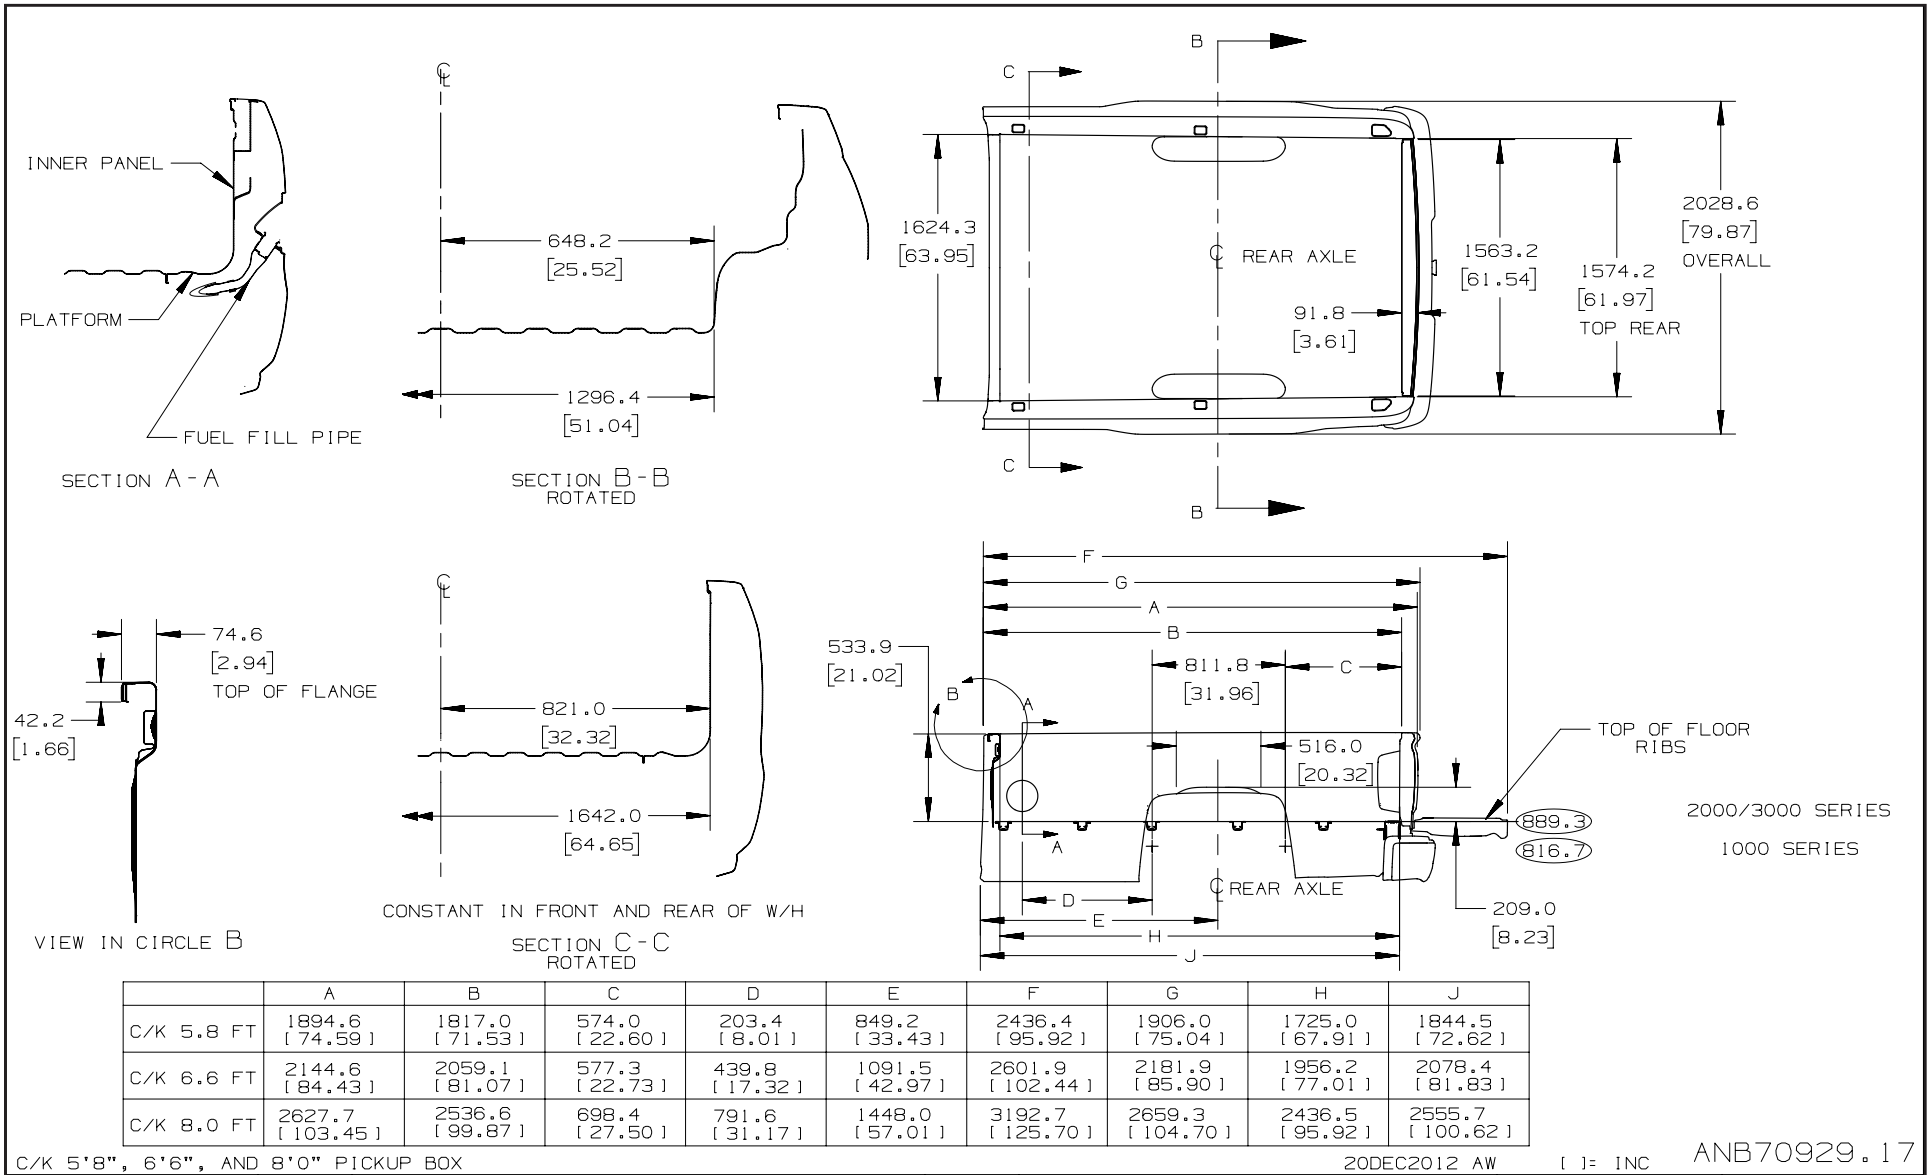

PAGE **32**

Technical drawing of a pickup box inner side, showing dimensions and sections. The drawing includes a main side view and several cross-sections (L-L, M-M, N-N, P-P, C-C, D-D) and a detail view (B). Dimensions are provided in inches and millimeters.

Dimensions (Inches / Millimeters):

- 1835.8 [72.28]
- 1721.2 [67.76]
- 1626.5 [64.03]
- 1479.8 [58.26]
- 1466.1 [57.72]
- 1403.2 [55.25]
- 1318.2 [51.90]
- 1152.1 [45.36]
- 780.0 [30.707]
- 511.4 [20.13]
- 427.9 [16.85]
- 397.9 [15.66]
- 239.4 [9.43]
- 155.1 [6.11]
- 66.4 [2.61]
- 515.7 [20.30]
- 518.2 [20.40]
- 529.4 [20.84]
- 525.5 [20.69]
- 447.9 [17.64]
- 829.0
- 4645 CK15543
- 781.0 [30.75]
- 154.4 [6.08]
- 66.4 [2.62]
- 49.2 [1.94] TYP 4 PLACES
- 85.0 [3.35] TYP 2 PLACES
- 10.3 X 35.7 SLOT [0.4] [1.4] 2 PLACES
- 76.5 [3.01]
- 9.0 [0.35] TYP 4 PLACES
- 88.0 [3.46]
- 105.6 [4.16]
- 105.4 [4.15]
- 45.8 [1.80]
- 131.3 [5.17]
- 135.7 [5.34]
- 50.8 [2.00]
- 72.2 [2.84]
- 539.1 [21.22]
- 248.0 [9.76]
- 49.1 [1.93]
- 25.5 [1.00]
- 26.0 [1.02]
- 23.2 [0.91]
- 6.0 [0.24]
- 61.7 [2.43]
- 25.0 X 20.0 SLOT [0.98] [0.79]

Sections and Details:

- SECTION L-L**
- SECTION M-M**
- SECTION N-N**
- SECTION P-P TYP 2 PLACES**
- SECTION C-C**
- SECTION D-D 3 PLACES**
- DETAIL B**

Other Labels:

- REAR AXLE
- TOP OF FLOOR RIBS
- 4645 CK15543


Notes:

- PICKUP BOX INNER SIDE, BOX 5'8", CK15543/53, 2014
- SHOWN CK15553
- 20DEC2012 AW
- [] = INCHES
- ANB86203.5

FULL SIZE C/K LD PICKUPS

PAGE 33


Cross Sills Location, 5' 8" Box – Pickup Box

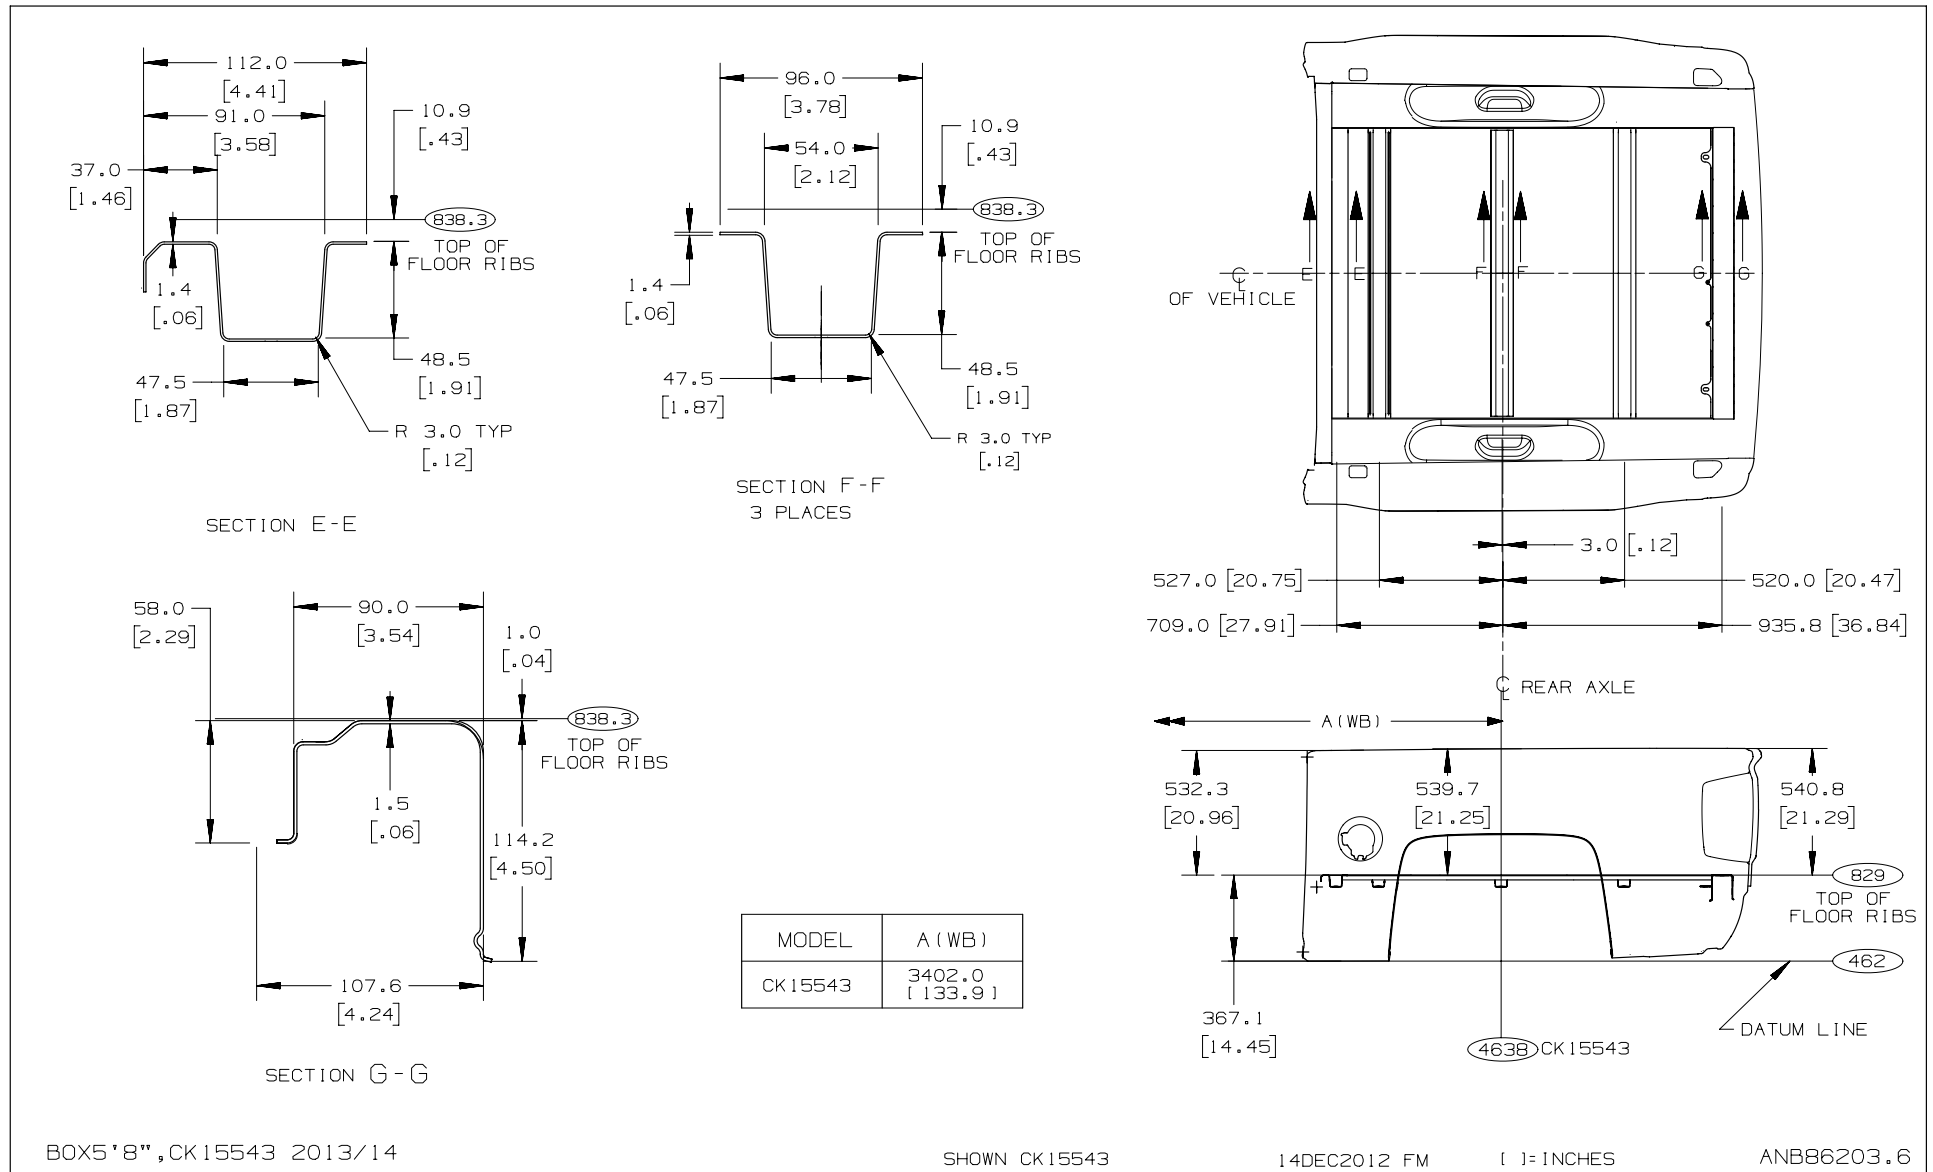

FULL SIZE C/K LD PICKUPS

PAGE 34


Inside Panel, 6' 6" Box – Pickup Box

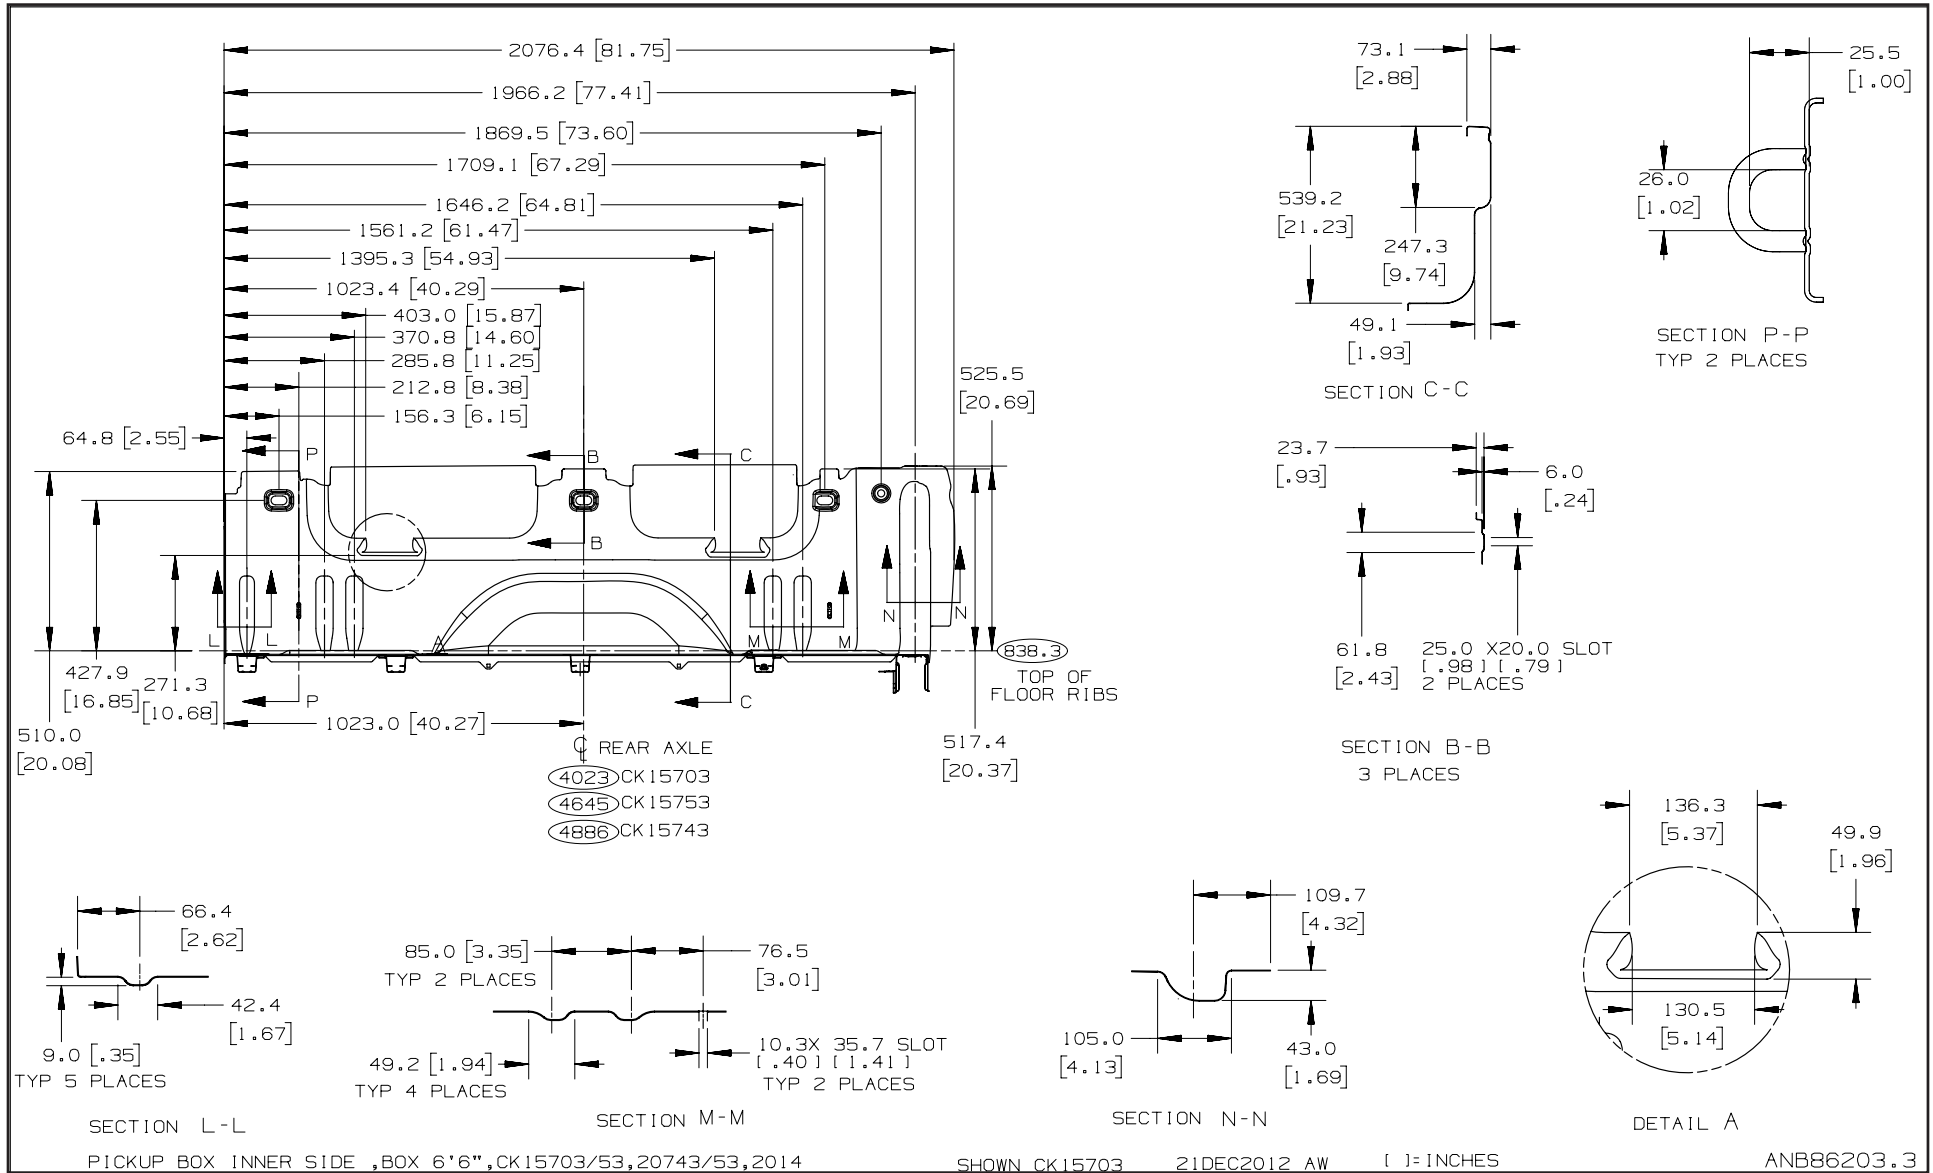

FULL SIZE C/K LD PICKUPS

PAGE 35


Cross Sills Location, 6' 6" Box – Pickup Box

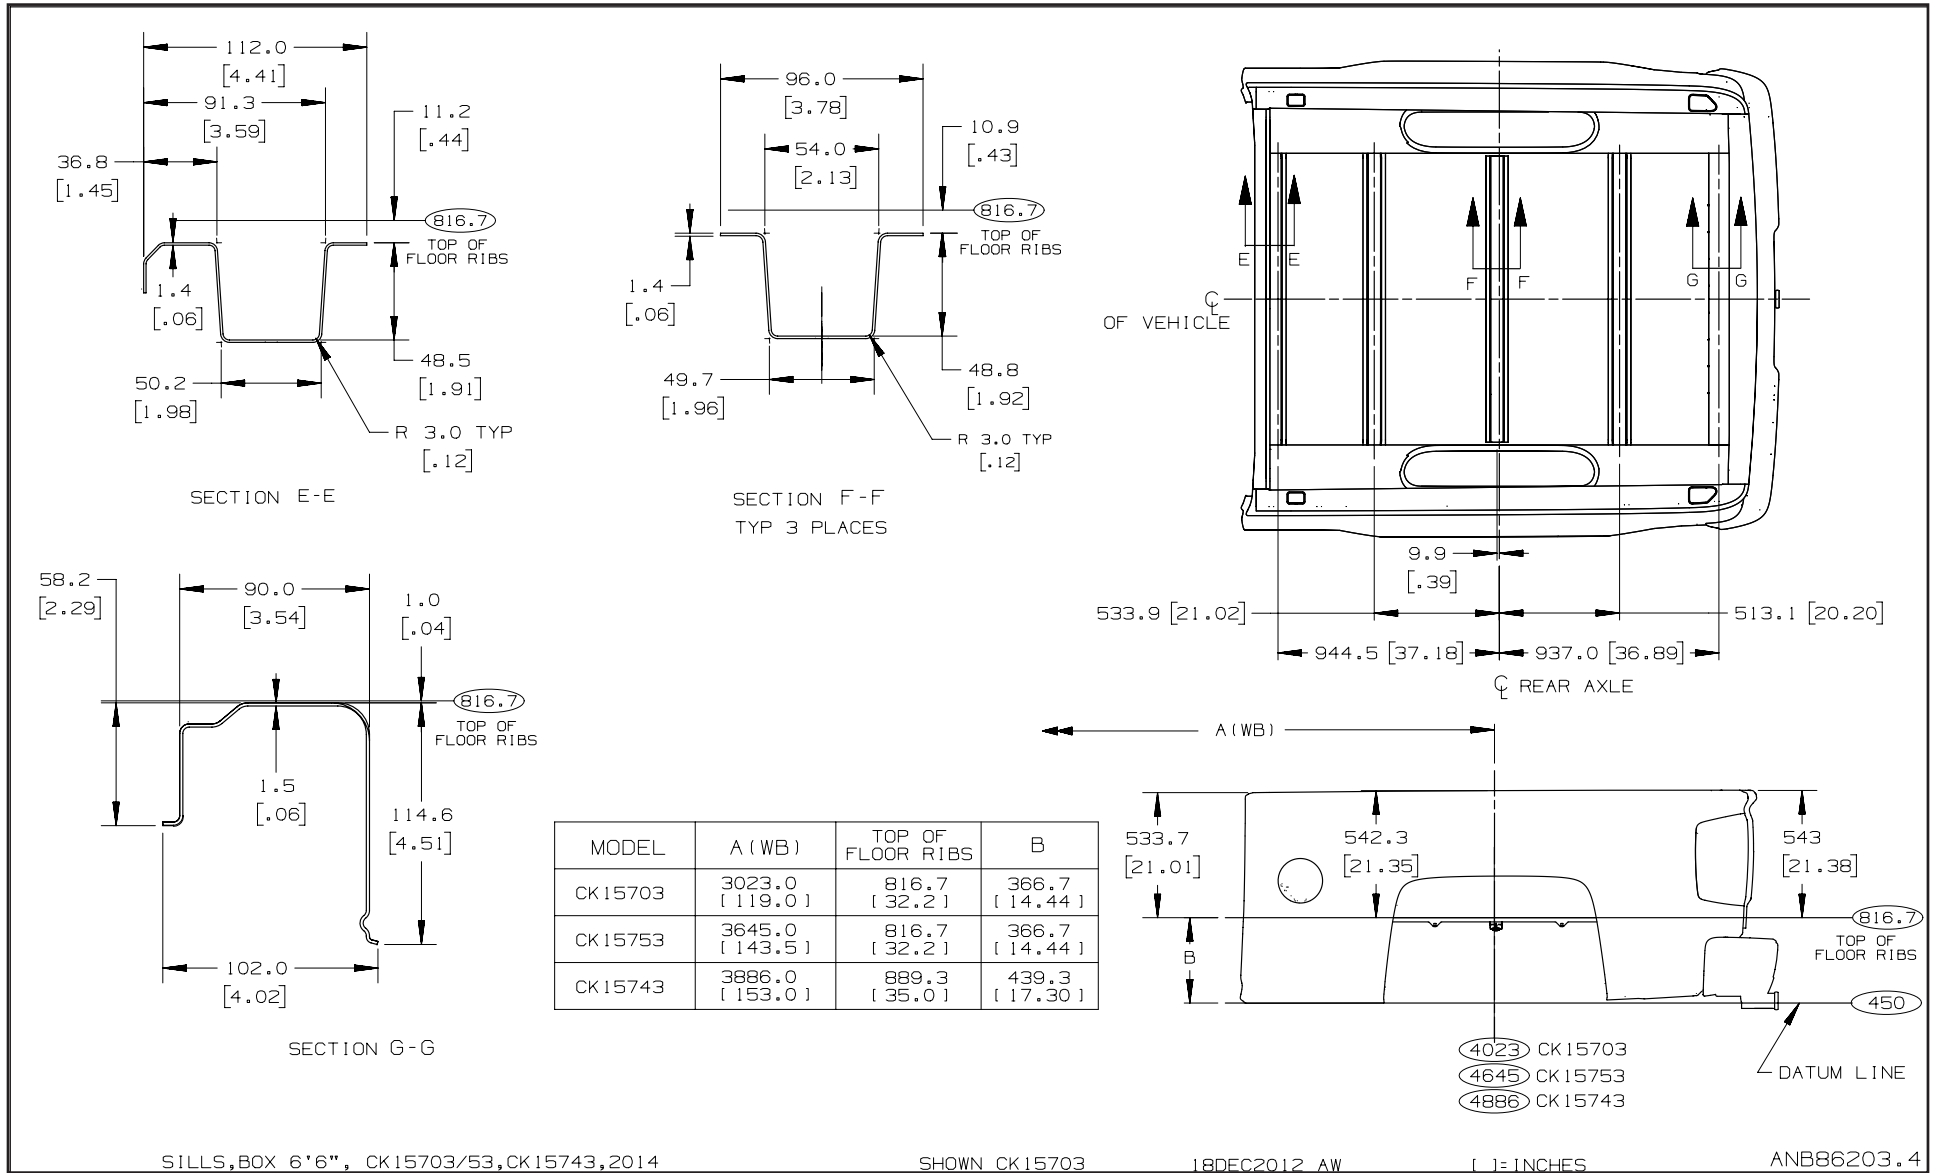

FULL SIZE C/K LD PICKUPS

PAGE 36


Inside Panel, 8' Box – Pickup Box

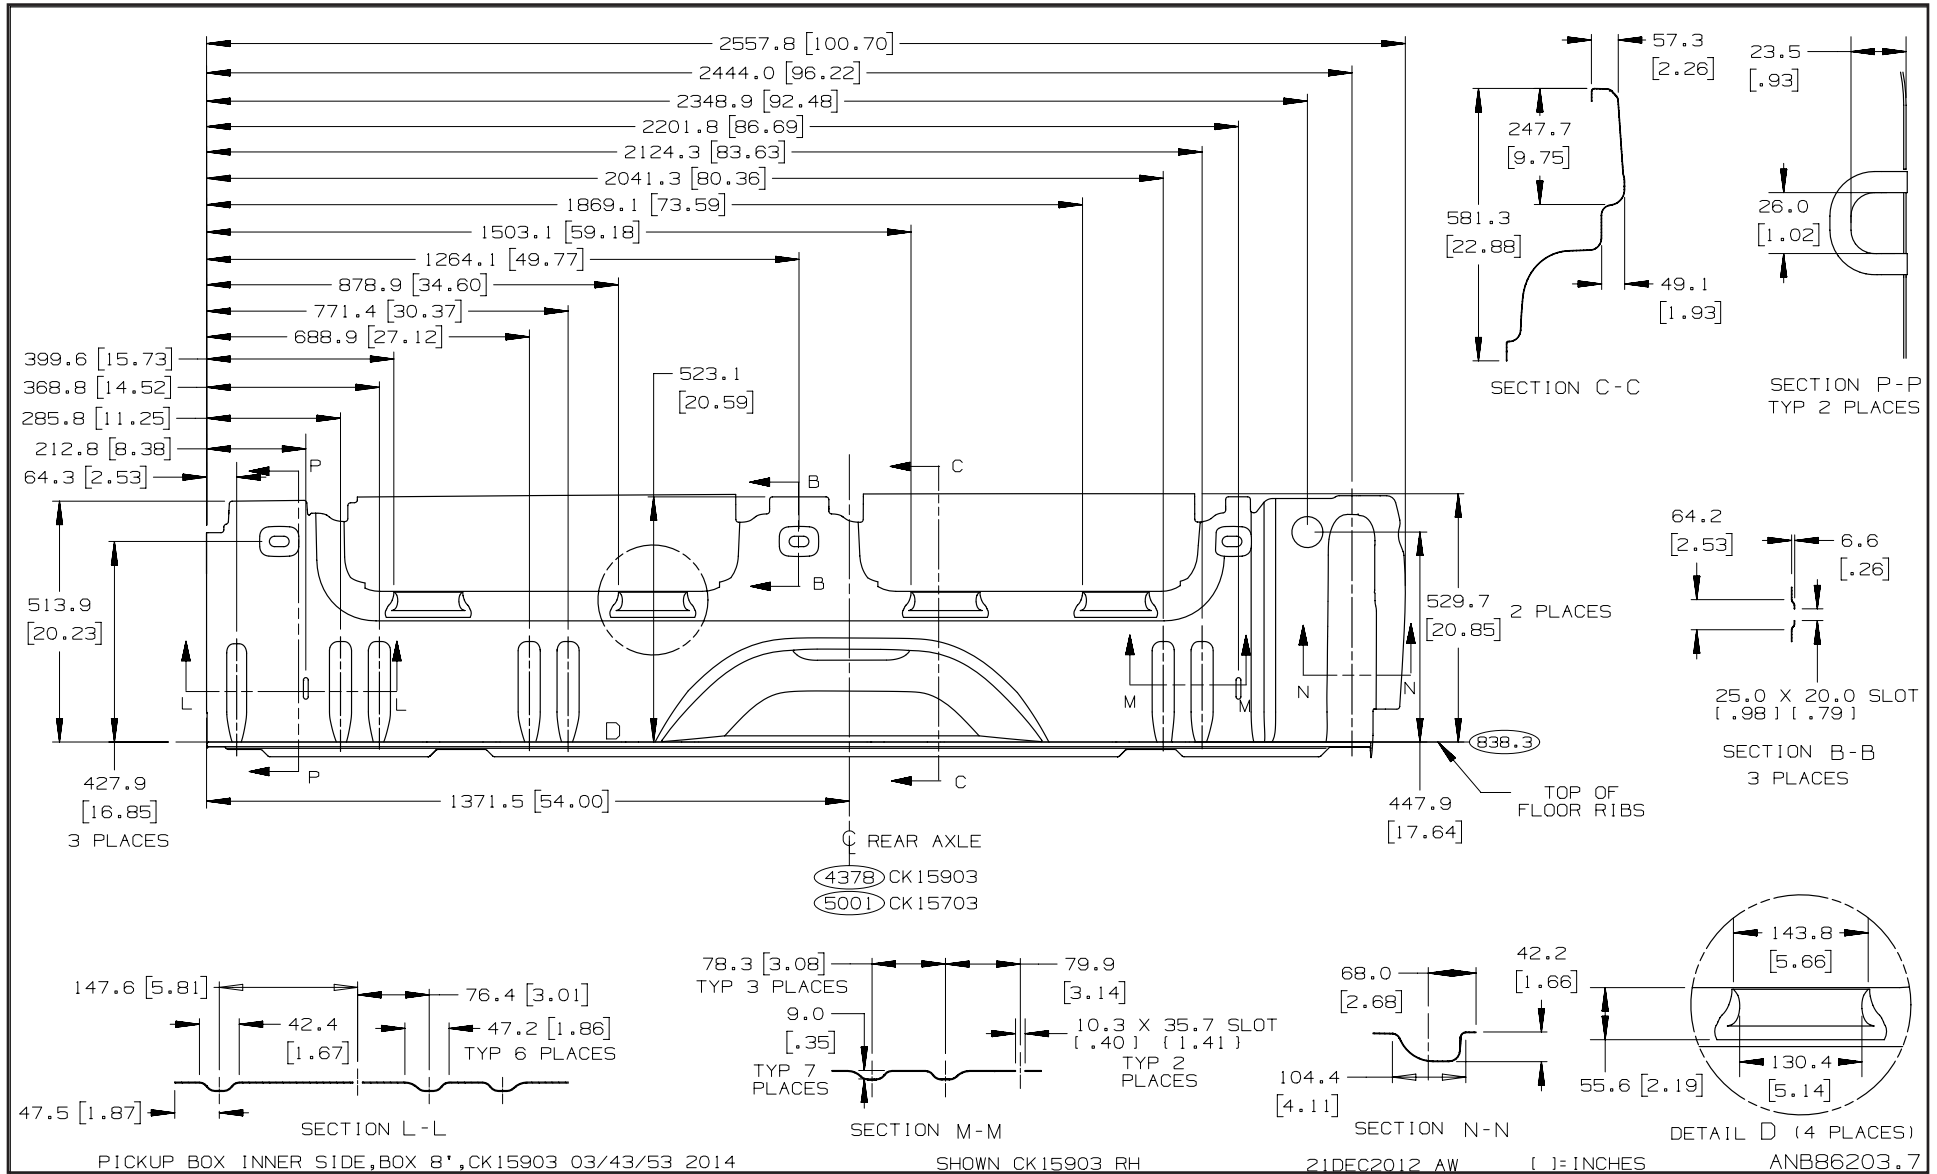

FULL SIZE C/K LD PICKUPS

PAGE 37

Seating Positions and H Points 1st Row Front View, Pickups – C/K 100/200/300 (03/53/43)

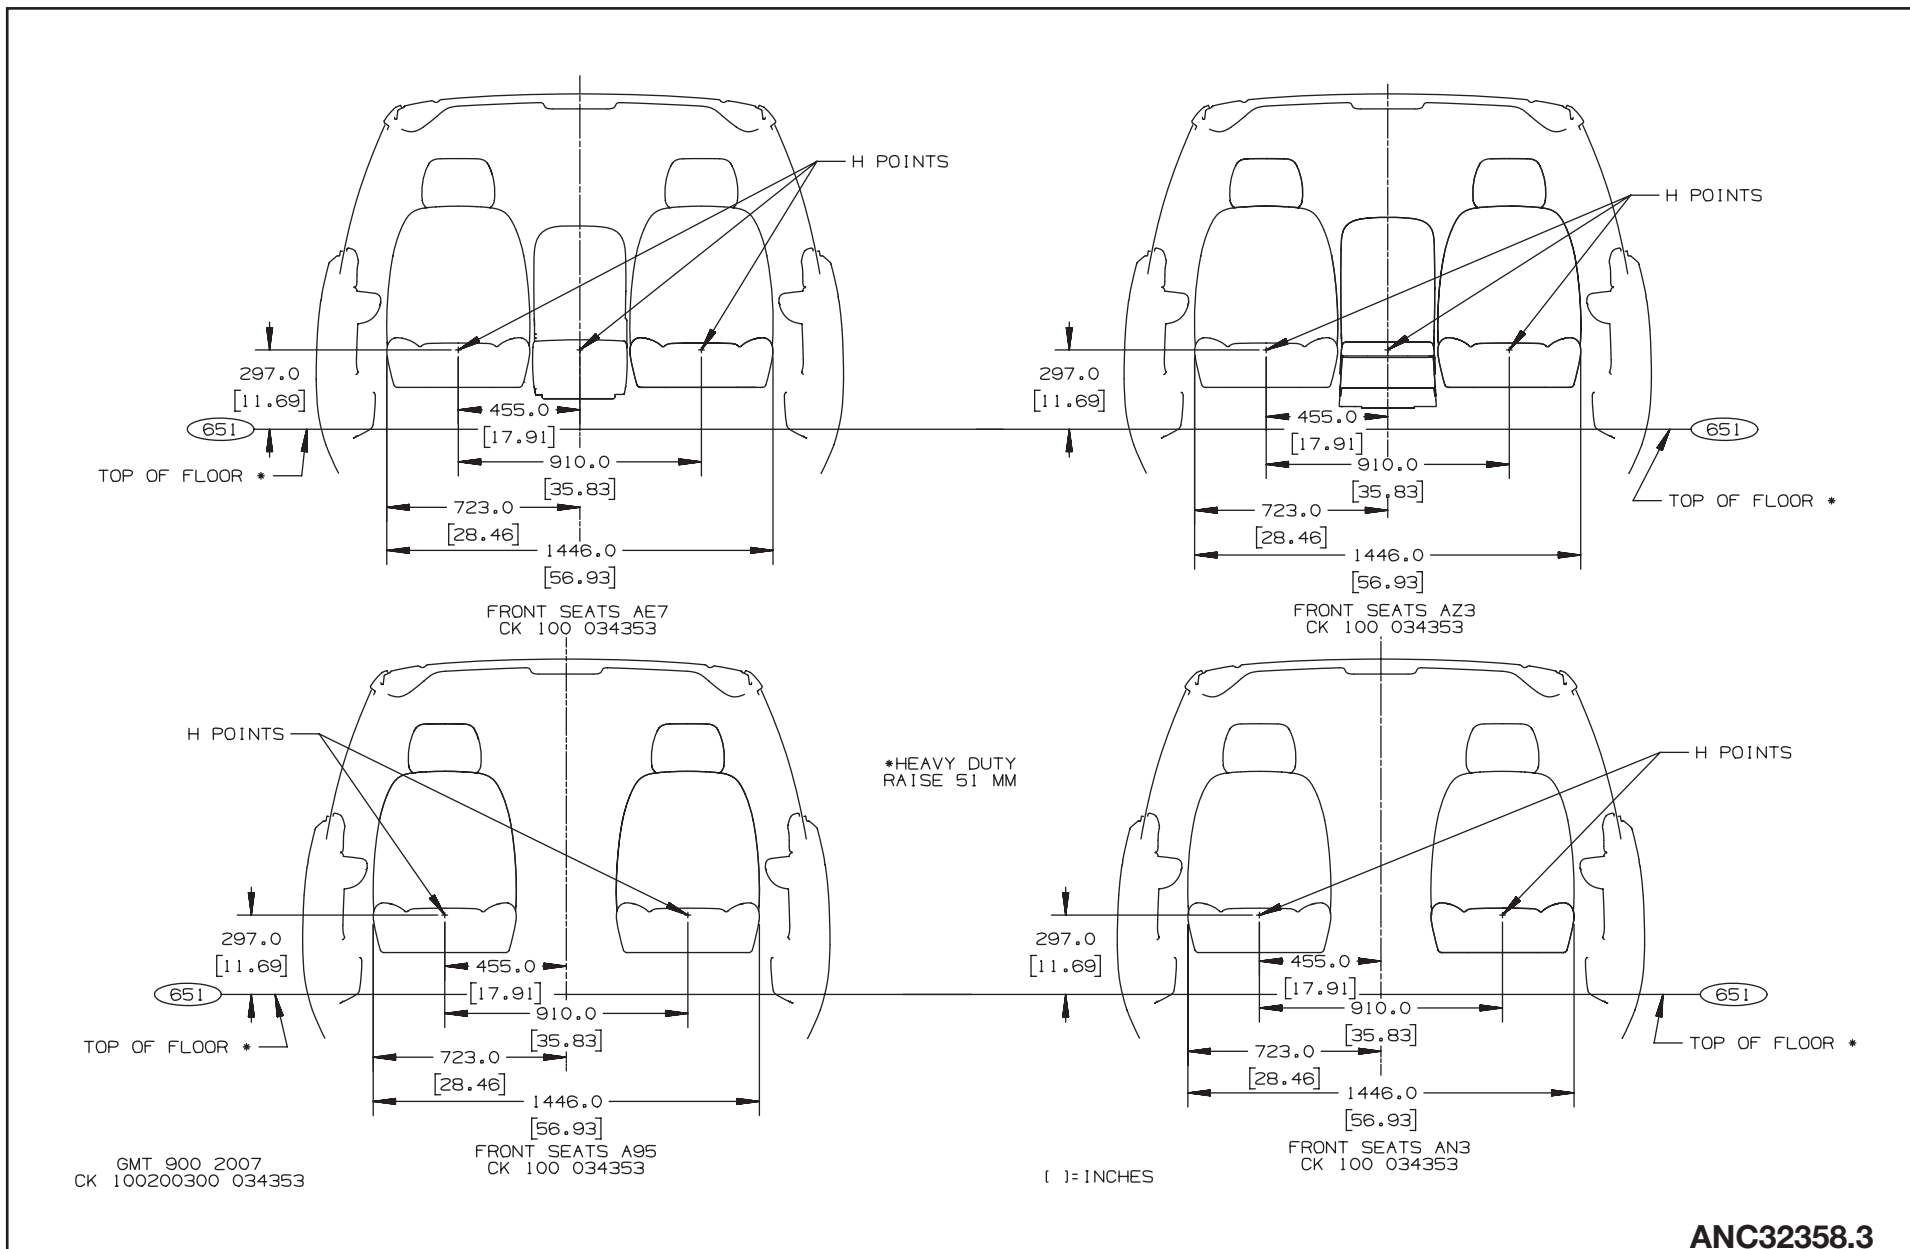


ANC32358.3

FULL SIZE C/K LD PICKUPS

PAGE 38

Seating Positions and H Points 2nd Row Front View, Pickups – C/K 100/200/300 (03/53/43)

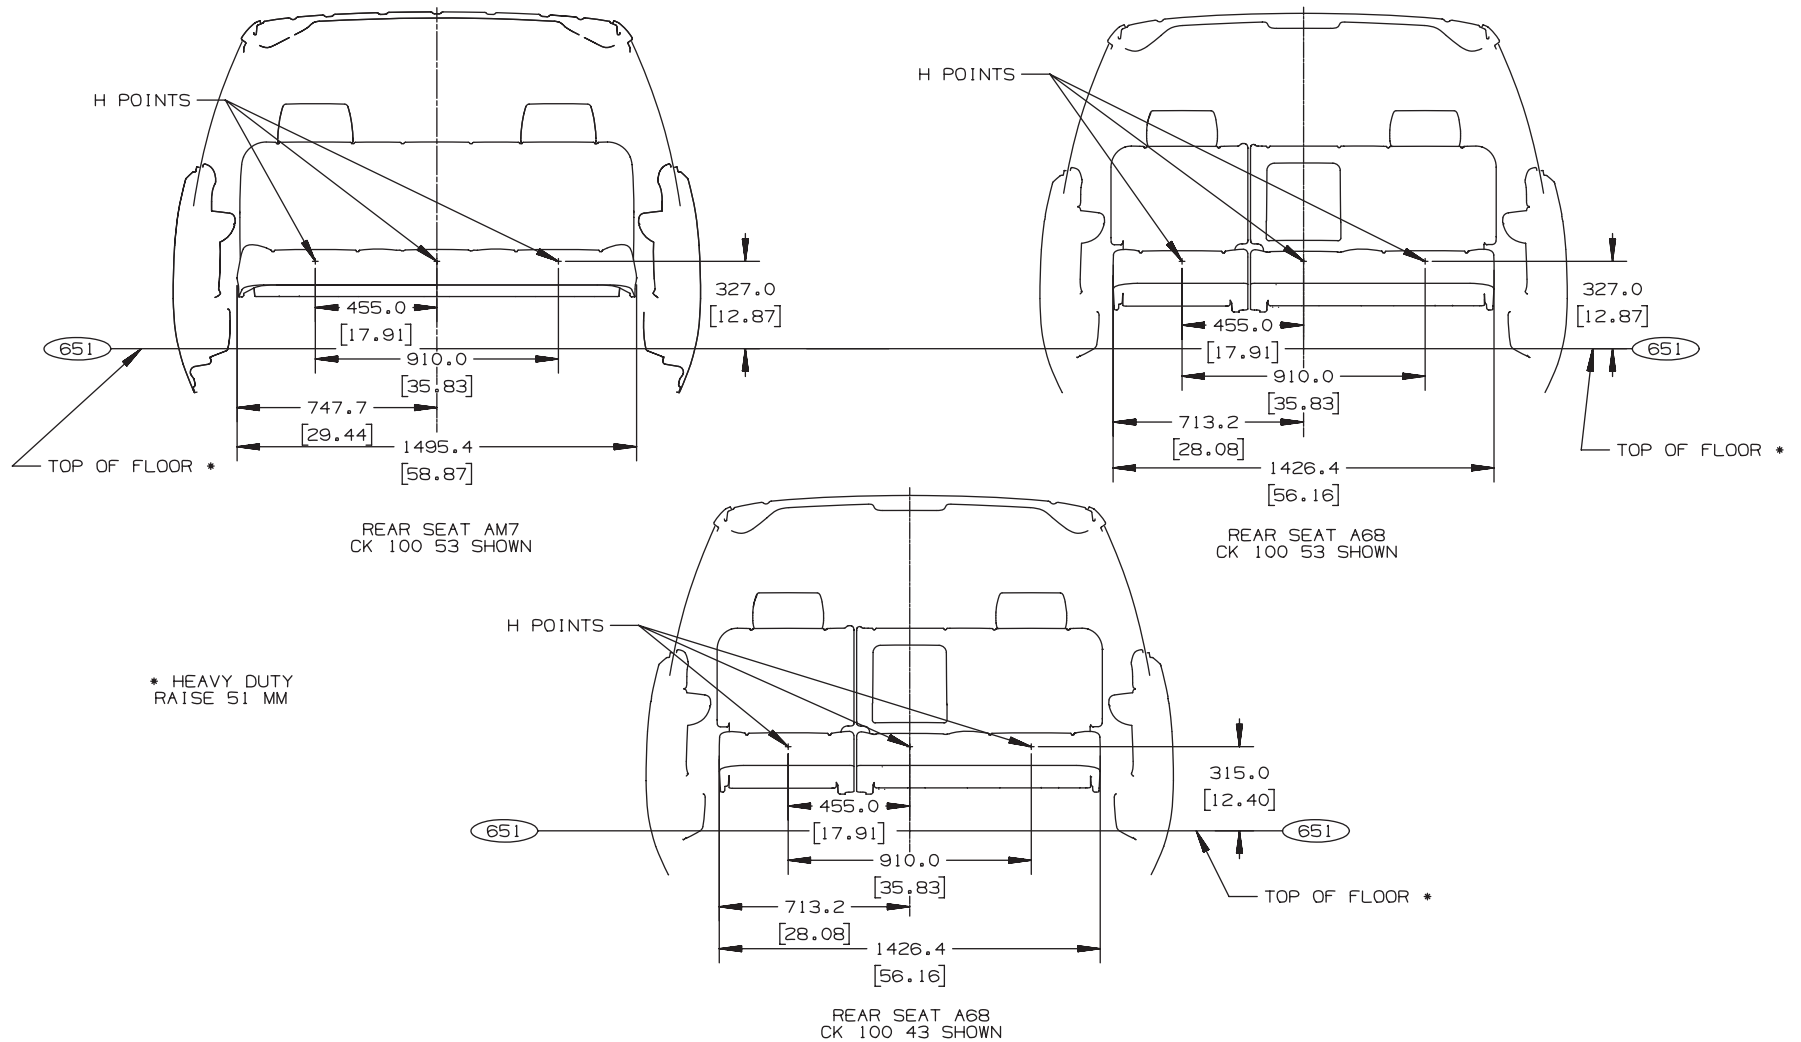

GMT 900 2007
CK 100200300 034353


(1)= INCHES

ANC32358.4

FULL SIZE C/K LD PICKUPS

PAGE 39

Seating Positions and H Points Side View, Pickups – C/K 100/200/300 (03/53/43)

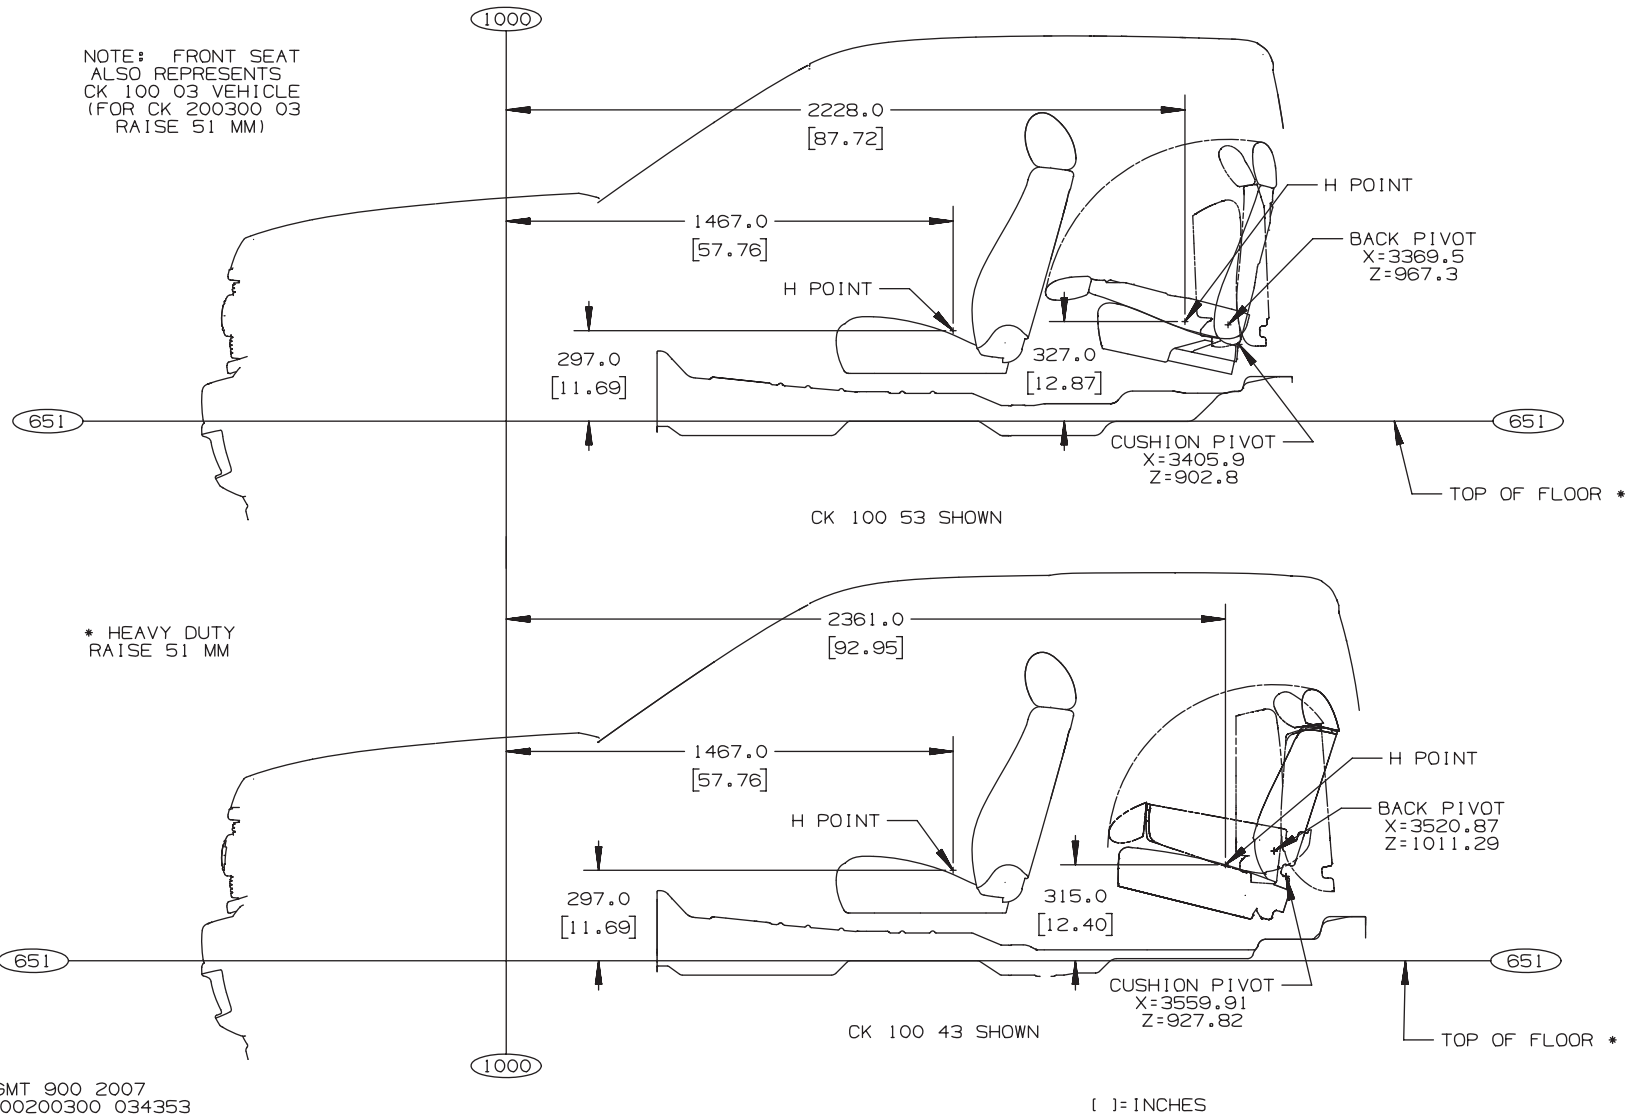

ANC32358.5

1000
C FRT AXLE

1360.0
[53.54]

977.0
[38.46]

680.0
[26.77]

403.0
[15.87]

1380.1
[54.33]

907.5
[35.73]

20.1
[.79]

5.0
[.20]

818.5
[32.23]

358.0
[14.09]

876.0
[34.49]

926.5
[36.48]

1533.0
[60.35]

1007.0
[39.65]

2ND ROW JUMP SEAT MOUNTING

EXTENDED CAB SHOWN
03 SAME AS 53 FRONT
ROW SEAT MOUNTS

651

TOP OF FLOOR

SECTION A-A

702

TOP OF FLOOR

SECTION A-A
03/53 HD (ONLY)

GMT900 C/K 100/200/300 03/53 SEAT MOUNT LOCATIONS 2008

[]=INCHES

ANB51264.3

Structural drawing of a floor slab section showing dimensions and reinforcement details. The drawing includes a plan view at the top and a cross-section view at the bottom.

Plan View Dimensions:

- Overall width: 1042.0 [41.02]
- Overall length: 1528.0 [60.16]
- Reinforcement spacing: 353.0 [13.90], 5.0 [.20], 13.0 [.51], 21.0 [.83]
- Reinforcement spacing: 383.0 [15.08], 403.0 [15.87], 430.0 [16.93], 605.0 [23.82]

Cross Section View:

- Section A-A is shown at the bottom.
- Reinforcement is shown as circles with dots.
- Dimensions for the cross-section are 5.0 [.20] and 8.0 [.31].
- The section is labeled "TOP OF FLOOR" and "651".

15MR05 MK


[]= INCHES

Revised Date: 06/30/2017

FULL SIZE C/K LD PICKUPS

PAGE 42

C/K 100 (00) and C/K 200 (00) – Datum Hole Location

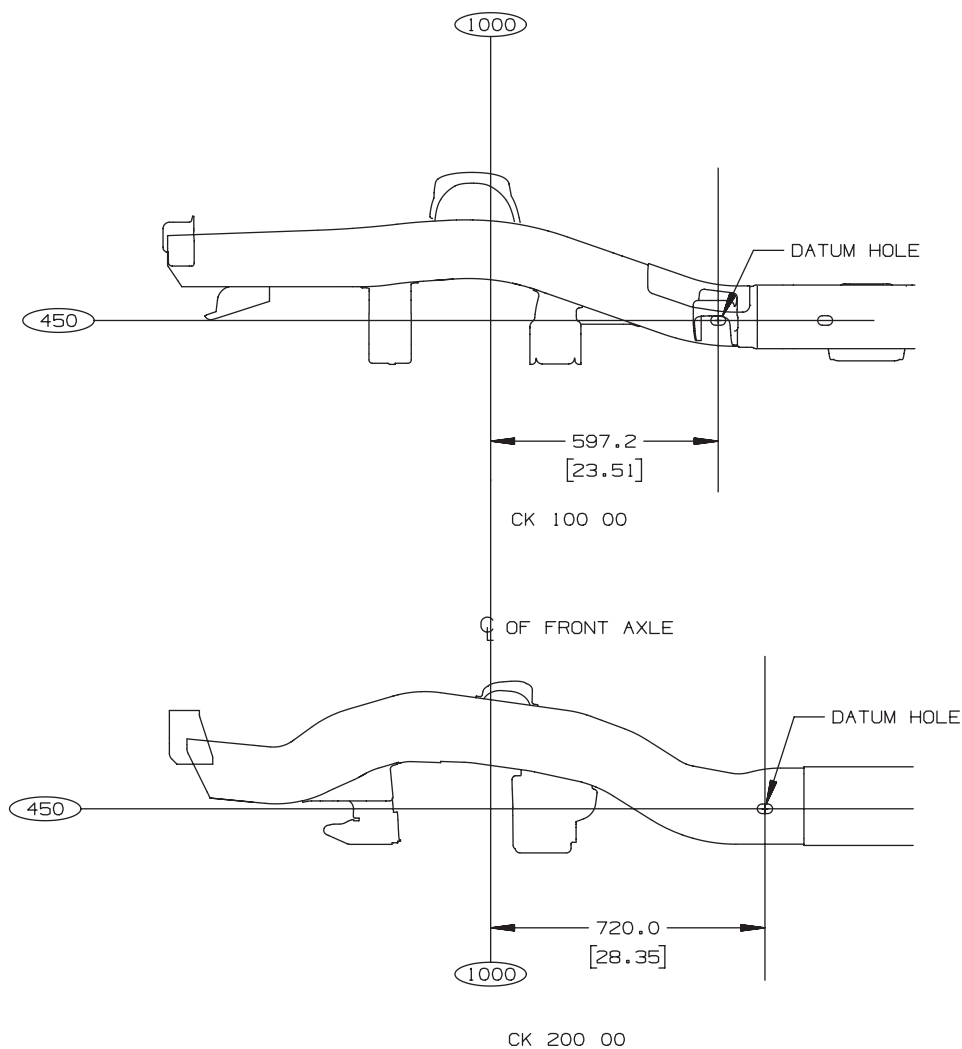


GMT 900 CK100200 00 FRAME DATUM LOCATIONS

[] = INCHES

ANC30752.3

C/K 15703 – Frame Rail and Crossmember Locations

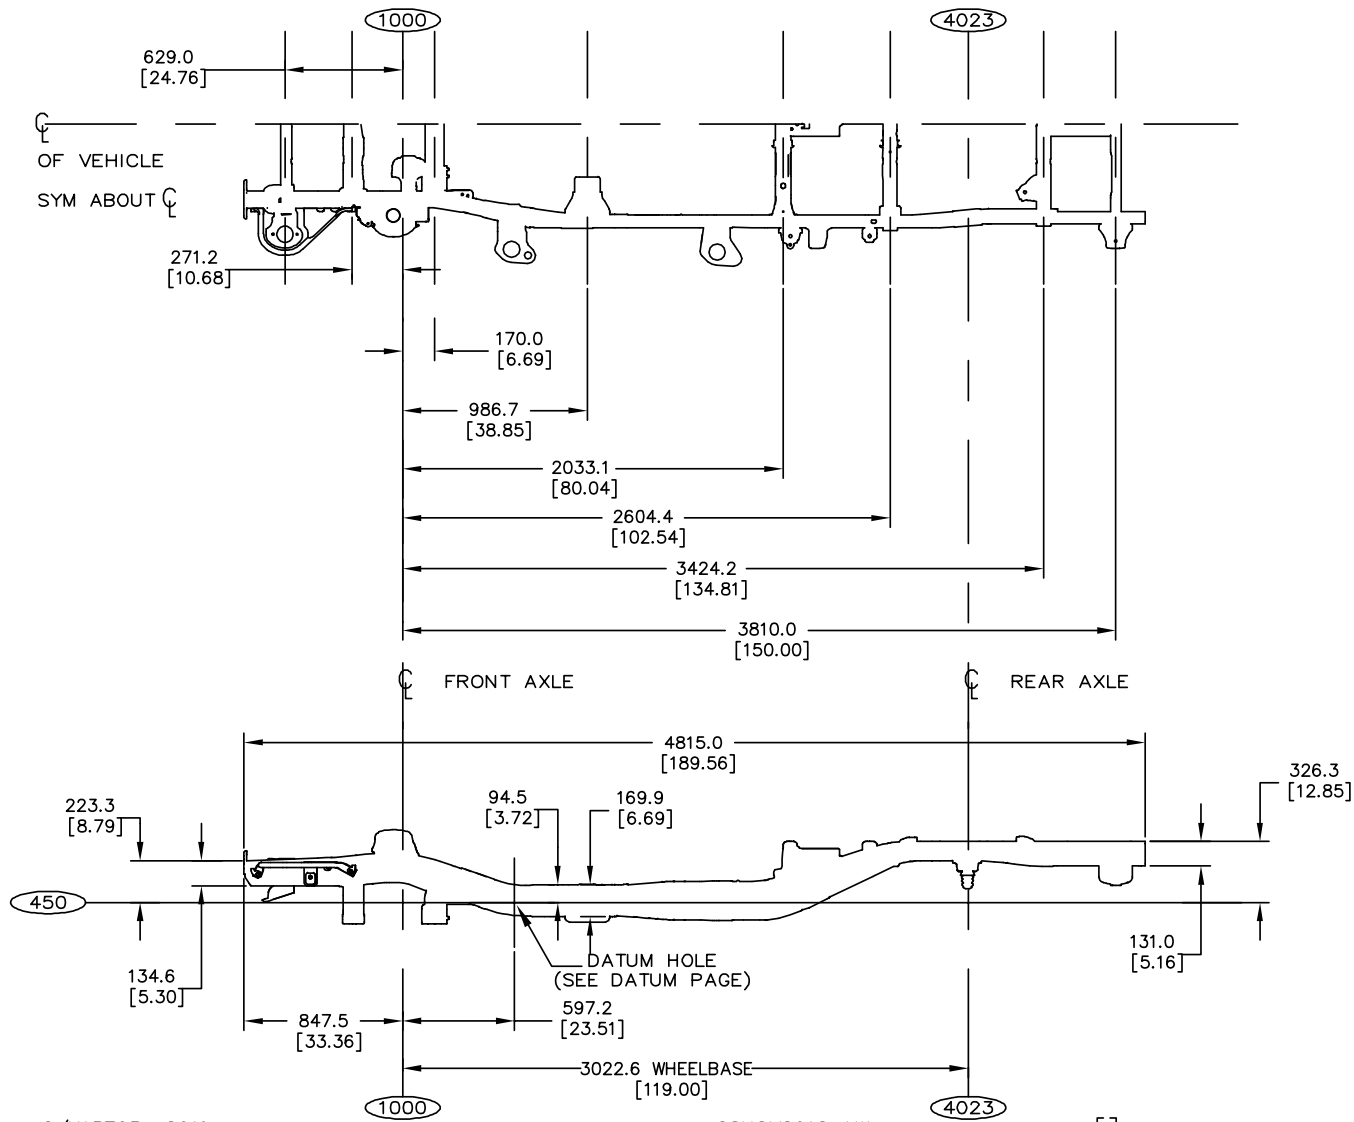

C/K15703 2016

28NOV2012 AW


[]=INCHES

ANB34864.6

FULL SIZE C/K LD PICKUPS

PAGE 44

C/K 15903 – Frame Rail and Crossmember Locations

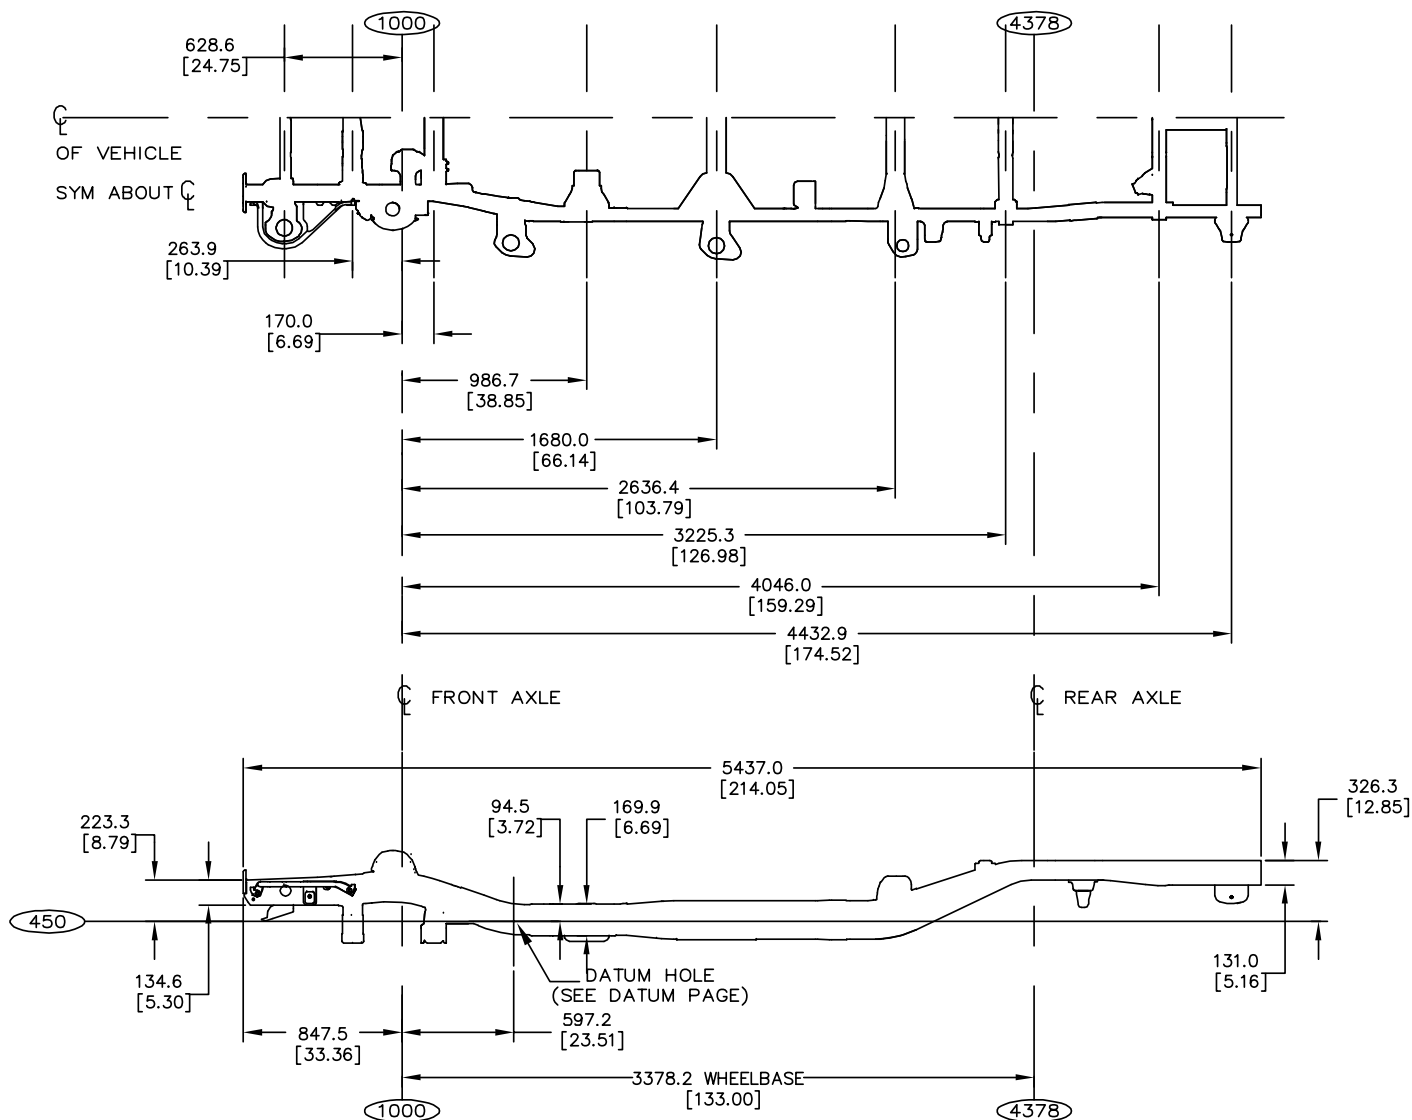


C/K 15903 2016

30NOV2012 AW

[]=INCHES

ANB34864.7

C/K 15753 – Frame Rail and Crossmember Locations

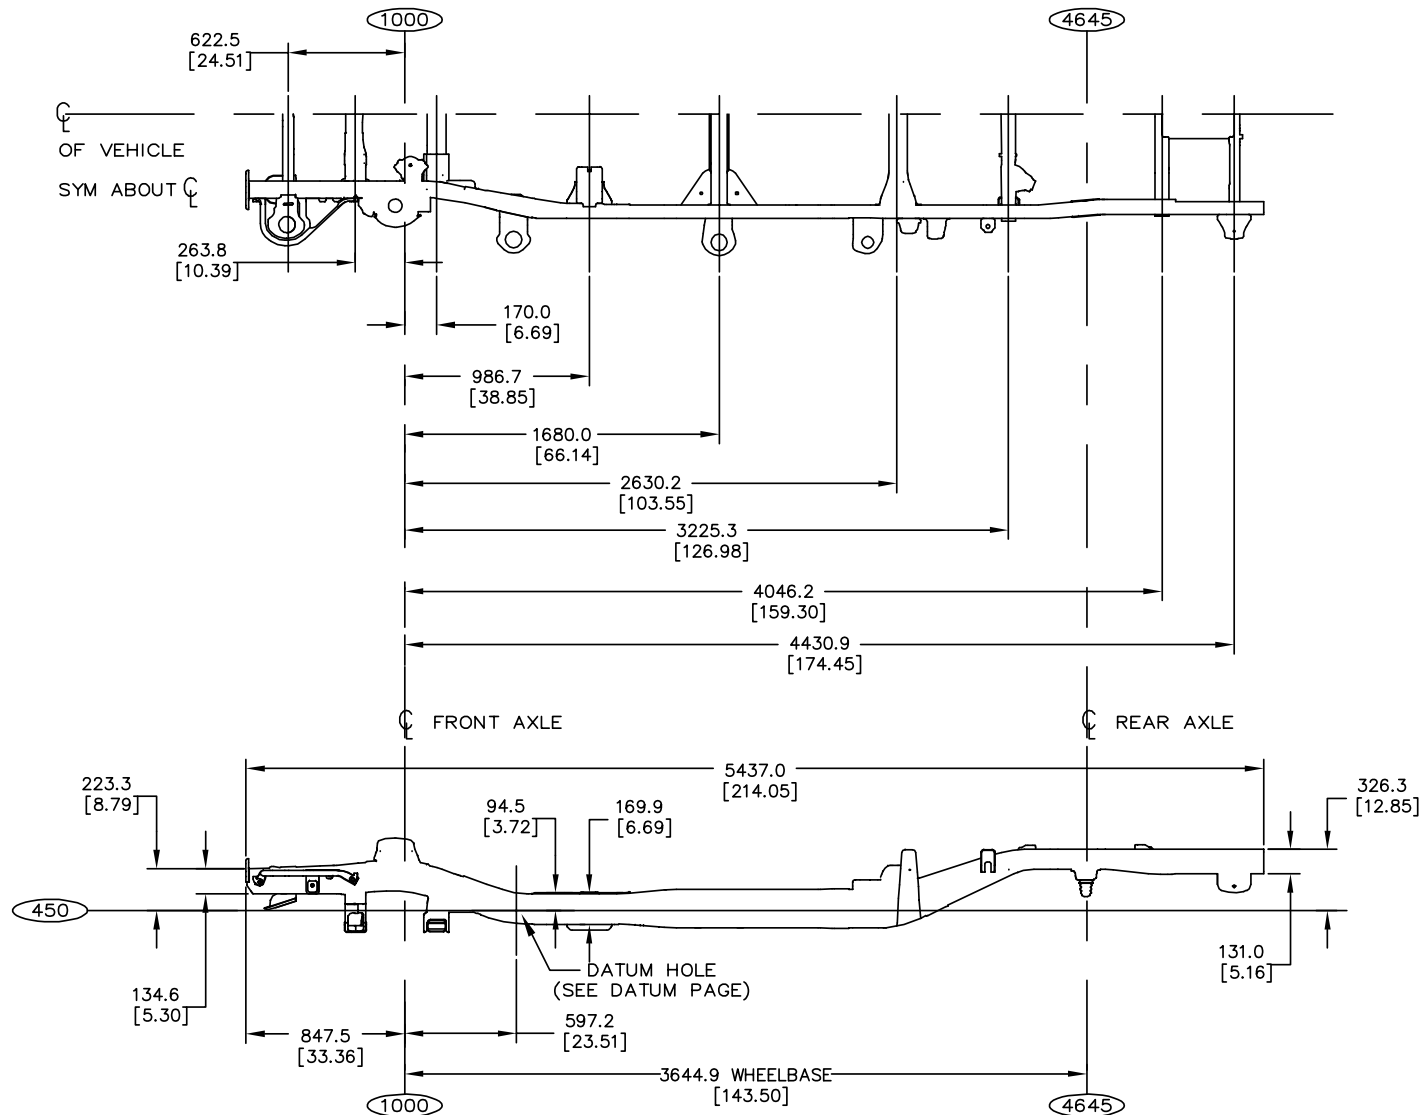


C/K 15753 2016

30NOV2012 AW

[]=INCHES

ANB34864.12

C/K 15743 – Frame Rail and Crossmember Locations

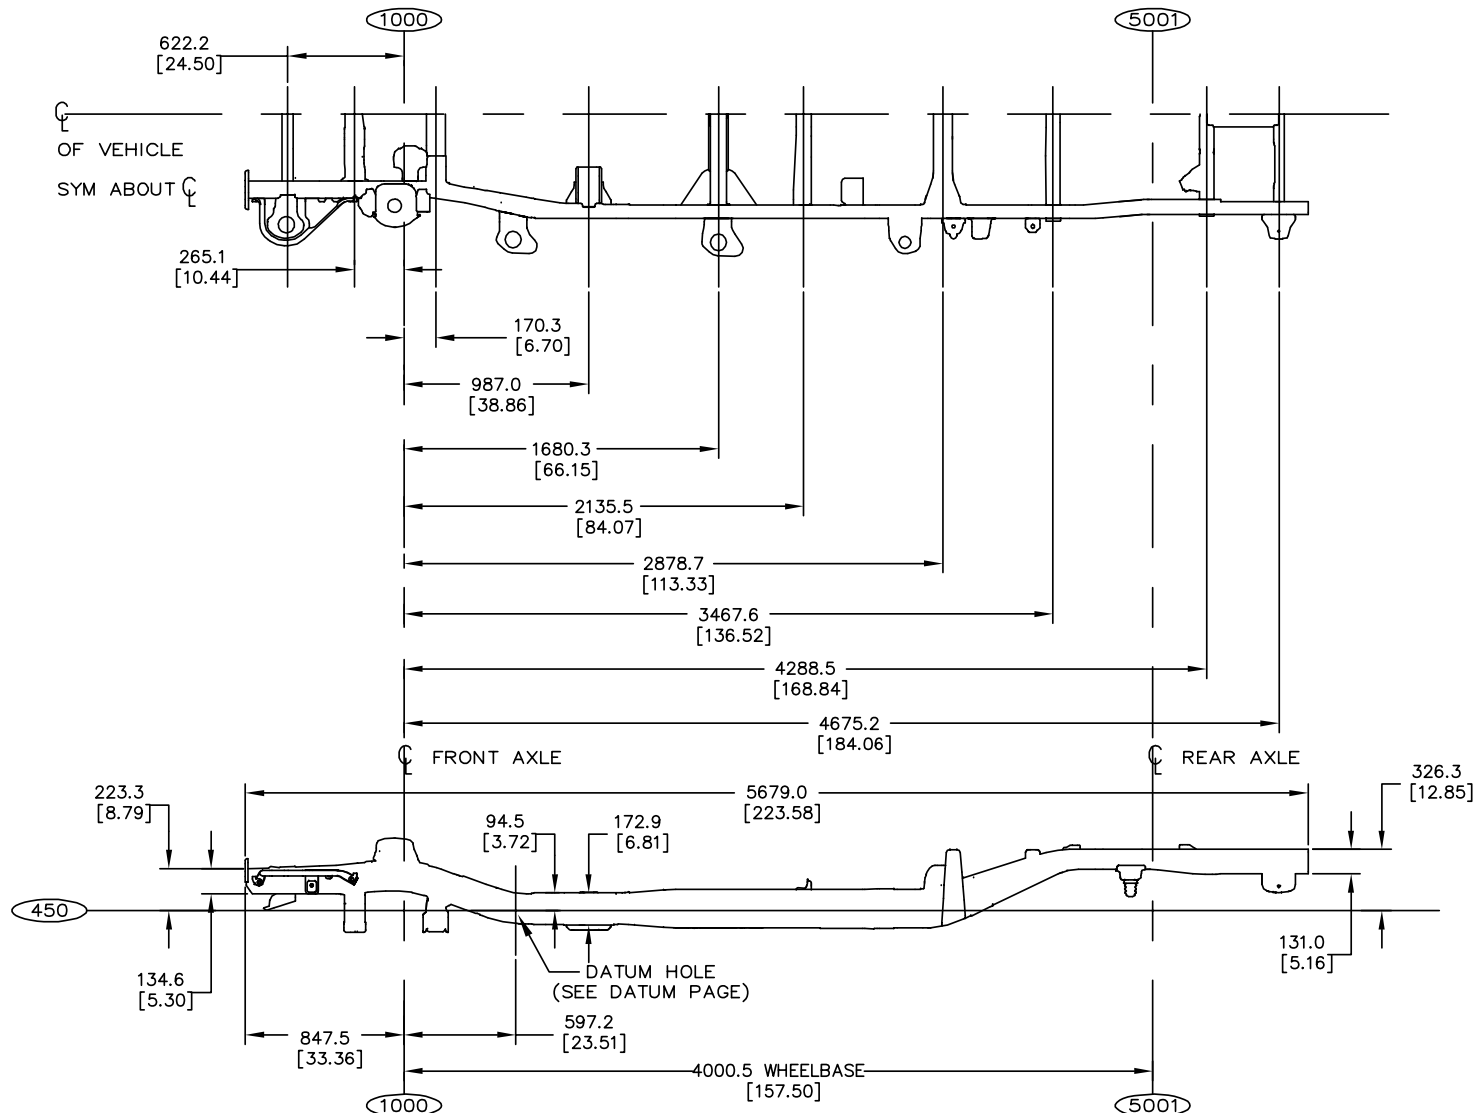

C/K 15743 2016

03DEC2012 AW


[]=INCHES

ANB34864.13

FULL SIZE C/K LD PICKUPS


PAGE 47

C/K 15543 – Frame Rail and Crossmember Locations

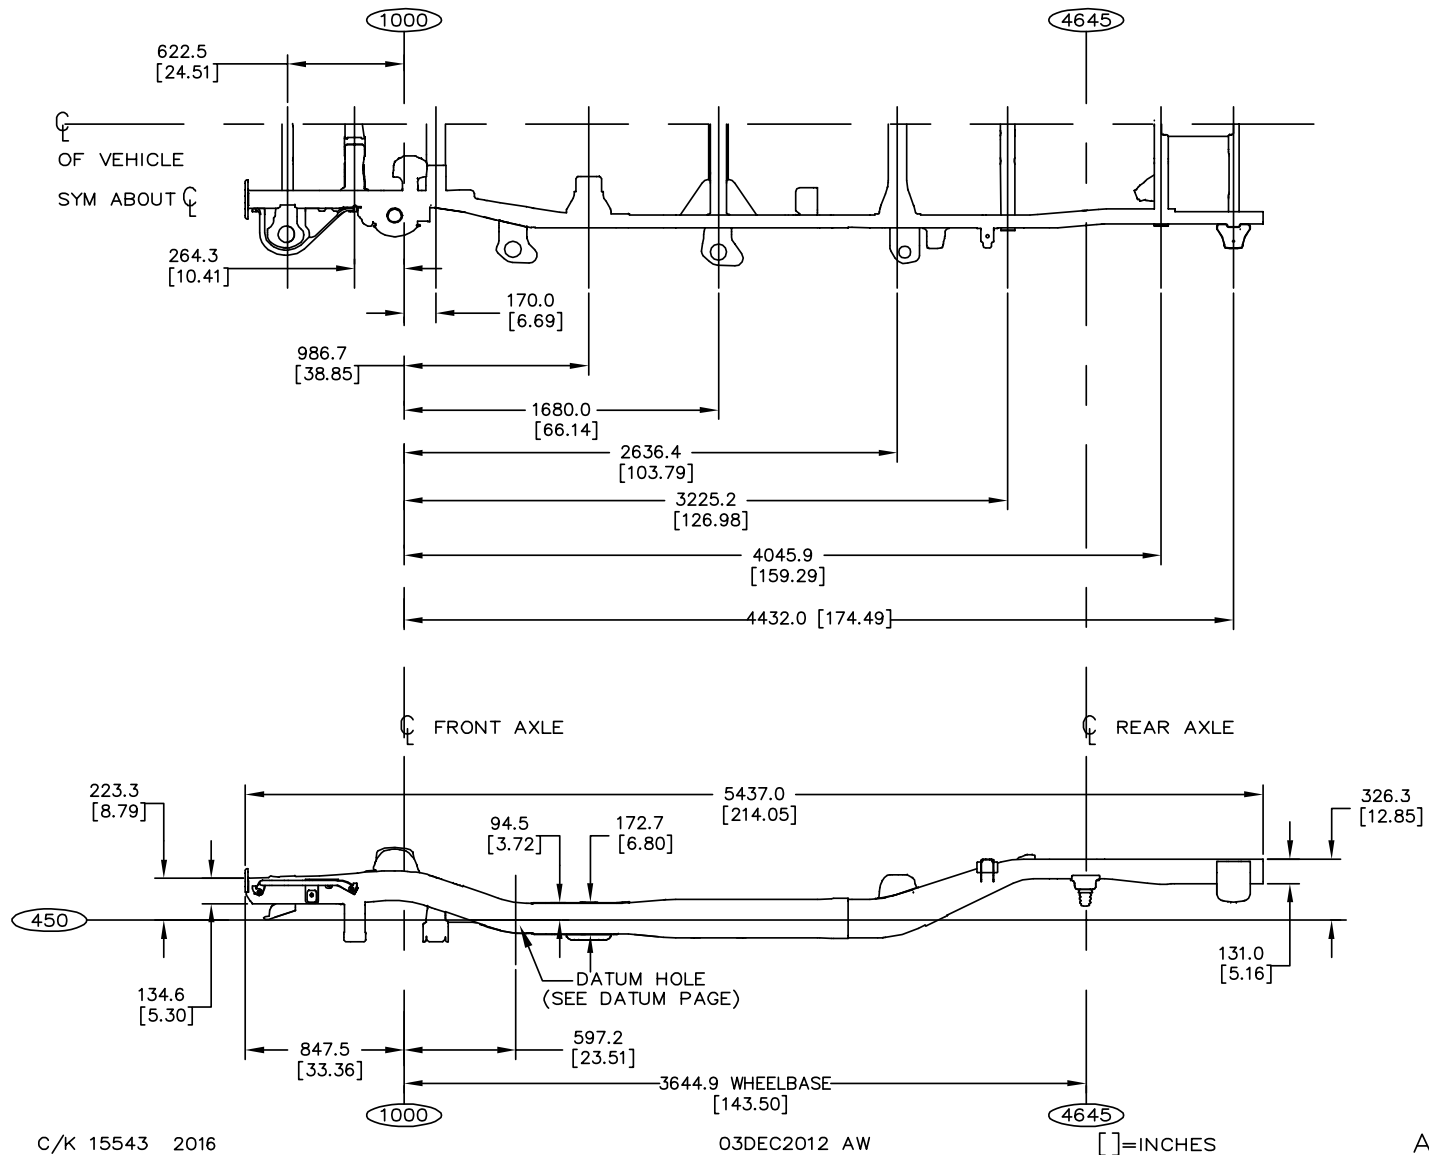


FULL SIZE C/K LD PICKUPS

C/K 1000 Series Pickups – Spare Tire Location

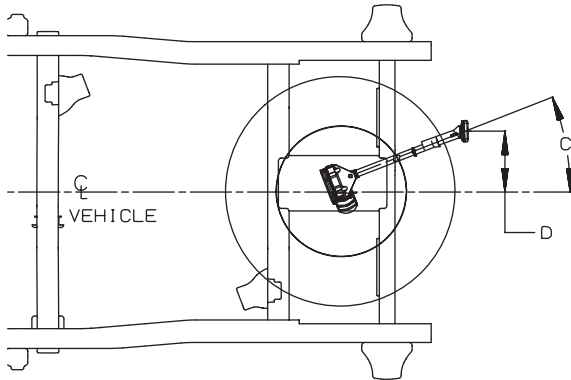

MODEL	TIRE	A	B	C	D	E	F
CK10703	P265/75R-17	923.0 [36.34]	81.0 [3.17]	21°	216.3 [8.50]	1072.3 [42.22]	240.0 [9.45]
CK10753	P265/70R-17	945.5 [37.22]	81.0 [3.17]	21°	216.3 [8.50]	990.5 [39.00]	240.0 [9.45]
CK10903	P265/70R-17	945.5 [37.22]	81.0 [3.17]	21°	216.3 [8.50]	1094.8 [43.10]	222.0 [8.74]
CK10953	P265/70R-17	923.0 [36.34]	81.0 [3.17]	16.5°	216.3 [8.50]	1197.0 [47.12]	222.0 [8.74]
CK10543	P265/70R-17	895.5 [35.25]	81.0 [3.17]	21°	203.2 [8.00]	1020.5 [40.18]	240.0 [9.45]
CK10553	P265/70R-17	631.5 [24.90]	81.0 [3.17]	21°	216.3 [8.50]	1072.3 [42.22]	222.0 [8.74]

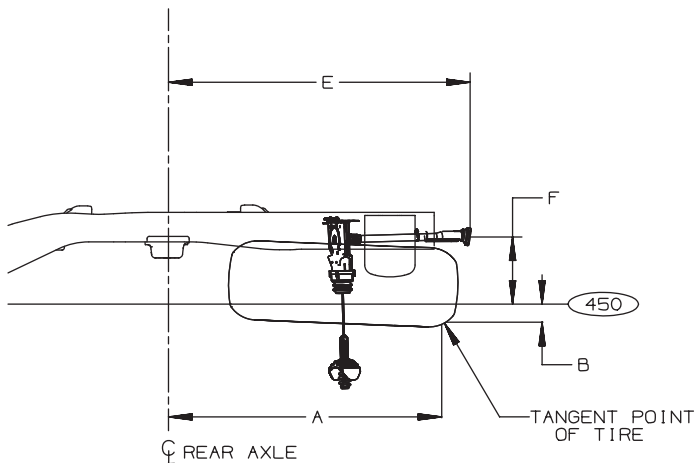

GMT900 2007 SPARE TIRE TRUCKS 1000 SERIES


[] = INCHES

ANC39360.4

FULL SIZE C/K LD PICKUPS

PAGE 49

Pickups C/K 100 (03/53/43) – Platform Hitch

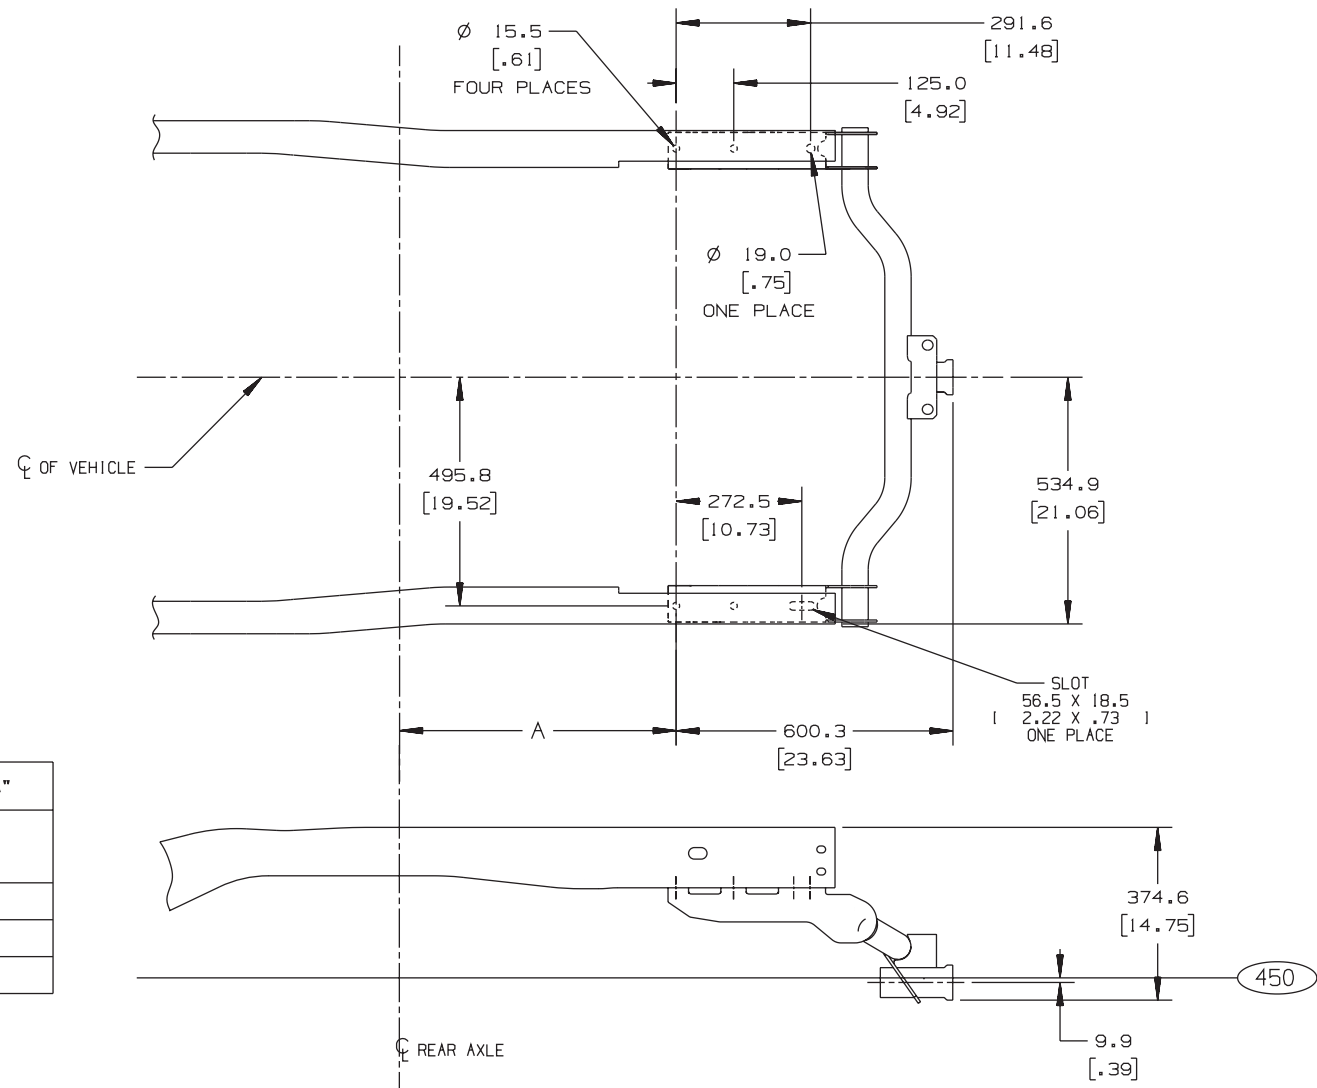


MODEL	CL REAR AXLE	DIM "A"
C/K 155 43	4645	599.6
C/K 157 53	4023	599.8
C/K 159 03	4378	724.2
C/K 159 53	5001	723.9

GMT900 C/K 100 03/43/53 2008

[] = INCHES

ANB84248.3

Front Axle Tire Data Drawing – C/K 10000 Pickups

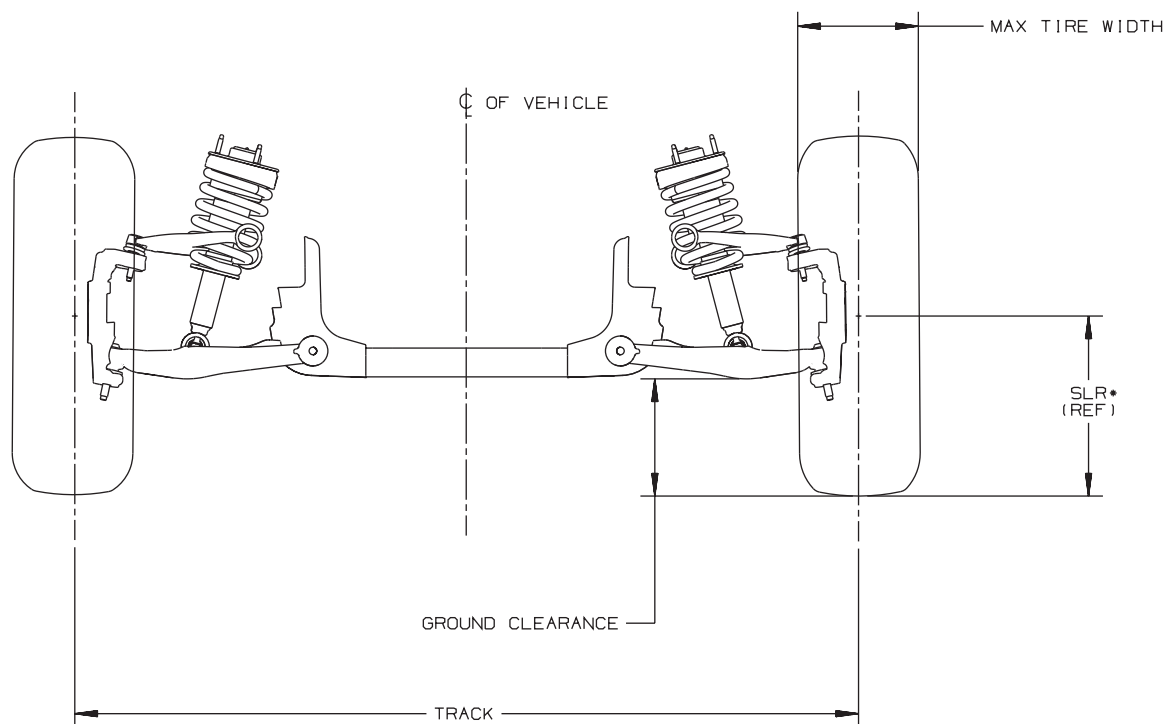

VYU = SNOW PLOW

ZB3 = CHASSIS PACKAGE SOLID SMOOTH RIDE

ZB5 = CHASSIS PACKAGE INCREASED CAPACITY

E63 = BODY EQUIPMENT FLEETSIDE PICKUP BOX

Z71 = CHASSIS PACKAGE OFF ROAD

ZW7 = CHASSIS PACKAGE PREMIUM SMOOTH RIDE

*MINIMUM GROUND CLEARANCE TO BE
CALCULATED BY USING GROSS
AXLE WEIGHT AND RECOMMENDED TIRE PRESURE

GMT900 UTILITIES 1000 SERIES/TRUCK 1000 SERIES FRONT AXLE/TIRE DATA (2007)

1"=1 INCHES

ANB46140.13

Front Axle Tire Data Chart – C/K 10000 Pickups

SERIES	OPT	SLR	TIRES	GVW RATING	REAR WHEEL	TRACK	WHEEL OFFSET	MAX TIRE WIDTH	GROUND CLEARANCE
CK15703	Z83/Z85/E63/Z71/Z60	370	P265/65R18	6400	SINGLE	1726.3	31.0	TBD	217.6
C15753	Z83/Z85/E63/Z71/Z60	351	P245/70R17	6800	SINGLE	1726.3	31.0	266.0	181.4
C15753	Z83/Z85/E63/Z71/Z60	368	P265/70R17	6800	SINGLE	1726.3	31.0	281.0	198.6
C15753	Z83/Z85/E63/Z71/Z60	370	P265/65R18	6800	SINGLE	1726.3	31.0	286.0	206.7
C15753	Z83/Z85/E63/Z71/Z60	368	P275/55R20	6800	SINGLE	1726.3	31.0	298.0	199.2
C15753	Z83/Z85/E63/Z71/Z60	359	LT245/70R17	7000	SINGLE	1726.3	31.0	266.0	195.7
C15753	Z83/Z85/E63/Z71/Z60	366	P265/70R17	7000	SINGLE	1726.3	31.0	281.0	202.7
C15753	Z83/Z85/E63/Z71/Z60	368	P275/55R20	7000	SINGLE	1726.3	31.0	298.0	205.3
K15753	Z83/Z85/E63/Z71/Z60	365	P265/70R17	7000	SINGLE	1726.3	31.0	281.0	207.6
K15753	Z83/Z85/E63/Z71/Z60	367	P265/65R18	7000	SINGLE	1726.3	31.0	286.0	189.9
K15753	Z83/Z85/E63/Z71/Z60	365	P275/55R20	7000	SINGLE	1726.3	31.0	298.0	208.0
K15753	Z83/Z85/E63/Z71/Z60	356	LT245/70R17	7200	SINGLE	1726.3	31.0	266.0	199.1
K15753	Z83/Z85/E63/Z71/Z60	363	P265/70R17	7200	SINGLE	1726.3	31.0	281.0	185.9
K15753	Z83/Z85/E63/Z71/Z60	365	P275/55R20	7200	SINGLE	1726.3	31.0	298.0	208.0
C15903	Z83/Z85/E63/Z71	353	P245/70R17	6400	SINGLE	1726.3	31.0	266.0	195.6
C15903	Z83/Z85/E63/Z71	370	P265/70R17	6400	SINGLE	1726.3	31.0	281.0	203.4
C15903	Z83/Z85/E63/Z71	370	P265/65R18	6400	SINGLE	1726.3	31.0	286.0	202.8
K15903	VYU/Z83/Z85/E63/Z71	347	P245/70R17	6800	SINGLE	1726.3	31.0	266.0	173.8
K15903	VYU/Z83/Z85/E63/Z71	370	P265/65R18	6800	SINGLE	1726.3	31.0	286.0	195.8
K15903	VYU/Z83/Z85/E63/Z71	359	LT245/70R17	6800	SINGLE	1726.3	31.0	266.0	184.8
K15903	VYU/Z83/Z85/E53Z71	365	P265/70R17	6800	SINGLE	1726.3	31.0	281.0	191.1
C15953	Z83/Z85/E63/Z71	350	P245/70R17	6900	SINGLE	1726.3	31.0	266.0	186.2
C15953	Z83/Z85/E63/Z71	369	P265/65R18	6900	SINGLE	1726.3	31.0	286.0	204.7
C15953	Z83/Z85/E63/Z71	367	P265/70R17	6900	SINGLE	1726.3	31.0	291.0	202.4
K15953	Z83/Z85/E63/Z71	348	P245/70R17	7000	SINGLE	1726.3	31.0	266.0	194.0
K15953	Z83/Z85/E63/Z71	365	P265/70R17	7000	SINGLE	1726.3	31.0	291.0	211.2
K15953	Z83/Z85/E63/Z71	367	P265/65R18	7000	SINGLE	1726.3	31.0	286.0	212.6

GMT900 TRUCKS FRONT AXLE/TIRE DATA 1000 SERIES (2007)

METRIC CONVERSION TO INCHES
MM / 25.4 = INCHES

ANB46140.17

FULL SIZE C/K LD PICKUPS

Front Axle Tire Data Chart – C/K 10000 Pickups



SERIES	OPT	SLR	TIRES	GVW RATING	REAR WHEEL	TRACK	WHEEL OFFSET	MAX TIRE WIDTH	GROUND CLEARANCE
C15543	Z71/783/Z85/E63	346	LT245/70R17	6800	SINGLE	1726.3	31.0	266.0	183.0
C15543	Z71/783/Z85/E63	346	P245/70R17	6800	SINGLE	1726.3	31.0	266.0	183.0
C15543	Z71/783/Z85/E63	370	P265/65R18	6800	SINGLE	1726.3	31.0	286.0	206.7
C15543	Z71/783/Z85/E63	359	LT245/70R17	6800	SINGLE	1726.3	31.0	266.0	195.7
C15543	Z71/783/Z85/E63	368	P265/70R17	6800	SINGLE	1726.3	31.0	281.0	203.8
C15543	Z71/783/Z85/E63	368	P275/55R20	6800	SINGLE	1726.3	31.0	298.0	205.0
K15543	Z71/783/Z85/E63	365	P275/55R20	7000	SINGLE	1726.3	31.0	298.0	211.4
K15543	Z71/783/Z85/E63	367	P265/65R18	7000	SINGLE	1726.3	31.0	286.0	212.7
C15543	Z71/783/Z85/E63	368	P265/65R18	7100	SINGLE	1726.3	31.0	286.0	220.0
K15543	Z71/783/Z85/E63	365	P265/70R17	7000	SINGLE	1726.3	31.0	281.0	204.0
K15543	Z71/783/Z85/E63	348	LT245/70R17	7000	SINGLE	1726.3	31.0	266.0	193.6
K15543	Z71/783/Z85/E63	348	P245/70R17	7000	SINGLE	1726.3	31.0	266.0	193.6
K15543	Z71/783/Z85/E63	356	LT245/70R17	7300	SINGLE	1726.3	31.0	266.0	202.5
K15543	Z71/783/Z85/E63	365	P275/55R20	7300	SINGLE	1726.3	31.0	298.0	211.4
K15543	Z71/783/Z85/E63	363	P265/70R17	7300	SINGLE	1726.3	31.0	281.0	208.7

GMT900 TRUCKS FRONT AXLE/TIRE DATA 1000 SERIES (2007)

METRIC CONVERSION TO INCHES
MM / 25.4 = INCHES

ANB46140.18

Rear Axle Tire Data Drawing – C/K 10000 Pickups

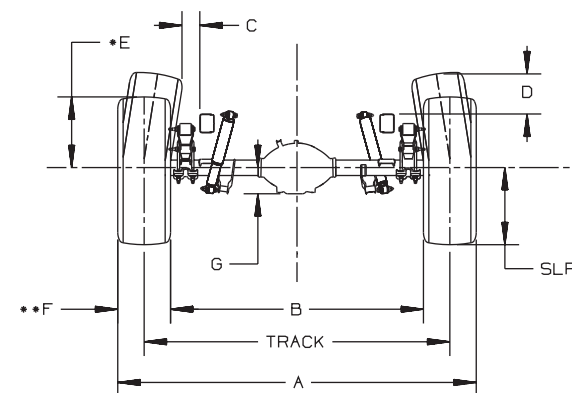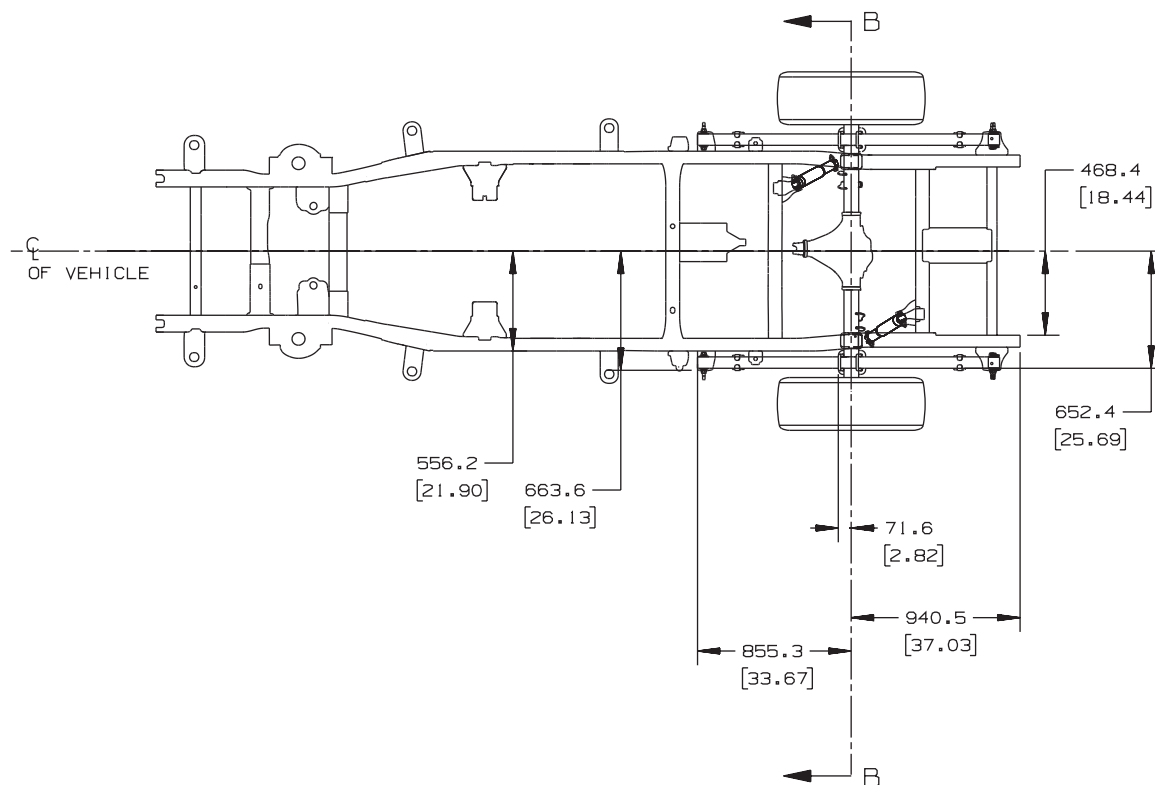

SECTION B-B
ROTATED 90

$$A = \text{TRACK} + F$$

$$B = \text{TRACK} - F$$

- MAX GROWN TIRE RADIUS ON NARROWEST RIM
- MAX GROWN TIRE WIDTH ON WIDEST RIM
- TIRE CHAINS NOT INCLUDED

VYU = SNOW PLOW
 Z83 = CHASSIS PACKAGE SOLID SMOOTH RIDE
 Z85 = CHASSIS PACKAGE INCREASED CAPACITY
 E63 = BODY EQUIPMENT FLEETSIDE PICKUP BOX
 Z71 = CHASSIS PACKAGE OFF ROAD

RING GEAR	G
18.6 DIA	139.0 [5.47]
19.5 DIA	160.0 [6.30]

GMT900 TRUCKS REAR AXLE/TIRE DATA 1000 SERIES(2007)

1:1 INCHES

ANB46140.5

FULL SIZE C/K LD PICKUPS

Rear Axle Tire Data Chart – C/K 10000 Pickups

SERIES	OPT	SLR	TIRES	GVW RATING	REAR WHEEL	TRACK	WHEEL OFFSET	-A-	-B-	-C-	-D-	-E-	-F-
CK15703	Z83/Z85/E63	369	P265/65R18	6400	SINGLE	1701.8	31.0	1986.9	1414.9	119.9	234.9	408.5	286.0
CK15703	Z83/Z85/E63	367	P265/70R17	6400	SINGLE	1701.8	31.0	1980.8	1418.8	123.7	171.2	410.0	281.0
CK15703	Z83/Z85/E63	345	P245/70R17	6400	SINGLE	1701.8	31.0	1967.9	1435.9	130.3	228.9	393.9	266.0
CK15703	Z83/Z85/E63	367	P275/55R20	6400	SINGLE	1701.8	31.0	1999.0	1403.0	112.3	244.3	410.0	298.0
CK15703	VYU/Z83/Z85/E63	345	LT245/70R17	6400	SINGLE	1701.8	31.0	1967.9	1435.9	130.6	229.7	393.9	266.0
C15753	Z83/Z85/E63/Z71/Z60	345	P245/70R17	6400	SINGLE	1701.8	31.0	1967.9	1435.9	129.9	228.9	393.9	266.0
C15753	Z83/Z85/E63/Z71/Z60	367	P265/70R17	6400	SINGLE	1701.8	31.0	1980.8	1418.8	122.1	236.7	410.0	281.0
C15753	Z83/Z85/E63/Z71/Z60	367	P265/65R18	6800	SINGLE	1701.8	31.0	1986.9	1414.9	118.8	241.3	408.5	286.0
C15753	Z83/Z85/E63/Z71/Z60	348	P245/70R17	6800	SINGLE	1701.8	31.0	1967.9	1435.9	129.9	228.9	393.9	266.0
C15753	Z83/Z85/E63/Z71/Z60	365	P265/70R17	6800	SINGLE	1701.8	31.0	1982.8	1420.8	122.1	236.7	380.0	281.0
C15753	Z83/Z85/E63/Z71/Z60	365	P275/55R20	6800	SINGLE	1701.8	31.0	1999.0	1403.0	111.9	244.3	410.0	298.0
C15753	Z83/Z85/E63/Z71/Z60	361	P265/70R17	7000	SINGLE	1701.8	31.0	1980.8	1418.8	122.1	236.7	410.0	281.0
C15753	Z83/Z85/E63/Z71/Z60	355	LT245/70R17	7000	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	396.9	266.0
C15753	Z83/Z85/E63/Z71/Z60	365	P275/55R20	7000	SINGLE	1701.8	31.0	1999.0	1403.0	111.9	244.3	410.0	298.0
K15753	Z83/Z85/E63/Z71/Z60	355	P245/70R17	7000	SINGLE	1701.8	31.0	1967.9	1435.9	129.9	228.9	393.9	266.0
K15753	Z83/Z85/E63/Z71/Z60	367	P265/65R18	7000	SINGLE	1701.8	31.0	1986.9	1414.9	118.8	241.3	408.5	286.0
K15753	Z83/Z85/E63/Z71/Z60	365	P265/70R17	7000	SINGLE	1701.8	31.0	1982.8	1420.8	122.1	236.7	380.0	281.0
K15753	Z83/Z85/E63/Z71/Z60	365	P275/55R20	7000	SINGLE	1701.8	31.0	1999.0	1403.0	111.9	244.3	410.0	298.0
K15753	Z83/Z85/E63/Z71/Z60	361	P265/70R17	7200	SINGLE	1701.8	31.0	1980.8	1418.8	122.1	236.7	410.0	281.0
K15753	Z83/Z85/E63/Z71/Z60	355	LT245/70R17	7200	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
K15753	Z83/Z85/E63/Z71/Z60	363	P275/55R20	7200	SINGLE	1701.8	31.0	1999.0	1403.0	111.9	244.3	410.0	298.0
C15903	Z85/Z83/Z71/E63	345	LT245/70R17	6400	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
C15903	Z85/Z83/Z71/E63	369	P265/65R18	6400	SINGLE	1701.8	31.0	1980.8	1418.8	118.8	241.3	410.0	281.0
C15903	Z85/Z83/Z71/E63	349	P245/70R17	6400	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
C15903	Z85/Z83/Z71/E63	367	P265/70R17	6400	SINGLE	1701.8	31.0	1980.8	1418.8	119.5	234.9	410.0	281.0
K15903	Z85/Z83/Z71/E63/VYU	345	P245/70R17	6400	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
K15903	Z85/Z83/Z71/E63/VYU	367	P265/70R17	6400	SINGLE	1701.8	31.0	1980.8	1418.8	119.5	234.9	410.0	281.0
K15903	Z85/Z83/Z71/E63/VYU	345	LT245/70R17	6400	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
K15903	Z85/Z83/Z71/E63/VYU	367	P265/65R18	6800	SINGLE	1701.8	31.0	1986.9	1414.9	122.1	236.8	408.5	286.0
K15903	Z85/Z83/Z71/E63/VYU	348	LT245/70R17	6800	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
K15903	Z85/Z83/Z71/E63/VYU	348	P245/70R17	6800	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
K15903	Z85/Z83/Z71/E63/VYU	365	P265/70R17	6800	SINGLE	1701.8	31.0	1980.8	1418.8	119.5	234.9	410.0	281.0

GMT900 TRUCKS REAR AXLE/TIRE DATA 1000 SERIES (2007)

METRIC CONVERSION TO INCHES
MM / 25.4 = INCHES

ANB46140.6

FULL SIZE C/K LD PICKUPS

Rear Axle Tire Data Chart – C/K 10000 Pickups

SERIES	OPT	SLR	TIRES	GVW RATING	REAR WHEEL	TRACK	WHEEL OFFSET	-A-	-B-	-C-	-D-	-E-	-F-
C15953	Z83/Z85/E63/Z71	367	P265/65R18	6900	SINGLE	1701.8	31.0	1986.9	1414.9	118.8	241.3	408.5	286.0
C15953	Z83/Z85/E63/Z71	348	P245/70R17	6900	SINGLE	1701.8	31.0	1967.9	1435.9	129.9	228.9	393.9	266.0
C15953	Z83/Z85/E63/Z71	365	P265/70R17	6900	SINGLE	1701.8	31.0	1980.8	1418.8	122.2	236.8	410.0	281.0
K15953	Z83/Z85/E63/Z71	367	P265/65R18	7000	SINGLE	1701.8	31.0	1986.9	1414.9	118.8	241.3	408.5	286.0
K15953	Z83/Z85/E63/Z71	355	P245/70R17	7000	SINGLE	1701.8	31.0	1967.9	1435.9	129.9	228.9	393.9	266.0
K15953	Z83/Z85/E63/Z71	365	P265/70R17	7000	SINGLE	1701.8	31.0	1980.8	1418.8	122.2	236.8	410.0	281.0
C15543	Z83/Z85/E63/Z71/Z60	367	P265/65R18	6800	SINGLE	1701.8	31.0	1986.9	1414.9	118.8	241.3	408.5	286.0
C15543	Z83/Z85/E63/Z71/Z60	348	LT245/70R17	6800	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
C15543	Z83/Z85/E63/Z71/Z60	348	P245/70R17	6800	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
C15543	Z83/Z85/E63/Z71/Z60	365	P265/70R17	6800	SINGLE	1701.8	31.0	1980.8	1418.8	122.2	236.8	410.0	281.0
C15543	Z83/Z85/E63/Z71/Z60	365	P275/55R20	6800	SINGLE	1701.8	31.0	1999.0	1403.0	111.9	244.3	410.0	298.0
K15543	Z83/Z85/E63/Z71/Z60	355	LT245/70R17	7000	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
K15543	Z83/Z85/E63/Z71/Z60	367	P265/65R18	7000	SINGLE	1701.8	31.0	1986.9	1414.9	118.8	241.3	408.5	286.0
K15543	Z83/Z85/E63/Z71/Z60	365	P275/55R20	7000	SINGLE	1701.8	31.0	1999.0	1403.0	111.9	244.3	410.0	298.0
C15543	Z83/Z85/E63/Z71/Z60	364	P265/70R17	7100	SINGLE	1701.8	31.0	1980.8	1418.8	122.2	236.8	410.0	281.0
C15543	Z83/Z85/E63/Z71/Z60	363	P265/65R18	7100	SINGLE	1701.8	31.0	1986.9	1414.9	118.8	241.3	408.5	286.0
K15543	Z83/Z85/E63/Z71/Z60	365	P265/70R17	7000	SINGLE	1701.8	31.0	1980.8	1418.8	122.2	236.8	410.0	281.0
K15543	Z83/Z85/E63/Z71/Z60	355	LT245/70R17	7000	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
K15543	Z83/Z85/E63/Z71/Z60	355	P245/70R17	7000	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
K15543	Z83/Z85/E63/Z71/Z60	355	LT245/70R17	7300	SINGLE	1701.8	31.0	1967.9	1435.9	130.2	229.7	393.9	266.0
K15543	Z83/Z85/E63/Z71/Z60	361	P265/70R17	7300	SINGLE	1701.8	31.0	1980.8	1418.8	122.2	236.8	410.0	281.0
K15543	Z83/Z85/E63/Z71/Z60	363	P275/55R20	7300	SINGLE	1701.9	31.0	1999.0	1403.0	111.9	244.3	410.0	298.0

GMT900 TRUCKS REAR AXLE/TIRE DATA 1000 SERIES(2007)


METRIC CONVERSION TO INCHES
MM / 25.4 = INCHES

ANB46140.7

FULL SIZE C/K LD PICKUPS

PAGE 56

C/K 15703 – Fuel Systems

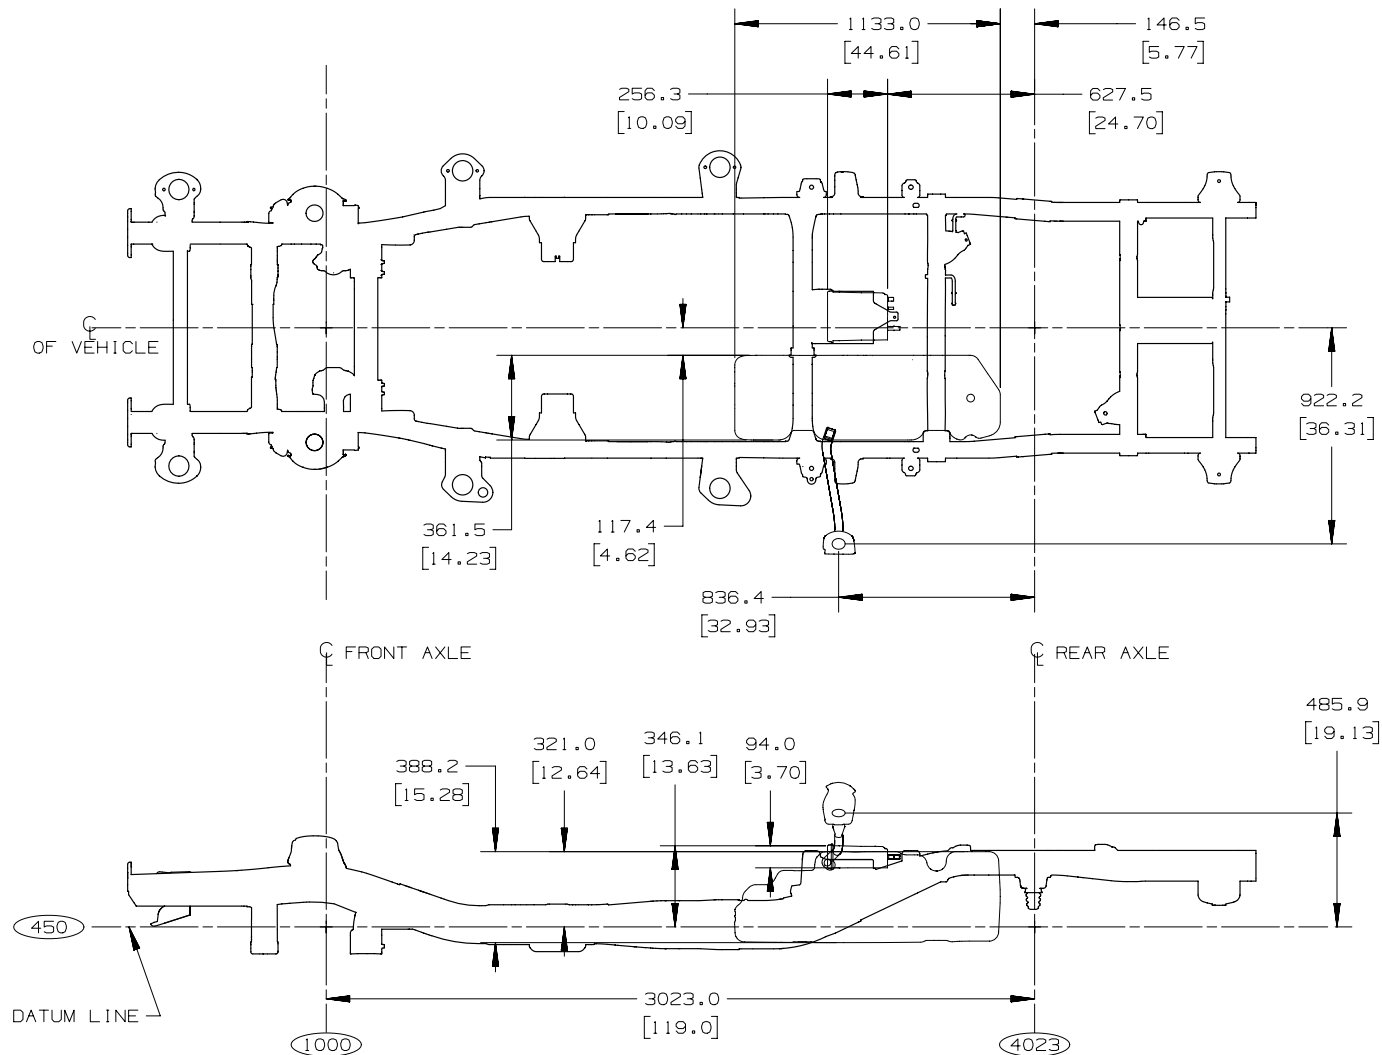

26 GALLON FUEL TANK
CK15703 2014

03DEC2012 AW


1:1 INCHES

ANB49354.6

FULL SIZE C/K LD PICKUPS

PAGE 57


C/K 15903 Pickup – Fuel Systems

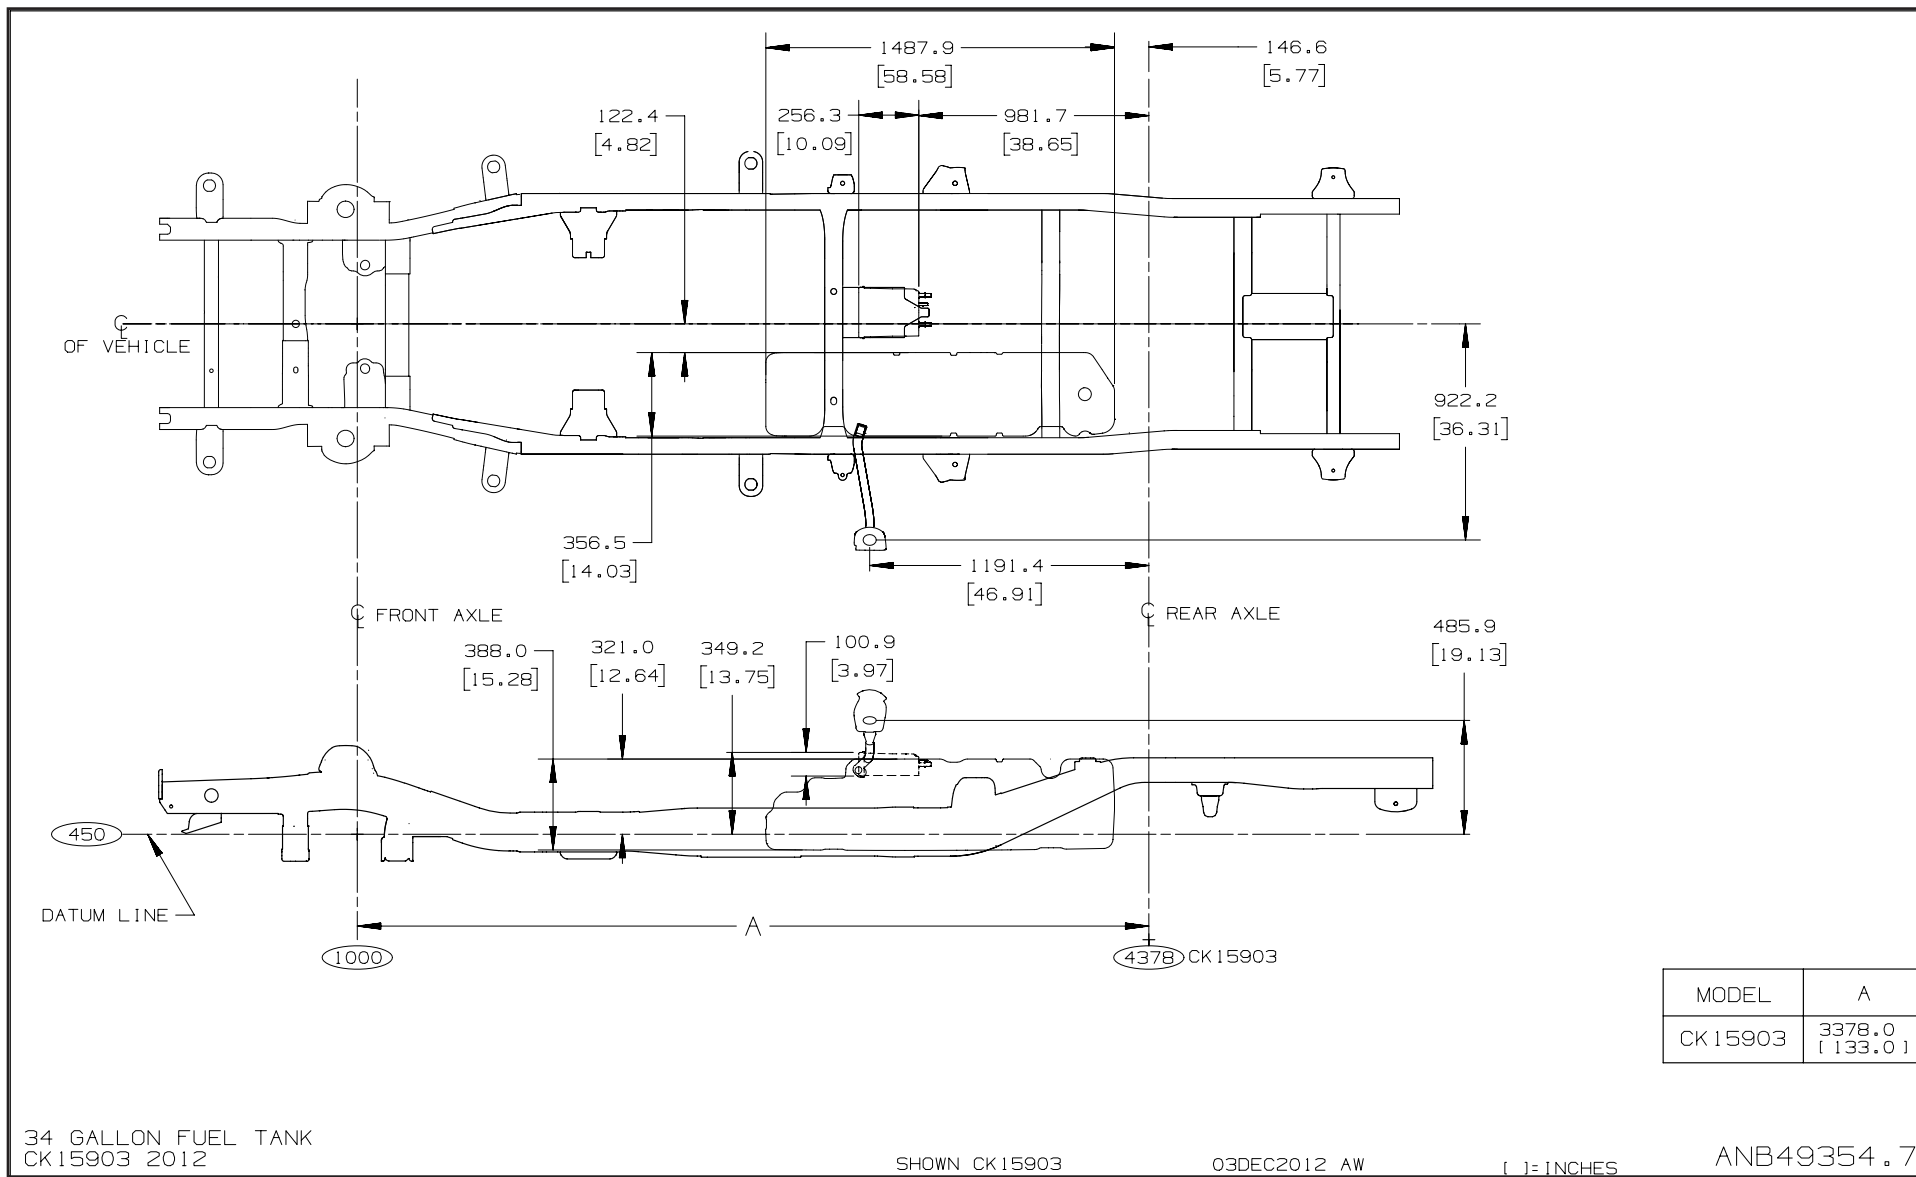

FULL SIZE C/K LD PICKUPS

PAGE 58

C/K 15743, 15753 and C/K 15543 Pickup – Fuel Systems

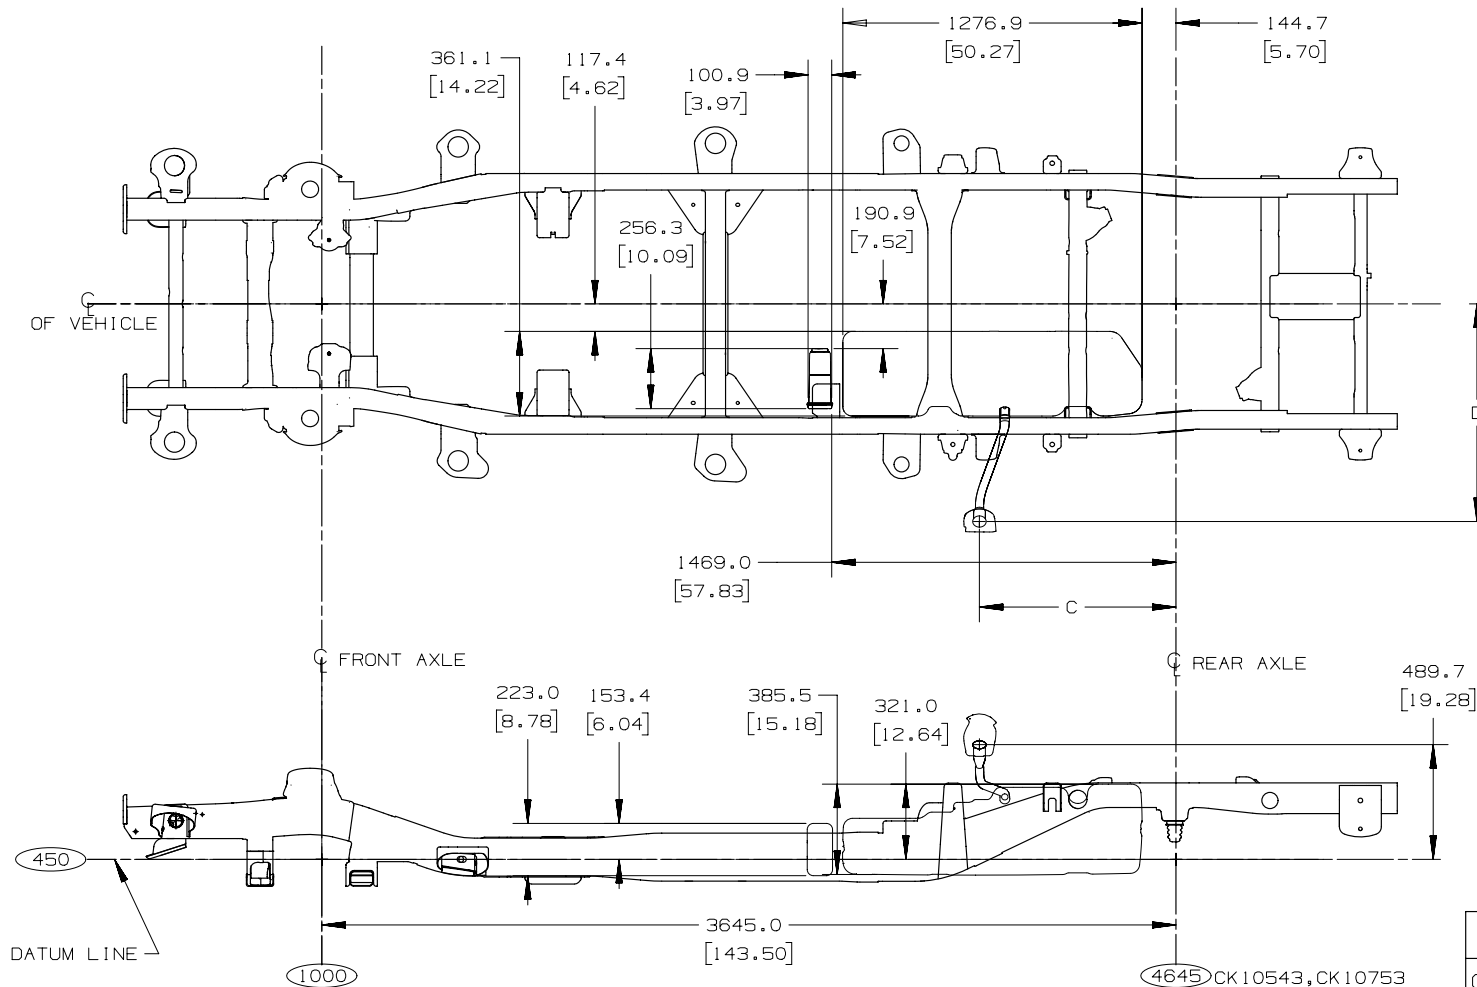

MODEL	C	D
CK 15743	609.4 [24.01]	938.7 [36.95]
CK 15753	838.9 [33.03]	928.8 [36.56]

26 GALLON FUEL TANK
CK15753 & CK15743 2012

SHOWN CK15753

03DEC2012 AW


[]=INCHES

ANB49354.8

FULL SIZE C/K LD PICKUPS

PAGE 59


C/K 100 (00) w/LV3 (4.3L V6) – Exhaust Systems

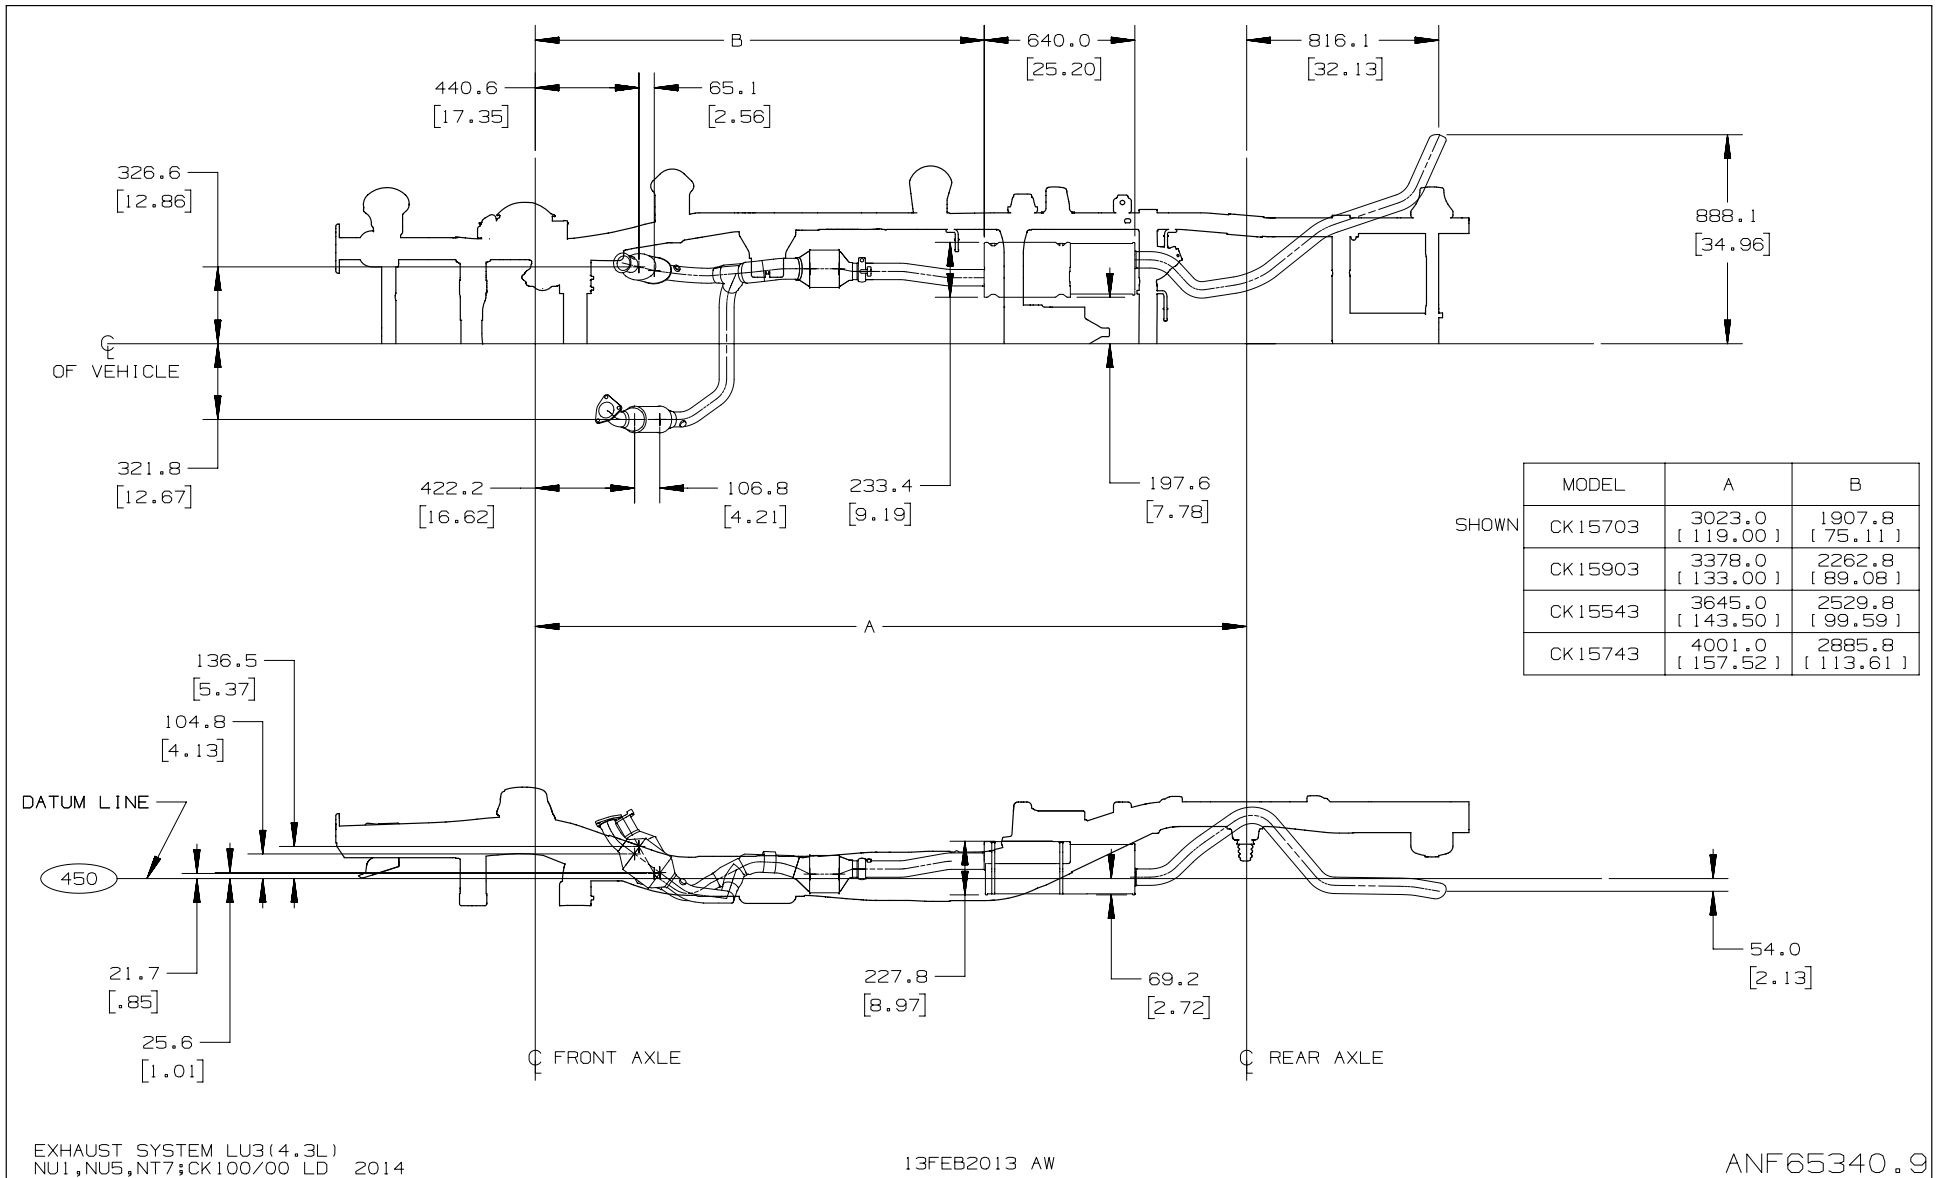

FULL SIZE C/K LD PICKUPS

PAGE 60

C/K 100 (00) w/L83 & (5.3L V-8) – Exhaust Systems

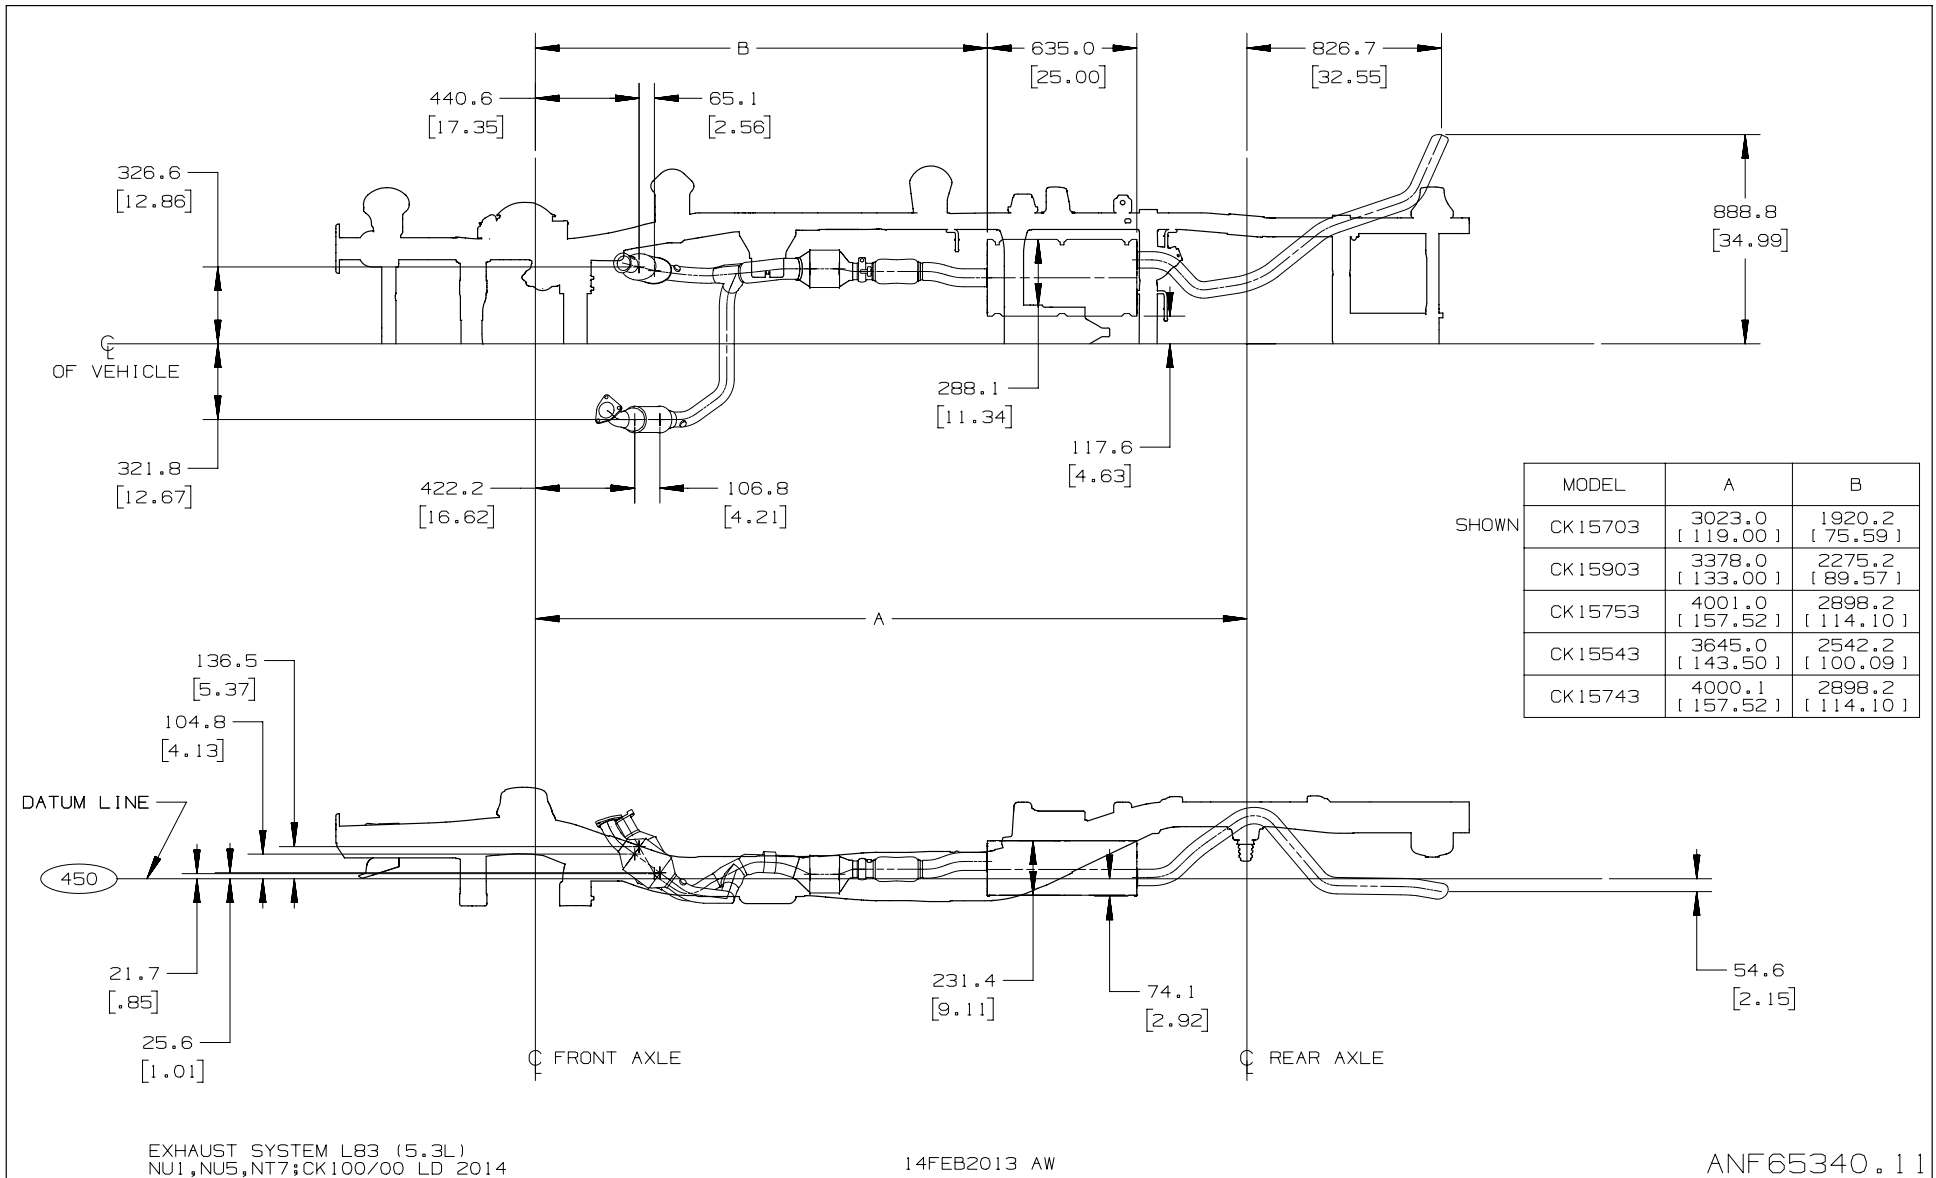

FULL SIZE C/K LD PICKUPS

PAGE 61

C/K 100 (00) w/L86 (6.2L V-8) – Exhaust Systems

